



US 20100066938A1

(19) **United States**

(12) **Patent Application Publication**
Lee

(10) **Pub. No.: US 2010/0066938 A1**

(43) **Pub. Date: Mar. 18, 2010**

(54) **DISPLAY DEVICE**

(30) **Foreign Application Priority Data**

(76) Inventor: **Jung Mok Lee, Suwon (KR)**

May 23, 2007 (KR) 10-2007-0050367

Jun. 20, 2007 (KR) 10-2007-0060230

Correspondence Address:

BIRCH STEWART KOLASCH & BIRCH
PO BOX 747
FALLS CHURCH, VA 22040-0747 (US)

Publication Classification

(51) **Int. Cl.**
G02F 1/1333 (2006.01)

(52) **U.S. Cl.** **349/58**

(21) Appl. No.: **12/523,190**


(22) PCT Filed: **May 9, 2008**

(57) **ABSTRACT**


(86) PCT No.: **PCT/KR2008/002640**

Disclosed is a display device. A liquid crystal panel and a backlight assembly are fixed to a frame by using resin such as silicon, so that a slim and small-sized display device is realized.


§ 371 (c)(1),
(2), (4) Date: **Jul. 15, 2009**

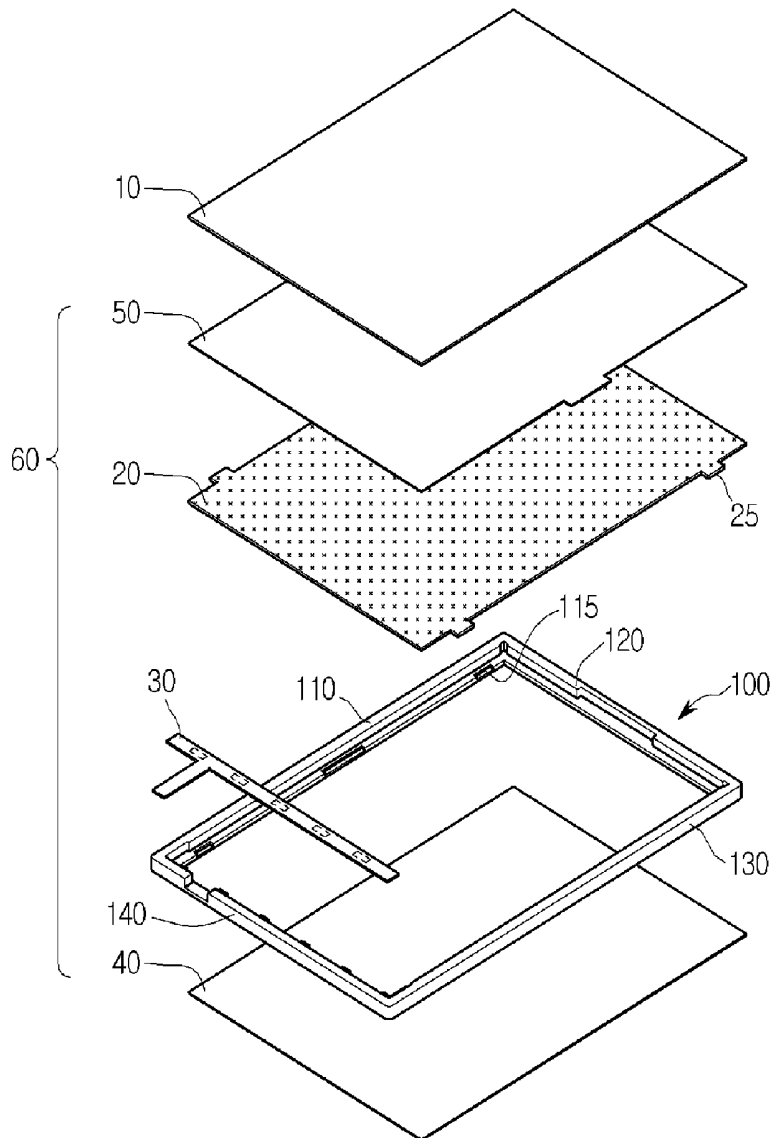


[Fig. 1]

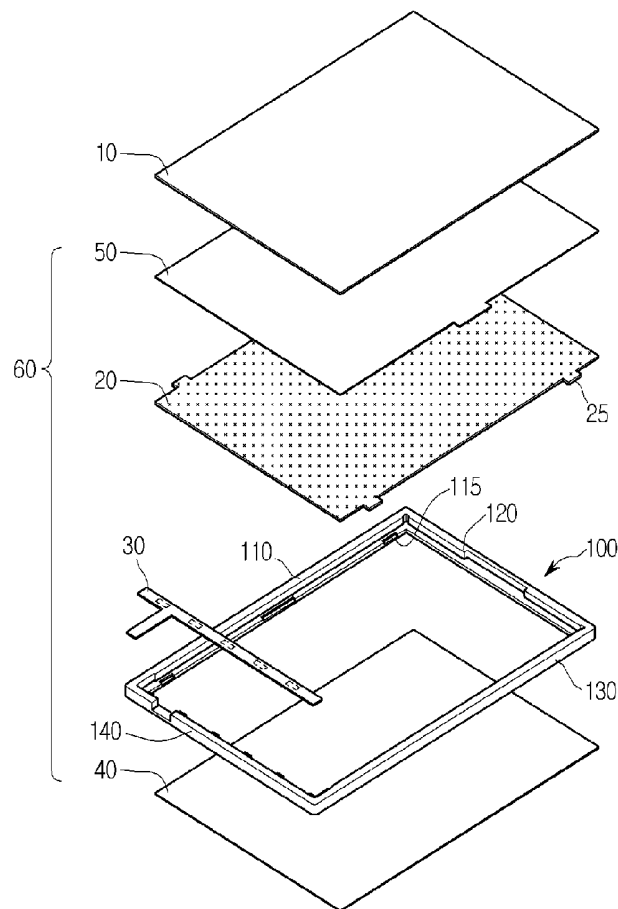


[Fig. 2]

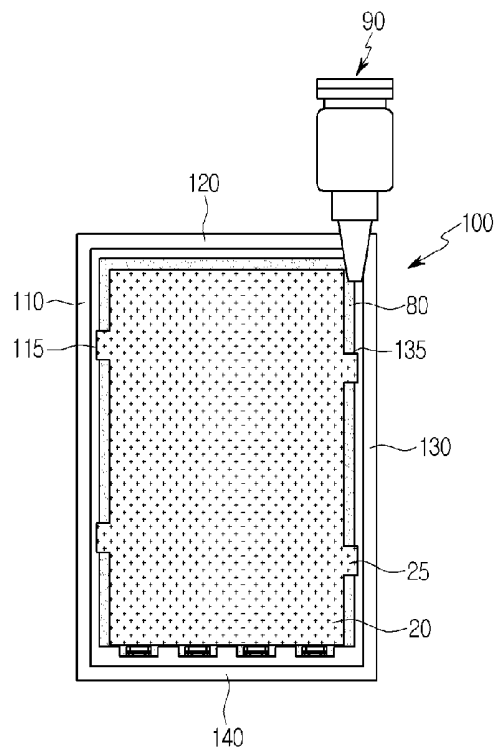


[Fig. 3]

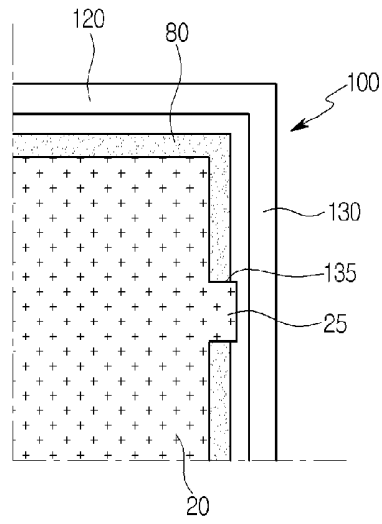


[Fig. 4]

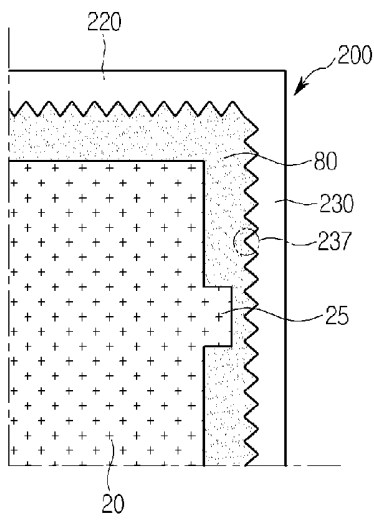


[Fig. 5]

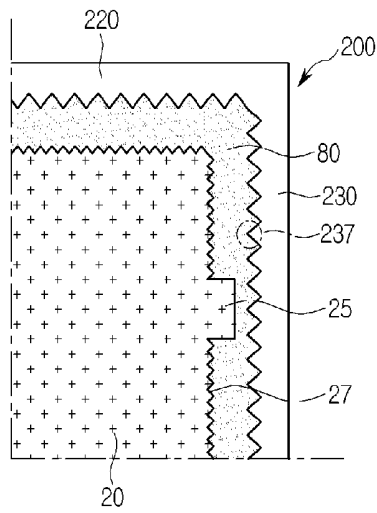


[Fig. 6]

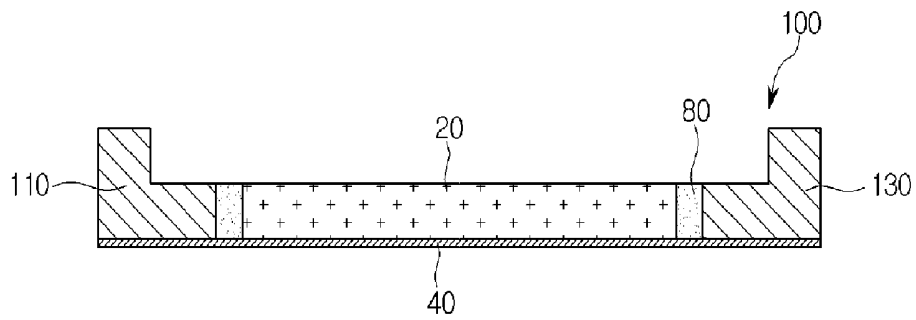


[Fig. 7]

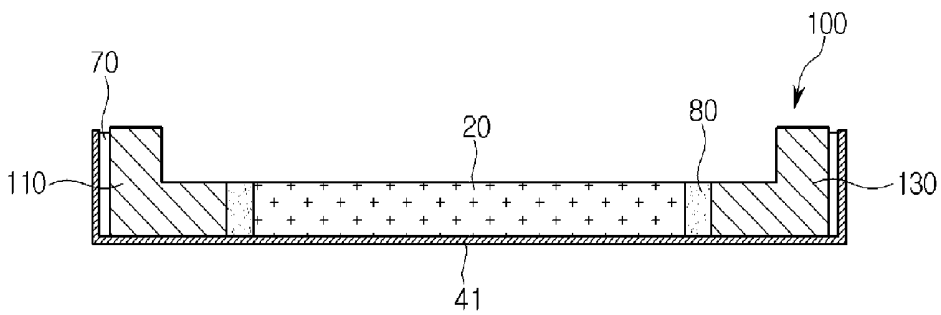


[Fig. 8]

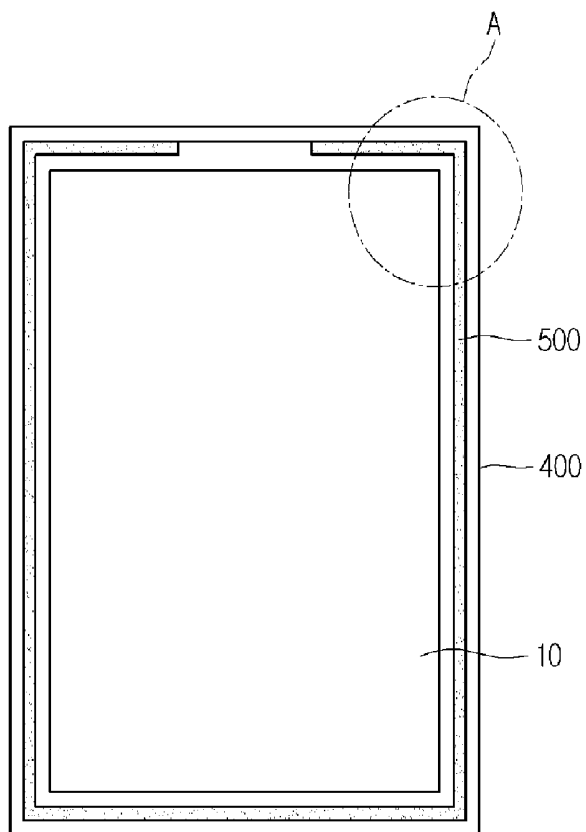


[Fig. 9]

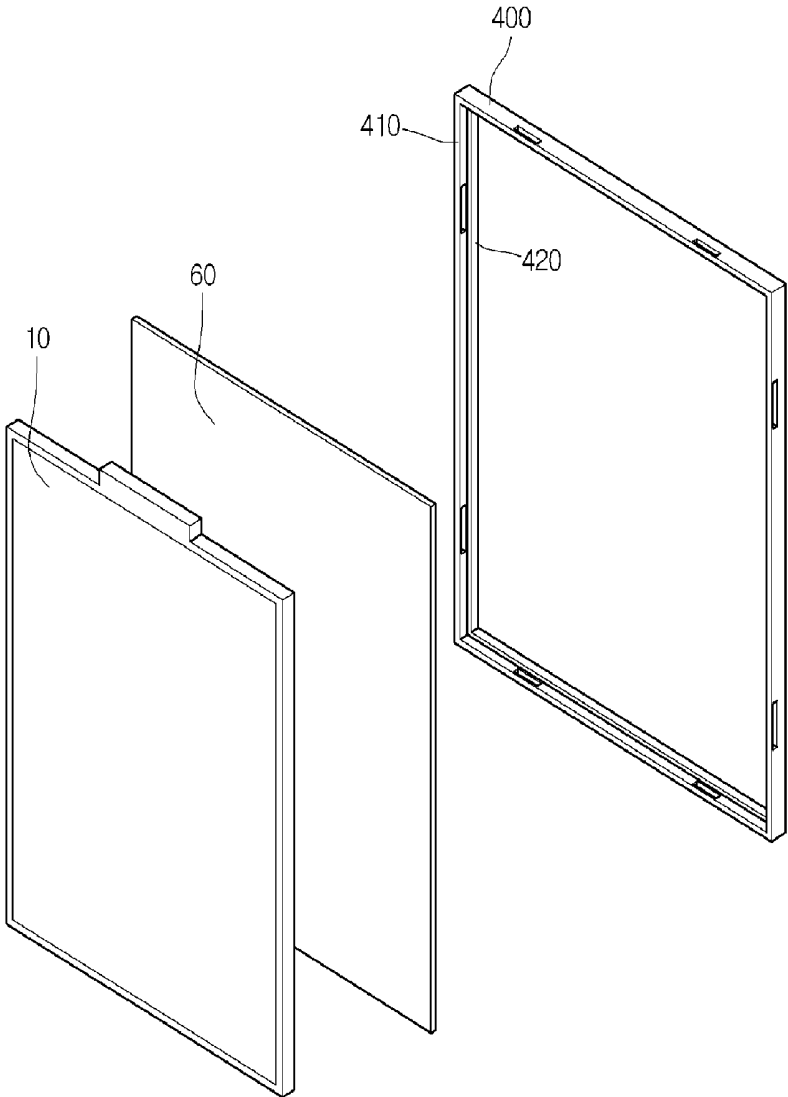


[Fig. 10]

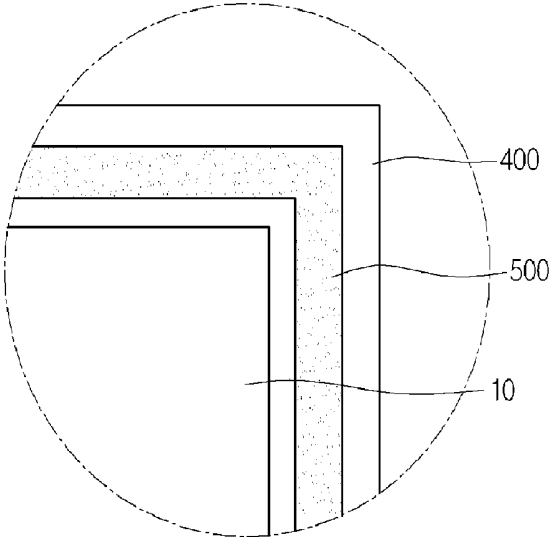


[Fig. 11]

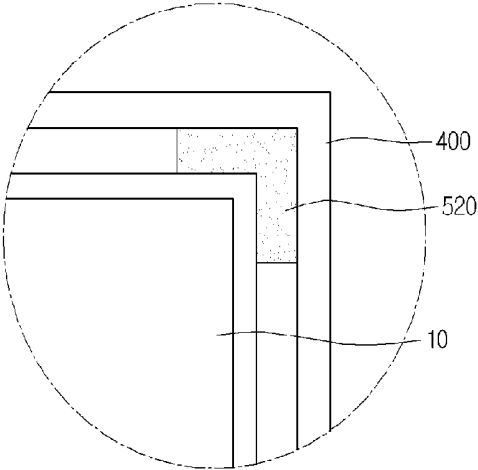


[Fig. 12]

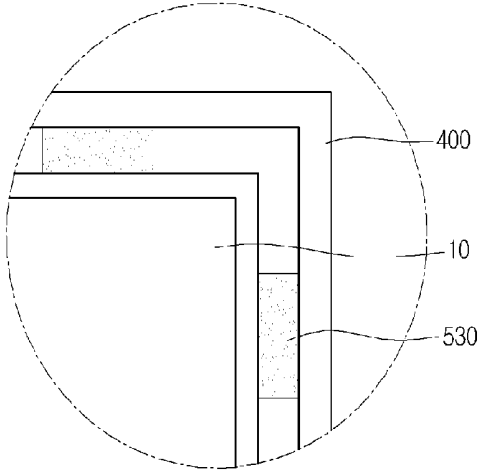

[Fig. 13]

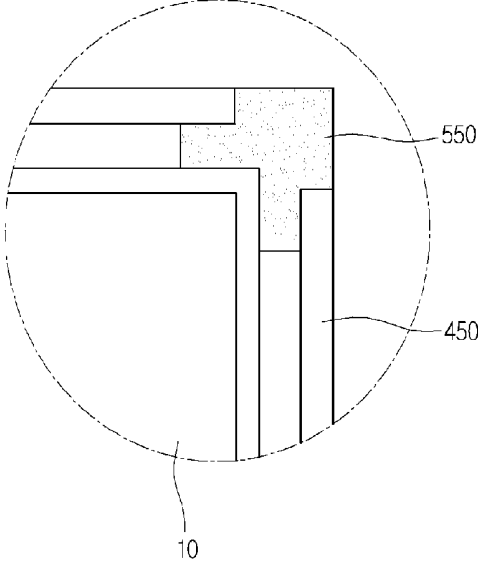

[Fig. 14]

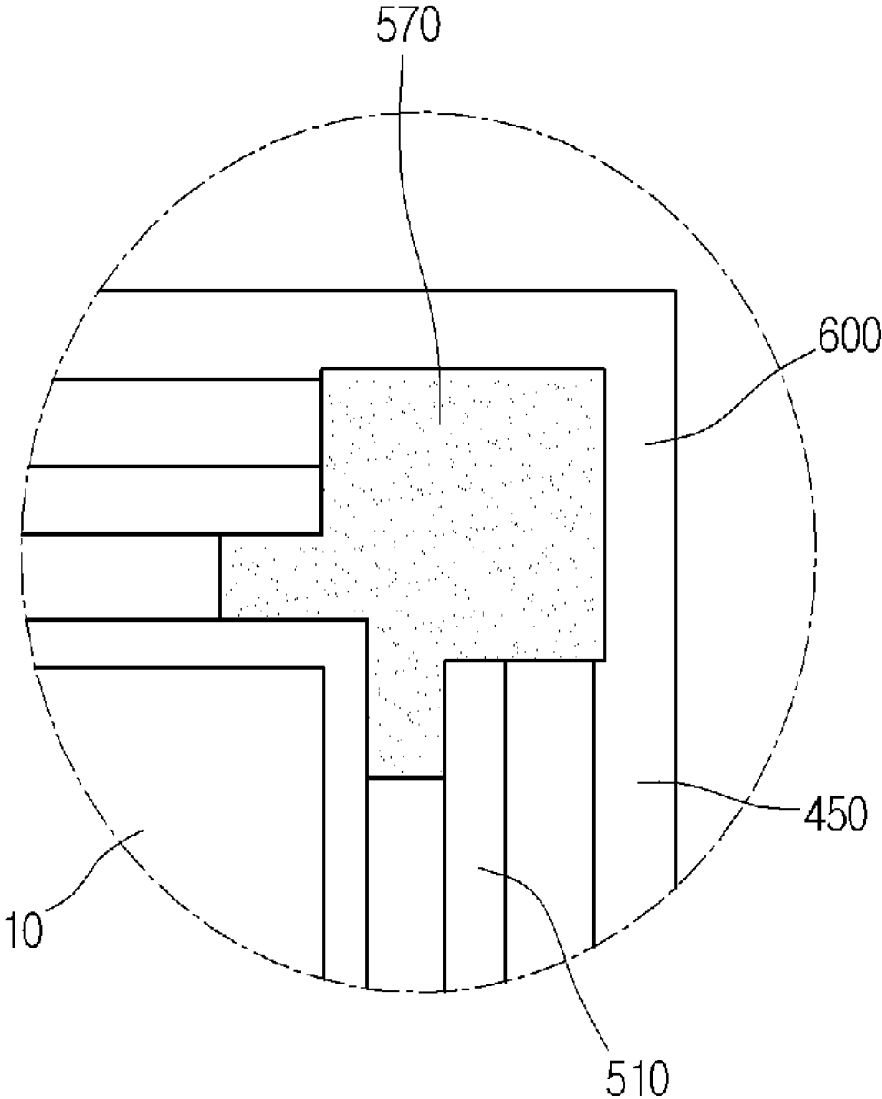

DISPLAY DEVICE

TECHNICAL FIELD

[0001] The present embodiment relates to a display device.

[0002] A liquid crystal display(LCD) that is one of display devices represent low power consumption, a light weight, and a small volume.

BACKGROUND ART

[0003] A display device includes a liquid crystal panel that displays image information, and a backlight unit that provides light to the liquid crystal panel.

[0004] Since such a liquid crystal panel is a light receiving device that does not emit light by itself, the liquid crystal panel requires a backlight unit. Accordingly, the performance of a liquid crystal display mainly depends on the performance of a backlight unit as well as the liquid crystal panel.

[0005] The backlight unit comprises a backlight assembly, which includes a reflective sheet, a light guide plate, a prism sheet, a diffusion sheet, a protective sheet, and a light source, and a frame receiving the backlight unit.

[0006] The liquid crystal display is provided by coupling the backlight assembly and the liquid crystal panel to the frame.

DISCLOSURE OF INVENTION

Technical Problem

[0007] The embodiment provides a display device.

Technical Solution

[0008] According to the embodiment, a display device comprises a display part comprising at least one of a liquid crystal panel and a backlight assembly, a frame receiving the display part, and a fixing member disposed between the display part and the frame.

[0009] According to the embodiment, a display device comprises a backlight assembly comprising a light guide plate, an optical sheet, and a reflective sheet, and a frame formed with a sidewall to receive and fix the backlight assembly, in which at least one portion of the backlight assembly is fixed to the frame by using a fixing member.

Advantageous Effects

[0010] According to the present embodiment, a display device can be realized by fixing the display device to a frame using a fixing member including resin.

[0011] In addition, since the fixing member comprises synthetic resin or polymer resin, the display device can be protected from an external shock.

[0012] Further, the coupling force between the frame and the display device can be enhanced due to the fixing member.

BRIEF DESCRIPTION OF THE DRAWINGS

[0013] FIG. 1 is an exploded perspective view showing a display device according to the first embodiment;

[0014] FIG. 2 is a plan view showing the coupling of a frame and a light of FIG. 1 guide plate of a backlight assembly;

[0015] FIG. 3 is an enlarged view showing a portion of a display device shown in FIG. 2;

[0016] FIGS. 4 and 5 are enlarged views showing portions of a frame and a light guide plate having another shape according to the first embodiment;

[0017] FIGS. 6 and 7 are sectional views showing the coupling of a light guide plate and a reflective sheet to a frame according to the first embodiment;

[0018] FIG. 8 is a plan view showing a display device according to the second embodiment;

[0019] FIG. 9 is an exploded perspective view of a liquid crystal panel and a frame shown in FIG. 8;

[0020] FIG. 10 is an enlarged view of an A area shown in FIG. 8;

[0021] FIGS. 11 and 12 are views showing the fixing member that is located in various positions different from the position shown in FIG. 9; and

[0022] FIGS. 13 and 14 are views showing a frame and a fixing member having another shape according to the second embodiment.

MODE FOR THE INVENTION

[0023] FIG. 1 is an exploded perspective view showing a display device according to the first embodiment. FIG. 2 is a plan view showing the coupling of a frame and a light guide plate of a backlight assembly.

[0024] Referring to FIGS. 1 and 2, the display device comprises a liquid crystal panel 10, a backlight assembly 60, and a frame 100.

[0025] The liquid crystal panel 10, which displays image information, is formed by interposing a liquid crystal layer between a TFT substrate and a color filter substrate.

[0026] The backlight assembly 60 is installed at the rear surface of the liquid crystal panel 10 so that light can be supplied to the liquid crystal panel 10. The backlight assembly 60 includes a light emitting part 30, a light guide plate 20, an optical sheet 50, and a reflective sheet 40.

[0027] The light emitting part 30 includes a light emitting diode (LED) or a cold cathode fluorescent lamp (CCFL) to emit light to the light guide plate 20.

[0028] The light guide plate 20 receives the light emitted from the light emitting part 30 to uniformly disperse the light over the entire light emission area of a backlight. The light guide plate 20 is provided at the side surface with at least one protrusion 25 such that the light guide plate 20 is received in the frame 100.

[0029] The optical sheet 50 is attached onto the top surface of the light guide plate 20, and includes a lens sheet, a diffusion sheet, or a protective sheet.

[0030] The reflective sheet 40 is attached onto the bottom surface of the light guide plate 20. The reflective sheet 40 reflects light, which is leaked from the light guide plate 20 downward, toward the light emission area of the backlight.

[0031] The frame 100 receives or fixes at least one of the liquid crystal panel and the backlight assembly 60 therein or thereto. For example, the frame 100 includes polycarbonate resin, styrene resin, or synthetic resin such as poly(vinyl chloride) or polypropylene.

[0032] The frame 100 includes sidewalls 110, 120, 130, and 140. For example, the frame 100 employs four sidewalls such that the sidewalls form a square-type frame. Hereinafter, the four sidewalls are referred to as the first sidewall 110, the second sidewall 120, the third sidewall 130, and the fourth sidewall 140.

[0033] The first sidewall 110 faces the third sidewall 130. The second sidewall 120 faces the fourth sidewall 140.

Accordingly, the first to the fourth sidewalls **110** to **140** are connected to each other in a closed loop shape. The first to fourth sidewalls **110** to **140** form a square-shape frame when viewed in a plan view.

[0034] The first and third sidewalls **110** and **130** may have grooves **115** and **135** in a position corresponding to protrusions **25** formed at the side surface of the light guide plate **20**.

[0035] Accordingly, when the light guide plate **20** is coupled to the frame **100**, the protrusions **25** of the light guide plate **20** are inserted into the grooves **115** and **135** of the frame **100** so that the light guide plate **20** may be fixed to the frame **100**.

[0036] Referring to FIGS. **2** and **3**, the light guide plate **20** may be fixed to the frame **100** by using a fixing member **80**. The fixing member **80** may be resin. For example, the fixing member **80** may be a liquid adhesive agent such as synthetic resin or silicon resin.

[0037] Reference number **90** represents an injector of a liquid adhesive agent.

[0038] In order to fix the light guide plate **20** to the frame **100**, the light guide plate **20** is positioned on the frame **100**. Then, the protrusions **25** of the light guide plate **20** are inserted into the grooves **115** and **135** of the first and third sidewalls **110** and **130** of the frame **100** such that the light guide plate **20** is fixed to the frame **100**.

[0039] A liquid adhesive agent including silicon resin is injected into a contact area between the frame **100** and the light guide plate **20**. Then, the liquid adhesive agent is hardened so that the fixing member **80** is formed between the light guide plate **20** and the frame **100**. In this case, the light guide plate **20** adheres to the frame **100**.

[0040] Since the light guide plate **20** is fixed to the frame **100** by using the fixing member **80**, the light guide plate **20** can be fixed to the frame **100** regardless of the thicknesses of the light guide plate **20** and the frame **100**.

[0041] Accordingly, since the light guide plate **20** is coupled to the frame **100** by the fixing member **80**, the light guide plate **20** can be stably coupled to the frame **100** even if the light guide plate **20** is thin.

[0042] In addition, even if the protrusions **25** and the grooves **115** and **135** are not formed in the light guide plate **20** and the frame **100**, the light guide plate **20** is fixedly coupled to the frame **100** by using the fixing member **80**.

[0043] FIGS. **4** and **5** are views showing a frame and a light guide plate having another shape.

[0044] Referring to FIG. **4**, a zigzag protrusion part **237** may be formed on one of sidewalls of a frame **200**.

[0045] If the zigzag protrusion part **237** is formed on sidewalls **220** and **230** of the frame **200**, a contact area between the frame **200** and the fixing member **80** is widened when the frame **200** is coupled to the light guide plate **20**, so that the coupling force between the fixing member **80** and the frame **200** can be more enhanced.

[0046] Referring to FIG. **5**, a protrusion part **27** is formed on the side surface of the light guide plate **20**. In addition, the zigzag protrusion part **237** may be formed on at least one among the sidewalls of the frame **200**.

[0047] If the zigzag protrusion parts **27** and **237** are formed on the side surface of the light guide plate **20** and the sidewall of the frame **200**, a coating area of the fixing member **80** is widened when the light guide plate **20** is coupled to the frame **200**. Accordingly, the coupling force between the light guide plate **20** and the frame **200**.

[0048] FIGS. **6** and **7** are a sectional view showing a reflective sheet when a light guide plate is coupled to a frame.

[0049] Referring to FIG. **6**, when the light guide plate **20** is coupled to the frame **100**, the reflective sheet **40** is fixedly coupled to the light guide plate **20** and the frame **200**.

[0050] After the frame **100** is rested on the reflective sheet **40**, the light guide plate **20** is coupled into the frame **100**.

[0051] Thereafter, a liquid adhesive agent including resin is injected into the contact area between the frame **100** and the light guide plate **20**. The liquid adhesive agent is injected into a space between the frame **100** and the light guide plate **20** so that the liquid adhesive agent is penetrated into the reflective sheet **40** positioned in the lower portion of the frame **100**.

[0052] Then, the liquid adhesive is hardened so that the fixing member **80** is formed between the light guide plate **20** and the frame **100**. The fixing member **80** makes contact with the reflective sheet **40** so that the reflective sheet **40** can be fixed to the frame **100**.

[0053] Accordingly, when the light guide plate **20** makes contact with the frame **100**, the reflective sheet **40** is simultaneously fixed to the light guide plate **20** and the frame **100**.

[0054] Meanwhile, since an additional fixing unit such as an adhesive tape is not required in order to fix the reflective sheet **40** to the frame **100**, a manufacturing process can be simplified, and the manufacturing cost can be reduced.

[0055] In addition, since the additional fixing unit such as the adhesive tape is not required, a slim and small-sized backlight unit can be realized.

[0056] Referring to FIG. **7**, when the light guide plate **20** is coupled to the frame **100**, the reflective sheet **41** is fixedly coupled to the light guide plate **20** and the frame **100** at the same time.

[0057] In particular, the reflective sheet **41** may be formed more widely than the frame **100**. If the reflective sheet **41** is formed more widely than the frame **100**, the reflective sheet **41** may be fixed onto the sidewalls **110** and **130** of the frame **100** while surrounding the lower portion of the frame **100**.

[0058] In other words, the reflective sheet **41** may be fixed to the frame **100** by the fixing member **80** formed in the contact area between the light guide plate **20** and the frame **100**.

[0059] Further, a portion of the reflective sheet **41** positioned on the sidewalls **110** and **130** of the frame **100**, which is the outer peripheral surfaces of the frame **100**, may be bonded to the frame **100** by using an adhesive member **70** such as an adhesive tape.

[0060] Accordingly, when the light guide plate **20** is bonded to the frame **100** by using the fixing member **80**, the reflective sheet **41** is simultaneously fixed to the light guide plate **20** and the frame **200**. At this time, the reflective sheet is additionally bonded to the sidewall of the frame **100**, so that the adhesive strength of the reflective sheet **41** may be enhanced.

[0061] In the display device and a method for manufacturing the same according to the first embodiment, a backlight assembly is fixed to a frame by using a fixing member including resin. Accordingly, the coupling force between the backlight assembly and the frame is enhanced so that the reliability of the display device can be improved.

[0062] Further, when a thin backlight assembly is employed, since the thin backlight assembly is coupled to a frame by using a fixing member including resin, a slim and small-sized backlight unit can be realized.

[0063] In addition, according to the first embodiment, although a fixing member is used when a frame is coupled to a backlight assembly, the fixing member may be used even when a liquid crystal panel is coupled to the frame with the backlight assembly.

[0064] Hereinafter, a display device and a method for manufacturing the same according to the second embodiment will be described with reference to FIGS. 8 to 14.

[0065] FIG. 8 is a front view showing a display device according to the second embodiment, and FIG. 9 is an exploded perspective view of the display device shown in FIG. 8.

[0066] Referring to FIGS. 8 and 9, the display device comprises a liquid crystal panel 10, a backlight assembly 60, a frame 400, and a fixing member 500. The liquid crystal panel 10 and the backlight assembly 60 are identical to those of the first embodiment, and details thereof will be omitted.

[0067] The liquid crystal panel 10 and the backlight assembly 60 must be received and fixed. To this end, the frame 400 and the fixing member 500 are used.

[0068] The frame 400 is a square-type frame having opened front and rear portions so that the liquid crystal panel 10 and the backlight assembly 60 can be received and fixed. Although it is not shown in drawings, the frame 400 may be a square-type frame, only a front portion of which is opened. In the following description, the frame 400 having opened front and rear portions will be described as an example.

[0069] Since the liquid crystal panel 10 and the backlight assembly 60 have a square structure, the frame 400 according to the embodiment may be a square-type frame. However, according to the embodiment, the structure of the frame 400 is not limited to one shape.

[0070] The frame 400 includes a side surface support part 410 for supporting the side surfaces of the liquid crystal panel 10 and the backlight assembly 60, and a rear surface support part 420 vertically bent from the side surface support part 410 in order to support the rear surfaces of the liquid crystal panel 10 and the backlight assembly 60.

[0071] Since the frame 400 includes metal such as steel or alloy steel, the frame 400 may be formed thin.

[0072] If the liquid crystal panel 10 and the backlight assembly 60 are rested into the frame 400, the side surface support part 410 of the frame 400 makes contact with the side surfaces of the liquid crystal panel 10 and the backlight assembly 60, and the rear surface support part 420 makes contact with the boundary of the rear surface of the backlight assembly 60.

[0073] In this case, the frame 400 may be slightly larger than the liquid crystal panel 10 and the backlight assembly 60. Accordingly, a space may be created in the contact area between the frame 400 and the liquid crystal panel 10 and the backlight assembly 60. In order to enhance the coupling strength between the frame 400 and the liquid crystal panel 10 and the backlight assembly 60, the fixing member 500 is formed in the space.

[0074] The fixing member 500 is used to fix the liquid crystal panel 10 and the backlight assembly 60 onto the frame 400, and includes resin. For example, the fixing member 500 includes synthetic resin or silicon resin.

[0075] In particular, the silicon resin has superior heat resistance, water resistance, weather-resistance, and fouling resistance, and has superior elasticity even after the silicon resin is hardened.

[0076] Hereinafter, a scheme of coupling the frame 400 and the liquid crystal panel 10 and the backlight assembly 60 will be described.

[0077] The liquid crystal panel 10 and the backlight assembly 60 are rested into the frame 400. In addition, liquid-phase resin is injected into the space between the frame 400 and the liquid crystal panel 10 and the backlight assembly 60.

[0078] If the resin is hardened after predetermined time lapses, the side surface support part 410 and the rear surface support part 420 of the frame 400 adhere to the side surfaces and the rear surfaces of at least one of the liquid crystal panel 10 and the backlight assembly 60. Accordingly, the frame 400 can be coupled to the liquid crystal panel 10 and the backlight assembly 60 by the fixing member 500.

[0079] FIG. 10 is an enlarged view of an A area shown in FIG. 8, and FIGS. 11 and 12 are views showing the fixing member of FIG. 10 that is selectively formed.

[0080] Referring to FIG. 10, the fixing member 500 may be formed by injecting silicon resin into the entire side surfaces of the liquid crystal panel 10 after the liquid crystal panel 10 is mounted on the frame 400. Then, the liquid crystal panel 10 may be fixedly coupled to the frame 400 by using the fixing member 500.

[0081] Although it is not shown in the drawings, the backlight assembly 60 may be provided at the lower portion of the liquid crystal panel 10. Accordingly, the backlight assembly 60 may be fixed to the frame 400 together with the liquid crystal panel 10 by using the fixing member 500.

[0082] Referring to FIG. 11, a fixing member 520 can be formed in a corner area in which the liquid crystal panel 10 makes contact with the frame 400.

[0083] Silicon resin may be injected only into the corner area of the frame 400 after the liquid crystal panel 10 is mounted on the frame 400, thereby forming the fixing member 520.

[0084] Accordingly, the liquid crystal panel 10 can be fixedly coupled to the frame 400 by the fixing member 520.

[0085] Referring to FIG. 12, a fixing member 530 is selectively formed at the side surfaces except for the corner area of the liquid crystal panel 10 and the frame 400.

[0086] Silicon resin may be selectively injected into the side surfaces except for the corner area of the frame 400 after the liquid crystal panel 10 is mounted on the frame 400, thereby forming the fixing member 530.

[0087] Accordingly, the liquid crystal panel 10 can be fixedly coupled to the frame 400 by the fixing member 530.

[0088] Referring to FIGS. 13 and 14, a frame 450 is formed as a square-shape frame, and may be formed with an opened corner area.

[0089] Referring to FIG. 13, silicon resin may be injected into the corner area of the liquid crystal panel 10 after the liquid crystal panel 10 is mounted on the frame 450, thereby forming a fixing member 550 to fill the opened corner area of the frame 450.

[0090] Accordingly, the fixing member 550 bonds the liquid crystal panel 10 with the frame 450. In addition, the fixing member 550 fills the opened corner area of the frame 450, so that the strength of the frame 450 can be more enhanced.

[0091] Referring to FIG. 14, silicon resin is injected into a corner area of the liquid crystal panel 10 after the liquid crystal panel 10 is mounted on the frame 450, thereby forming a fixing member 570. In this case, the fixing member 570 may protrude out of the opened corner area of the frame 450.

[0092] Accordingly, the fixing member 570 bonds the liquid crystal panel 10 with the frame 450. In addition, the fixing member 570 protrudes out of the opened corner area of the frame 450 to protect the liquid crystal panel 10 when an external structure such as a case 600 is mounted outside the frame 450.

[0093] In other words, the fixing member 570 protrudes outward the frame 450 to absorb the shock occurring when the frame 450 makes contact with the case 600, so that the fixing member 570 can protect the liquid crystal panel 10.

[0094] Although the fixing member 570 is formed in the corner area of the frame 450 and the liquid crystal panel 10 as an example in the drawings, the fixing member 570 may be entirely or selectively formed at the side surfaces of the liquid crystal panel 10 and the frame 450.

[0095] In a display device and a method for manufacturing the same according to the second embodiment, since a frame, into which a liquid crystal panel and a backlight assembly are received and fixed, includes a chassis, which is coupled to an existing mold frame in order to enhance the strength of the mold frame, the thickness of the display device can be reduced by the thickness of the mold frame.

[0096] Further, in the display device, silicon resin is injected into the frame on which the liquid crystal panel and the backlight assembly are mounted, so that the frame can be coupled to the liquid crystal panel and the backlight assembly. Accordingly, since a conventional mold frame forming process and a conventional chassis coupling process, or a conventional chassis insertion process are omitted, a manufacturing process is simplified so that the manufacturing time can be saved, and the manufacturing cost can be reduced.

[0097] In addition, the display device can be protected from an external shock by a fixing member interposed between the frame and the backlight assembly and the liquid crystal panel. This is because the fixing member includes silicon resin having an elastic force. Accordingly, even if the liquid crystal panel and the backlight assembly are shocked, the liquid crystal panel and the backlight assembly are primarily protected by the frame, and secondarily protected by the elastic force of the fixing member positioned inside the frame. Especially, the fixing member formed between a steel frame and the liquid crystal panel and the backlight assembly serves as a cushion, so that the display device can be more safely protected.

[0098] In addition, since the backlight assembly and the liquid crystal panel are coupled to the frame by the fixing member including resin, the manufacturing time can be saved, and the manufacturing cost can be reduced. In detail, since a conventional taping process, which is employed to fix a liquid crystal panel onto a mold frame on which a backlight assembly is mounted, is omitted, the manufacturing process is simplified so that the manufacturing cost can be reduced.

[0099] Any reference in this specification to "one embodiment", "an embodiment," "example embodiment," etc., means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the invention. The appearances of such phrases in various places in the specification are not necessarily all referring to the same embodiment. Further, when a particular feature, structure, or characteristic is described in connection with any embodiment, it is submitted that it is within the purview of one skilled in the art to effect such feature, structure, or characteristic in connection with other ones of the embodiments.

[0100] Although embodiments have been described with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the spirit and scope of the principles of this disclosure. More particularly, various variations and modifications are possible in the component parts and/or arrangements of the subject combination arrangement within the scope of the disclosure, the drawings and the appended claims. In addition to variations and modifications in the component parts and/or arrangements, alternative uses will also be apparent to those skilled in the art.

INDUSTRIAL APPLICABILITY

[0101] The embodiment relates to a display module.

1. A display device comprising:
 - a display part comprising at least one of a liquid crystal panel and a backlight assembly;
 - a frame receiving the display part; and
 - a fixing member disposed between the display part and the frame.
2. The display device as claimed in claim 1, wherein the frame comprises metal or synthetic resin, and the fixing member comprises resin.
3. The display device as claimed in claim 1, wherein the fixing member is entirely or selectively formed between the frame and the display part.
4. The display device as claimed in claim 1, wherein the frame is formed as a square frame having an opened corner part, and the fixing member is formed in a corner area formed between the frame and the display part.
5. The display device as claimed in claim 1, wherein the fixing member is formed at a corner area or a side portion of the frame and the display part.
6. The display device as claimed in claim 1, wherein the frame comprises a side surface support part that supports a side surface of the display part and a lower portion support part that supports the lower portion of the display part.
7. The display device as claimed in claim 1, wherein the backlight assembly comprises a reflective sheet, and the reflective sheet is positioned at a lower-most portion of the backlight assembly and bonded by the fixing member.
8. The display device as claimed in claim 1, comprising a zigzag protrusion formed at least one of an inner peripheral surface of a sidewall of the frame and a portion of an outer peripheral surface of the backlight assembly.
9. The display device as claimed in claim 4, wherein the fixing member formed at the corner area of the frame protrudes beyond a sidewall of the frame.
10. The display device as claimed in claim 9, comprising a case mounted on an outer peripheral surface of the frame and the fixing member.
11. A display device comprising:
 - a backlight assembly comprising a light guide plate, an optical sheet, and a reflective sheet; and
 - a frame formed with a sidewall to receive the backlight assembly, in which at least one portion of the backlight assembly is fixed to the frame by using a fixing member.
12. The display device as claimed in claim 11, wherein the frame comprises metal or synthetic resin, and the fixing member comprises resin.
13. The display device as claimed in claim 11, wherein at least one protrusion is formed at a side surface of the light guide plate.

14. The display device as claimed in claim **13**, wherein a groove is formed at an inner peripheral surface of a sidewall of the frame corresponding to the protrusion of the light guide plate.

15. The display device as claimed in claim **11**, wherein the fixing member is provided between the light guide plate and the frame.

16. The display device as claimed in claim **15**, wherein the reflective sheet is fixed to a lower surface of the frame and the fixing member.

17. The display device as claimed in claim **11**, comprising a zigzag protrusion formed at least one of an inner peripheral

surface of a sidewall of the frame and an outer peripheral surface of the light guide plate.

18. The display device as claimed in claim **11**, wherein the reflective sheet is provided to surround a bottom surface and an outer peripheral surface of a sidewall of the frame, and is fixed to the outer peripheral surface of the sidewall of the frame by using an adhesive tape.

19. The display device as claimed in claim **11**, wherein the sidewall of the frame comprises a side support part that supports a sidewall of the backlight assembly, and a lower support part that supports a lower portion of the backlight assembly and is bent from the side support part.

* * * * *

专利名称(译)	显示设备		
公开(公告)号	US20100066938A1	公开(公告)日	2010-03-18
申请号	US12/523190	申请日	2008-05-09
[标]申请(专利权)人(译)	李正莫		
申请(专利权)人(译)	李正莫		
当前申请(专利权)人(译)	李正莫		
[标]发明人	LEE JUNG MOK		
发明人	LEE, JUNG MOK		
IPC分类号	G02F1/1333		
CPC分类号	G02B6/0088 G02B6/0093 G02F2202/28 G02F2201/503 G02F1/133308		
优先权	1020070050367 2007-05-23 KR 1020070060230 2007-06-20 KR		
其他公开文献	US8471975		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种显示装置。通过使用诸如硅的树脂将液晶面板和背光组件固定到框架，从而实现纤薄和小尺寸的显示装置。

