



(19) **United States**

(12) **Patent Application Publication**

(10) **Pub. No.: US 2003/0071796 A1**

Nakanishi et al.

(43) **Pub. Date:**

Apr. 17, 2003

(54) **TOUCH PANEL AND ELECTRONIC APPARATUS USING THE SAME**

(52) **U.S. Cl.** 345/173

(76) **Inventors:** Akira Nakanishi, Osaka (JP);
Nobuhiro Yamaue, Osaka (JP);
Shigeyuki Fujii, Osaka (JP)

(57) **ABSTRACT**

Correspondence Address:
WENDEROTH, LIND & PONACK, L.L.P.
2033 K STREET N. W.
SUITE 800
WASHINGTON, DC 20006-1021 (US)

A touch panel comprising a transparent substrate with a transparent conductive layer, and a second transparent substrate with a second transparent conductive layer. Color of the touch panel is 2.0 or smaller in the b^* value of the $L^*a^*b^*$ color specification in accordance with JIBS Z 8729. At least one of the first and second transparent substrates is provided with a color adjustment layer which renders optical interference. A touch panel further comprises a third transparent substrate provided with a color adjustment layer, or a third transparent substrate containing a colorant having complementary color to a color of the transparent conductive layer. The touch panel has less yellowish appearance, and shows least color change of a color display device. When attached on a liquid crystal display device in an electronic apparatus, the electronic apparatus exhibits a high grade color display without accompanying a sense of incompatibility.

(21) **Appl. No.:** 10/263,722

(22) **Filed:** Oct. 4, 2002

(30) **Foreign Application Priority Data**

Oct. 4, 2001 (JP) 2001-308307

Publication Classification

(51) **Int. Cl.⁷** G09G 5/00

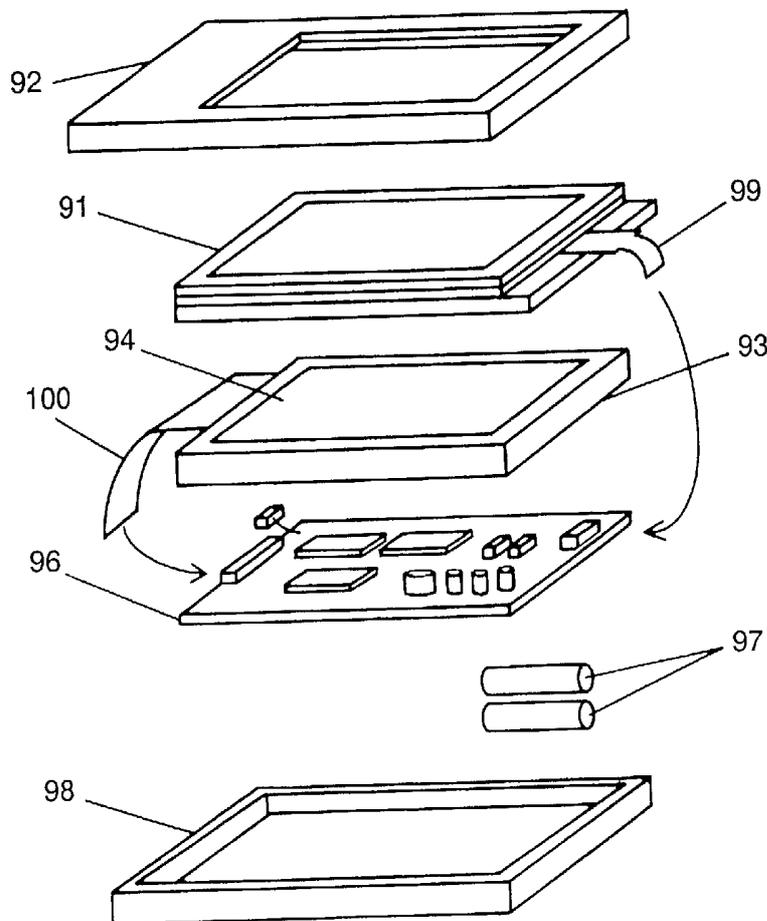


FIG. 1

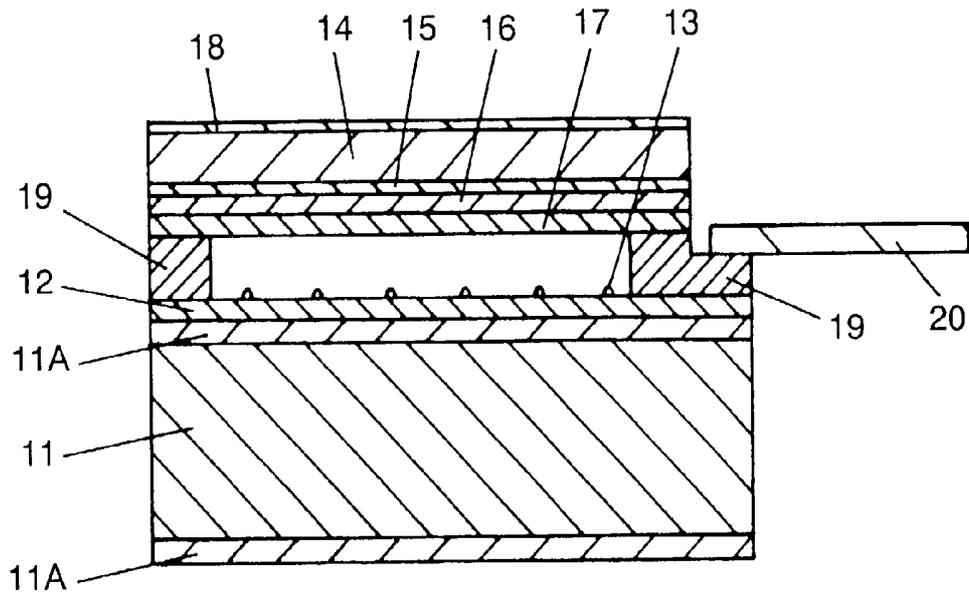


FIG. 2

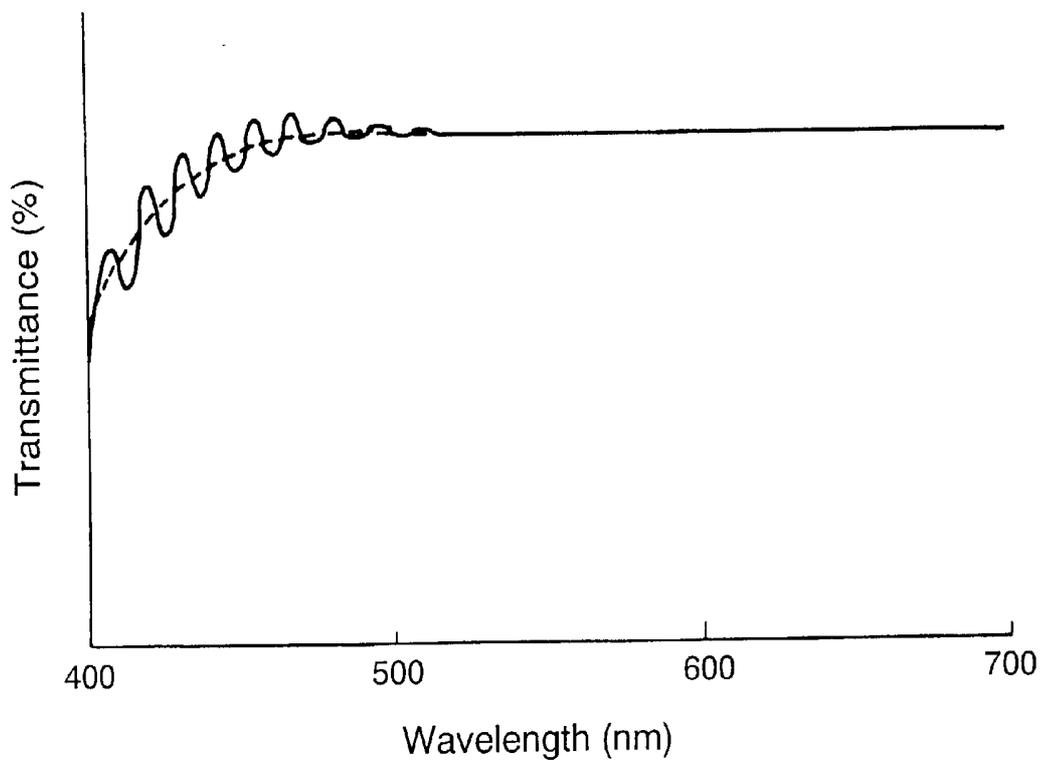


FIG. 3

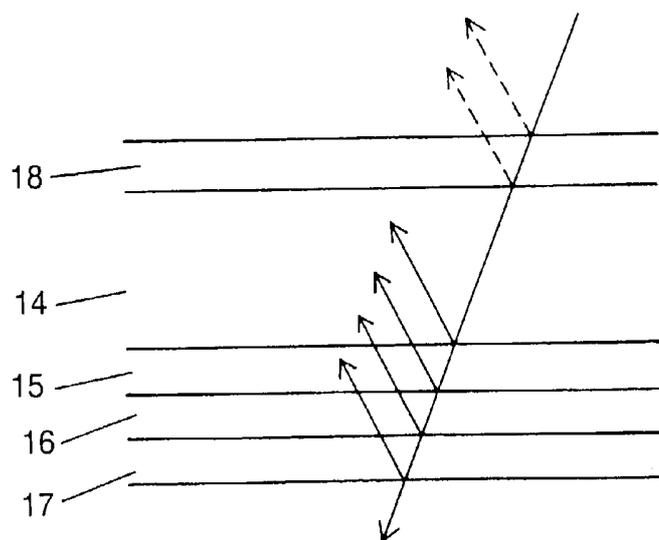


FIG. 4

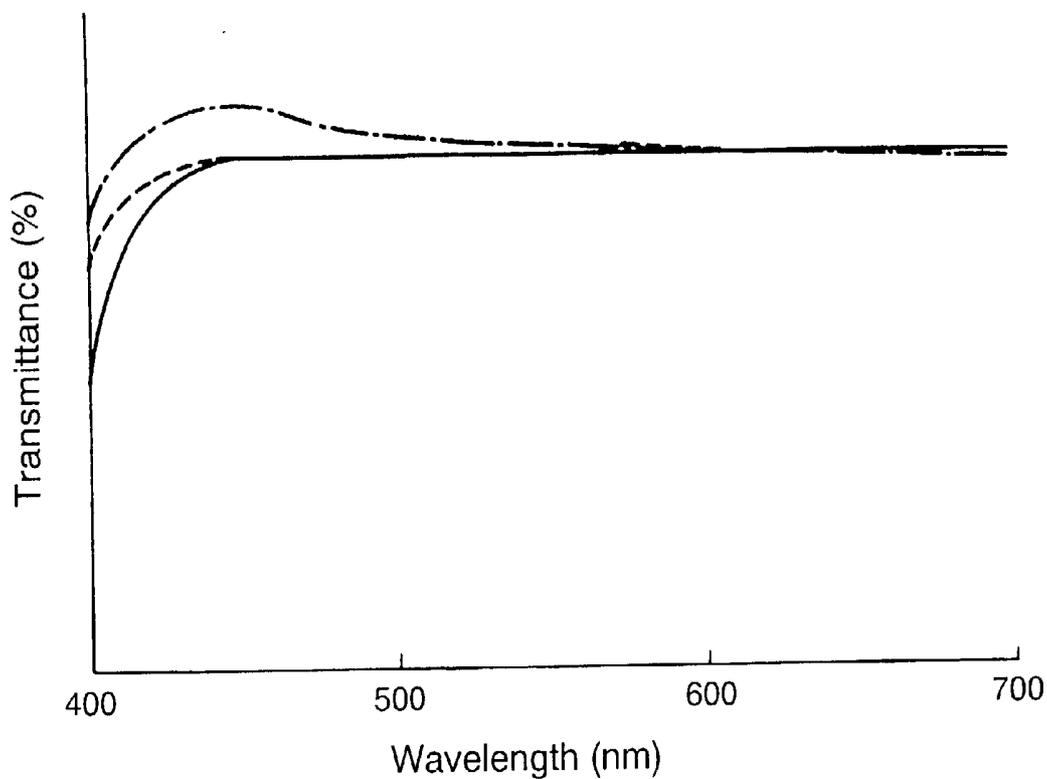


FIG. 5

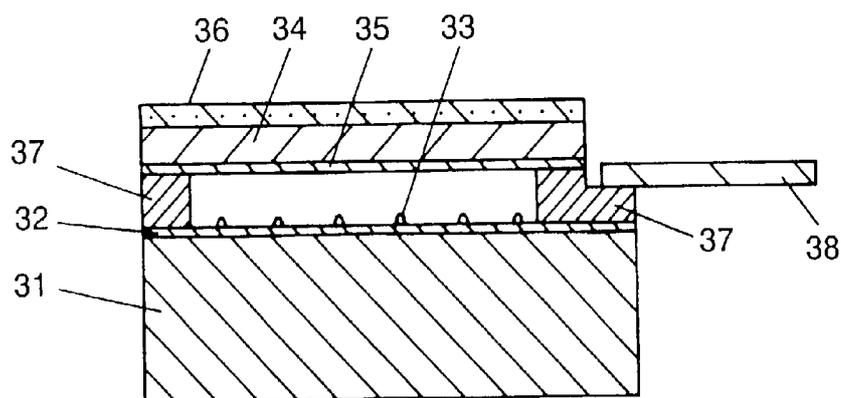


FIG. 8

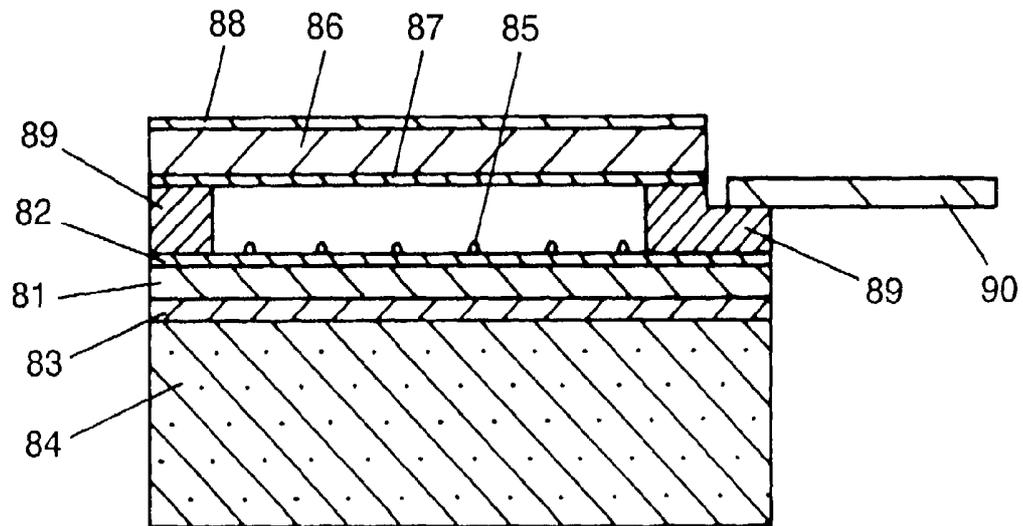


FIG. 9


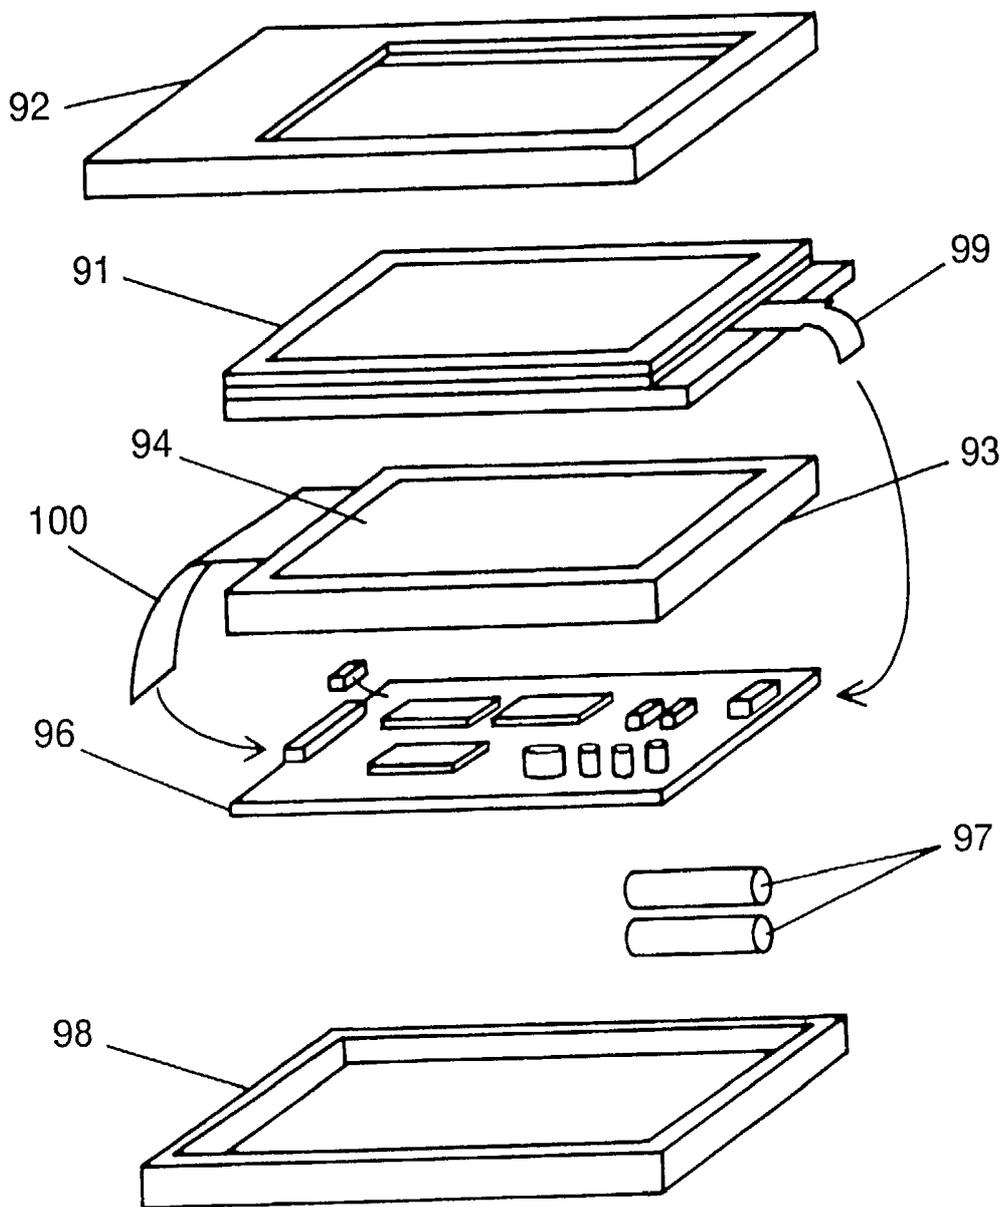


FIG. 10 Prior Art

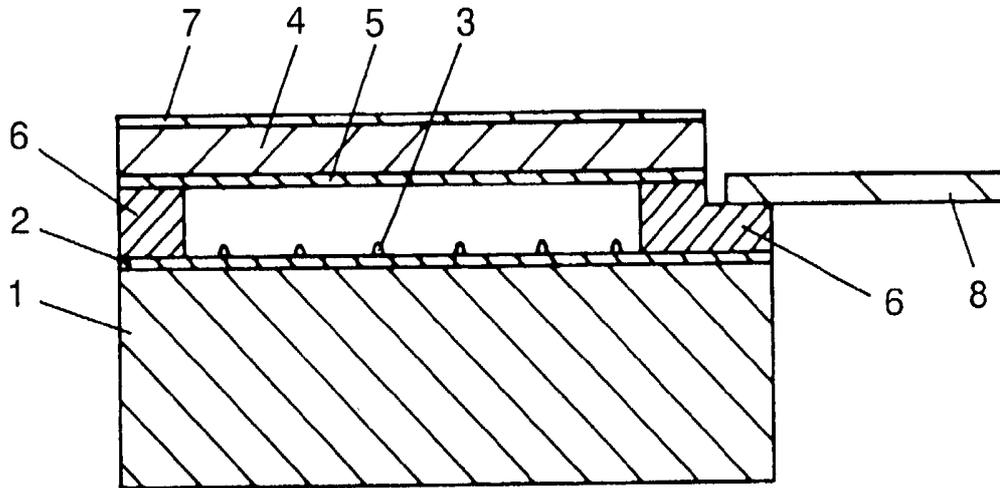

TOUCH PANEL AND ELECTRONIC APPARATUS USING THE SAME

FIELD OF THE INVENTION

[0001] The present invention relates to a touch panel, which is attached in front of a display surface of a liquid crystal display device or the like display means. The touch panel makes it possible to input a certain specific signal by being pressed its surface corresponding to a content displayed on the display means with a pen or a finger. The present invention also relates to an electronic apparatus using the touch panel.

BACKGROUND OF THE INVENTION

[0002] An increasing number of electronic apparatus have been employing a touch panel (hereinafter the touch panel is referred to as TP), which enables to input a certain specific signal corresponding to displayed contents by pressing the relevant place of display screen with a pen or a finger. In the following, a conventional TP is described referring to the drawing. The drawings used in the present invention are shown expanded in the direction of panel thickness for the sake of easier understanding.

[0003] FIG. 10 is a cross sectional view of a conventional TP. Referring to FIG. 10, a first transparent substrate 1, or the bottom substrate, is made of a glass, a plastic film, a plastic sheet or the like material. The first transparent substrate 1 is provided on an upper surface with a first transparent conductive layer 2 formed by sputtering indium tin oxide (ITO) or tin dioxide (SnO_2). Provided on the first transparent conductive layer 2 are very small dot spacers 3 made of an insulating epoxy resin or the like material disposed at a certain specific pitch. A second transparent substrate 4, or the upper substrate made of a glass, a plastic film or a plastic sheet, is provided beneath the lower surface with a second transparent conductive layer 5 made of ITO, SnO_2 , or the like.

[0004] The first transparent substrate 1 and the second transparent substrate 4 are adhered together by an outer circumference part 6 so that the second transparent conductive layer 5 opposes insulated to the first transparent conductive layer 2 with a certain specific clearance. An insulation pattern, an electrode pattern, a wiring pattern, a pattern of adhesive compound, or the like are provided in the outer circumference part 6.

[0005] The upper surface of the second transparent substrate 4 is covered with a hard coat layer 7 of pencil hardness of 3H, which is made of an acrylic resin in order to protect the upper surface from a scratch or other possible damage to be caused when it is pressed with a pen or a finger.

[0006] A flexible circuit board 8 is fixed by an adhesive at one end with the outer circumference part 6 for delivering output signals generated at the first transparent conductive layer 2 and the second transparent conductive layer 5 to an external circuit (not shown), while another end is connected with the external circuit.

[0007] Next, operation of the above-configured conventional TP is described.

[0008] When a transparent substrate 4 is pressed with a finger or a pen at a specific position from an above, the

substrate bends at the position accompanying the surrounding area. This brings the first transparent conductive layer 2 and the second transparent conductive layer 5 into contact at the pressed position. When, the dot spacers 3 keep the transparent conductive layers separated to be making no contact to each other in the area other than the pressed position.

[0009] The pressed position is detected by an external circuit via the flexible circuit board 8 in the form voltage ratio relative to a voltage applied to the transparent conductive layer 2 and the transparent conductive layer 5 at the position of contact.

[0010] Since the transparent conductive layers 2 and 5 made of ITO, SnO_2 or the like have a slightly yellowish color, conventional TPs sometimes exhibit yellowish color, that is one of the problems of the TPs.

[0011] Namely, when a conventional TP is attached on a monochrome liquid crystal display device, the display device is seen slightly yellowish via the TP because the display device originally has a background color of gray-yellow or yellow-green. When a conventional TP is attached on a color display device such as color liquid crystal display device, color organic EL or the like, color tone of the color display device sometimes changes creating a sense of incompatibility in the display of white, among other colors. This impairs evaluation of an apparatus, and request for the improvement has been arising increasingly.

[0012] The yellow color can be numerically represented by the b^* value of $L^*a^*b^*$ (hereinafter referred to as b^* value) color specification in accordance with JIBS (Japan Industrial Standard) Z 8729, which is equivalent with CIE (Commission Internationale de l'Eclairage) LAB and CIE LUV. The larger the + value in b^* value the stronger the color yellow; whereas, the larger in the negative value the stronger the color blue.

[0013] The glass with ITO layer normally has the b^* value of +1 or greater, the plastic film or sheet with ITO layer has the b^* value of +1.5 or greater. So, a TP formed of a glass transparent substrate 1 and a plastic transparent substrate 4 exhibits the b^* value of +2.5 or greater, and a TP in which both of the transparent substrates 1 and 4 are plastic exhibits the b^* value of +3 or greater.

[0014] The present invention addresses the above problems, and provides a high quality TP which has a reduced yellowish appearance.

SUMMARY OF THE INVENTION

[0015] A TP of the present invention comprises a first transparent substrate provided with a first transparent conductive layer, and a second transparent substrate provided with a second transparent conductive layer, the second transparent conductive layer opposing to the first transparent conductive layer with a certain specific clearance, wherein a b^* value of the TP is 2.0 or smaller in the $L^*a^*b^*$ color specification in accordance with JIS Z 8729. At least one of the first transparent substrate and the second transparent substrate is provided with a layer for color adjustment which generates an optical interference. A TP in another embodiment of the present invention further comprises a third transparent substrate provided with a color adjustment layer, or a third transparent substrate containing a colorant that has

a color complementary to the color of the transparent conductive layer. A TP in still another embodiment of the present invention contains a colorant that has a color complementary to the color of transparent conductive layer in at least one of the first and the second transparent substrates.

[0016] A TP in the present invention is less yellowish and shows least change in a display color when attached on a color display device. When attached on a display surface of a liquid crystal display device or the like of an electronic apparatus, the electronic apparatus shows a high quality color display which accompanies least sense of incompatibility.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] FIG. 1 is a cross sectional view of a TP in accordance with a first exemplary embodiment of the present invention.

[0018] FIG. 2 is a chart showing light transmittance of the TP.

[0019] FIG. 3 shows a state of light transmission to the second transparent substrate.

[0020] FIG. 4 is a chart showing light transmittance of the TP in the first embodiment of the present invention.

[0021] FIG. 5 is a cross sectional view of a TP in accordance with a second exemplary embodiment of the present invention.

[0022] FIG. 6 is a cross sectional view of a TP in accordance with a third exemplary embodiment of the present invention.

[0023] FIG. 7 is a cross sectional view of a TP in accordance with a fourth exemplary embodiment of the present invention.

[0024] FIG. 8 is a cross sectional view of a TP in accordance with a fifth exemplary embodiment of the present invention.

[0025] FIG. 9 is an exploded perspective view of an electronic apparatus in accordance with a sixth exemplary embodiment of the present invention.

[0026] FIG. 10 is a cross sectional view of a conventional TP.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0027] In the following, exemplary embodiments of the present invention are described with reference to FIG. 1 through FIG. 9. The drawings are shown enlarged in a direction of a thickness of a panel so that the panel structure can be understood easily.

[0028] First Exemplary Embodiment

[0029] FIG. 1 shows a cross sectional view of a TP in accordance with a first exemplary embodiment of the present invention. A first transparent substrate 11, or a lower substrate, is made of a 1.1 mm thick soda lime glass.

[0030] The first transparent substrate 11 is provided at both of an upper and a lower surfaces with silicon dioxide (SiO₂) layers 11A for preventing alkaline substance from

dissolving out of the glass material. On the upper SiO₂ layer 11A, a first transparent conductive layer of ITO having a refractive index of 1.9 is formed at a thickness of 200 Å.

[0031] The light transmittance of the transparent substrate 11 including the upper and the lower SiO₂ layers 11A and the transparent conductive layer 12 is measured using a visible light spectrophotometer. The transmitted light does not have a peak spectrum at a specific wavelength; the total luminous transmittance in accordance with JIS K 7361-1 (hereinafter referred to as total transmittance) is 94%, and b* value specified by the L*a*b* color specification in accordance with JIS Z 8729 (hereinafter referred to as b* value) is 1.0.

[0032] Very small sized dot spacers 13 made of an insulating epoxy resin or the like material are disposed on the transparent conductive layer 12 at a specific pitch.

[0033] Beneath a lower surface of a second transparent substrate 14, which being an upper substrate and made of a 175 μm thick biaxial oriented polyethylene terephthalate (PET) film, a titanium dioxide (TiO₂) layer 15 having a refractive index of 2.2 is formed. Further beneath a surface of the TiO₂ layer 15, a SiO₂ layer 16 having a refractive index of 1.4 is formed.

[0034] In the present embodiment, the TiO₂ layer 15 and the SiO₂ layer 16 are controlled to have certain respective layer thickness to function integrally as a color adjustment layer. Namely, the TiO₂ layer 15 is formed at a thickness of 500 Å, while the SiO₂ layer 16 at a thickness of 400 Å, in the present exemplary embodiment.

[0035] Beneath the lower surface of the SiO₂ layer 16, a second transparent conductive layer 17 of ITO having a refractive index of 1.9 is formed at a thickness of 200 Å.

[0036] On an upper surface of the transparent substrate 14, a transparent hard coat layer 18 of an acrylic resin having a pencil hardness 3H is provided to protect the surface from being damaged by a finger or a pen used during input operation.

[0037] Spectral transmittance of the transparent substrate 14, the color adjustment layer consisting of the TiO₂ layer 15 and the SiO₂ layer 16, and the second transparent conductive layer 17 has a peak value of 94% at 480 nm, and the total transmittance is 91%, and the b* value is -0.2.

[0038] Spectral transmittance of the transparent substrate 14 was measured also by the visible light spectrophotometer in the same way as the transparent substrate 11. In some cases, spectral peak of the transmittance changes at a short cycle of approximately 10 nm for a small amplitude of approximately 1-2% transmittance, as shown in FIG. 2 with a solid line, as a result of optical interference of the hard coat layer 18 or the like. When such a spectral transmittance curve appears, the short-cycle small-amplitude portion is averaged to provide a spectral transmittance curve as indicated with a dotted line in FIG. 2, and peak of the latter curve is regarded as the spectral peak of the transmittance.

[0039] The transparent substrates 11 and 14 are adhered together at an outer circumferential part 19 so that the transparent conductive layer 12 and the transparent conductive layer 17 are opposed and insulated to each other by a gap of approximately 100 μm.

[0040] In the outer circumferential part 19, an insulating epoxy resin pattern, an electrode pattern and a wiring pattern

formed of powdered Ag and a polyester resin, an adhesive pattern of an acrylic pressure sensitive adhesive and the like are formed.

[0041] A flexible circuit board **20** at its one end is adhered and fixed with the outer circumferential part **19** for delivering the signals from the transparent conductive layers **12** and **17** to an external circuit, while another end of the flexible circuit board is connected with an external circuit (not shown).

[0042] Operating principle of the above-configured TP remains the same as that described in the background of the invention. Namely, when the transparent substrate **14** is pressed at a certain specific position with a finger or a pen from the above, it bents at the position accompanying the surrounding area together, which brings the transparent conductive layer **17** to make contact with the transparent conductive layer **12** at a place corresponding to the position. Voltage ratio at the position is detected by an external circuit via the flexible circuit board **20**.

[0043] Next, a method of manufacturing the TP in the present embodiment is described.

[0044] A transparent substrate **11** is dipped into a silicone alkoxide solution, and then baked at 400° C. to have SiO₂ layers **11A** formed on an upper and a lower surfaces thereof.

[0045] On an upper surface of the SiO₂ layer **11A**, a transparent conductive layer **12** is formed by a sputtering method, and then dot spacers **13** are formed thereon by a screen printing or the like process.

[0046] A transparent substrate **14** is provided on one of its surfaces with a transparent hard coat layer **18** by a roll coating process, and then on another surface with a TiO₂ layer **15**, an SiO₂ layer **16** and a transparent conductive layer **17** in this order by a sputtering method.

[0047] An insulation pattern, an electrode pattern, a wiring pattern, a pattern of pressure sensitive adhesive, which integrally constitute an outer circumferential part **19**, are formed on either one or both of the transparent substrate **11** and the transparent substrate **14** by a screen printing method or the like process. The transparent substrate **14** and the transparent substrate **11** are adhered together via the outer circumferential part **19** so that the transparent conductive layer **17** opposes to the transparent conductive layer **12** with a specific distance in between.

[0048] Then, adhered body is kept in a hot chamber of approximately 50-120° C. in order to slightly soften the outer circumferential part **19**. By such treatment, the transparent substrate **14**, which is adhered only in the area of outer circumferential part **19**, is released from a strain and a surface flatness of the transparent substrate **14** is assured.

[0049] Finally, a flexible circuit board **20** is connected to a specific position by a hot pressing to provide a finished TP.

[0050] A TP thus completed shows a total transmittance of 86% and has a b* value of +0.8. Thus it has a color of reduced yellowish color with very high total transmittance.

[0051] The above results are obtained by an effect of the b* value of the transparent substrate **14**.

[0052] When light passes through the transparent substrate **14** provided with the above-described layers, each of the

interfaces formed by materials of different refractive indices reflects the light. Meanwhile, the transparent substrate **14** is provided with a TiO₂ layer **15** and an SiO₂ layer **16** formed at specific thickness between the transparent substrate **14** and the transparent conductive layer **17**, which are working as a color adjustment layer that allows the short-wavelength light to pass through at a high luminous transmittance. As a result, luminous transmittance of the transparent substrate **14** is controlled to exhibit a peak value of 93% of spectral transmittance at 480 nm, as shown with the dashed dotted line in **FIG. 4**. Due to this effect, decrease of luminous transmittance at a short-wavelength light of 400-500 nm caused by the transparent conductive layer **17** can be improved.

[0053] The spectral transmittance and the peak position are adjustable by controlling the layer thickness of the TiO₂ layer **15** and the SiO₂ layer **16**. For example, it is possible to allow the 400-500 nm wavelength component to pass through the layers without having a peak in the spectral transmittance, as shown with the dotted line in **FIG. 4**.

[0054] Since the TP in the present embodiment employs the second transparent substrate **14** having the spectral peak at 480 nm, the TP as a whole allows the light containing a 400-500 nm short-wavelength component, for example, to pass through at a high transmittance. Thereby, the yellowish appearance of a TP can be improved, and a high transmittance can be obtained.

[0055] Namely, a TP that exhibits an effectively reduced yellowish appearance can be produced by employing a substrate having the spectral transmittance peak at 500 nm or shorter. In **FIG. 4**, the solid line curve represents a conventional TP.

[0056] The TP in the present embodiment has a b* value of +0.8, which represents a sum of the transparent substrate **11** and the transparent substrate **14**. When the TP is attached on a display device (not shown) of an apparatus, it effects least color change and there is almost no sense of incompatibility, regardless of whether the display device is a monochromatic display device or a color display device. Furthermore, the display can be seen clearer.

[0057] According to the results of experiments conducted by the inventors of the present invention, any TP having the b* value of 2.0 or smaller exhibits, like the one described in the above, least significant color change when it is attached on a display device. However, it is preferred that the b* value is within a range of not greater than +1.0 and not smaller than -2.0.

[0058] In a case where the transparent substrate **11** is made of glass, the practical thickness is 0.2-5 mm, preferably 0.4-3 mm.

[0059] Besides the glass material, the transparent substrate **11** may be made of a transparent plastic sheet of an acrylic resin, a methacrylic resin, a polyolefin resin, a polycyclohexadiene resin, or the like material formed through an ordinary method such as extruding, press molding, a casting process or an injection molding. A transparent film such as a biaxial oriented PET film, a polycarbonate film, a polyether sulfon film, a polyallylate film, a polyolefin film may also be used. The practical thickness of them is, for example, 0.025-0.5 mm, preferably 0.075-0.25 mm.

[0060] Plastic film, or sheet, used for the transparent substrate **11** tends to increase the b^* value of transparent substrate **11**, as compared to a glass substrate. Therefore, it is preferred to provide a color adjustment layer also on the transparent substrate **11** side, like the structure of the transparent substrate **14**.

[0061] The transparent substrate **14** may be made of, besides the biaxial oriented PET film, a biaxial oriented polyethylene naphthalate film, a mono-axial oriented polyethylene terephthalate film, a polycarbonate film, a polyether sulfon film, a polyallylate film, a polyolefin film, or the like. The practical thickness is 0.05-0.4 mm, preferably 0.1-0.2 mm.

[0062] The transparent conductive layer **12** and the transparent conductive layer **17** may be made of tin dioxide (SnO_2), zinc oxide (ZnO), gold (Au) thin film, silver (Ag) thin film or the like, besides the ITO.

[0063] In place of the TiO_2 layer **15** and the SiO_2 layer **16** provided as the color adjustment layer, following layers may be used. In place of the high refractive index TiO_2 layer **15**, a layer having a refractive index of 1.7 or higher, such as an ITO layer, an SnO_2 layer, a zirconium dioxide (ZrO_2) layer may be used. In place of the low refractive index SiO_2 layer **16** layer having a refractive index of 1.5 or lower, such as magnesium fluoride (MgF_2) layer or the like. Optimum layer thickness must be decided according to the respective materials.

[0064] It is not necessary for a color adjustment layer to be formed of the above-described two layers i.e. a layer of high refractive index and a layer of low refractive index. It may be a single layer, or three or more layers. In any case, the thickness of the layers needs to be controlled so that the spectral peak of transmittance is at 500 nm or a shorter wavelength.

[0065] When the color adjustment layer is formed of a single layer, it is effective to make a color adjustment layer using a material of low refractive index, and to provide the layer of low refractive index directly under a transparent conductive layer, because ITO layer has a high refractive index.

[0066] In a case of multi-layer color adjustment layer, where a high refractive index layer and a low refractive index layer are alternatively disposed, the low refractive index layer may be preferably disposed directly under the transparent conductive layer.

[0067] The place for disposing the above color adjustment layers is not limited to the place between the transparent conductive layer **17** and the transparent substrate **14**. The same effects can be obtained by disposing the layer at least at one of the places of, for example, at the lower surface of the transparent substrate **11**, between the transparent conductive layer **12** and the transparent substrate **11**, and on the upper surface of the transparent substrate **14**. Besides the above-described disposition, the color adjustment layer may be provided on each of the opposing substrates, or provided at a plurality of places. A TP having such configuration exhibits a further reduced yellowish appearance with a high transmittance.

[0068] Second Embodiment

[0069] FIG. 5 is a cross sectional view of a TP in accordance with a second exemplary embodiment of the present invention. Referring to FIG. 5, a first transparent conductive layer **32** made of an ITO and having a refractive index of 1.9 is formed on an upper surface a first transparent substrate **31** made of a 1.1 mm thick soda lime glass.

[0070] Spectral transmittance through the transparent substrate **31** including the first transparent conductive layer **32** formed thereon does not show a peak, a total transmittance is 90%, and the b^* value is 2.0.

[0071] The transparent substrate **31** in the present embodiment is also provided with SiO_2 layers for preventing alkaline substance from dissolving out of the glass. Illustration and description of the SiO_2 layers are omitted here.

[0072] Very small sized dot spacers **33** made of an insulating epoxy resin or the like material are provided on a surface of the transparent conductive layer **32** and are disposed at a specific pitch.

[0073] A second transparent substrate **34** made of a 175 μm thick biaxial oriented PET film is provided at a lower surface with a second transparent conductive layer **35** of ITO and having a refractive index of 1.9.

[0074] On the upper surface of the transparent substrate **34**, a transparent hard coat layer **36** of pencil hardness 3H made of an acrylic resin is provided in order to protect the transparent substrate **34** from being damaged by a finger or a pen used for an inputting operation. The transparent hard coat layer **36** in the present embodiment contains a 0.1 weight % of blue pigment, phthalocyanine blue, whose color is complementary to the first and the second transparent conductive layers **32** and **35**.

[0075] Although the phthalocyanine blue is actually in a state of fine particles of 1 μm or smaller in diameter, it is represented by black dots in the hard coat layer **36** in FIG. 5.

[0076] Spectral transmittance through the transparent substrate **34**, the transparent conductive layer **35** formed thereon and the hard coat layer **36** shows a peak value of 88% at 460 nm, the total transmittance is 86%, and the b^* value is -3.0.

[0077] The distance between the transparent substrate **31** and the transparent substrate **34**, the structure of outer circumferential part **37** and other structures of a TP in the present embodiment remain the same as those of the first embodiment.

[0078] The above-configured TP in the present embodiment shows a 77% total transmittance and a b^* value of -1.0, rendering a color of least yellowish color, or colorless or a color slightly close to blue. This result has been brought about by the use of a hard coat layer **36**, which was adjusted to have a b^* value of -3.0 by mixing the blue pigment.

[0079] Since the TP in the present embodiment comprises a transparent substrate **34** having less number of layers as compared with the first embodiment, the TP can be produced at a relatively low cost.

[0080] Any TP having the b^* value of 2.0 or smaller shows, also in the present embodiment, least significant color change when it is attached on a display device. However, it is preferred that the b^* value is within a range not greater than +1.0 and not smaller than -2.0.

[0081] In place of the phthalocyanine blue pigment mixed in the hard coat layer 36, other blue pigments or dyes may be used. Preferred content is 0.01-0.5 weight % in a resin component of the hard coat layer 36. Too much amount of pigment or dye may result in too thick coloring. This not only invites an overwhelming complementary color but it causes a deteriorated luminous transmittance. So, the amount of pigment or dye needs to be decided on request.

[0082] As described above, it is an efficient procedure to mix a blue pigment into the hard coat layer 36 to obtain a required color with a less number of layer forming steps. However, it is also possible to modify the b^* value by providing another color adjustment layer different from the hard coat layer.

[0083] The color adjustment layer may be provided at least one of the following places, the lower surface of the first transparent substrate 31, between the first transparent conductive layer 32 and the first transparent substrate 31, between the second transparent conductive layer 35 and the second transparent substrate 34, and upper surface of second transparent substrate 34. The color adjustment layer(s) may be disposed taking into consideration of the colors and the deterioration in the luminous transmittance of the TP.

[0084] In an exemplary case where each of the opposing substrates is provided with a layer containing a colorant i.e. in a TP where there are two colorant-containing layers, a sum of the b^* values makes the b^* value of a entire TP. Therefore, it may be a practical idea to determine a b^* value for each of the colorant-containing layer to be a half of the desired b^* value of the entire TP.

[0085] The above descriptions is made on a procedure in which the colorant containing layers are provided separately. However, the same effects can be obtained by mixing a colorant into the first or the second transparent substrate, color of the colorant being complementary to color of the first and the second transparent conductive layers. Namely, a colored sheet glass, a colored resin sheet or the like may be used for the purpose.

[0086] Third Embodiment

[0087] FIG. 6 is a cross sectional view of a TP in accordance with a third exemplary embodiment of the present invention. Referring to FIG. 6, a first transparent substrate 41 of a biaxial oriented PET film is supported at the lower surface, via an adhesive layer 42 made of an acrylic resin, by a transparent supporting substrate 43 of a 1.0 mm thick polycarbonate sheet.

[0088] An ITO layer 44 of refractive index of 1.9, and an SiO_2 layer 45 of refractive index of 1.4 are formed on an upper surface of the transparent substrate 41. The ITO layer 44 and the SiO_2 layer 45 are formed at predetermined thickness to function as a color adjustment layer.

[0089] A first transparent conductive layer 46 of an ITO having a refractive index of 1.9 is provided on an upper surface of the SiO_2 layer 45.

[0090] Spectral transmittance through the transparent substrate 41, the color adjustment layer consisting of the ITO layer 44 and the SiO_2 layer 45, the transparent conductive layer 46, the transparent supporting substrate 43 and the adhesive layer 42 shows a peak value of 92% at 490 nm, and a total transmittance is 91%, the b^* value is +0.1.

[0091] Very small sized dot spacers 47 made of an insulating epoxy resin or the like material are disposed on the transparent conductive layer 46 at a certain specific pitch.

[0092] Beneath a lower surface of the second transparent substrate 48, which is made of a 175 μm thick biaxial oriented PET film, a TiO_2 layer 49 having a refractive index of 2.2 is provided, and an SiO_2 layer 50 having a refractive index of 1.4 is formed beneath a lower surface of the TiO_2 layer 49.

[0093] Thickness of the TiO_2 layer 49 and the SiO_2 layer 50 are controlled in a predetermined thickness so that the layers function as a color adjustment layer. A second transparent conductive layer 51 of an ITO and having a refractive index of 1.9 is formed beneath the lower surface of the SiO_2 layer 50.

[0094] Spectral transmittance through the transparent substrate 48, the color adjustment layer consisting of TiO_2 layer 49 and SiO_2 layer 50, and the transparent conductive layer 51 has a peak value of 93% at 480 nm, and a total transmittance is 91%, the b^* value is -0.2.

[0095] On an upper surface of the transparent substrate 48, a hard coat layer 52 of pencil hardness of 3H and made of an acrylic resin is provided in order to protect the second transparent substrate 48 from being damaged by a finger or a pen used for an inputting operation.

[0096] The transparent substrate 41, the second transparent substrate 48, the distance between the transparent conductive layer 46 and the transparent conductive layer 51, the structures of outer circumferential part and other portions of the TP in the present embodiment remain the same as those in the first and the second embodiments. The above-configured TP in the present embodiment rendered a b^* value -0.1, having least yellowish color, or a color close to the colorless transparency. Furthermore, it provides a total transmittance of as high as 83%.

[0097] These characteristics are brought about by the color adjustment layer. The effectiveness and advantages remain the same as those in the first embodiment, and a detailed description is omitted here. Since the TP in the present embodiment is provided with color adjustment layers on both of the transparent substrate 41 and the transparent substrate 48, significant improvements are observed in the b^* value and the total transmittance.

[0098] Furthermore, since the transparent substrate 41 is supported by the transparent supporting substrate 43, the rigidity and the durability are improved. A careless bending of the first and the second transparent substrates 41 and 48 can be avoided and a stable contact during the operation is obtained.

[0099] A TP that has an effectively reduced yellowish appearance can be produced by employing a substrate having the spectral peak at 500 nm or shorter. Any TP having the b^* value of 2.0 or smaller exhibits least significant color change when it is attached on a display device. However, it is preferred that the b^* value is within a range of not greater than +1.0 and not smaller than -2.0 as is disclosed in the first embodiment.

[0100] Besides the polycarbonate sheet described earlier, the transparent supporting substrate 43 may be made of a plastic sheet of an acrylic resin, methacrylic resin, polyolefin

resin, polycyclohexadiene resin, norbornene resin, or the like, which are formed through an ordinary process such as extruding, press molding, a casting process or an injection molding, or a glass material. The practical thickness of the transparent supporting substrate **43** is 0.2-5 mm, preferably 0.4-3 mm.

[0101] As for the acrylic resin adhesive layer **42**, those having a good adhesive property with both of the transparent substrate **41** and the transparent supporting substrate **43** are preferred. Besides the acrylic resins, silicone resin pressure sensitive adhesive may also be used. The adhesive layer **42** may be applied on the first transparent substrate **41** or the transparent supporting substrate **43**, or it may be used in the form of a double-sided pressure sensitive adhesive tape.

[0102] Fourth Embodiment

[0103] FIG. 7 is a cross sectional view of a TP in accordance with a fourth exemplary embodiment of the present invention. Referring to FIG. 7, a first transparent conductive layer **62** of ITO and having a refractive index of 1.9 is formed on an upper surface of a first transparent substrate **61** of biaxial oriented PET film. The first transparent substrate **61** is supported, via an adhesive layer **63** of an acrylic resin formed beneath the lower surface, by a transparent supporting substrate **64** which is made of a 1.0 mm thick polycarbonate sheet.

[0104] Beneath the lower surface of the transparent supporting substrate **64** in the present embodiment, a SiO₂ layer **65** with a refractive index of 1.4, an ITO layer **66** with a refractive index of 1.9 and a SiO₂ layer **67** with a refractive index of 1.4 are formed in this order. Each of these layers is controlled to a predetermined thickness to constitute a color adjustment layer.

[0105] Spectral transmittance through the transparent substrate **61**, the transparent conductive layer **62**, the transparent supporting substrate **64**, the color adjustment layer and the adhesive layer **63** has a peak value of 94% at 480 nm, and the total transmittance is 92%, the b* value is -2.4.

[0106] Very small sized dot spacers **68** made of an insulating epoxy resin or the like material are disposed on the first transparent conductive layer **62** at a certain specific pitch.

[0107] A second transparent conductive layer **70** made of an ITO and having a refractive index of 1.9 is formed beneath a lower surface of a 175 μm thick biaxial oriented PET film, and a hard coat layer **71** of pencil hardness 3H made of an acrylic resin is formed on an upper surface of the second transparent substrate **69**. Spectral transmittance through the transparent substrate **69**, the hard coat layer **71**, and the transparent conductive layer **70** formed on both surfaces does not have a spectral peak, and the total transmittance is 88%, the b* value is 3.0.

[0108] The transparent substrate **61**, the second transparent substrate **69**, the distance between the transparent conductive layers **62** and **70**, the structures of outer circumferential part and other portions of the TP in the present embodiment remain the same as those in the foregoing embodiments.

[0109] The above-configured TP in the present embodiment show a total transmittance of 81% and the b* value of +0.6. It renders a color of least yellowish, or close to the

colorless transparency. This is due to a function of the color adjustment layer, as described in the first embodiment.

[0110] The color adjustment layer in the present embodiment is disposed at the lower surface of the transparent supporting substrate **64**, or the place least affected by an operating force given on a TP. Thus the color adjustment layer can be kept away from an unexpected bending and other mechanical influence when the TP is operated. The TP maintains a good appearance of least yellowish color and the high transmittance for a long period of time.

[0111] As described above, the color adjustment layer is formed on the transparent supporting substrate **64**, and can be formed independently from the first and the second transparent substrates **61**, **69** having the first and the second transparent conductive layers **62**, **70**. This makes it easy to adjust and control the respective layers in their thickness. This means that the color adjustment layer, the first and the second transparent conductive layers **62**, **70** are easily available at their optimum layer thickness and in optimum characteristics.

[0112] In the present embodiment, each of the respective substrates is provided only at one of the surfaces with one layer of the color adjustment layer, the first and the second transparent conductive layers **62**, **70**. So, the layers can be formed by simple process, and high quality layers can be provided at low cost. Consequently, an integrated TP has a high grade appearance of least yellowish color at relatively low cost.

[0113] Also, in the construction of the present embodiment, a TP that renders an effectively reduced yellowish appearance can be manufactured by employing a substrate having a peak of the spectral transmittance at 500 nm or shorter wavelength. Further, any TP having the b* value of 2.0 or smaller renders least significant color change when it is attached on a display device, however, it is also preferred that the b* value is within a range of not greater than +1.0 and not smaller than -2.0 in the present embodiment, as is disclosed in the first embodiment.

[0114] Besides the above-described structure, a TP may be formed by adhering a transparent substrate having a color adjustment layer to the lower surface of the transparent supporting substrate **64**. Or a transparent substrate having a color adjustment layer may be adhered to a lower surface of the first transparent substrate or to the upper surface of the second transparent substrate.

[0115] Fifth Embodiment 5

[0116] FIG. 8 is a cross sectional view of a TP in accordance with a fifth exemplary embodiment of the present invention. Referring to FIG. 8, a first transparent substrate **81** of biaxial oriented PET film is provided at the upper surface with a first transparent conductive layer **82** with a refractive index of 1.9 and made of an ITO. The first transparent substrate **81** is supported, via an adhesive layer **83** of an acrylic resin formed beneath the lower surface thereof, by a transparent supporting substrate **84** of a 1.0 mm thick polycarbonate sheet.

[0117] The transparent supporting substrate **84** in the present embodiment contains within the polycarbonate sheet a colorant of 0.1 weight % of phthalocyanine blue, whose

color is complementary to the transparent conductive layer **82** and a second transparent conductive layer **87**, which are to be described later.

[0118] Spectral transmittance through the transparent substrate **81**, the transparent conductive layer **82**, the transparent supporting substrate **84**, and the adhesive layer **83** has a peak value of 85% at 480 nm, and the total transmittance is 83%, the b^* value is -2.0 .

[0119] Very small sized dot spacers **85** made of an insulating epoxy resin or the like material are disposed on the first transparent conductive layer **82** at a specific pitch.

[0120] A second transparent conductive layer **87** having a refractive index of 1.9 and made of an ITO are formed beneath a lower surface of a second transparent substrate **86** of a 175 μm thick biaxial oriented PET, and on the upper surface of the second transparent substrate **86**, a hard coat layer **88** of pencil hardness 3H made of an acrylic resin is formed.

[0121] Spectral light transmittance through the transparent substrate **86**, the transparent conductive layer **87** and the hard coat layer **88** does not have a peak, and a total transmittance is 88%, and the b^* value is 3.0.

[0122] The transparent substrate **81**, the transparent substrate **84**, a distance between the transparent conductive layer **82** and the transparent conductive layer **87**, the structures of outer circumferential part and other portions of the TP in the present embodiment remain the same as those in the fourth embodiment.

[0123] The TP having the above-described structure shows a total transmittance of 75%, and a b^* value of $+0.1$, rendering least yellowish color, or a color close to the colorless transparency.

[0124] This is due to a function of the colorant contained in the transparent supporting substrate **84**. The working principle remains the same as that in the second embodiment and the description is eliminated here. In the present embodiment, also, any TP having the b^* value of 2.0 or smaller shows least significant color change when it is attached on a display device, however, it is preferred that the b^* value is within a range of not greater than $+1.0$ and not smaller than -2.0 .

[0125] Like in the fourth embodiment, the transparent supporting substrate **84** containing a colorant is a separate member independent from the first and the second transparent substrates **81**, **86** having the first and the second transparent conductive layers **82**, **87**. As a result, it is easy to provide the above-described layers and substrates in their optimized state.

[0126] Instead of adding a colorant into the transparent supporting substrate **84**, a separate transparent substrate containing a corresponding colorant may be adhered thereto. In this case, the separate transparent substrate containing the colorant can be used for adjusting the color of the transparent supporting substrate **84** containing a colorant.

[0127] The separate transparent substrate containing a corresponding colorant may be disposed at a place between the transparent substrate **81** and the transparent supporting substrate **84**, or on the upper surface of the transparent substrate **86**.

[0128] In still another alternative, the transparent substrates provided with a layer containing corresponding colorant may be adhered, or the above-described layer may be formed on the transparent supporting substrate **84**, like in the second embodiment.

[0129] Sixth Embodiment

[0130] FIG. 9 is an exploded perspective view of a portable information terminal (a handheld computer, hereinafter referred to as PDA), which being an example of an electronic apparatus in accordance with a sixth exemplary embodiment of the present invention. In FIG. 9, the TP **91** in accordance with the first embodiment is disposed beneath an upper case **92**, and a TFT color liquid crystal display device **93** is disposed underneath the TP **91**.

[0131] Although the liquid crystal display device **93** is provided on both surfaces with polarization plates **94**, that beneath a lower surface is not shown in FIG. 9.

[0132] A PDA in the present embodiment further comprises: a control circuit **96** placed under the liquid crystal display device **93**, and comprising a central processing unit, a memory device and the like electronic components; and a battery **97** for supplying power to the control circuit **96**. These components are packed and supported to their specified places by the upper case **92** and a lower case **98**. The TP **91** and the liquid crystal display device **93** are connected with the control circuit **96** via flexible circuit boards **99**, **100**, each taken out from the respective sides.

[0133] In the present embodiment, those polarization plates **94** a sum of the b^* values of which becomes 1.6 are used on both surfaces of the liquid crystal display device **93**.

[0134] In the above-configured PDA, when the TP **91** is pressed with a pen or a finger, the control circuit **96** performs power ON/OFF, selects software and puts the selected software into operation. The control circuit **96** contains a central processing unit and memory devices for the operation of the handheld computer. The liquid crystal display device **93** shows a display on the screen corresponding to the operating actions as described above.

[0135] The handheld computer in the present embodiment has the above-described structure. It judges, at the control circuit **96**, specific signals generated as a result of the operation given on the TP **91** for putting a certain specific function into operation.

[0136] In the present electronic apparatus, the TP **91** in accordance with the first embodiment has a b^* value of 0.8 as described above. When the TP **91** is attached on the liquid crystal display device **93** having polarization plates **94**, the total b^* value can be made to be 2.4. In this way, an electronic apparatus having a high grade appearance and a superior visibility with the liquid crystal display device, with least yellowish appearance is obtained.

[0137] For the purpose of comparing the visibility of liquid crystal display devices, a sample of handheld computer was produced by using a TP having a b^* value of 3.0 and the polarization plates having a b^* value of 1.6 (total of the b^* values being 4.6). Results of the comparison showed that the TFT color liquid crystal display **93** in the present embodiment was superior in that it is easy to watch and the color is natural.

[0138] As a result of a precise study by the present inventors, it has been found that an easy-to-see handheld computer that exhibits a natural color comparable to the present embodiment can be obtained when a combined total b^* value of a TP and polarization plates of a liquid crystal display device is 3.0 or smaller.

[0139] As to the liquid crystal display device 93, the above-described advantages are made available regardless of whether it is a color STN, a monochrome STN or a TN type liquid crystal display. For the polarization plates 94 of liquid crystal display device, either an iodine polarization plate or a dye polarization plate can be used

[0140] As described in the foregoing, since a TP in the present invention is specified to have the b^* value of 2.0 or smaller in the $L^*a^*b^*$ color specification in accordance with JIS Z 8729, an electronic apparatus renders a high grade display where the yellowish color of TP is reduced, the color change is small and the sense of incompatibility is decreased.

[0141] Although the above descriptions have been made based on a TP in which at least one of the transparent substrates is made of resin sheet or film, the principle of present invention can be applied also to a TP in which both of the transparent substrates are made of glass.

What is claimed is:

1. A touch panel comprising:

a first transparent substrate provided with a first transparent conductive layer; and

a second transparent substrate provided with a second transparent conductive layer, said second transparent conductive layer opposing to said first transparent conductive layer with a specific distance;

wherein a color of said touch panel is 2.0 or smaller in a " b^* value" specified by the $L^*a^*b^*$ color specification in accordance with JIS Z 8729.

2. The touch panel of claim 1, wherein at least one of said first transparent substrate and said second transparent substrate is provided with an optical interference layer for color adjustment.

3. The touch panel of claim 2, wherein said layer controls a peak spectrum of a spectral transmittance of visible light to be at 500 nm or shorter wavelength.

4. The touch panel of claim 1, wherein at least one of said first transparent substrate and said second transparent substrate is provided with a color adjustment layer containing a colorant which is complementary to color of said first and second transparent conductive layers.

5. The touch panel of claim 1, wherein at least one of said first and second transparent substrates contains a colorant

which is complementary to color of said first and second transparent conductive layers.

6. The touch panel of claim 1, further comprising a third transparent substrate provided with a color adjustment layer which renders optical interference.

7. The touch panel of claim 6, wherein said third transparent substrate is disposed at least one of beneath a lower surface of said first transparent substrate, between said first transparent conductive layer and said first transparent substrate, between said second transparent conductive layer and said second transparent substrate, and on an upper surface of said second transparent substrate.

8. The touch panel of claim 6, wherein said layer controls a peak spectrum of a spectral transmittance of visible light to be at 500 nm or shorter wavelength.

9. The touch panel of claim 1, further comprising a third transparent substrate containing a colorant which is complementary to a color of said first and second transparent conductive layers.

10. The touch panel of claim 9, wherein said third transparent substrate is disposed at least one of beneath a lower surface of said first transparent substrate, between said first transparent conductive layer and said first transparent substrate, between said second transparent conductive layer and said second transparent substrate, and on an upper surface of said second transparent substrate.

11. The touch panel of claim 1, wherein at least one of said first transparent substrates and second transparent substrates comprises a resin film or a resin sheet.

12. An electronic apparatus comprising:

a liquid crystal display device; and

a touch panel disposed in front of a display surface of said liquid crystal display device, said touch panel comprising:

a first transparent substrate provided with a first transparent conductive layer; and

a second transparent substrate provided with a second transparent conductive layer, said second transparent conductive layer opposing to said first transparent conductive layer with a specific distance,

wherein a color of said touch panel is 2.0 or smaller in a " b^* value" specified by the $L^*a^*b^*$ color specification in accordance with JIS Z 8729, and a sum of the b^* value of said touch panel and the b^* value of a polarization plate of said liquid crystal display device is 3.0 or smaller.

* * * * *

专利名称(译)	触控面板及使用其的电子设备		
公开(公告)号	US20030071796A1	公开(公告)日	2003-04-17
申请号	US10/263722	申请日	2002-10-04
[标]申请(专利权)人(译)	中西AKIRA YAMAUE信弘 藤井重幸		
申请(专利权)人(译)	中西AKIRA YAMAUE信弘 藤井重幸		
当前申请(专利权)人(译)	中西AKIRA YAMAUE信弘 藤井重幸		
[标]发明人	NAKANISHI AKIRA YAMAUE NOBUHIRO FUJII SHIGEYUKI		
发明人	NAKANISHI, AKIRA YAMAUE, NOBUHIRO FUJII, SHIGEYUKI		
IPC分类号	G02F1/1333 G06F3/033 G06F3/041 G06F3/045 G06F3/048 H01H13/02 H01H13/712 G09G5/00		
CPC分类号	G02F1/13338 G06F3/0488 G06F3/045 G02F2001/133521		
优先权	2001308307 2001-10-04 JP		
其他公开文献	US6903729		
外部链接	Espacenet USPTO		

摘要(译)

一种触控面板，包括具有透明导电层的透明基板，以及具有第二透明导电层的第二透明基板。根据JIBS Z 8729， $L^* a^* b^*$ 颜色规格的 b^* 值中的触摸板的颜色为2.0或更小。第一和第二透明基板中的至少一个设有颜色调整层，其呈现光学干涉。触摸面板还包括：第三透明基板，设置有颜色调节层；或第三透明基板，包含具有与透明导电层的颜色互补的颜色的着色剂。触摸面板具有较少的黄色外观，并且显示出彩色显示装置的最小颜色变化。当附着在电子设备中的液晶显示装置上时，电子设备呈现出高级彩色显示而没有伴随不相容感。

