



US 20040008506A1

(19) **United States**(12) **Patent Application Publication** (10) **Pub. No.: US 2004/0008506 A1**
Son (43) **Pub. Date: Jan. 15, 2004**(54) **SURFACE LIGHT SOURCE DEVICE AND
LIQUID CRYSTAL DISPLAY ASSEMBLY
USING THE SAME**

Jan. 11, 2003 (KR) 2003-1809

Publication Classification(75) Inventor: **Yang-Han Son**, Hadong-gun (KR)(51) **Int. Cl.⁷** **F21V 7/04**(52) **U.S. Cl.** **362/31**

Correspondence Address:

STAAS & HALSEY LLP**SUITE 700****1201 NEW YORK AVENUE, N.W.****WASHINGTON, DC 20005 (US)**(57) **ABSTRACT**(73) Assignee: **SAMSUNG SDI CO., LTD.**, Suwon-
City (KR)(21) Appl. No.: **10/448,416**(22) Filed: **May 30, 2003**(30) **Foreign Application Priority Data**

May 31, 2002 (KR) 2002-30619

A surface light source device includes a light guide plate which guides light upward and downward, a light quantity adjustment unit which is provided on at least one of top and bottom surfaces of the light guide plate and adjusts the quantity of light above the light guide plate to be different from that below the light guide plate, an emitting device which is provided to at least one side of the light guide plate, and diffusion plates which are respectively installed at the top and bottom surfaces of the light guide plate. By adjusting the quantities of light radiated above and below the light guide plate, the brightness of an image can be easily adjusted.

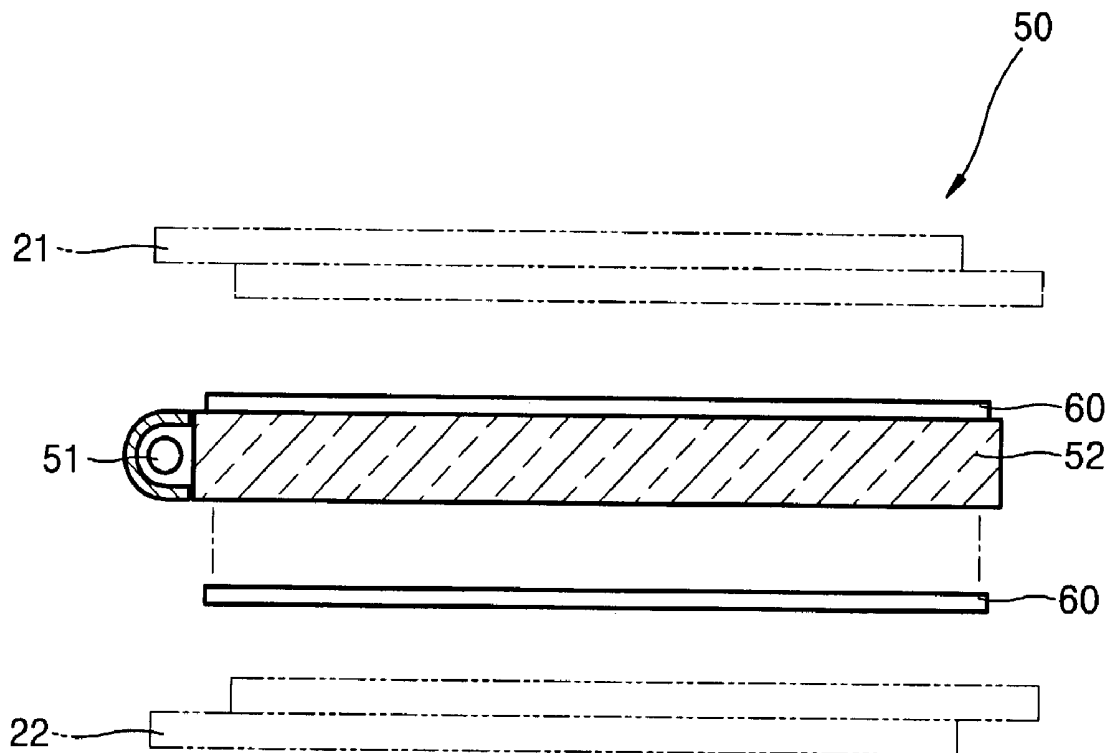


FIG. 1 (PRIOR ART)

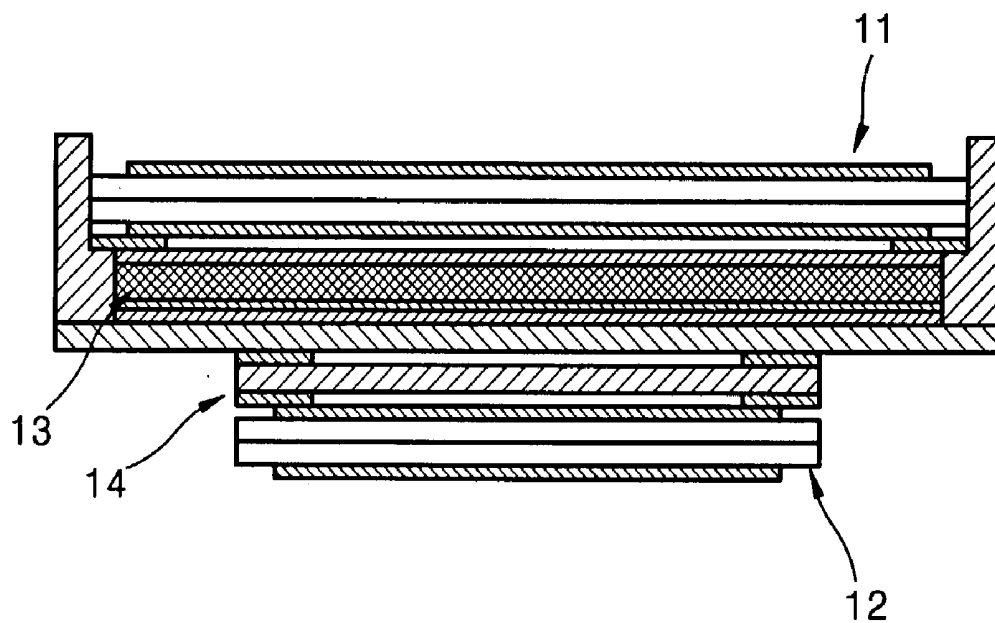


FIG. 2

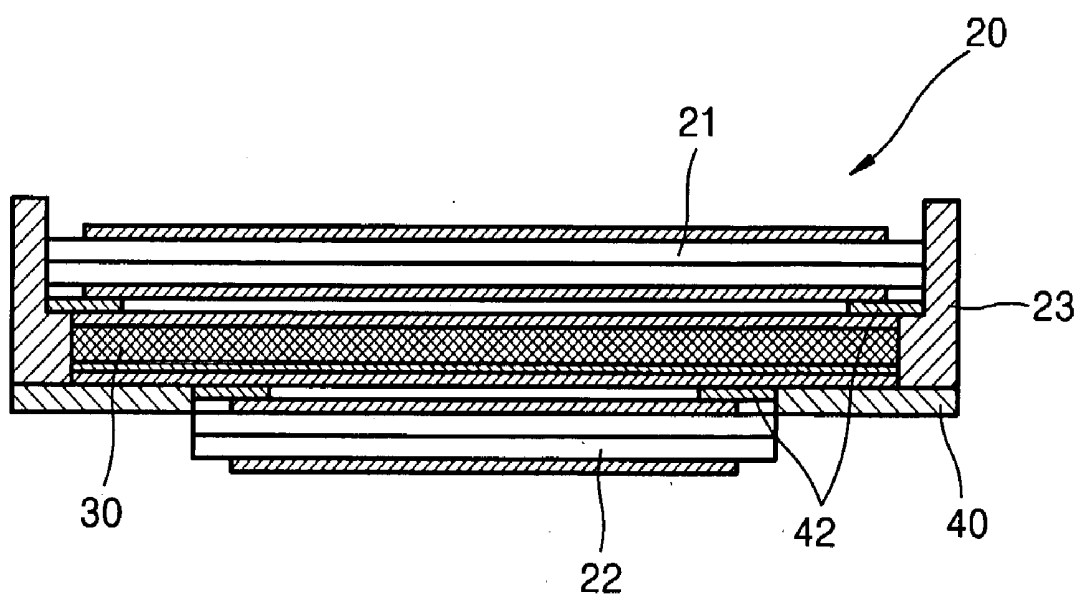


FIG. 3

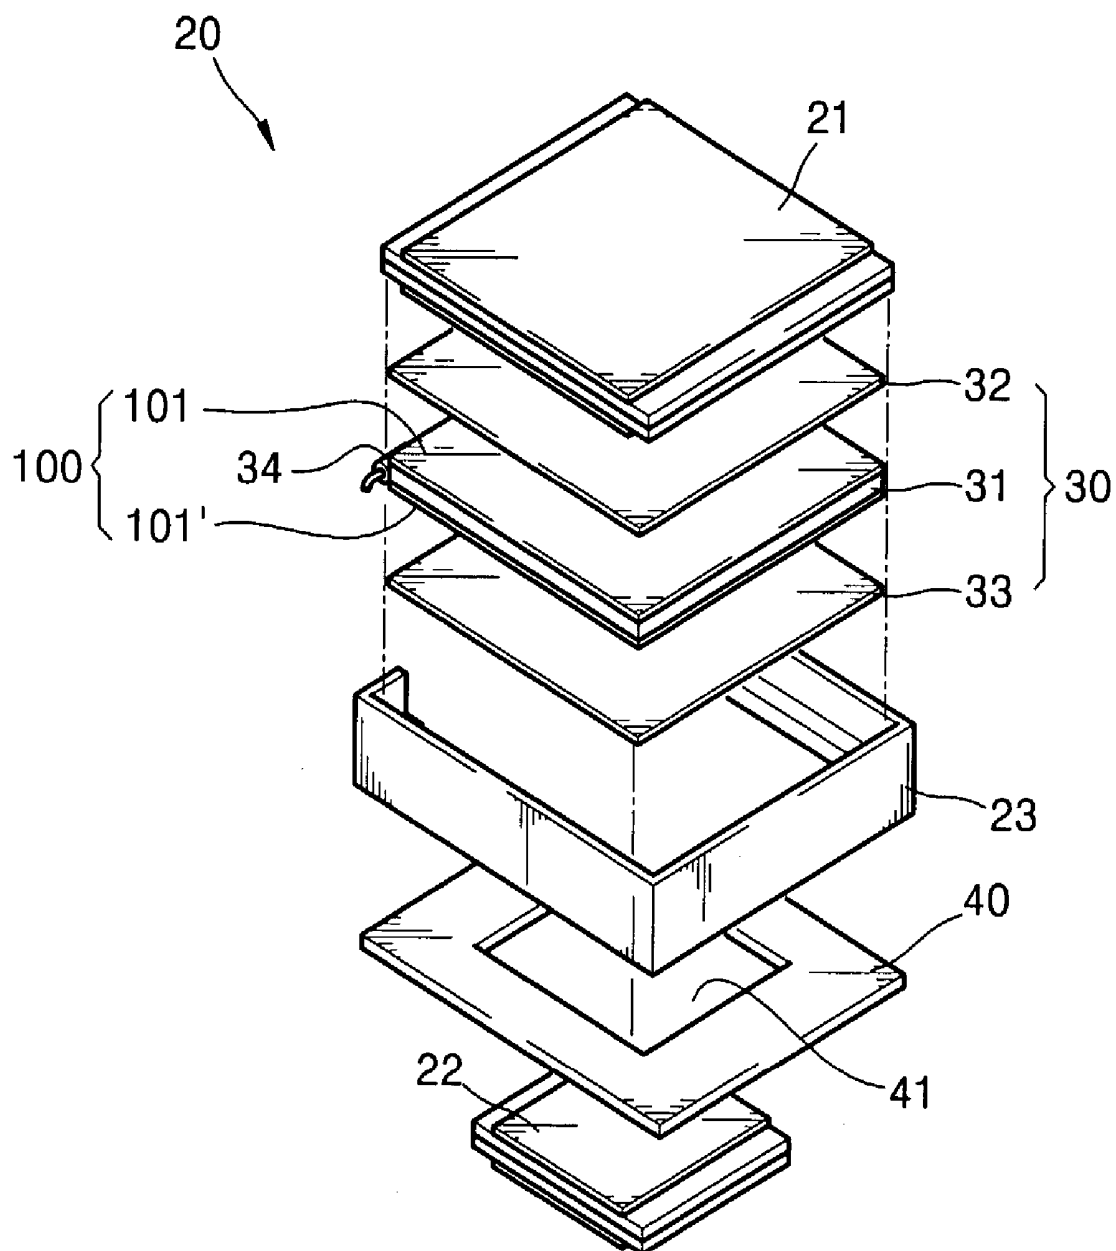


FIG. 4

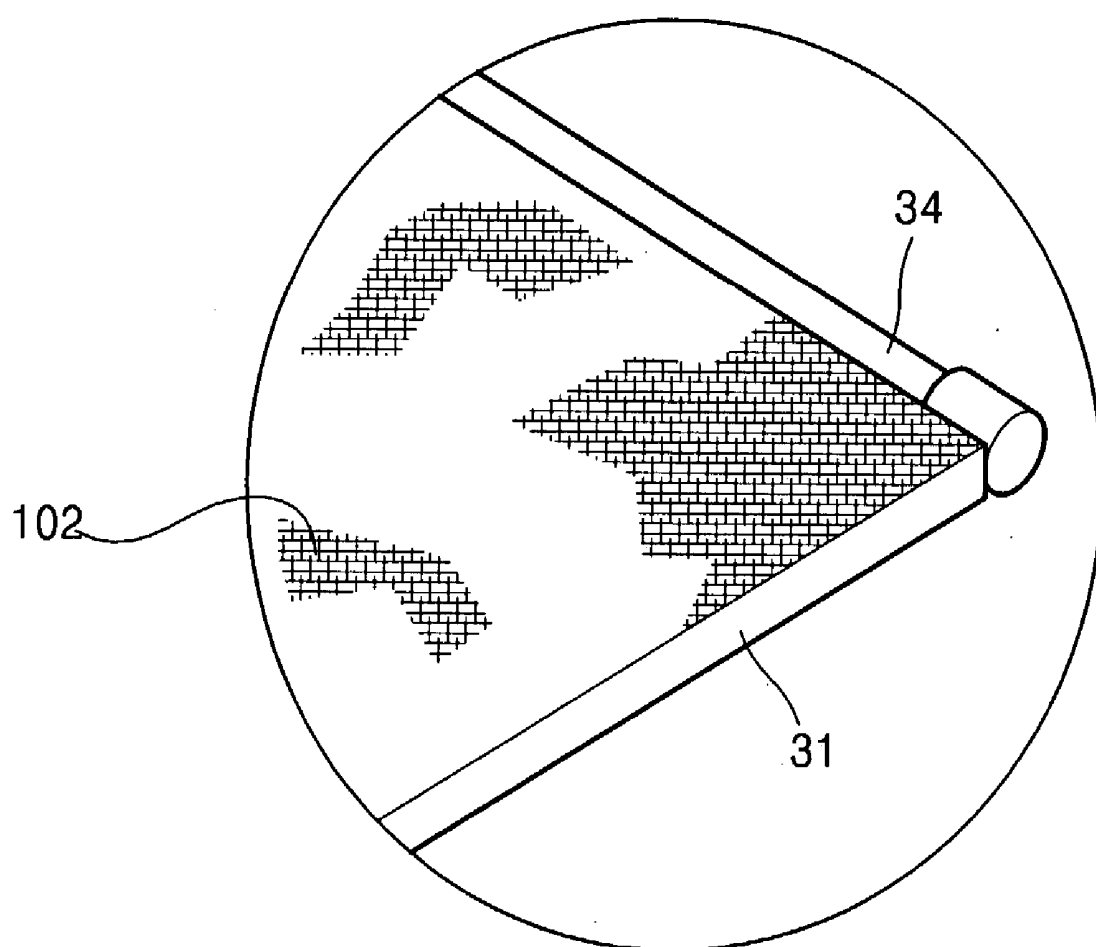


FIG. 5

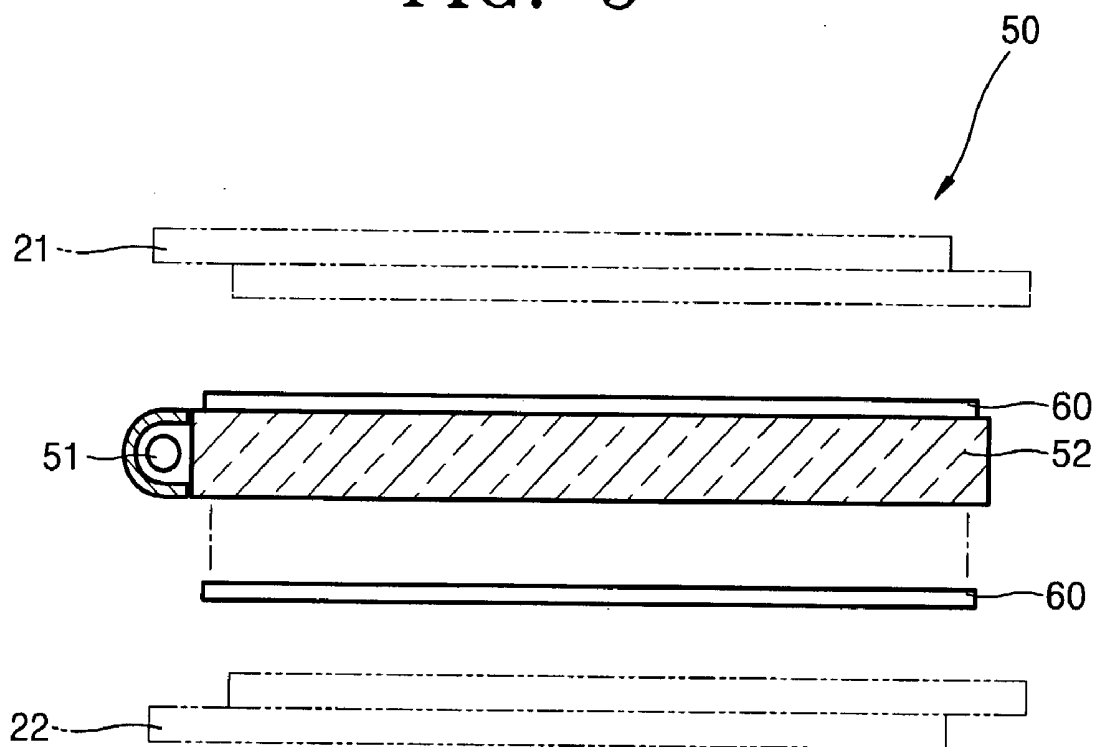


FIG. 6

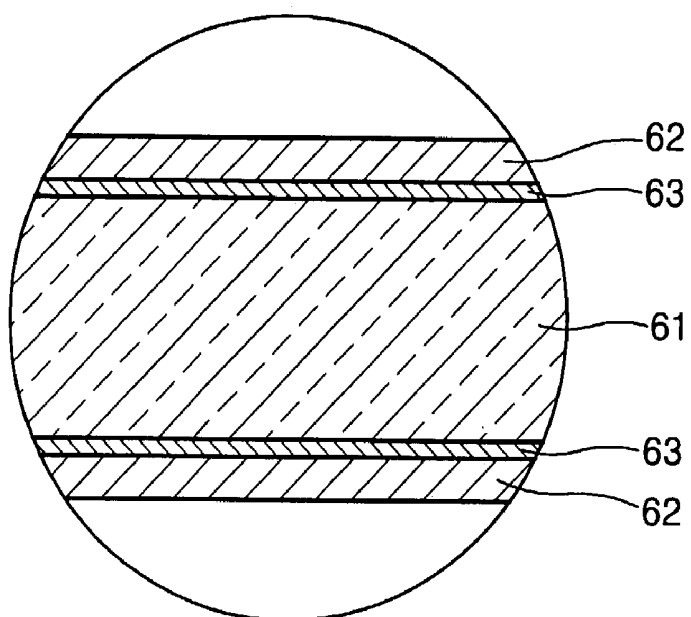


FIG. 7



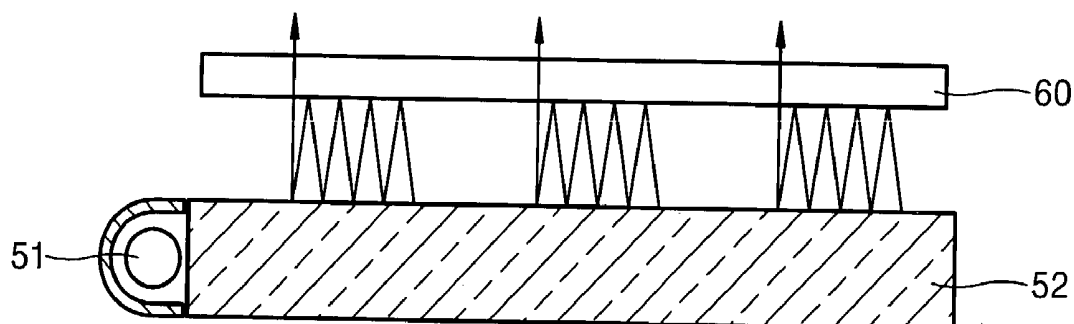


FIG. 8

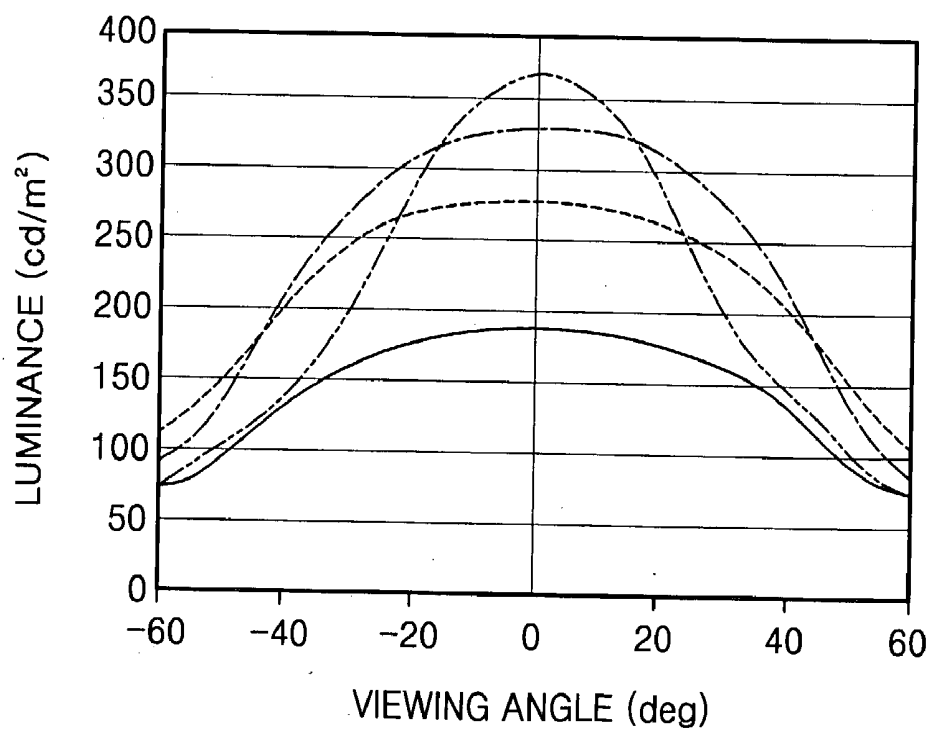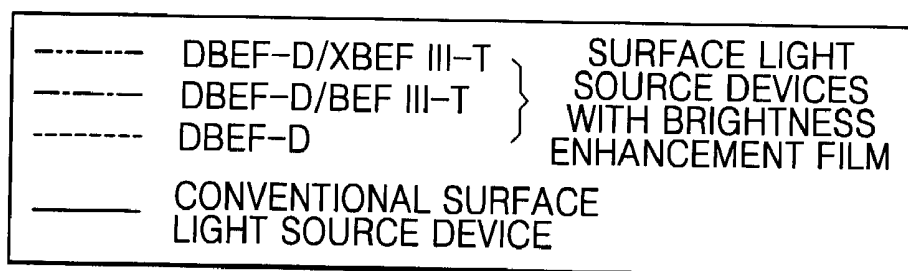

SURFACE LIGHT SOURCE DEVICE AND LIQUID CRYSTAL DISPLAY ASSEMBLY USING THE SAME

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the benefit of Korean Patent Application Nos. 2002-30619 filed on May 31, 2002 and 2003-1809 filed on Jan. 11, 2003, the disclosures of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a liquid crystal display (LCD) assembly using a surface light source device, and more particularly, to an LCD assembly using a surface light source device which can radiate light at two LCD devices at different luminances.

[0004] 2. Description of the Related Art

[0005] Generally, surface light source devices are used as light sources for light receiving devices. Such light source devices for LCD devices are disclosed in Japanese Patent Publication No. 60-216435 and Korean Patent Publication Nos. 1995-1922, 1996-15030, 1996-24562, and 1994-15029.

[0006] For example, a conventional surface light source device includes a light guide plate, a reflection plate fixed on a bottom of the light guide plate, a diffusion plate formed on the light guide plate, and an emitting device, which is implemented by a fluorescent lamp or a light emitting diode (LED), that is fixed on at least one side of the light guide plate. In such a surface light source device, the light guide plate has a structure that scatters and diffuses light on one side of a transparent acrylic resin.

[0007] Other types of light guide plates include blasting etching types, enplus types, optical insertion (OPI) types, double-sided prism types, and hologram pattern types. Such light guide plates are made by forming scratches on an acrylic substrate, in a predetermined pattern, so as to emit light only from one side of the substrate.

[0008] Since conventional surface light source devices emit light only from one side, where a stack of two LCD devices is used as in dual type cellular phones, as shown in **FIG. 1**, surface light source devices **13** and **14** must be installed for LCD devices **11** and **12**, respectively. Accordingly, the thickness of the products increases, and thus it is difficult to manufacture thin and light products.

[0009] To overcome the above problem, Korean Patent Publication No. 2002-39273 discloses surface light source devices that emit light from both sides thereof. However, such surface light source devices have a problem in that the quantity of light emitted upward cannot be adjusted to be similar to the quantity of light emitted downward. Since the quantity of light emitted upward cannot be actively controlled so as to be different from light emitted downward, an after image of one LCD device smaller than the other LCD device appears on an image of the larger LCD device. Moreover, such conventional surface light source devices have low luminance, and thus there is a limit in increasing the luminance of an image formed by LCD devices.

SUMMARY OF THE INVENTION

[0010] Accordingly, it is an aspect of the present invention to provide a surface light source device for a liquid crystal display (LCD) assembly having LCD devices, which uniformly radiates light upward and downward from a light guide plate at different luminances.

[0011] Another aspect of the present invention is to provide a surface light source device for an LCD assembly, which increases the luminance of light radiated from an emitting device using the resonance effect of the light.

[0012] Yet another aspect of the present invention is to provide a light and thin LCD assembly, in which light can be radiated at two stacked LCD devices.

[0013] Additional aspects and advantages of the invention will be set forth in part in the description which follows and, in part, will be obvious from the description, or may be learned by practice of the invention.

[0014] To achieve the above and/or other aspects of the present invention, there is provided a surface light source device comprising a light guide plate which guides light upward and downward, a light quantity adjustment unit which is provided on at least one of top and bottom surfaces of the light guide plate and adjusts a quantity of the light above the light guide plate to be different between from below the light guide plate, an emitting device which is installed to at least one side of the light guide plate, and diffusion plates which are respectively installed at the top and bottom surfaces of the light guide plate.

[0015] The light quantity adjustment unit may comprise a corrosive surface which is formed by corroding at least one of the top and bottom surfaces of the light guide plate so as to adjust a transmittance of the light or comprise a light transmitting sheet having a different transmittance from that of the light guide plate.

[0016] A radiation area above the light guide plate may be different from a radiation area below the light guide plate.

[0017] The surface light source device may further comprise a brightness enhancement film which is attached to at least one of the top and bottom surfaces of the light guide plate and resonates the light emitted from the emitting device so as to increase a brightness of the light.

[0018] To achieve the above and/or other aspects of the present invention, there is provided another surface light source device comprising a light guide plate which guides light upward and downward, and a brightness enhancement film which is provided on at least one of top and bottom surfaces of the light guide plate and resonates the light so as to increase a brightness of the light.

[0019] The surface light source device may further comprise diffusion plates which are respectively provided on top and bottom surfaces of the brightness enhancement film so as to diffuse the light.

[0020] The brightness enhancement film may comprise a resonance layer and diffusion layers respectively attached to top and bottom surfaces of the resonance layer.

[0021] To achieve the above and/or other aspects of the present invention, there is provided an LCD assembly comprising first and second LCD devices which are stacked with

respect to each other, a light guide plate which is disposed between the first and second LCD devices and guides light upward and downward, a light quantity adjustment unit which is provided on at least one of top and bottom surfaces of the light guide plate and adjusts a quantity of the light above the light guide plate to be different from below the light guide plate, an emitting device which is installed to at least one side of the light guide plate, and diffusion plates which are respectively installed at the top and bottom surfaces of the light guide plate.

[0022] The LCD assembly may further comprise a light blocking device which restricts the light radiated to one of the first and second LCD devices to an area corresponding to the one of the first and second LCD devices.

[0023] To achieve the above and/or other aspects of the present invention, there is provided another LCD assembly comprising first and second LCD devices which are stacked with respect to each other, a light guide plate which is disposed between the first and second LCD devices and guides light upward and downward, an emitting device which is installed to one side of the light guide plate, and a brightness enhancement film which is attached to at least one of top and bottom surfaces of the light guide plate and resonates the light emitted from the emitting device so as to increase a brightness of the light. The LCD assembly may further comprise a light quantity adjustment unit which is provided on at least one of the top and bottom surfaces of the light guide plate.

BRIEF DESCRIPTION OF THE DRAWINGS

[0024] These and/or other aspects and advantages of the present invention will become more apparent and more readily appreciated from the following description of the embodiments taken in conjunction with the accompanying drawings of which:

[0025] **FIG. 1** is a cross-sectional view of a conventional liquid crystal display (LCD) assembly;

[0026] **FIG. 2** is a cross-sectional view of an LCD assembly according to an embodiment of the present invention;

[0027] **FIG. 3** is an exploded perspective view of the LCD assembly shown in **FIG. 2**;

[0028] **FIG. 4** is a partial perspective view of a light guide plate shown in **FIG. 2**;

[0029] **FIG. 5** is a cross-sectional view of a surface light source device according to another embodiment of the present invention;

[0030] **FIG. 6** is an enlarged view of a brightness enhancement film shown in **FIG. 5**;

[0031] **FIG. 7** is a diagram illustrating the operation of the brightness enhancement film shown in **FIG. 5**; and

[0032] **FIG. 8** is a comparison graph showing luminances of surface light source devices having a brightness enhancement film according to the present invention and of a conventional surface light source device.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0033] Reference will now be made in detail to the present preferred embodiments of the present invention, examples

of which are illustrated in the accompanying drawings, wherein like reference numerals refer to the like elements throughout. The embodiments are described below in order to explain the present invention by referring to the figures.

[0034] **FIG. 2** shows a surface light source device and a liquid crystal display (LCD) assembly using the same, according to an embodiment of the present invention. Referring to **FIG. 2**, the LCD assembly **20** includes first and second LCD devices **21** and **22**, a surface light source device **30** which is disposed between the first and second LCD devices **21** and **22** and serves as a rear light source, a circuit board **40** which drives the first and second LCD devices **21** and **22** and the surface light source device **30**, and a case **23** which combines and fixes the surface light source device **30**, the first and second LCD devices **21** and **22**, and the circuit board **40**.

[0035] Substrates (not shown), on which a driving electrode pattern or a thin film transistor (TFT) pattern is formed, are respectively joined to the first and second LCD devices **21** and **22** such that the substrates face each other, thereby forming a liquid crystal injection space into which a liquid crystal, such as TN or STN, is injected. Effective screens having the same or different standards may be respectively formed in the first and second LCD devices **21** and **22**. For example, in the case of a dual type cellular phone, an LCD device exposed to the outside may be larger than that positioned inside the cellular phone.

[0036] As shown in **FIG. 3**, the surface light source device **30** serves as a light source device for the first and second LCD devices **21** and **22**. The surface light source device **30** includes a light guide plate **31** which is made of, for example, a transparent acrylic, a light quantity adjustment unit **100** which is provided on at least one of the bottom and top surfaces of the light guide plate **31** and adjusts the quantity of light passing therethrough, diffusion plates **32** and **33** which are respectively installed at the bottom and top surfaces of the light guide plate **31** and diffuse the light passing through the light quantity adjustment unit **100**, and an emitting device **34** which is installed in at least one side of the light guide plate **31** to emit the light. A fluorescent lamp or light emitting diode (LED) lamp may be used as the emitting device **34**, but the present invention is not restricted thereto.

[0037] The light quantity adjustment unit **100** which adjusts the quantity of light, i.e., luminance, includes light transmitting sheets **101** and **101'** having predetermined transmittances. The light transmitting sheets **101** and **101'**, which are respectively attached to the top and bottom surfaces of the light guide plate **31**, may have different transmittances. In another embodiment of the light quantity adjustment unit **100**, as shown in **FIG. 4**, the light quantity adjustment unit **100** may be implemented by a corrosive surface **102** formed on at least one of the top and bottom surfaces of the light guide plate **31**. Where corrosive surfaces are formed on both the top and bottom surface of the light guide plate **31**, they may have different transmittances.

[0038] **FIG. 5** shows a surface light source device according to another embodiment of the present invention. Referring to **FIG. 5**, the surface light source device **50** includes a lamp **51** which emits light, a light guide plate **52** which seats the lamp **51** at its side or bottom surface and transmits the light emitted from the lamp **51**, and a brightness enhance-

ment film **60** which is installed to at least one of the top and bottom surfaces of the light guide plate **52** and provokes the light emitted from the lamp **51** to resonate so as to increase a brightness thereof. As shown in **FIG. 6**, the brightness enhancement film **60** includes a resonance layer **61** and diffusion layers **62** positioned on top and bottom surfaces of the resonance layer **61**. The diffusion layers **62** may be bonded to the resonance layer **61** using an adhesive **63**. A Vikuiti brightness enhancement film (BEF) or a dual brightness enhancement film (DBEF) manufactured by 3M Corporation may be used as the brightness enhancement film **60**.

[0039] In this embodiment, the light quantity adjustment unit **100** may be further provided with respect to the top or bottom surface of the light guide plate **52**. The light quantity adjustment unit **100** has been described in detail with reference to **FIGS. 3 and 4**, and thus a description thereof will be omitted to avoid repetition. The light quantity adjustment unit **100** may be integrally formed with the brightness enhancement film **60**. In other words, the quantity of light can be adjusted by adjusting the transmittance of the diffusion layers **62** of the brightness enhancement film **60**.

[0040] Referring back to **FIG. 3**, the circuit board **40** may be installed at the bottom surface of the light guide plate **31** or at the case **23**. The circuit board **40** may serve as a light blocking device which partially blocks the light emitted from the surface light source device **30**. For example, where the second LCD device **22** has an effective screen size that is smaller than that of the first LCD device **21**, the circuit board **40** allows the light to be radiated only to an area corresponding to the second LCD device **22**. More specifically, a via-hole **41** is formed in the circuit board **40** to correspond to the second LCD device **22**. The first and second LCD devices **21** and **22** are joined to the surface light source device **30** using a double side tape **42** shown in **FIG. 1**, but the present invention is not restricted thereto.

[0041] In a surface light source device and an LCD assembly using the same, according to the present invention, light emitted from the emitting device **34** provided at one side of the light guide plate **31** is transmitted through the light guide plate **31** and radiated to both upward and downward.

[0042] Since the brightness enhancement films **60** or the light transmitting sheets **101** and **101'** having different transmittances are installed on the top and bottom surface of the light guide plate **31** or **50**, the brightness of the light emitted from the emitting device **34** or the lamp **51** can be increased, and the light can be radiated above and below the light guide plate **31** or **52** at different luminances. In other words, the quantities of light emitted from the emitting device **34** or the lamp **51** and then transmitted upward and downward through the light guide plate **31** or **52** are equal to one another, but the quantities of light having passed through the light transmitting sheets **101** and **101'** or the corrosive surfaces **102** are different from one another above and below the light guide plate **31** or **52**, so that the luminance of the first LCD device **21** is different from that of the second LCD device **22**. In addition, as shown in **FIG. 7**, where light transmitted through the light guide plate **52** is not optically coaxial with a polarizing film of an LCD apparatus, the light does not pass through the brightness enhancement film **60**, but resonates between the light guide plate **52** and the brightness enhancement film **60**, and is then

output through the brightness enhancement film **60** with enhanced brightness where its optical axis coincides with that of the polarizing film of the LCD apparatus. Consequently, the brightness of an image can be increased.

[0043] After being emitted from the emitting device **34** or the lamp **51** and then enhanced or quantitatively adjusted by the brightness enhancement film **60** or the light quantity adjustment unit **100**, the light is diffused by the diffusion plates **32** and **33** and then radiated to the first and second LCD devices **21** and **22**.

[0044] For example, light can be radiated above and below the light guide plate **31** or **52** at different luminances, the luminance of external and internal LCD devices in a dual type cellular phone can be adjusted. In addition, the brightness of the light can be increased in the present invention. As shown in **FIG. 8**, the brightness of the light of a surface light source device of the present invention is more than 50% higher than that of a conventional surface light source device.

[0045] As described above, the present invention provides a surface light source device which is provided between first and second LCD devices and radiates light at the first and second LCD devices in different quantities. Accordingly, the brightness of an image can be adjusted depending on the installation conditions of the first and second LCD devices. In addition, the present invention provides brightness enhancement films on top and bottom surfaces of a light guide plate so as to increase the brightness of light emitted from a surface light source device thereof. Therefore, the brightness of an image formed by an LCD device using the same can be increased. Since the brightness of the surface light source device is high, an afterimage of an LCD device installed at one of the top and bottom surfaces of the surface light source device is prevented from being projected onto another LCD device installed at the other surface.

[0046] Although a few preferred embodiments of the present invention have been shown and described, it would be appreciated by those skilled in the art that changes may be made in this embodiment without departing from the principles and spirit of the invention, the scope of which is defined in the claims and their equivalents.

What is claimed is:

1. A surface light source device comprising:

- a light guide plate which guides light upward and downward;
- a light quantity adjustment unit which is provided on at least one of top and bottom surfaces of the light guide plate and adjusts a quantity of the light above the light guide plate to be different from below the light guide plate;
- an emitting device which is installed to at least one side of the light guide plate; and
- diffusion plates which are respectively installed at the top and bottom surfaces of the light guide plate.

2. The surface light source device of claim 1, wherein the light quantity adjustment unit comprises a corrosive surface which is formed by corroding at least one of the top and bottom surfaces of the light guide plate so as to adjust a transmittance of the light.

3. The surface light source device of claim 1, wherein the light quantity adjustment unit comprises a light transmitting sheet having a different transmittance from that of the light guide plate.

4. The surface light source device of claim 1, further comprising a brightness enhancement film which is attached to at least one of the top and bottom surfaces of the light guide plate and resonates the light emitted from the emitting device so as to increase a brightness of the light.

5. The surface light source device of claim 4, wherein the brightness enhancement film comprises a resonance layer and diffusion layers respectively attached to top and bottom surfaces of the resonance layer.

6. The surface light source device of claim 1 further comprising a light blocking device which is installed to at least one of the top and bottom surfaces of the light guide plate having the diffusion plates so as to have a radiation area above the light guide plate be different from that below the light guide plate.

7. A surface light source device comprising:

a light guide plate which guides light upward and downward; and

a brightness enhancement film which is provided on at least one of top and bottom surfaces of the light guide plate and resonates the light so as to increase a brightness of the light.

8. The surface light source device of claim 7, wherein the brightness enhancement film comprises a resonance layer and diffusion layers respectively attached to top and bottom surfaces of the resonance layer.

9. A liquid crystal display (LCD) assembly comprising:

first and second LCD devices which are stacked with respect to each other;

a light guide plate which is disposed between the first and second LCD devices and guides light upward and downward;

a light quantity adjustment unit which is provided on at least one of top and bottom surfaces of the light guide

plate and adjusts a quantity of the light above the light guide plate to be different from below the light guide plate;

an emitting device which is installed to at least one side of the light guide plate; and

diffusion plates which are respectively installed at the top and bottom surfaces of the light guide plate.

10. The LCD assembly of claim 9, further comprising a light blocking device which restricts the light radiated to one of the first and second LCD devices to an area corresponding to the one of the first and second LCD devices.

11. The LCD assembly of claim 10, wherein the light blocking device comprises a circuit board.

12. The LCD assembly of claim 9, further comprising a brightness enhancement film which is attached to at least one of the top and bottom surfaces of the light guide plate and resonates the light emitted from the emitting device so as to increase a brightness of the light.

13. A liquid crystal display (LCD) assembly comprising:

first and second LCD devices which are stacked with respect to each other;

a light guide plate which is disposed between the first and second LCD devices and guides light upward and downward;

an emitting device which is installed to one side of the light guide plate; and

a brightness enhancement film which is attached to at least one of top and bottom surfaces of the light guide plate and resonates the light emitted from the emitting device so as to increase a brightness of the light.

14. The LCD assembly of claim 13, further comprising a light quantity adjustment unit which is provided on at least one of the top and bottom surfaces of the light guide plate and adjusts a quantity of the light above the light guide plate to be different from below the light guide plate.

* * * * *

专利名称(译)	面光源装置和使用其的液晶显示组件		
公开(公告)号	US20040008506A1	公开(公告)日	2004-01-15
申请号	US10/448416	申请日	2003-05-30
申请(专利权)人(译)	三星SDI CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	SON YANG HAN		
发明人	SON, YANG-HAN		
IPC分类号	G02F1/13357 F21V8/00 F21Y103/00 G02F1/1347 F21V7/04		
CPC分类号	G02B6/0051 G02B6/0063 G02B6/0071 G02F2001/133342 G02F1/133615 G02F1/1347 G02B6/0088		
优先权	1020020030619 2002-05-31 KR 1020030001809 2003-01-11 KR		
其他公开文献	US6882382		
外部链接	Espacenet USPTO		

摘要(译)

一种面光源装置，包括：导光板，用于向上和向下引导光；光量调节单元，设置在导光板的顶表面和底表面中的至少一个上，并调节导光板上方的光量与导光板下方的发光装置，设置在导光板的至少一侧的发光装置，以及分别安装在导光板的顶表面和底表面上的扩散板不同。通过调节在导光板上方和下方辐射的光量，可以容易地调节图像的亮度。

