



US 20050253789A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0253789 A1**

Ikeda

(43) **Pub. Date: Nov. 17, 2005**

(54) **DISPLAY**

(52) **U.S. Cl. 345/76**

(76) Inventor: **Hiroshi Ikeda, Tochigi (JP)**

(57) **ABSTRACT**

Correspondence Address:
BIRCH STEWART KOLASCH & BIRCH
PO BOX 747
FALLS CHURCH, VA 22040-0747 (US)

(21) Appl. No.: **10/518,410**

(22) PCT Filed: **Jun. 13, 2003**

(86) PCT No.: **PCT/JP03/07549**

(30) **Foreign Application Priority Data**

Jun. 20, 2002 (JP) 2002-179931

Publication Classification

(51) **Int. Cl.⁷ G09G 3/30**

A display apparatus comprises transparent display elements arranged on a transparent substrate, a display panel DP whose display image can be observed from either side, a pair of liquid crystal shutter means 2as and 2bs disposed in such a manner as to sandwich the display panel DP, display control means 13 and 15 for displaying, on the display panel, a mirror image of an image to be displayed in every other frame, and liquid crystal shutter control means 14 for opening and closing the pair of liquid crystal shutter means in synchronism with the operation of the display control means such that they do not open simultaneously in each frame scan. The pair of liquid crystal shutter means are opened and closed such that the mirror image can be observed as a regular image on one side of the display panel DP. Image information displayed on the display panel can be viewed simultaneously from both the front surface and the back surface of the display panel.

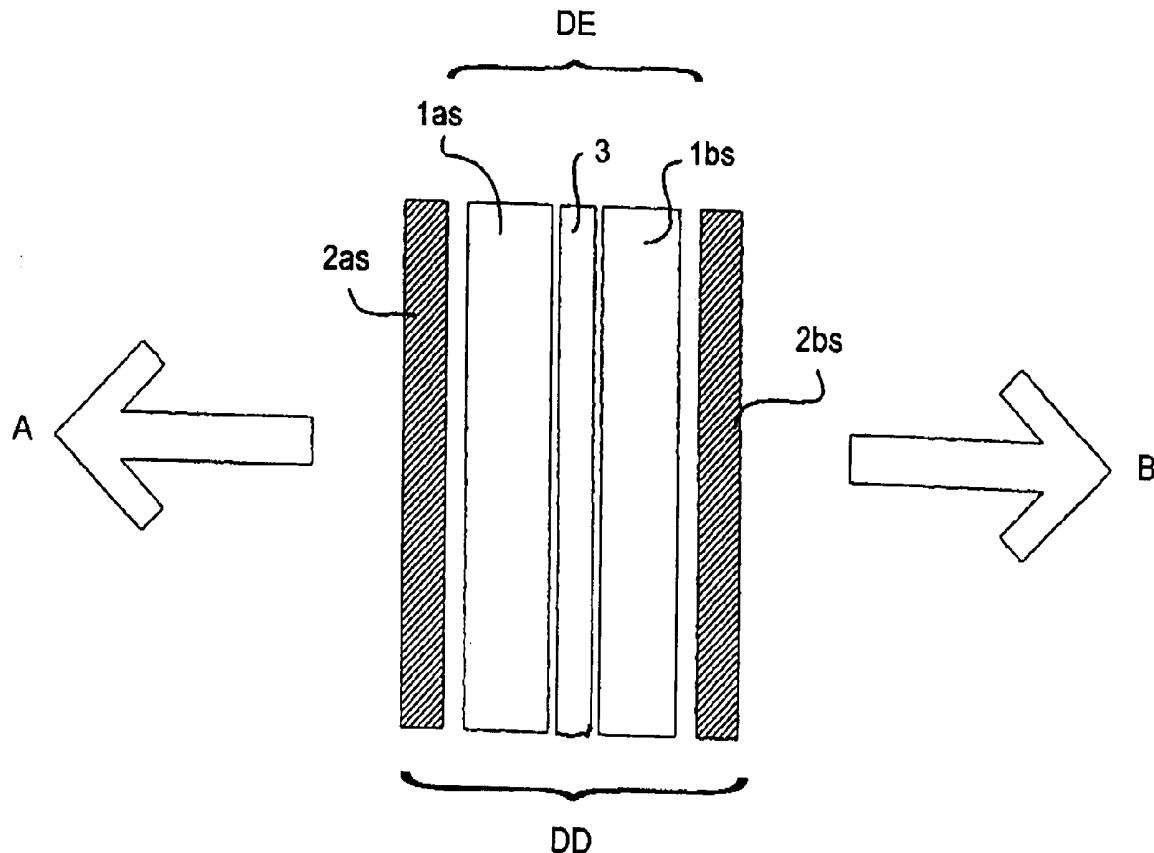


Fig. 1

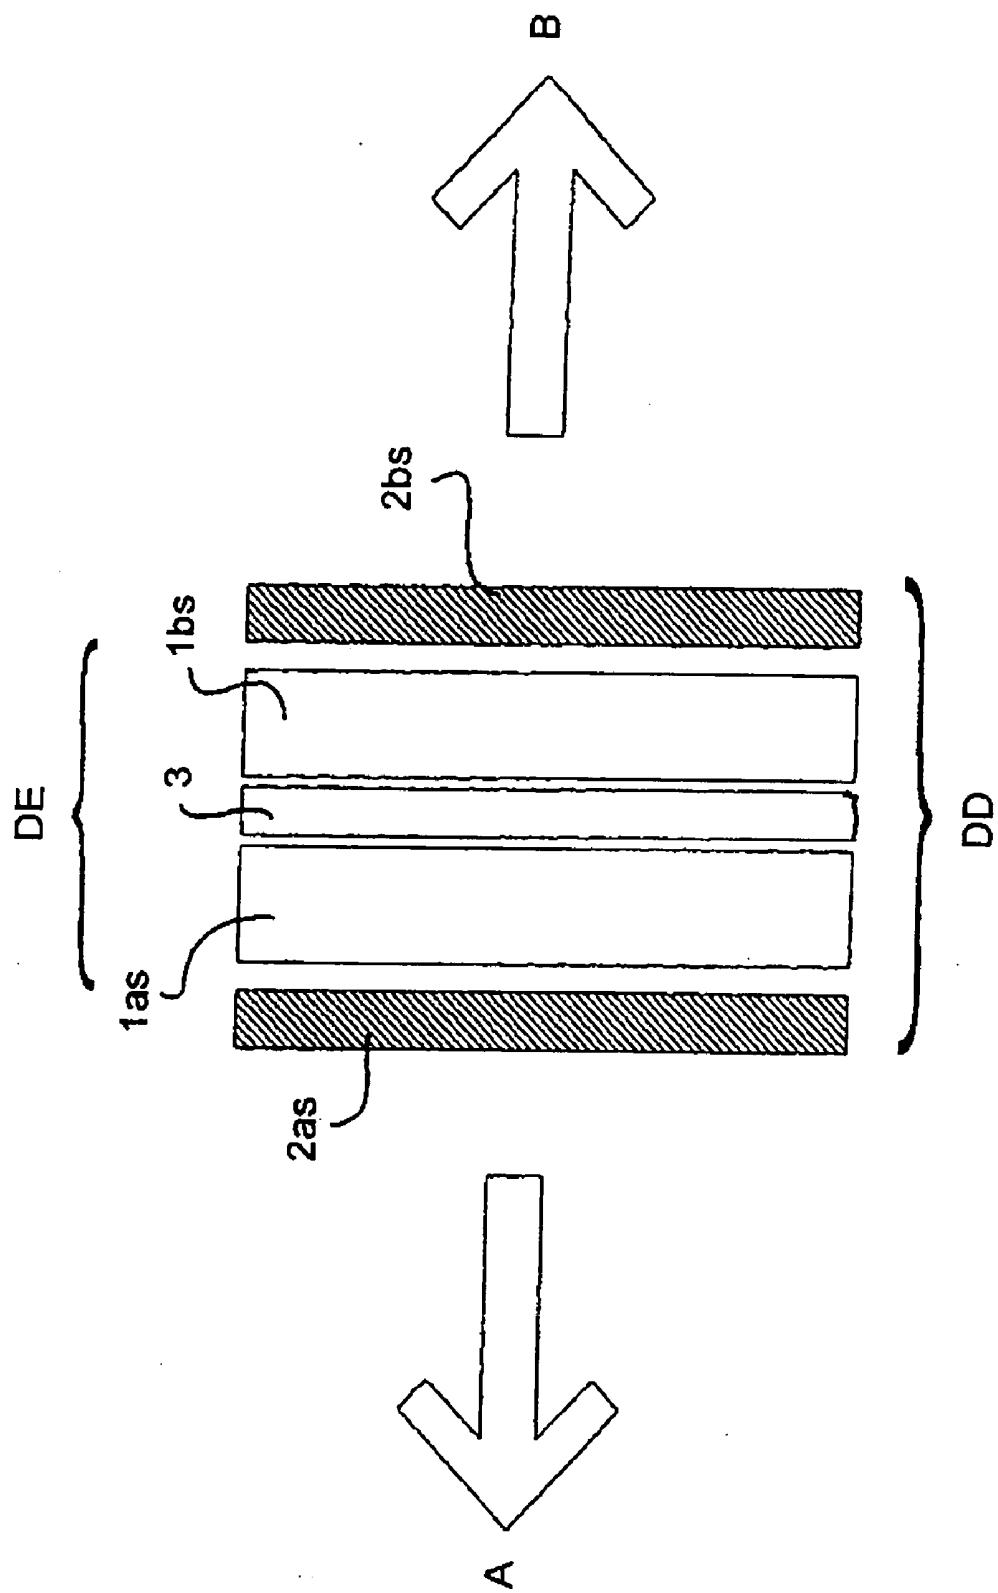


Fig. 2

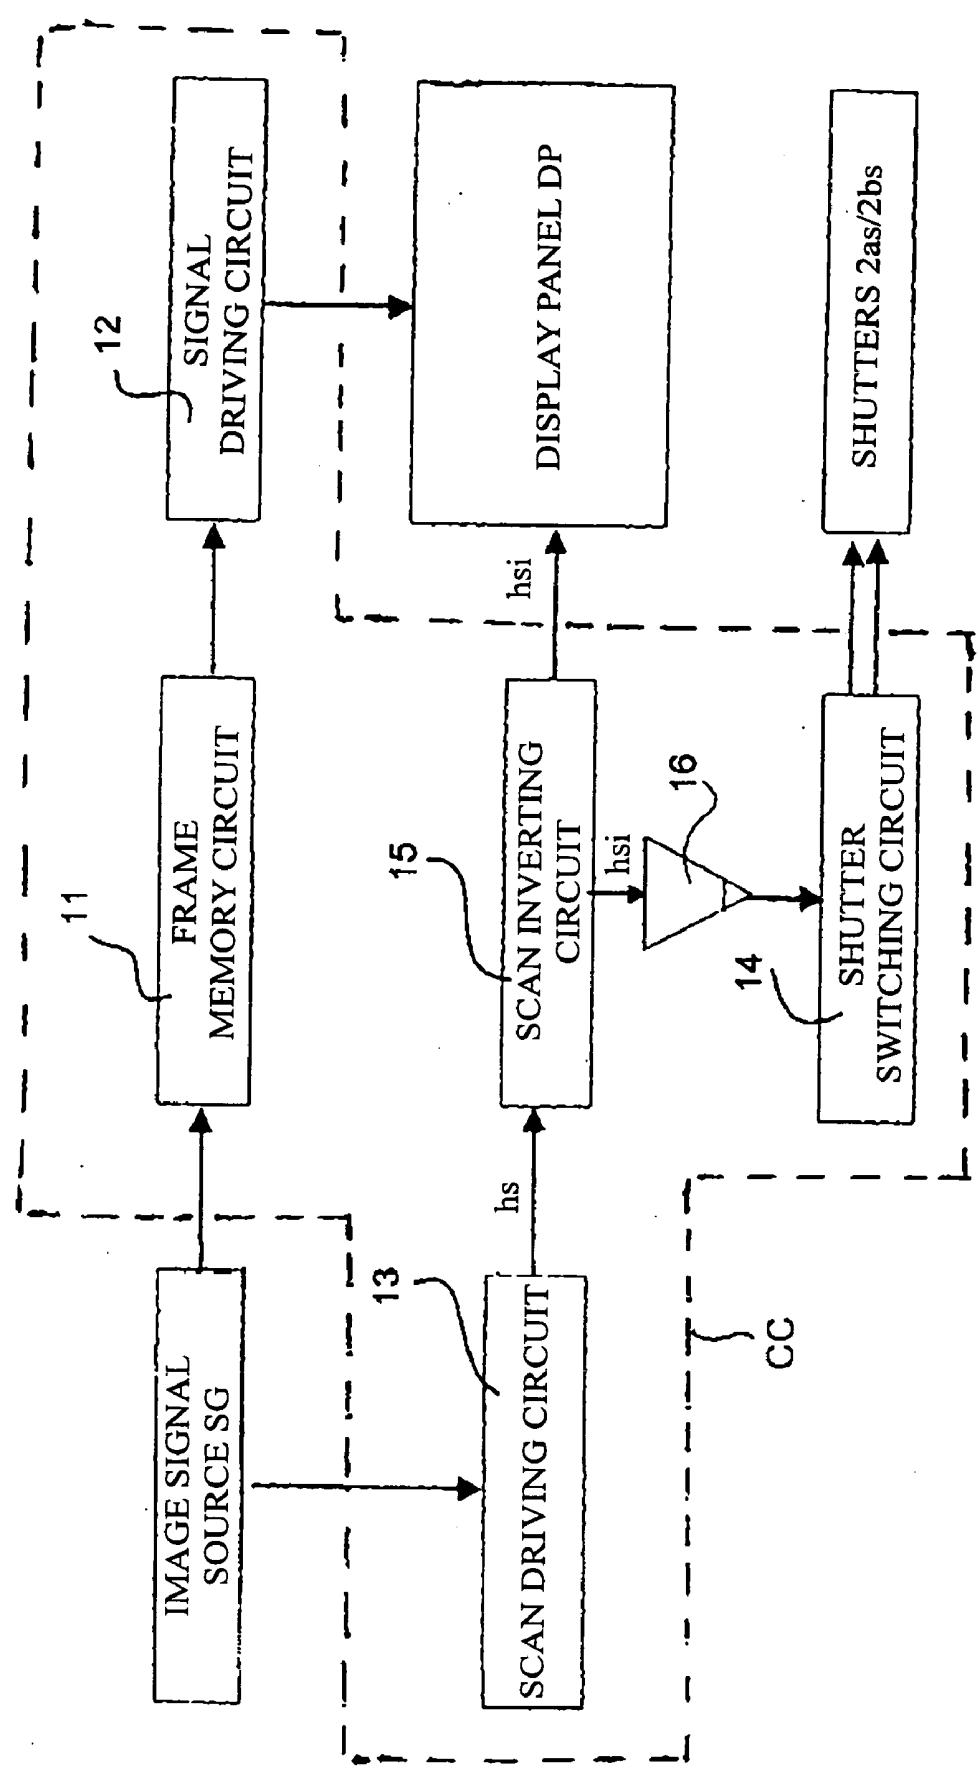


Fig. 3

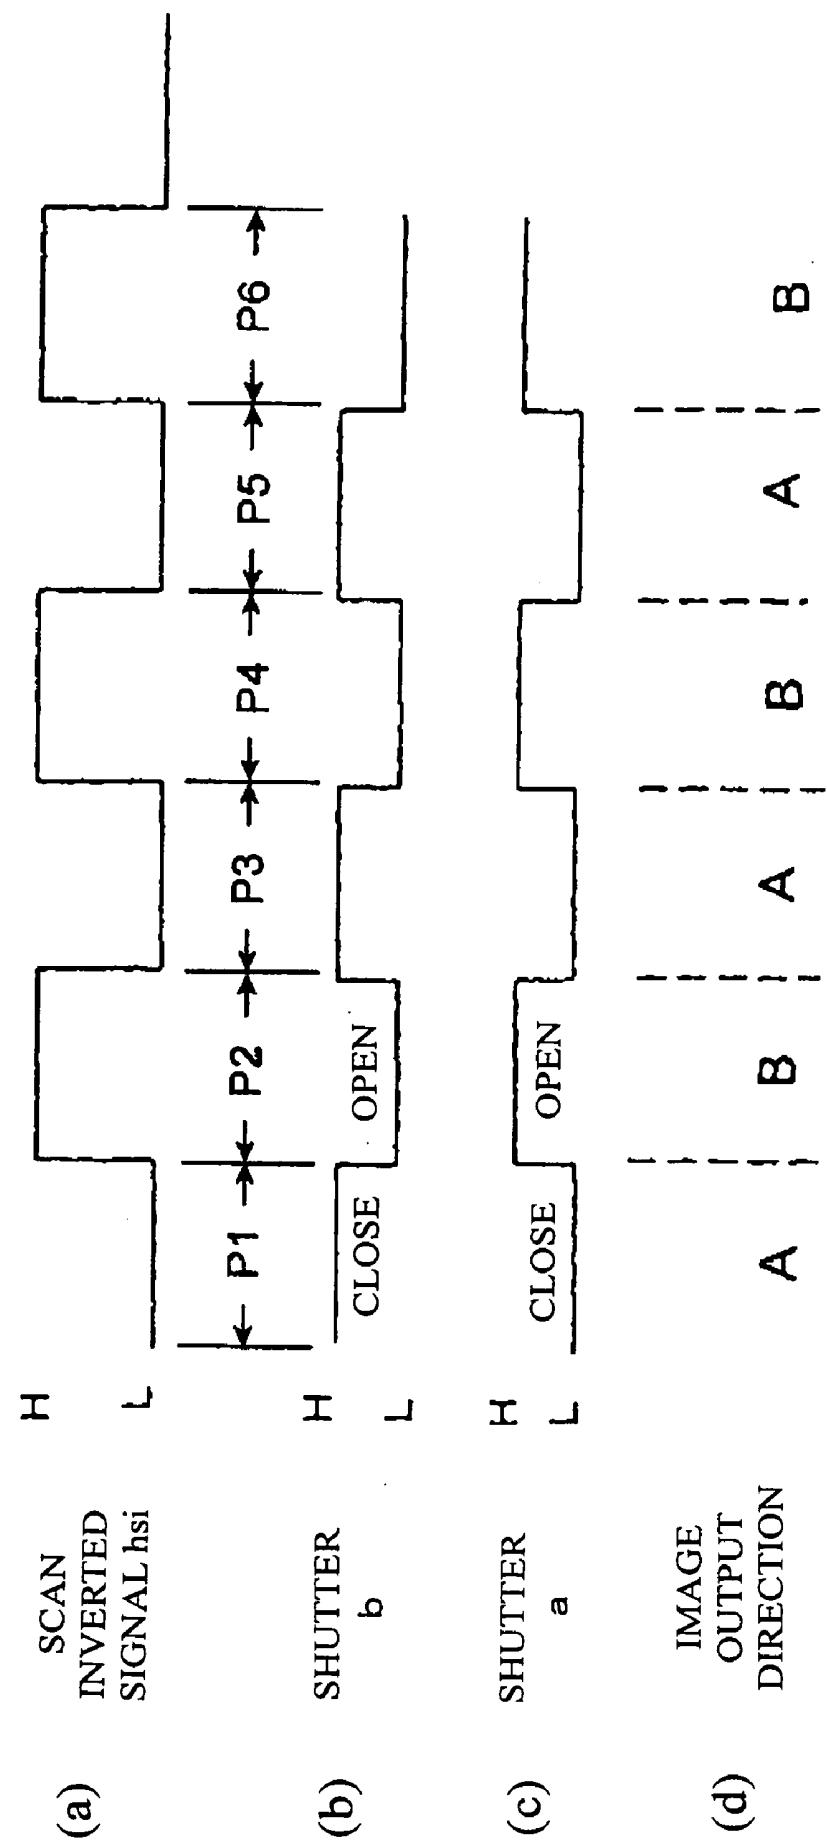


Fig. 4

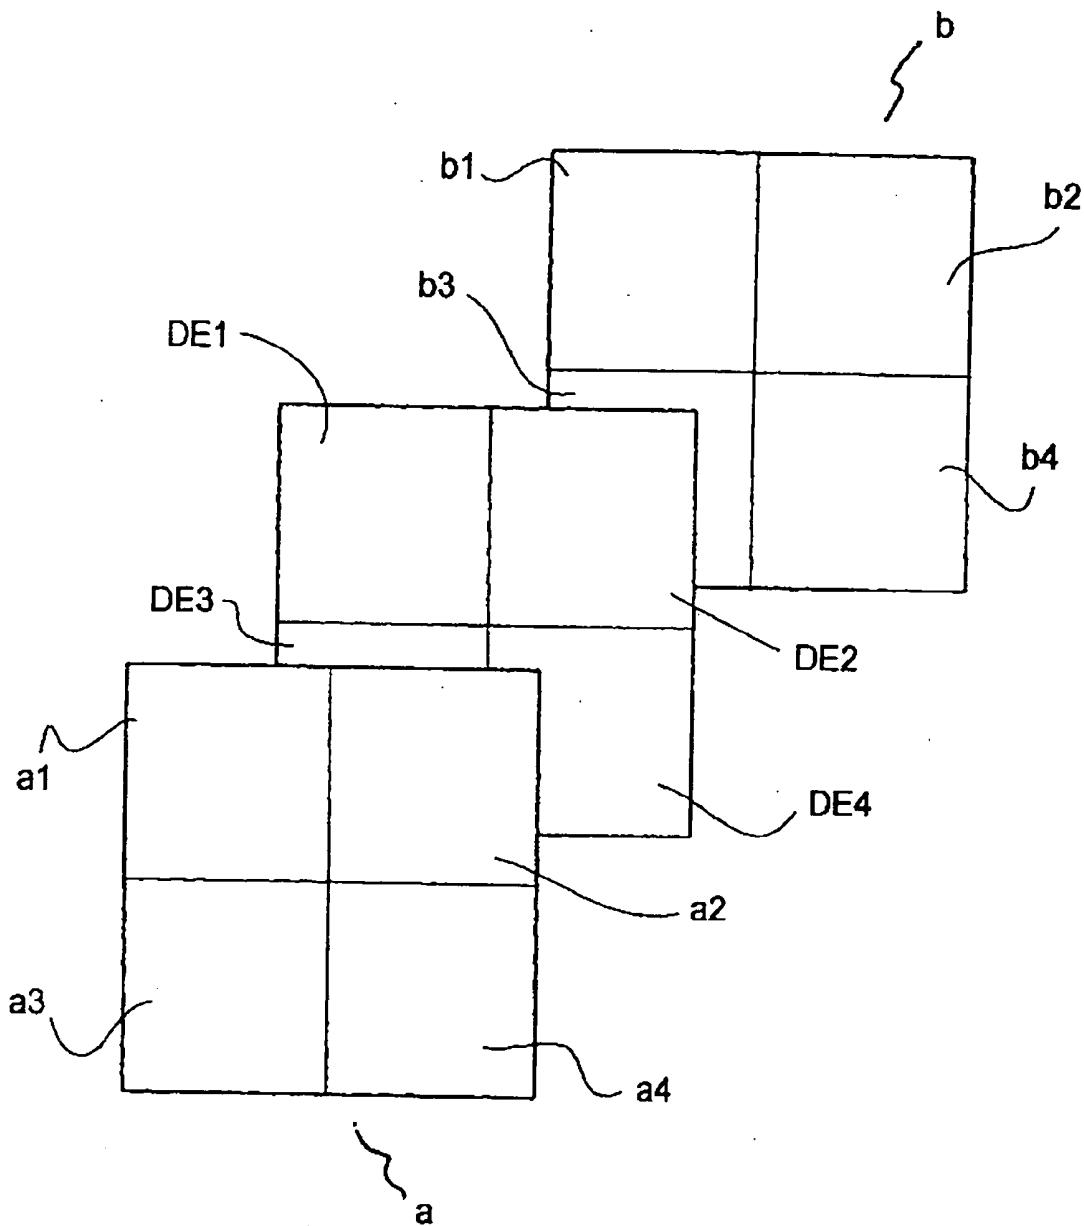


Fig. 5

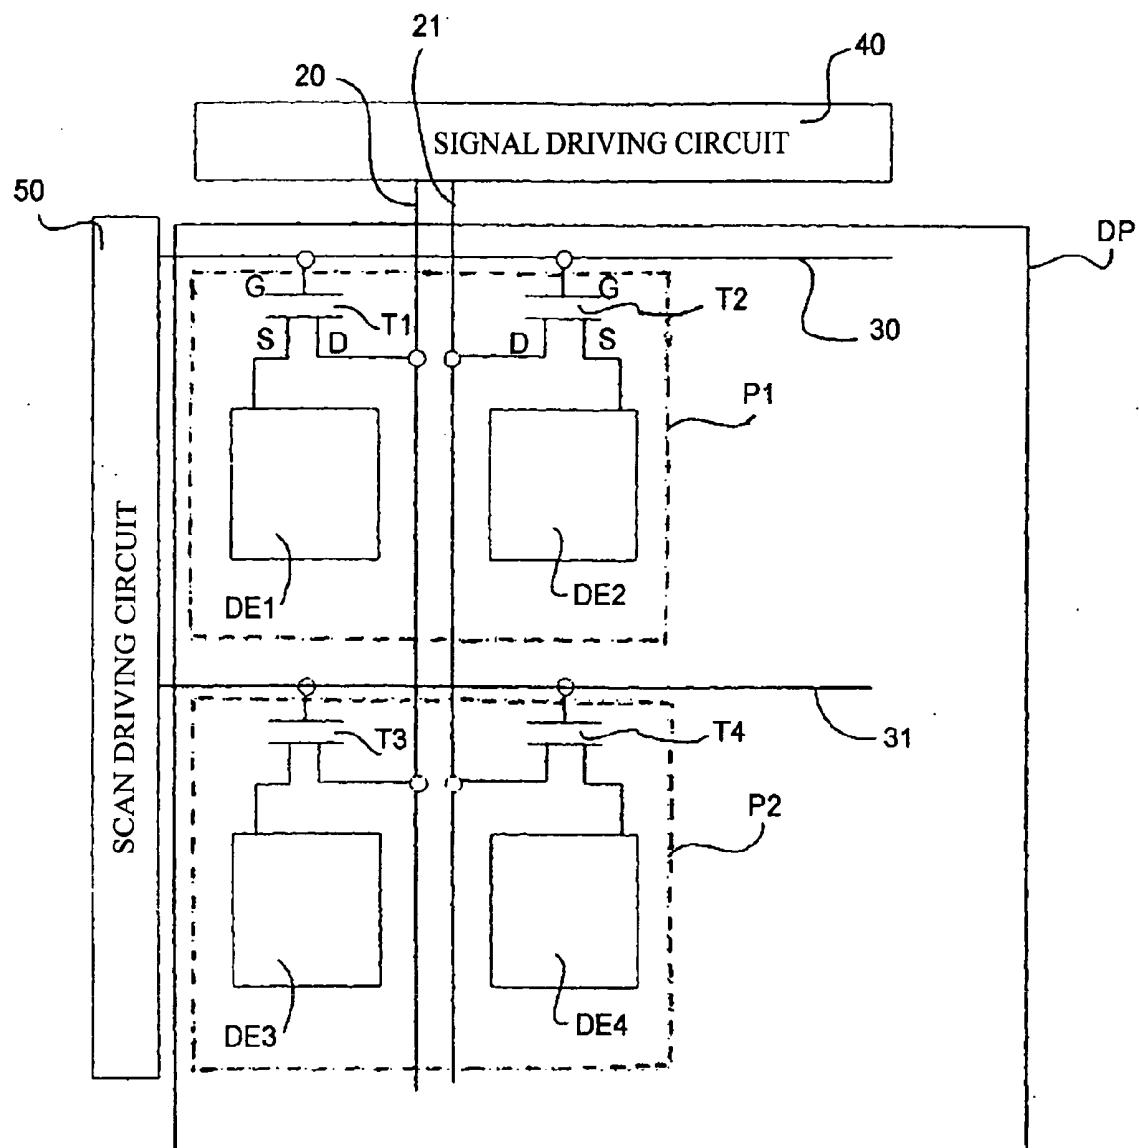


Fig. 6


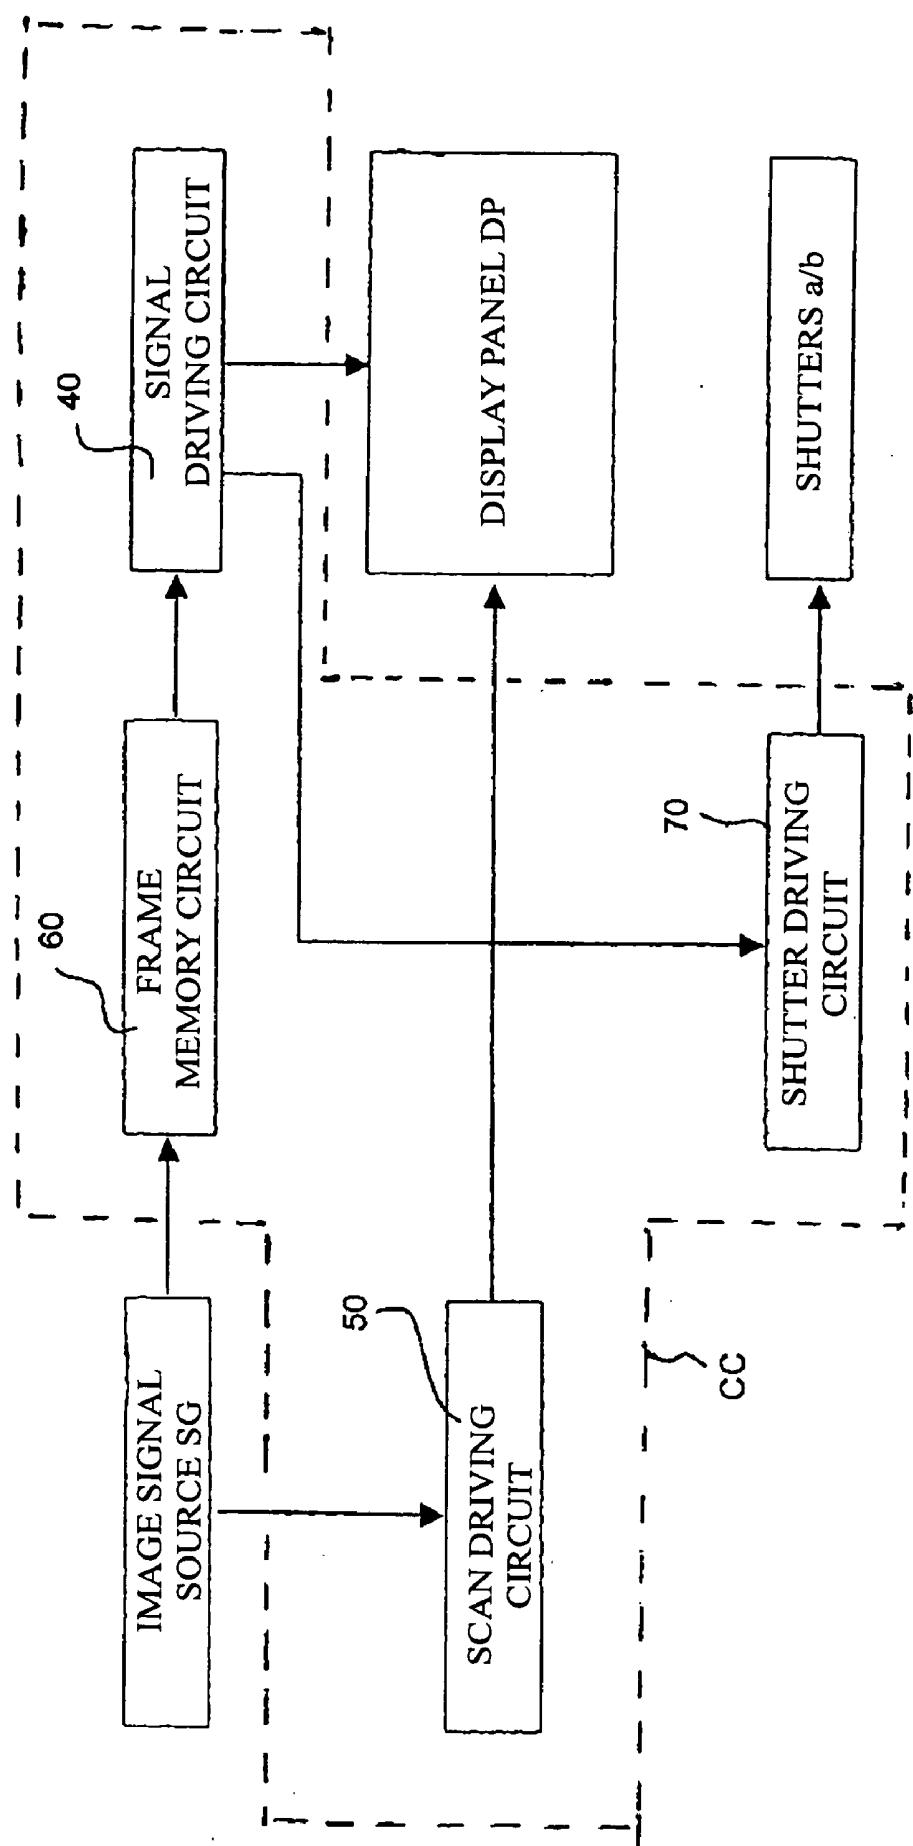


Fig. 7

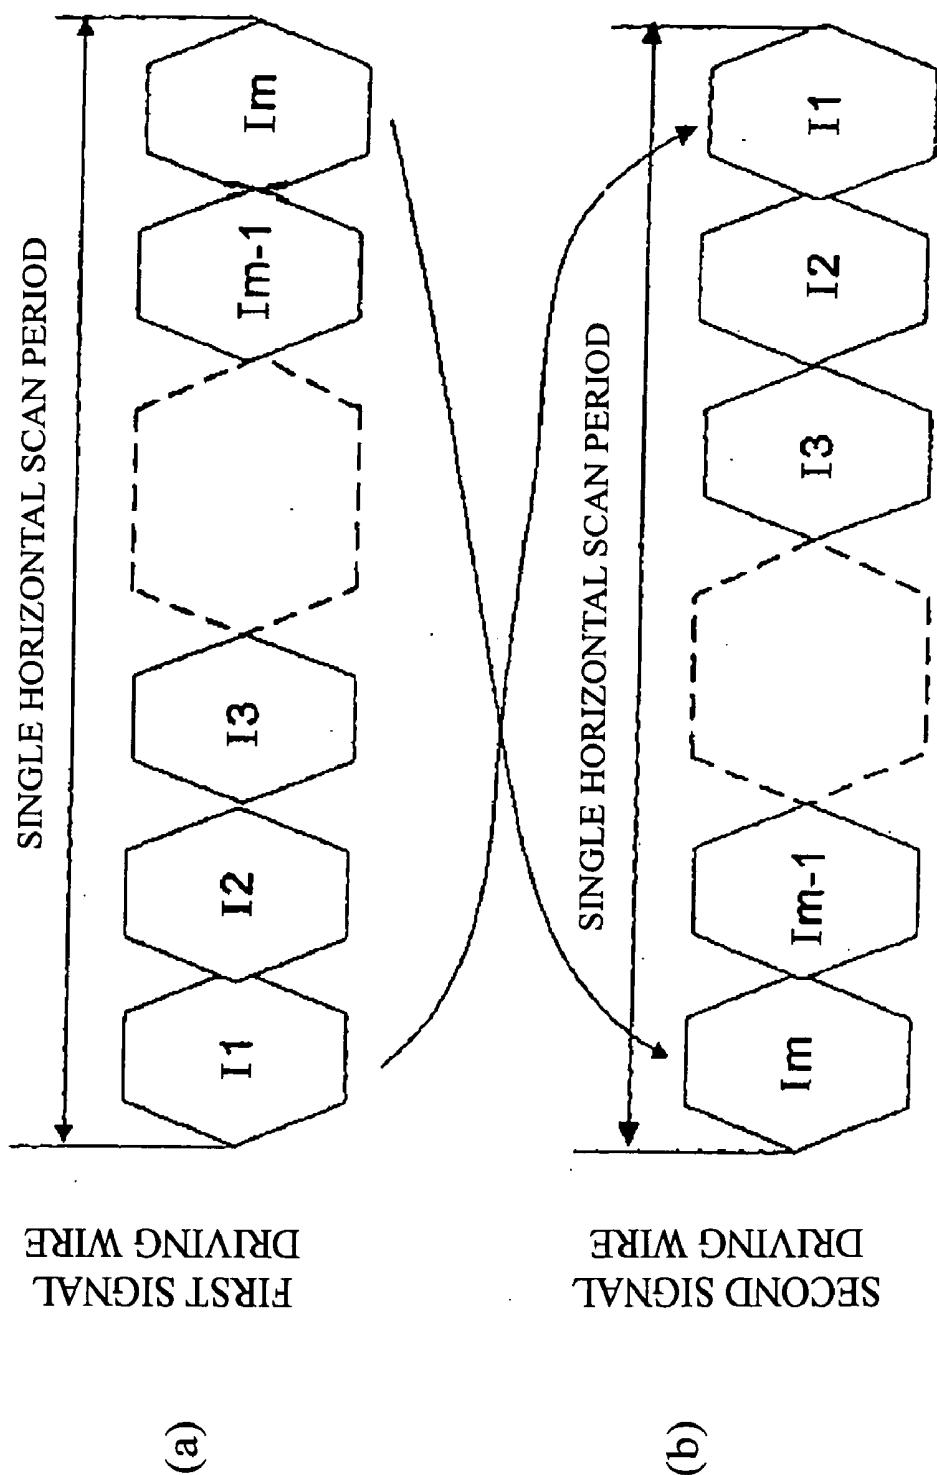

DISPLAY

TECHNICAL FIELD

[0001] The present invention relates to a display technology for viewing a display panel from both a front surface and a back surface thereof simultaneously.

BACKGROUND ART

[0002] In a display apparatus for displaying textual information, image information, and the like, there are cases where one person who faces the display surface of the display apparatus and another person who faces the back of the display surface wish to view the information displayed on the display apparatus almost simultaneously in a face-to-face manner. Circumstances where it is desirable to share the information displayed on the display apparatus include a case where the simulation results of insurance premiums, for example, must be explained when soliciting for an insurance contract from a customer, and a case where a product description or presentation is made using the display apparatus, for example.

[0003] As a display apparatus for such purposes, JP Patent Publication (Kokai) No. 61-185853 A (1986) discloses an apparatus using a flat Braun tube. Also, JP Patent Publication (Kokai) No. 9-190158 A (1997) discloses a technology by which a shutter is disposed on each display surface of a pair of image display apparatuses positioned back to back, and switching is performed by the shutter depending on whether or not to use the image display apparatuses.

DISCLOSURE OF THE INVENTION

[0004] However, in the apparatus using a flat Braun tube in the aforementioned prior art, a structure is necessary for supporting the weight of the Braun tube per se, so that the size of the display apparatus per se increases. There is another problem that power consumption increases since the display unit employs a Braun tube, as compared with a display panel using liquid crystal, for example. For these reasons, the display apparatus using a flat Braun tube is not suitable especially for mobile/portable purposes.

[0005] Moreover, in the technology using a pair of liquid crystal display apparatuses disclosed in JP Patent Publication (Kokai) No. 9-190158 A (1997), two liquid crystal display apparatuses adapted for color display are necessary especially when color display is required, resulting in an increase in production cost.

[0006] The present invention is proposed so as to solve the problems as mentioned above. It is an object of the present invention to provide a display apparatus such that images displayed on a display panel can be viewed from both a front surface and a back surface of the display panel in the same manner.

[0007] In order to achieve the aforementioned object, the invention according to claim 1 provides a display apparatus comprising: a display panel whose display can be observed from either side; a pair of liquid crystal shutter means disposed in such a manner as to sandwich the display panel; display control means for displaying a mirror image of display on the display panel in every other frame or every other field; and liquid crystal shutter control means for opening and closing the pair of liquid crystal shutter means

in synchronism with the operation of the display control means in each frame scan or each field scan such that they do not open simultaneously, wherein the pair of liquid crystal shutter means are opened and closed by the liquid crystal shutter control means such that the mirror image can be observed as the original display on one side of the display panel.

[0008] In accordance with claim 2 of the invention, the display control means comprises a scan inverting circuit for inverting the direction of a horizontal scan on the display panel in each frame or each field, and the liquid crystal shutter control means controls the switching of the opening and closing of the pair of liquid crystal shutter means in response to an output from the scan inverting circuit.

[0009] In order to achieve the aforementioned object, the invention according to claim 3 provides a display apparatus comprising: a display panel comprising a plurality of picture elements of which each is composed of a pair of display elements, wherein display can be observed from either side of the display panel; a pair of liquid crystal shutter means disposed in such a manner as to sandwich the display panel; display control means for driving each of the display elements such that a mirror image of display that is being made by a set of display elements consisting of one of each pair of display elements can be displayed by another set of display elements consisting of the other of each pair of display elements; and liquid crystal shutter control means for opening and closing the pair of liquid crystal shutter means in synchronism with the operation of the display control means in each frame scan or each field scan such that they do not open simultaneously, wherein the pair of liquid crystal shutter means are opened and closed by the liquid crystal shutter control means such that the mirror image can be observed as the original display on one side of the display panel.

[0010] In accordance with claim 4 of the invention, the display control means causes the mirror image to be displayed alternately in each horizontal scan by the one set and the other set of each pair of display elements.

[0011] The invention further provides a display apparatus comprising: a display panel having a plurality of picture elements that perform display based on an input signal, the display panel being capable of display on both surfaces, namely a first surface and a second surface, thereof, using a picture element at a selected location; first shutter means and second shutter means disposed on the first surface side and the second surface side, respectively, the first and second shutter means being capable of opening and closing for a single picture element or a plurality of picture elements; and control means comprising display control means for performing display control such that a first display observed from the first surface side and a second display observed from the second surface side can be viewed as the same display, and shutter control means for controlling the opening and closing of the shutters such that the display picture elements on the second surface side are screened by the second shutter means upon the first display and the display picture elements on the first surface side are screened by the first shutter means upon the second display.

[0012] The invention further provides a display apparatus comprising: a display panel having a plurality of picture elements, each including at least two, namely a first and a

second, display elements disposed closely to each other, which is capable of display from both surfaces, namely a first display surface and a second display surface, thereof, using a picture element at a selected location; first shutter means and second shutter means disposed on the first display surface side and the second display surface side, respectively, that are capable of opening and closing for each of the display elements; and control means comprising display control means for performing display control such that a first display observed from the first display surface side and a second display observed from the second display surface side can be viewed as the same display, and shutter control means for controlling the opening and closing of the shutters such that the display picture elements on the second display surface side are screened by the second shutter means upon the first display and the display picture elements on the first display surface side are screened by the first shutter means upon the second display.

[0013] The invention further provides a display apparatus comprising: a display panel having a plurality of picture elements that perform display based on an input signal, the display panel being capable of display on both surfaces, namely a first surface and a second surface, thereof, using a picture element at a selected location; first shutter means and second shutter means disposed on the first surface side and the second surface side, respectively, that are capable of opening and closing for a single picture element or a plurality of picture elements; and control means comprising display control means for performing display control of a first display observed from the first surface side and a second display, which is different from the first display, observed from the second surface side, and shutter control means for controlling the opening and closing of the shutters such that the display picture elements on the second surface side are screened by the second shutter means upon the first display and the display picture elements on the first surface side are screened by the first shutter means upon the second display.

[0014] The invention further provides a display apparatus comprising: a display panel having a plurality of picture elements, each including at least two, namely a first and a second, display elements disposed closely to each other, that can provide a display on both surfaces, namely a first display surface and a second display surface, thereof, using a picture element at a selected location; first shutter means and second shutter means disposed on the first display surface side and the second display surface side, respectively, that are capable of opening and closing for each the display element; and control means comprising display control means for performing display control of a first display observed from the first display surface side and a second display, which is different from the first display, observed from the second display surface side, and shutter control means for controlling the opening and closing of the shutters such that the display picture elements on the second display surface side are screened by the second shutter means upon the first display and the display picture elements on the first display surface side are screened by the first shutter means upon the second display.

BRIEF DESCRIPTION OF THE DRAWINGS

[0015] FIG. 1 shows a cross-sectional view of an example of a display element used in a display apparatus according to a first embodiment of the present invention.

[0016] FIG. 2 shows a block diagram of a configuration of a control circuit for driving a display apparatus using the display element of FIG. 1.

[0017] FIG. 3(a), (b), (c), and (d) show a timing chart for describing the operation of the control circuit shown in FIG. 2.

[0018] FIG. 4 shows a display apparatus according to a second embodiment of the present invention, in which a single picture element comprises two display elements and each display element is sandwiched by a pair of liquid crystal shutters.

[0019] FIG. 5 shows a circuit diagram of an example of the display panel of a display apparatus according to the second embodiment of the present invention.

[0020] FIG. 6 shows a block diagram of a configuration of a control circuit for driving a display apparatus using the display panel of FIG. 5.

[0021] FIGS. 7(a) and (b) show a timing chart for describing the operation of the control circuit shown in FIG. 6.

BEST MODE FOR CARRYING-OUT OF THE INVENTION

[0022] FIG. 1 shows a cross-sectional view of the structure of a display unit DD, which is a display panel that can be used for a display apparatus according to the embodiments of the present invention. The display unit DD comprises a display element DE comprising a light transmission type organic electroluminescence element (to be hereafter referred to as "light transmission type organic EL element"), and a pair of switches that sandwich the display element DE. As shown in FIG. 1, the display unit DD comprises the display element DE and a pair of liquid crystal shutters 2as and 2bs that sandwich the display element DE. The display element DE has a structure such that a light transmission type organic EL element 3 is formed on one substrate 1as of a pair of transparent substrates 1as and 1bs, and the light transmission type organic EL element 3 is sandwiched by the other transparent substrate 1bs. The pair of liquid crystal shutters 2as and 2bs are attached to the outer surfaces of the transparent substrates 1as and 1bs respectively such that they are integrated to constitute the display unit DD as a single picture element.

[0023] The light transmission type organic EL element 3, which is well-known, can be formed by disposing a transparent anode layer, a hole transport layer, a light emitting layer, an organic electron injecting layer, and a transparent cathode layer, for example, on one transparent substrate 1as. Light emission from the light emitting layer can be obtained from both the transparent anode layer side and the transparent cathode layer side by applying a predetermined voltage across the pair of the transparent anode layer and the transparent cathode layer.

[0024] Each of the pair of the liquid crystal shutters 2as and 2bs has a TN-type liquid crystal structure, for example, in which liquid crystals in a twisted state are sandwiched by two sheets of transparent electrodes. Further, the two sheets of transparent electrodes that sandwich the liquid crystals are held between two sheets of polarizing filters with orthogonal directions of polarization. With this configuration, light emission from the display element DE can be

caused to be transmitted for display only in the A direction or the B direction by selectively applying voltage across the two sheets of transparent electrodes of each liquid crystal shutter.

[0025] An active matrix display panel DP (see **FIG. 2**) can be configured in a two-dimensional plane by arranging as many of the aforementioned display elements DE as necessary for image display vertically and/or laterally in a matrix manner.

[0026] **FIG. 2** shows a block diagram of an example of a display apparatus according to a first embodiment of the present invention. The apparatus comprises a display panel DP in which as many of the display elements DE shown in **FIG. 1** as desired are arranged in a planar manner. It also comprises a control circuit for controlling the operation of the display panel DP. In **FIG. 2**, liquid crystal shutters 2as and 2bs are disposed such that each can be switched on/off in response to the display element DE. The pair of liquid crystal shutters 2as and 2bs are disposed to sandwich the display panel DP.

[0027] As shown in **FIG. 2**, the display apparatus according to the first embodiment of the present invention is provided with a control circuit CC that receives an image signal from an image signal source SG, a display panel DP that is controlled by the control circuit CC, and a plurality of pairs of liquid crystal shutters 2as and 2bs. In the following, the operation of the control circuit CC for causing image signals to be displayed on the display panel DP shown in **FIG. 1** is described, focusing mainly on the relationship between the display panel DP and a plurality of pairs of liquid crystal shutters 2as and 2bs, with reference made to **FIGS. 2 and 3**. As shown in **FIG. 2**, the control circuit CC is provided with a frame memory circuit 11, a signal driving circuit 12, a scan driving circuit 13, a shutter switching circuit 14, a scan inverting circuit 15, and an inverter 16. The inputs of the frame memory circuit 11 and the scan driving circuit 13 are connected to the outputs of the image signal source SG. The outputs of the shutter switching circuit 14 are connected to the liquid crystal shutters 2as and 2bs, and the output of the scan inverting circuit 15 is connected to the display panel DP.

[0028] In **FIG. 2**, an image signal outputted per frame from the image signal source SG is fed to the frame memory circuit 11. The image signal source SG also supplies the frame signal to the scan driving circuit 13. The scan driving circuit 13 generates a horizontal direction scan signal hs regarding the display panel DP in synchronism with the frame signal from the image signal source SG. The horizontal direction scan signal hs from the scan driving circuit 13 is fed to the scan inverting circuit 15, where the scan direction is inverted per frame, thereby generating a horizontal direction scan inverted signal hsi with which the display panel DP is driven.

[0029] Meanwhile, the image signal read from the frame memory circuit 11 is subjected to a signal processing in the signal driving circuit 12, and is then inputted into a signal line extending in the column direction on the display panel DP. In this case, as the horizontal direction scan inverted signal hsi is supplied from the scan inverting circuit 15 to a scan line extending in the row direction on the display panel DP, a video signal and the horizontal direction scan inverted signal hsi are applied to each display element DE on the

display panel DP, thereby causing the display element DE disposed at a location where the activated signal and scan lines intersect to emit light. This enables a display on the display panel DP in accordance with the signal from the image signal source SG.

[0030] The horizontal scan inverted signal hsi from the scan inverting circuit 15 is further inverted in the inverter 16 back to the same signal as the original horizontal direction scan signal hs, which is then provided to the shutter switching circuit 14. In the following, an example of the operation of the shutter switching circuit 14 is described with reference to a timing chart shown in **FIG. 3**. In a frame period P1 in which a horizontal direction scan inverted signal hsi (**FIG. 3(a)**) from the scan inverting circuit 16 is low (L: non-inverted), the shutter switching circuit 14 receives a horizontal direction scan signal hs from the inverter 16, and applies a high (H) signal (**FIG. 3(b)**) to the liquid crystal shutter 2bs on one side and a low (L) signal (**FIG. 3(c)**) to the liquid crystal shutter 2 as on the other side. Since both the liquid crystal shutters 2as and 2bs are composed of TN-type liquid crystal elements, for example, the liquid crystal shutter 2bs, to which the H signal is applied, closes and blocks the light path because of a reduced optical transmittance, while the liquid crystal shutter 2 as, to which the low signal is applied, opens for opening the light path because of an increased optical transmittance. Namely, with reference to the image output directions shown in **FIG. 1**, light emitted from the display element DE passes in the A direction and is blocked in the B direction, so that the image output direction of the display apparatus is A as shown in **FIG. 3(d)**.

[0031] In the next frame period P2, a horizontal direction scan inverted signal hsi outputted from the scan inverting circuit 15 is high, and so the horizontal direction scan on the display panel DP is initiated in a direction opposite to the scan direction in the previous frame period P1. For example, if the horizontal scan has been performed from right to left in the previous frame period P1, the scan is performed from left to right in the present frame period P2. Meanwhile, a horizontal direction scan signal hs that is provided to the shutter switching circuit 14 from the inverter 16 is low, so that a low signal is applied to the liquid crystal shutter 2bs on one side, and a high signal is applied to the liquid crystal shutter 2 as on the other side. Consequently, the liquid crystal shutter 2bs of one side opens and so does the light path, while the liquid crystal shutter 2 as of the other side closes and blocks the light path.

[0032] Therefore, light emitted from the display element DE is blocked in the A direction and allowed to pass in the B direction, so that an image is displayed only in the B direction on the display apparatus.

[0033] In the following frame periods P3, P4, P5, P6, . . . , the same operation as described above is repeated such that the direction of image output from the display apparatus is switched alternately between the A direction and the B direction, as shown in **FIG. 3(d)**.

[0034] When the display panel DP that displays the video signal outputted from the image signal source SG outputs an image in the image output direction A, namely, when the liquid crystal shutter 2 as opens the light path, a normal image can be observed by an observer who faces the liquid crystal shutter 2as. In other words, the image can be viewed

by the observer who faces the liquid crystal shutter 2 as when the display image displayed on the display panel DP in the frame periods P1, P3, P5, . . . , (hereafter referred to as “the first frame periods”), in which the horizontal direction scan inverted signal hsi is not inverted (namely, the horizontal direction scan inverted signal hsi is low), is outputted in the image output direction A through the open liquid crystal shutter 2as.

[0035] In the next frame periods P2, P4, P6 . . . (hereafter referred to as “the second frame periods”), the horizontal direction scan inverted signal hsi outputted from the scan inverting circuit 15 is inverted to a low signal. The horizontal scan is therefore performed in the opposite direction on the display panel DP, and the liquid crystal shutter 2 as closes and blocks the light path, while the liquid crystal shutter 2bs opens and so does the light path. Therefore, an image displayed on the display panel DP in the first frame periods is outputted in the image output direction B, and the image can be viewed by the first observer who watches the display apparatus from the side facing the liquid crystal shutter 2as. The same image as viewed by the first observer can also be viewed by the second observer who watches the display apparatus from the side facing the liquid crystal shutter 2bs in the second frame periods. Thus, information can be shared by the two persons viewing the same image displayed on the display panel DP, from either side of the display apparatus.

[0036] In the following, the display apparatus according to a second embodiment of the present invention is described with reference to FIG. 4. In the display apparatus according to the second embodiment, two display elements constitute one picture element, and liquid crystal shutters are disposed on the front and rear surfaces of each display element. Namely, as shown in FIG. 4, one picture element in one row consists of two display elements DE 1 and DE 2 adjoining in the row direction, and one picture element in the next row adjoining the aforementioned picture element consists of display elements DE 3 and DE 4. The display elements DE 3 and DE 4 in the next row are described as a matter of convenience for the following operational description. For each of these display elements DE 1 to DE 4, a pair of liquid crystal shutters a1, b1, a2, b2, a3, b3, a4, and b4 are disposed to sandwich each display element.

[0037] Namely, a pair of liquid crystal shutters a1 and b1 are disposed on the display element DE 1, a pair of liquid crystal shutters a2 and b2 are disposed on the display element DE 2, a pair of liquid crystal shutters a3 and b3 are disposed on the display element DE 3, and a pair of liquid crystal shutters a4 and b4 are disposed on the display element DE 4.

[0038] In practice, the display panel has a matrix-like structure comprising $n \times m$ picture elements, in which there are n rows, each horizontal row having $2m$ display elements (namely, m picture elements), each display element having the same structure as the pair of display elements DE 1 and DE 2 shown in FIG. 4, each composed of a light transmission type organic EL element. FIG. 5 shows an example of a circuit for driving each display element of the aforementioned display panel DP. However, in the display panel DP in FIG. 5, of the display elements arranged in n rows and m columns, there is only indicated a configuration of two pairs of display elements DE 1 to DE 4 that constitute two picture

elements P1 and P2 that are adjoining in the column direction. In the following, the display elements DE 1 and DE 2 that constitute the picture element P1 and DE 3 and DE 4 that constitute the adjoining picture element P2 are described for ease of understanding.

[0039] As shown in FIG. 5, the pair of display elements DE 1 and DE 2 that constitute a single picture element are driven by corresponding drive transistors T1 and T2, respectively. These transistors are controlled to switch on/off by a voltage (gate voltage) applied to a scan driving wire 30 extending in the row direction. Similarly, the pair of the display elements DE 3 and DE 4 adjoining the above picture element are driven by corresponding drive transistors T3 and T4, respectively. These transistors are controlled to switch on/off by a voltage applied to a scan driving wire 31 running in the row direction.

[0040] Image data that is to be displayed on each picture element is inputted into a first signal driving wire 20 and a second signal driving wire 21 from a signal driving circuit 40. A high or low voltage is applied to the scan driving wires 30 and 31 from a scan driving circuit 50.

[0041] More specifically, the gates G of a pair of the transistors T1 and T2 adjoining in the row direction are connected to the scan driving wire 30, and the gates of a pair of the transistors T3 and T4 in the next row are connected to the scan driving wire 31. Of the four transistors T1 to T4, the drains D of the transistors T1 and T3 on one side are connected to the first signal driving wire 20, and the drains D of the transistors T3 and T4 on the other side are connected to the second signal driving wire 21. The display elements DE 1 to DE 4 comprising light transmission type organic EL elements are each connected to the source S of a corresponding transistor. When any of these transistors T1 to T4 is switched on by the voltage on the scan driving wire 30 or 31, the display element connected to the switched-on transistor emits light based on image data signals supplied from the first signal driving wire 20 and the second signal driving wire 21. In an actual matrix-like display panel DP with n rows and m columns, transistors are arranged for the individual display elements in the same manner as shown in FIG. 5, such that $2m$ signal driving wires and n scan driving wires are disposed.

[0042] The display panel DP comprising picture elements of n rows and m columns is operated in accordance with the timing shown in FIG. 7 under the control of a control circuit CC shown in FIG. 6. In FIG. 6, liquid crystal shutters a and b generically refer to each pair of liquid crystal shutters disposed in such a manner as to sandwich individual display element.

[0043] As shown in FIG. 6, the control circuit CC receives an image signal from an image signal source SG and drives the display panel DP and a plurality of pairs of liquid crystal shutters a and b. The control circuit CC includes a frame memory circuit 60 and a shutter driving circuit 70, in addition to the signal driving circuit 40 and the scan driving circuit 50 shown in FIG. 5. The inputs of the scan driving circuit 50 and the frame memory circuit 60 are connected to the outputs of the image signal source SG. A first output of the signal driving circuit 40 is fed to the display panel DP, and a second output is fed to the shutter driving circuit 70. The output of the shutter driving circuit 70 is connected to the liquid crystal shutters a and b.

[0044] In the same manner as already described in the first embodiment, in the apparatus shown in **FIG. 6**, the image signal source SG also outputs a number m pieces of image data for driving the m picture elements constituting a single horizontal row in a single horizontal scan period. The image data is fed to the frame memory circuit **60**. The image signal source SG also supplies the frame signal to the scan driving circuit **50**. The scan driving circuit **50** generates a horizontal direction scan signal hs for the display panel DP in synchronism with the frame signal from the image signal source SG. The horizontal direction scan signal hs from the scan driving circuit **50** drives the display panel DP.

[0045] Meanwhile, the image data read from the frame memory circuit **60** is processed in the signal driving circuit **40**, and then a video signal is inputted into a signal line extending in the column direction on the display panel DP. Simultaneously, a horizontal direction scan signal hs from the scan driving circuit **50** is supplied to the display panel DP in the row direction through a scan wire. The aforementioned video signal and the horizontal direction scan signal hs are applied to each display element on the display panel DP, thereby causing a specific display element disposed at a location where the signal and scan lines intersect to emit light. This enables a display on the display panel DP in accordance with the image data.

[0046] In this case, the signal driving circuit **40** outputs the image data received from the frame memory circuit **60** into the first signal driving wire and the second signal driving wire after changing the output order in each horizontal scan period. The following describes, with reference to FIGS. 7(a) and (b), the operation of the signal driving circuit **40** as it drives a pair of signal driving wires such that the same display can be viewed from the front and back surfaces of the display panel. **FIG. 7(a)** shows image data that the signal driving circuit **40** outputs to the first signal driving wire **20** and the second signal driving wire **21** in a single horizontal scan period. As shown in **FIG. 7(a)**, the signal driving circuit **40** applies signals for displaying m image data items $I1, I2, I3, \dots, Im-1$, and Im , which are to be displayed by the m picture elements in a single horizontal row, to each of the m first signal driving wires **20** in a single horizontal scan period in which one of the n scan driving wires, such as the scan driving wire **30** in **FIG. 5**, is driven high.

[0047] Namely, the image data $I1$ for the first column is provided to display elements connected to the first signal driving wire **20** of the first column, and the image data $I2$ for the second column is provided to display elements connected to the first signal driving wire of the second column. Subsequently, the image data Im for the m -th column is provided to display elements connected to the first signal driving wire of the m -th column in the same manner.

[0048] Simultaneously, in this horizontal scan period, the signal driving circuit **40** provides the image data Im for the m -th column to the second signal driving wire **21** of the first column, as shown in **FIG. 7(b)**, and provides the image data $Im-1$ for the $(m-1)$ -th column to the second signal driving wire of the second column. Subsequently, a signal for displaying the image data $I1$ for the first column is provided to the second signal driving wire of the m -th column in the same manner.

[0049] Namely, in the example shown in **FIG. 7(a)**, of the number $2m$ of display elements constituting the m picture

elements in one horizontal row, to the m display elements connected to the first signal driving wire, there are supplied signals for displaying the image data $I1$ for the first column to the image data Im for the m -th column, in order from the first column to the m -th column. Meanwhile, to the m display elements connected to the second signal driving wire, there are supplied signals to display the image data Im for the m -th column to the image data $I1$ for the first column, in order from the first column to the m -th column. Specifically, when the pair of the display elements **DE 1** and **DE 2** shown in **FIG. 5** constitute the picture element in the first row of the first column on the display panel DP, for example, in the case of **FIG. 7**, the image data $I1$ for the first column is supplied to the display element **DE 1** and the image data Im for the m -th column is supplied to the display element **DE 2**.

[0050] In this case, pairs of liquid crystal shutters (**a1** to **a4**, **b1** to **b4**, in **FIG. 4**, for example) are controlled to be in an open state (i.e., transmitting state) or a closed state (i.e., light-blocking state) by the shutter driving circuit **70**. In other words, in a period when one row in which a number m of picture elements each consisting of a pair of display elements (**DE 1** and **DE 2** in **FIG. 4**, for example) are arranged horizontally is scanned, the liquid crystal shutter **a1** disposed on one side of the display elements (**DE 1**, in **FIG. 5**, for example) connected to the first signal driving wire (**20**, in **FIG. 5**) is controlled to be in the open state while the liquid crystal shutter **b1** disposed on the other side is controlled to be in the closed state. In contrast, the liquid crystal shutter **a2** disposed on one side of the display elements (**DE 2**, in **FIG. 5**, for example) connected to the second signal driving wire (**21**, in **FIG. 5**) is controlled to be in the closed state while the liquid crystal shutter **b2** disposed on the other side is controlled to be in the open state.

[0051] In the same manner, in the period when the next horizontal row is scanned, the liquid crystal shutter **a3** disposed on one side of the display elements (**DE 3**, in **FIG. 5**, for example) connected to the first signal driving wire (**20**, in **FIG. 5**) is also controlled to be in the open state while the liquid crystal shutter **b3** disposed on the other side is controlled to be in the closed state. The liquid crystal shutter **a4** disposed on one side of the display elements (**DE 4**, in **FIG. 5**, for example) connected to the second signal driving wire (**21**, in **FIG. 5**) is controlled to be in the closed state while the liquid crystal shutter **b2** disposed on the other side is controlled to be in the open state.

[0052] Subsequently, for each picture element of the entire rows, the opening and closing of the liquid crystal shutters sandwiching the display elements are controlled such that, in each frame scan period, the liquid crystal shutters disposed on one side of all the display elements connected to the first signal driving wires are controlled to be in a first state (the open state, for example), and the liquid crystal shutters disposed on the other side are controlled to be in a second state (the closed state, for example), while the liquid crystal shutters disposed on one side of all the display elements connected to the second signal driving wires are controlled to be in the second state, and the liquid crystal shutters disposed on the other side are controlled to be in the first state.

[0053] Consequently, as the liquid crystal shutter disposed on one side of each display element connected to the first

signal driving wire and the liquid crystal shutter disposed on the other side of each display element connected to the second signal driving wire are driven to be in a light-transmitting state simultaneously, the same screen can be viewed from either side of the display panel DP by providing a signal for displaying the image data to the first and second signal driving wires in the order already described in FIG. 7 in each horizontal scan period.

[0054] The aforementioned operation is summarized in Table 1. In Table 1, display elements DE i11 to DE im2 designate the first to the m-th picture elements, respectively, in the i-th row, where i=1 to n, and O indicates the open (transmitting) state of a liquid crystal shutter and X indicates the closed (light-blocking) state of a liquid crystal shutter.

[0056] Namely, in a single horizontal scan period in which the scan driving wire of the i-th row is driven high, the signal driving circuit 40 applies signals for displaying m items of image data I1, I2, I3, ..., Im-1, and Im, which are to be displayed by m picture elements in the row, to m second signal driving wires 21, respectively. In other words, the image data I1 signal for the first column is provided to the display elements connected to the second signal driving wire 21 of the first column, and the image data I2 signal for the second column is provided to the display elements connected to the second signal driving wire of the second column. Subsequently, the image data Im signal for the m-th column is provided to the display elements connected to the second signal driving wire of the m-th column in the same

TABLE 1

Liquid crystal shutter on the other side	X	O	X	O	X	O	
	First picture element		Second picture element		m-th picture element		
	DEi11	DEi12	DEi21	DEi22	...	DEim1	DEim2
Image data	I1	Im	I2	Im - 1	...	Im	I1
Liquid crystal shutter on one side	O	X	O	X	O	X	

[0055] Control of the state of a pair of liquid crystal shutters is not limited to the above description. It is also possible to control the liquid crystal shutters in states different from those shown in Table 1 by changing the order of image data provided to the first and second signal driving wires in each horizontal scan period. For example, the same screen can be observed also from either side of the display panel DP by controlling the opening and closing of the liquid crystal shutters and the order of image data provided to each display element as shown in Table 2 below. In Table 2, the j-th row indicates the horizontal row following the i-th (namely, j=i+1) row.

manner. Simultaneously, in this horizontal scan period, the signal driving circuit 40 provides the image data Im signal for the m-th column to the first signal driving wire 20 of the first column, and provides the image data Im-1 signal for the (m-1)th column to the first signal driving wire of the second column. Subsequently, an image data I1 signal for the first column is provided to the first signal driving wire of the m-th column in the same manner.

[0057] In the next horizontal scan period, namely, a single horizontal scan period in which a scan driving wire of the j-th row is driven high, the signal driving circuit 40 applies m items of image data I1, I2, I3, ..., Im-1, and Im, which

TABLE 2

Liquid crystal shutter on the other side	i-th row						
	O	X	O	X	O	X	
	First picture element		Second picture element		m-th picture element		
Display element	DEi11	DEi12	DEi21	DEi22	...	DEim1	DEim2
Image data	Im	I1	Im - 1	I2	...	I1	Im
Liquid crystal shutter on one side	X	O	X	O	X	O	

Liquid crystal shutter on the other side	j-th row						
	X	O	X	O	X	O	
	First picture element		Second picture element		m-th picture element		
Display element	DEj11	DEj12	DEj21	DEj22	...	DEjm1	DEjm2
Image data	I1	Im	I2	Im - 1	...	Im	I1
Liquid crystal shutter on one side	O	X	O	X	O	X	

are to be displayed by the m picture elements in the row, to m first signal driving wires **20**, respectively. In other words, the image data **I1** signal for the first column is provided to the display elements connected to the first signal driving wire **20** of the first column, and the image data **I2** signal for the second column is provided to the display elements connected to the first signal driving wire of the second column. Subsequently, the image data **Im** signal for the m -th column is provided to the display elements connected to the first signal driving wire of the m -th column in the same manner. Simultaneously, in this horizontal scan period, the signal driving circuit **40** provides the image data **Im** signal for the m -th column to the second signal driving wire **20** of the first column, and provides the image data **Im-1** signal for the $(m-1)$ -th column to the second signal driving wire of the second column. Subsequently, an image data **I1** signal for the first column is provided to the second signal driving wire of the m -th column in the same manner.

[0058] Thus, the same screen can be observed also from both the front and back sides of the display panel **DP** by controlling the opening and closing of the liquid crystal shutters as shown by **O** and **X** in Table 2, while supplying image data to the first signal driving wire and the second signal driving wire.

[0059] Although the display apparatus according to the embodiments of the present invention has been described above, the present invention is not limited to these embodiments. For example, any transparent display element can be used instead of the light transmission type organic EL element as long as the object of the present invention can be achieved.

[0060] Moreover, while the embodiments have been described on the assumption that substantially the same display is performed on the first surface side and the second surface side, control may be performed such that the first and second surfaces display differently in cases where, in a face-to-face meeting, for example, a presenter should be shown materials for smooth explanation, while the presented party is shown actual materials. In this case, with reference to **FIG. 2** of the first embodiment, for example, display control can be performed based on a signal from the image signal source **SG** by storing first image data to be displayed on the first surface side and second image data to be displayed on the second surface side in the image signal source **SG**, and by providing an identification signal to the first image data and the second image data. In this case, by using a buffer memory for temporarily storing a previously inputted image, the image data through the buffer memory and image data that has been directly inputted can be controlled to be displayed simultaneously.

[0061] In this method, different displays can be shown on the first and second surface sides simultaneously in the same period. In this case, although it is not necessary to perform a process to invert scan signals, for example, it is preferable to adopt a configuration employing a memory for storing display locations on the first and second surface sides and capable of carrying out a shutter control based on the display locations stored in the memory.

[0062] While the above embodiments have been described with reference to a display panel comprising light transmis-

sion type organic EL elements, the display panel is not limited to this. Either organic or inorganic display panels may be used, and the light transmission type organic EL elements are only an example, so that obviously various types of display panel may be used. Also, the displayed objects are not limited to images and may be those of a variety of kinds, which are included in the scope of the present invention.

INDUSTRIAL APPLICABILITY

[0063] As will be understood from the detailed description above, the invention according to claim **1** provides a display apparatus that is capable of providing the same display from either the front or the back of a display panel. Therefore, observers who face each other can share the same information with this display apparatus located between them, so that the need for a conventional multi-display apparatus is eliminated and the trouble of turning the display surface toward individual observers can be removed, for example. Furthermore, the display apparatus per se can be reduced in size and weight.

[0064] The invention according to claim **2** controls the opening and closing of liquid crystal shutters using data from a signal generator, so that the circuit configuration of control means can be simplified.

[0065] The invention according to claim **3**, in contrast with the invention according to claim **1** which switches display per frame, displays a regular display and its mirror image simultaneously and enables the observation of the regular display on one side of the display apparatus and the mirror image on the other side by the opening and closing of a pair of liquid crystal shutters. Therefore, display in high resolution is possible.

[0066] The invention according to claim **4** switches a pair of display elements that display the mirror image in each horizontal scan, so that apparent resolution can be improved, thereby further improving the visibility of a display image.

[0067] The invention according to claim **5** controls the display on the display panel and the shutter means disposed on the both surfaces, so that display can be performed such that the display panel can be viewed in the same manner from a first surface side and a second surface side.

[0068] The invention according to claim **15** comprises display control means for controlling the display of the first display observed from the first surface side and of the second display observed from the second surface side, which is different from the first display. The invention also comprises shutter control means that controls the opening and closing of shutters such that a display picture element on the second surface side is screened by the second shutter means upon the first display, and a display picture element on the first surface side is screened by the first shutter means upon the second display. Therefore, different displays on the first side and the second side can be viewed almost simultaneously.

1. Display apparatus comprising:

a display panel whose display can be observed from either side thereof;

a pair of liquid crystal shutter means disposed in such a manner as to sandwich said display panel;

display control means for displaying a regular image and a mirror image observed from one side of said display panel on said display panel in each unit scan period based on one field unit or one frame unit; and

liquid crystal shutter control means for, while controlling the opening and closing of the liquid crystal shutter means on said one side in synchronism with the regular display by said display control means, said regular display being observed from said one side, such that said regular display can be observed, opening and closing the liquid crystal shutter means on said other side in synchronism with the mirror display by said display control means, said mirror display being observed from said one side, such that the regular display can be observed on said other side, and for controlling the opening and closing of said pair of liquid crystal shutter means such that said pair of shutter means do not open simultaneously.

2. A display apparatus comprising:

a display panel whose display can be observed from either side;

a pair of liquid crystal shutter means disposed in such a manner as to sandwich said display panel;

display control means for displaying a mirror image of display on said display panel in every other frame or every other field; and

liquid crystal shutter control means for opening and closing said pair of liquid crystal shutter means in synchronism with the operation of said display control means in each frame scan or each field scan such that they do not open simultaneously, wherein said pair of liquid crystal shutter means are opened and closed by said liquid crystal shutter control means such that said mirror image can be observed as the original display on one side of said display panel, wherein

said display control means comprises a scan inverting circuit for inverting the direction of a horizontal scan on said display panel in each frame or each field; and

said liquid crystal shutter control means controls the switching of the opening and closing of said pair of liquid crystal shutter means in response to an output from said scan inverting circuit.

3. A display apparatus comprising:

a display panel having a plurality of picture elements, each including a plurality of display elements as a single unit, wherein display can be observed from either side of said display panel;

a pair of liquid crystal shutter means disposed in such a manner as to sandwich said display panel, said pair of liquid crystal shutter means being provided for said display panel comprising a plurality of said picture elements, wherein said pair of liquid crystal shutter means includes liquid crystal shutter means that can open and close in each single display picture element field corresponding to said single picture element; and

liquid crystal shutter control means for controlling said liquid crystal shutter means such that a regular image can be observed simultaneously from both surfaces of said display panel, when one liquid crystal shutter

corresponding to said single picture element field is put in a transmitting state, by putting the other liquid crystal shutter into a light-blocking state, and, when one liquid crystal shutter corresponding to the other single picture element field is put in the light-blocking state, by putting the other liquid crystal shutter into the transmitting state.

4. The display apparatus according to claim 3, wherein said display control means causes said mirror image to be displayed alternately in each horizontal scan by the one set and the other set of said single picture element.

5. (canceled)

6. (canceled)

7. A display apparatus comprising:

a display panel having a plurality of picture elements that perform display based on an input signal, said display panel being capable of display on both surfaces, namely a first surface and a second surface, thereof, using a picture element at a selected location;

first shutter means and second shutter means disposed on said first surface side and said second surface side, respectively, said first and second shutter means being capable of opening and closing for a single picture element or a plurality of picture elements;

and control means comprising display control means for performing display control such that a first display observed from said first surface side and a second display observed from said second surface side can be viewed as the same display, and shutter control means for controlling the opening and closing of shutters such that the display picture elements on said second surface side are screened by said second shutter means upon said first display, and the display picture elements on said first surface side are screened by said first shutter means upon said second display, wherein

said display control means, while switching the display period of said first display and said second display, performs display control such that said first display and said second display have a relationship where they are substantially mirror images of each other upon viewing said first display and said second display from either said first surface side or said second surface side with said shutters open, wherein

said display period, in which said first display and said second display are switched is a unit scan period based on a single field unit or a single frame unit.

8. The display apparatus according to claim 7, wherein said shutter control means controls the opening and closing of shutters in synchronism with the switching of said display period by said display control means.

9. The display apparatus according to claim 7, wherein said control means comprises:

a memory circuit for storing a data signal in each scan unit of said picture element based on said input signal;

a scan inverting circuit for inverting the scan order in each said scan unit;

a signal driving circuit for outputting a data signal to said display panel in order to perform the first display by said scan order and the second display by the inverted scan order based on said inverted scan signal at differ-

ent times, based on said data signal stored in said memory circuit and said inverted scan signal outputted from said scan inverting circuit;

a signal inverting circuit for inverting the inverted scan signal outputted from said scan inverting circuit; and a shutter switching circuit for controlling the opening and closing of said first shutter means and said second shutter means based on an output signal from said signal inverting circuit, wherein, upon alternatively displaying either said first display or said second display outputted from said signal driving circuit in each said scan unit, the display surface side on which display has not been selected is screened alternatively by said first or second shutter means.

10. The display apparatus according to any one of claims 7 to 9, wherein said first and second shutter means are formed by liquid crystal panels disposed on said first display surface and said second display surface, respectively, in an opposing manner.

11. (canceled)

12. (canceled)

13. The display apparatus according to any one of claims 7 to 9, wherein said control means comprises:

a memory circuit for storing a data signal in each scan unit of said picture element based on said input signal;

a scan driving circuit for providing a scan driving signal to said display panel in the scan order of each said scan unit;

a signal driving circuit for changing the output order of said image signal received from said memory circuit in each scan order, while outputting to said display panel an image signal that is used to perform a first image display by said scan order and a second image display by the inverted scan order based on an inverted scan signal at different times, based on said data signal stored in said memory circuit and the scan driving signal outputted from said scan driving circuit;

a signal inverting circuit for inverting the inverted scan signal outputted from said scan inverting circuit; and

a shutter switching circuit for controlling the opening and closing of said first shutter means and said second shutter means based on an output signal from said signal inverting circuit, wherein, upon alternatively displaying either said first display or said second display based on said image signal outputted from said signal driving circuit in each said scan unit, the display surface side on which display has not been selected is screened alternatively by said first or second shutter means.

14. The display apparatus according to any one of claims 7 to 9, wherein said first and second shutter means are formed by liquid crystal panels disposed on said first display surface and said second display surface, respectively, in an opposing manner.

15. A display apparatus comprising:

a display panel having a plurality of picture elements that perform display based on an input signal, said display panel being capable of display on both surfaces, namely a first surface and a second surface that is

opposite to said first surface, thereof, using a picture element at a selected location;

first shutter means and second shutter means disposed on said first surface side and said second surface side, respectively, that are capable of opening and closing for a single picture element or a plurality of picture elements; and

control means comprising display control means for performing display control of a first display observed from said first surface side and a second display, which is different from said first display, observed from said second surface side, and shutter control means for controlling said shutter means such that a regular image can be observed simultaneously from both surfaces of said display panel, wherein the control of the opening and closing of shutters are performed such that the display picture elements on said second surface side are screened while transmitting the display picture elements on said first surface side by said second shutter means upon said first display, and such that the display picture elements on said first surface side are screened while transmitting the display elements on said second surface side by said first shutter means upon said second display.

16. A display apparatus comprising:

a display panel having a first display surface and a second display surface and capable of display from both surfaces, namely, said first display surface and said second display surface;

first shutter means and second shutter means disposed on said first surface side and said second surface side, respectively, that are capable of opening and closing for each said display element; and

control means comprising display control means for performing display control of a first display observed from said first display surface side and a second display, which is different from said first display, observed from said second display surface side, and liquid crystal shutter control means for controlling said liquid crystal shutter means such that a regular image can be observed simultaneously from both surfaces of said display panel by screening the display picture elements on said second display surface side while transmitting the display picture elements on said first display surface side by said second shutter means upon said first display, and by screening the display picture elements on said first display surface side while transmitting the display elements on said second display surface side by said first shutter means upon said second display.

17. The display apparatus according to claim 1, wherein the display control means of said display panel and said shutter means are controlled by the same circuit.

18. A terminal apparatus comprising the display apparatus according to claim 1.

19. The display apparatus according to claim 10, wherein said control means comprises:

a memory circuit for storing a data signal in each scan unit of said picture element based on said input signal;

a scan driving circuit for providing a scan driving signal to said display panel in the scan order of each said scan unit;

a signal driving circuit for changing the output order of said image signal received from said memory circuit in each scan order, while outputting to said display panel an image signal that is used to perform a first image display by said scan order and a second image display by the inverted scan order based on an inverted scan signal at different times, based on said data signal stored in said memory circuit and the scan driving signal outputted from said scan driving circuit;

a signal inverting circuit for inverting the inverted scan signal outputted from said scan inverting circuit; and

a shutter switching circuit for controlling the opening and closing of said first shutter means and said second

shutter means based on an output signal from said signal inverting circuit, wherein, upon alternatively displaying either said first display or said second display based on said image signal outputted from said signal driving circuit in each said scan unit, the display surface side on which display has not been selected is screened alternatively by said first or second shutter means.

20. The display apparatus according to claim 10, wherein said first and second shutter means are formed by liquid crystal panels disposed on said first display surface and said second display surface, respectively, in an opposing manner.

* * * * *

专利名称(译)	显示		
公开(公告)号	US20050253789A1	公开(公告)日	2005-11-17
申请号	US10/518410	申请日	2003-06-13
[标]申请(专利权)人(译)	池田HIROSHI		
申请(专利权)人(译)	池田HIROSHI		
当前申请(专利权)人(译)	夏普株式会社		
[标]发明人	IKEDA HIROSHI		
发明人	IKEDA, HIROSHI		
IPC分类号	G02F1/133 G02F1/1347 G09G3/36 H01L27/32 G09G3/30		
CPC分类号	G02F1/13306 G02F1/1347 G02F2001/133342 G09G3/36 H01L2251/5323 G09G2300/08 G09G2310/0283 G09G2340/0492 H01L27/3244 G09G2300/023		
优先权	2002179931 2002-06-20 JP		
外部链接	Espacenet USPTO		

摘要(译)

一种显示装置，包括：透明显示元件，设置在透明基板上；显示面板DP，其显示图像可以从任一侧观察；一对液晶快门装置2as和2bs，以夹住显示面板DP的方式设置，显示控制装置13和15，用于在显示面板上显示要在每隔一帧显示的图像的镜像，以及液晶快门控制装置14，用于与所述液晶快门装置同步地打开和关闭所述一对液晶快门装置。显示控制装置的操作使得它们在每次帧扫描中不会同时打开。打开和关闭该对液晶快门装置，使得可以在显示面板DP的一侧上观察镜像作为常规图像。可以从显示面板的前表面和后表面同时观看显示在显示面板上的图像信息。

