



US010007150B2

(12) **United States Patent**
Yong

(10) **Patent No.:** **US 10,007,150 B2**
(45) **Date of Patent:** **Jun. 26, 2018**

(54) **LIQUID CRYSTAL ALIGNMENT METHOD
AND LIQUID CRYSTAL DISPLAY PANEL**

(71) Applicant: **Shenzhen China Star Optoelectronics
Technology Co., Ltd.**, Shenzhen (CN)

(72) Inventor: **Weina Yong**, Shenzhen (CN)

(73) Assignee: **Shenzhen China Star Optoelectronics
Technology Co., Ltd.**, Shenzhen (CN)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 50 days.

(21) Appl. No.: **15/118,902**

(22) PCT Filed: **May 17, 2016**

(86) PCT No.: **PCT/CN2016/082280**

§ 371 (c)(1),
(2) Date: **Aug. 15, 2016**

(87) PCT Pub. No.: **WO2017/177503**

PCT Pub. Date: **Oct. 19, 2017**

(65) **Prior Publication Data**

US 2017/0299925 A1 Oct. 19, 2017

(30) **Foreign Application Priority Data**

Apr. 13, 2016 (CN) 2016 1 0227283

(51) **Int. Cl.**
G02F 1/1337 (2006.01)

G02F 1/1335 (2006.01)

G02F 1/1368 (2006.01)

(52) **U.S. Cl.**
CPC **G02F 1/133788** (2013.01); **G02F 1/1368**
(2013.01); **G02F 1/133514** (2013.01);

(Continued)

(58) **Field of Classification Search**

CPC ... G02F 2001/133757; G02F 1/133788; G02F
1/133753; G02F 1/133514; G02F
1/133516; G02F 2001/136222; G02F
2201/52; G09G 3/2003; G09G
2300/0452; G09G 2300/0443; G09G
3/3607; G09G 3/3611; G09G 5/02; G02B
5/201; H01L 27/322;

(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

8,134,668 B2* 3/2012 Nakagawa G02F 1/133753

349/124

2009/0284702 A1* 11/2009 Seo G02F 1/133753

349/128

(Continued)

FOREIGN PATENT DOCUMENTS


CN 103257480 A * 8/2013

Primary Examiner — Jia Pan

(57) **ABSTRACT**

The present invention provides a liquid crystal alignment method and a liquid crystal display panel. The method comprises the steps of: coating a first alignment material layer on a TFT substrate, the first alignment material layer having a plurality of first regions; coating a second alignment material layer on a CF substrate, the second alignment material layer having a plurality of second regions; and utilizing the length of each first region along the row direction as an exposing width and performing an exposing alignment procedure with the exposing width to each first region to form a first alignment layer at the side of the TFT substrate.

9 Claims, 5 Drawing Sheets

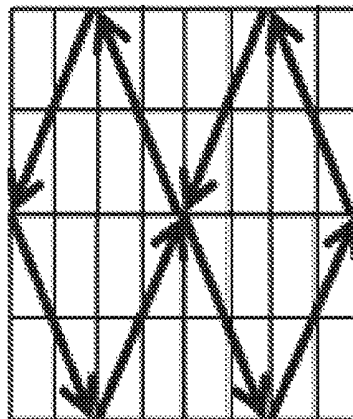

(52) **U.S. Cl.**

CPC .. **G02F 1/133723** (2013.01); **G02F 1/133753**
(2013.01); *G02F 2001/133757* (2013.01);
G02F 2201/40 (2013.01); *G02F 2201/52*
(2013.01)

(58) **Field of Classification Search**

CPC H01L 27/3213; H01L 27/3218; H01L
27/3211

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2010/0118246	A1 *	5/2010	Nakagawa	G02F 1/133753 349/129
2010/0157220	A1 *	6/2010	Shin	G02F 1/133707 349/123
2010/0157223	A1 *	6/2010	Shin	G02F 1/133753 349/129

* cited by examiner

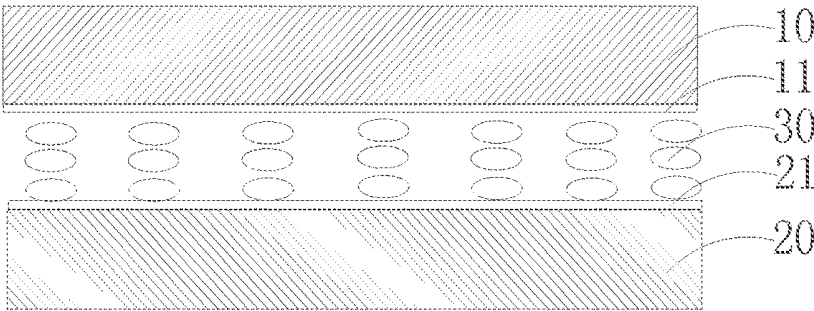


FIG. 1

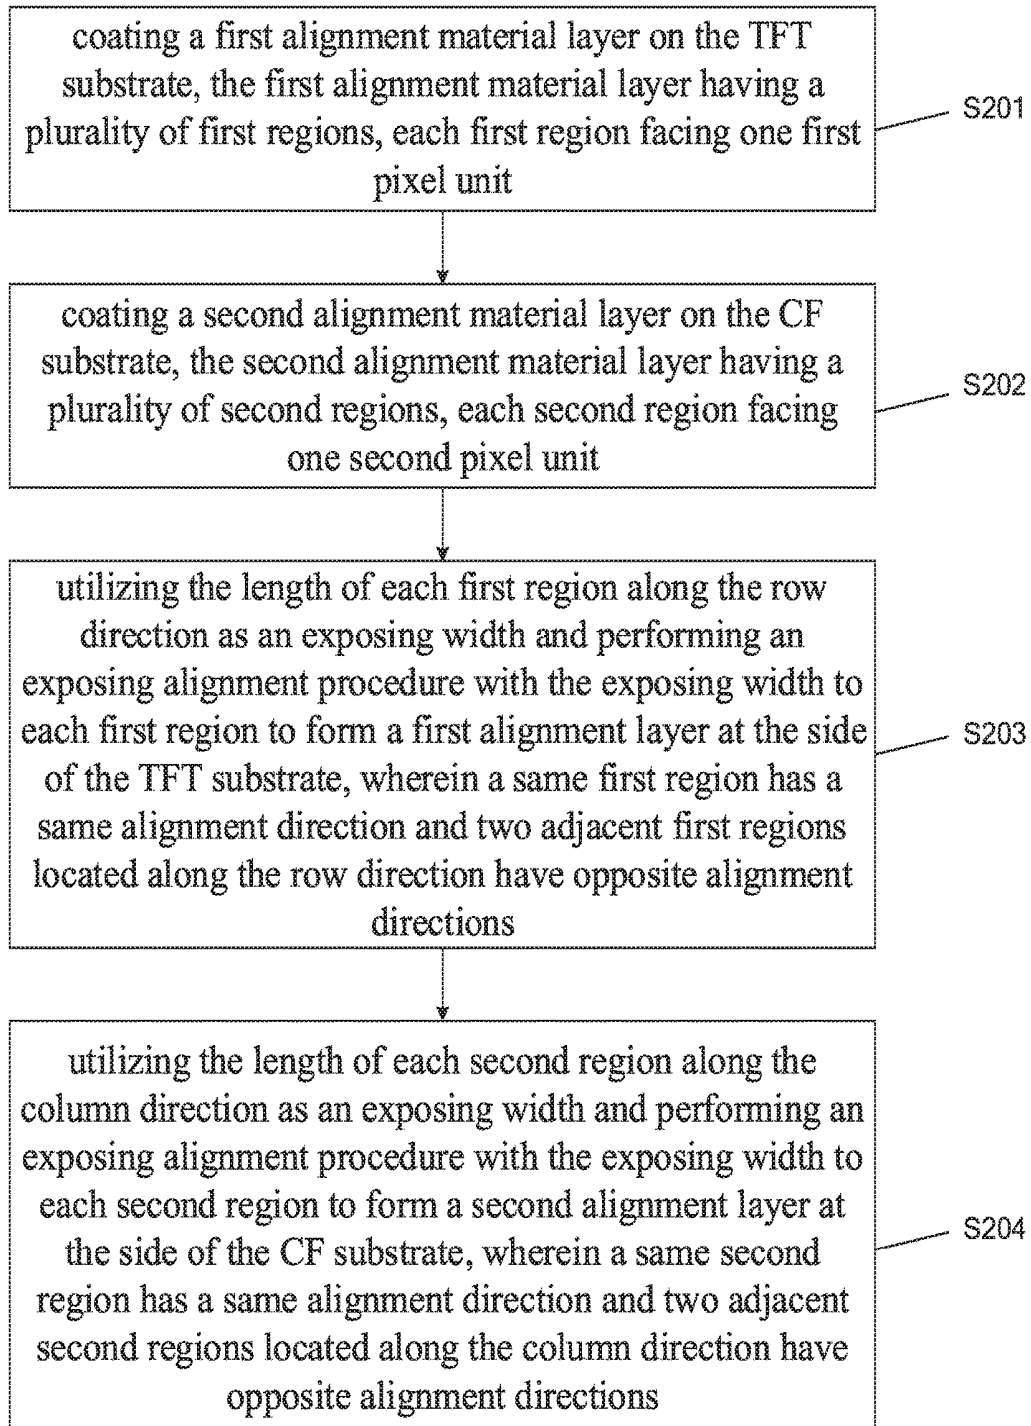


FIG. 2

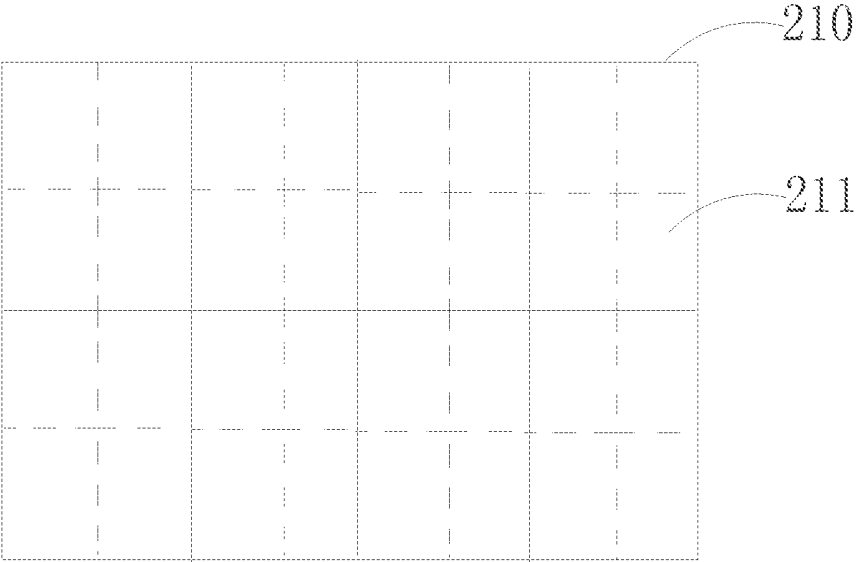


FIG. 3

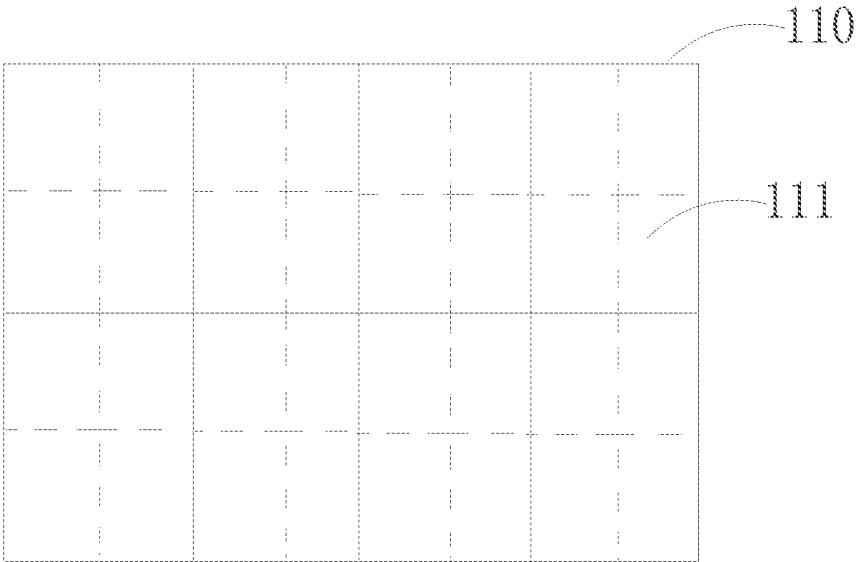


FIG. 4

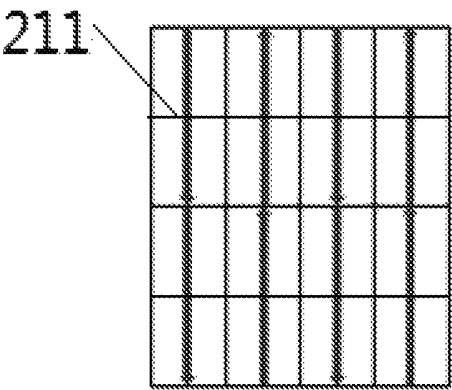


FIG. 5

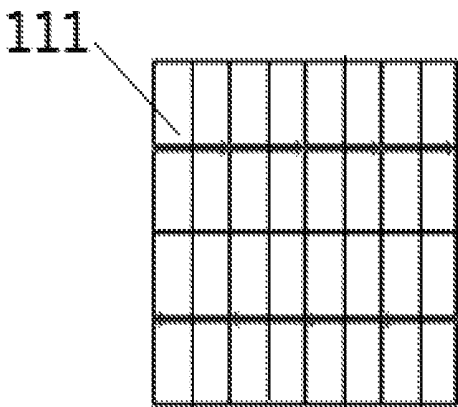


FIG. 6

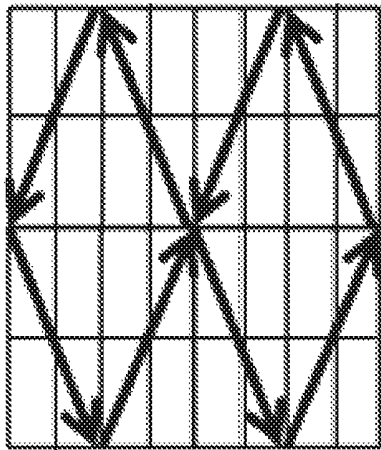


FIG. 7

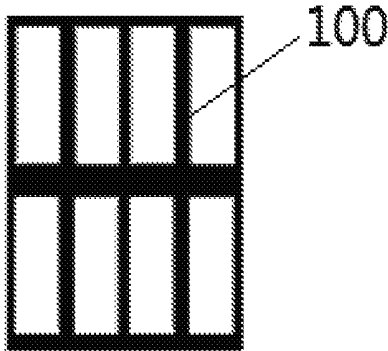


FIG. 8

LIQUID CRYSTAL ALIGNMENT METHOD AND LIQUID CRYSTAL DISPLAY PANEL

RELATED APPLICATIONS

This application is a National Phase of PCT Patent Application No. PCT/CN2016/082280 having International filing date of May 17, 2016, which claims the benefit of priority of Chinese Patent Application No. 201610227283.2 filed on Apr. 13, 2016. The contents of the above applications are all incorporated by reference as if fully set forth herein in their entirety.

FIELD AND BACKGROUND OF THE INVENTION

The present invention relates to a display technology, and more particularly, to a liquid crystal alignment method and a liquid crystal display panel.

In the TFT-LCD manufacture, there are two alignment approaches, that is, rubbing treatment and optical alignment. The rubbing treatment will cause static electricity and particle pollution. The optical alignment is a noncontact alignment technology, which utilizes linear polarized light to irradiate a light-sensitive polymer alignment film to form a pretilt angle.

The optical alignment will form a dark line pattern with a shape of 卐 or 卍, called WAN-ZI dark line pattern, in the inner of a pixel unit. The WAN-ZI dark line pattern seriously affects the aperture ratio of the pixel unit. The aperture ratio has become a bottleneck in the optical alignment technology, especially as with the increasing of PPI (Pixels per Inch).

Therefore, there is a need to improve the drawbacks in the existing skills.

SUMMARY OF THE INVENTION

The objective of present invention is to provide a liquid crystal alignment method and a liquid crystal display panel for solving the technical problem of low aperture ratio in the existing liquid crystal display panels.

To solve above problems, the technical schemes provided by the present invention are described below.

The embodiments of the present invention provides a liquid crystal alignment method, in which a liquid crystal display panel comprises a TFT (Thin Film Transistor) substrate, a CF (Color Filter) substrate, and a liquid crystal layer located between the TFT substrate and the CF substrate, the TFT substrate comprises a plurality of first pixel units distributed in a rectangular array, the CF substrate comprises a plurality of second pixel units distributed in a rectangular array, each first pixel unit faces one second pixel unit and corresponds thereto, said method comprising the steps of: a. coating a first alignment material layer on the TFT substrate, the first alignment material layer having a plurality of first regions, each first region facing one first pixel unit, wherein an orientation of the plural first regions along a row is a row direction and an orientation of the plural first regions along a column is a column direction; b. coating a second alignment material layer on the CF substrate, the second alignment material layer having a plurality of second regions, each second region facing one second pixel unit; c. utilizing the length of each first region along the row direction as an exposing width and performing an exposing alignment procedure with the exposing width to each first region to form a first alignment layer at the side of the TFT substrate,

wherein a same first region has a same alignment direction and two adjacent first regions located along the row direction have opposite alignment directions; and d. utilizing the length of each second region along the column direction as an exposing width and performing an exposing alignment procedure with the exposing width to each second region to form a second alignment layer at the side of the CF substrate, wherein a same second region has a same alignment direction and two adjacent second regions located along the column direction have opposite alignment directions; wherein the alignment direction for each first region is along the column direction and the alignment direction for each second region is along the row direction.

In the liquid crystal alignment method of the present invention, the first alignment material layer is formed by coating polyimide.

In the liquid crystal alignment method of the present invention, the thickness of the first alignment material layer is 0.02 mm-0.04 mm.

In the liquid crystal alignment method of the present invention, the second alignment material layer is formed by coating polyimide.

In the liquid crystal alignment method of the present invention, the thickness of the second alignment material layer is 0.03 mm-0.04 mm.

In the liquid crystal alignment method of the present invention, in Step d, a light beam tilted 45 degrees relative to the second alignment material layer is used to irradiate in exposing.

In the liquid crystal alignment method of the present invention, in Step c, a light beam tilted 45 degrees relative to the first alignment material layer is used to irradiate in exposing.

In the liquid crystal alignment method of the present invention, both of the first pixel unit and the second pixel unit comprise a red pixel sub unit, a green pixel sub unit, a blue pixel sub unit, and a white pixel sub unit; or both of the first pixel unit and the second pixel unit comprise a red pixel sub unit, a green pixel sub unit, and a blue pixel sub unit.

The present invention further provides a liquid crystal display panel, which comprises: a TFT (Thin Film Transistor) substrate comprising a plurality of first pixel units distributed in a rectangular array; a CF (Color Filter) substrate comprising a plurality of second pixel units distributed in a rectangular array, each first pixel unit facing one second pixel unit and corresponding thereto; a liquid crystal layer located between the TFT substrate and the CF substrate; a first alignment layer disposed on the side of the TFT substrate that is facing the liquid crystal layer, the first alignment layer having a plurality of first regions, each first region facing one first pixel unit, a same first region having a same alignment direction and two adjacent first regions located along a row direction having opposite alignment directions; and a second alignment layer disposed on the side of the CF substrate that is facing the liquid crystal layer, the second alignment layer having a plurality of second regions, each second region facing one second pixel unit, a same second region having a same alignment direction and two adjacent second regions located along a column direction having opposite alignment directions; wherein the alignment direction for each first region is along the column direction and the alignment direction for each second region is along the row direction.

In the liquid crystal display panel of the present invention, both of the first alignment material layer and the second alignment layer are formed by coating polyimide.

In the present invention, the length of one pixel unit along the row direction is specified as the width in each exposure of optical alignment such that a same first region has a same alignment direction and two adjacent first regions located along the row direction have opposite alignment directions, and a same second region has a same alignment direction and two adjacent second regions located along the column direction have opposite alignment directions, thereby changing the shape of dark line pattern. In such a manner, the dark line pattern may be approximately or completely distributed over an area between two adjacent pixel units that is facing the black matrix. It is helpful for improving the aperture ratio of the liquid crystal display panel.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

FIG. 1 is a schematic structural diagram showing a liquid crystal display panel in accordance with a preferred embodiment of the present invention.

FIG. 2 is a flow chart of a liquid crystal alignment method in accordance with a preferred embodiment of the present invention.

FIG. 3 is a schematic diagram showing a first alignment material layer.

FIG. 4 is a schematic diagram showing a second alignment material layer.

FIG. 5 is a schematic diagram showing alignment on the first alignment material layer.

FIG. 6 is a schematic diagram showing alignment on the second alignment material layer.

FIG. 7 is a vector multiplication diagram showing the overlapped alignment results of the first alignment material layer and the second alignment material layer.

FIG. 8 is a diagram showing alignment effect as a black matrix is presented.

DESCRIPTION OF SPECIFIC EMBODIMENTS OF THE INVENTION

The following descriptions for the respective embodiments are specific embodiments capable of being implemented for illustrations of the present invention with referring to appending figures. In describing the present invention, spatially relative terms such as "upper", "lower", "front", "back", "left", "right", "inner", "outer", "lateral", and the like, may be used herein for ease of description as illustrated in the figures. Therefore, the spatially relative terms used herein are intended to illustrate the present invention for ease of understanding, but are not intended to limit the present invention.

In the appending drawings, units with similar structures are indicated by the same reference numbers.

Please refer to FIG. 1, which is a schematic structural diagram showing a liquid crystal display panel in accordance with a preferred embodiment of the present invention. The liquid crystal display panel of the present preferred embodiment includes a CF (Color Filter) substrate **10**, a TFT (Thin Film Transistor) substrate **20**, a liquid crystal layer **30**, a first alignment layer **21**, and a second alignment layer **11**.

The TFT substrate **20** is similar to an array substrate in the existing skills that includes a plurality of first pixel units distributed in a rectangular array. Each first pixel unit comprises a red pixel sub unit, a green pixel sub unit, a blue pixel sub unit, and a white pixel sub unit; or each first pixel unit comprises a red pixel sub unit, a green pixel sub unit, and a blue pixel sub unit. Of course, it is not limited thereto.

The CF substrate **10** is similar to a color filter in the existing skills that includes a plurality of second pixel units distributed in a rectangular array. Each first pixel unit faces one second pixel unit and corresponds thereto. Each second pixel unit comprises a red pixel sub unit, a green pixel sub unit, a blue pixel sub unit, and a white pixel sub unit; or each second pixel unit comprises a red pixel sub unit, a green pixel sub unit, and a blue pixel sub unit.

The liquid crystal layer **30** is located between the TFT substrate **20** and the CF substrate **10**. The liquid crystal layer **30** has a plurality of liquid crystal molecules disposed therein.

The first alignment layer **21** is disposed on the side of the TFT substrate **20** that is facing the liquid crystal layer **30**.

The first alignment layer **21** has a plurality of first regions. Each first region is facing one first pixel unit. A same first region having a same alignment direction and two adjacent first regions located along a row direction having opposite alignment directions.

The second alignment layer **11** is disposed on the side of the CF substrate **10** that is facing the liquid crystal layer **30**. The second alignment layer **11** has a plurality of second regions. Each second region is facing one second pixel unit. A same second region having a same alignment direction and two adjacent second regions located along a column direction having opposite alignment directions.

The alignment direction for each first region is along the column direction and the alignment direction for each second region is along the row direction.

Specifically, both of the first alignment material layer and the second alignment layer are formed by coating polyimide. The thickness of the first alignment material layer may be 0.02 mm-0.04 mm. The thickness of the second alignment material layer may be 0.03 mm-0.04 mm.

In the present embodiment, the length of one pixel unit along the row direction is specified as the width in each exposure of optical alignment such that a same first region has a same alignment direction and two adjacent first regions located along the row direction have opposite alignment directions, and a same second region has a same alignment direction and two adjacent second regions located along the column direction have opposite alignment directions, thereby changing the shape of dark line pattern. In such a manner, the dark line pattern may be approximately or completely distributed over an area between two adjacent pixel units that is facing the black matrix. It is helpful for improving the aperture ratio of the liquid crystal display panel.

Please refer to FIG. 2, which is a flow chart of a liquid crystal alignment method in accordance with a preferred embodiment of the present invention. First of all, a liquid crystal display panel is provided. The liquid crystal display panel comprises a TFT substrate, a CF substrate, and a liquid crystal layer located between the TFT substrate and the CF substrate. The TFT substrate comprises a plurality of first pixel units distributed in a rectangular array; the CF substrate comprises a plurality of second pixel units distributed in a rectangular array. Each first pixel unit faces one second pixel unit and corresponds thereto. The liquid crystal alignment method of the present preferred embodiment comprises the following steps.

Step S201—coating a first alignment material layer on the TFT substrate, the first alignment material layer having a plurality of first regions, each first region facing one first pixel unit, wherein an orientation of the plural first regions along a row is a row direction and an orientation of the plural first regions along a column is a column direction.

Step S202—coating a second alignment material layer on the CF substrate, the second alignment material layer having a plurality of second regions, each second region facing one second pixel unit.

Step S203—utilizing the length of each first region along the row direction as an exposing width and performing an exposing alignment procedure with the exposing width to each first region to form a first alignment layer at the side of the TFT substrate, wherein a same first region has a same alignment direction and two adjacent first regions located along the row direction have opposite alignment directions.

Step S204—utilizing the length of each second region along the column direction as an exposing width and performing an exposing alignment procedure with the exposing width to each second region to form a second alignment layer at the side of the CF substrate, wherein a same second region has a same alignment direction and two adjacent second regions located along the column direction have opposite alignment directions;

The alignment direction for each first region is along the column direction and the alignment direction for each second region is along the row direction.

Of course, the orders of Step S201 and Step S202 may be inverted as well as the orders of Step S203 and Step S204.

Each step in the liquid crystal alignment method is detailedly described below.

In Step S201, the first alignment material layer 210 may utilize a common alignment material, for example, formed by using polyimide. The thickness of the first alignment material layer 210 may be 0.02 mm-0.04 mm. The size and shape of each first region 211 may be identical to that of the corresponding first pixel unit. The plural first regions 211 may be distributed in a rectangular matrix as the same as the plural first pixel units. An orientation of the plural first regions 211 along a row is a row direction and an orientation of the plural first regions 211 along a column is a column direction. This is illustrated in FIG. 3. The process turns to Step S202.

In Step S202, the second alignment material layer 110 may utilize a common alignment material, for example, formed by using polyimide. The thickness of the second alignment material layer 110 may be 0.03 mm-0.04 mm. The size and shape of each second region 111 may be identical to that of the corresponding second pixel unit. The plural second regions 111 may be distributed in a rectangular matrix as the same as the plural second pixel units. This is illustrated in FIG. 4. The process turns to Step S203.

In Step S203, during an exposing alignment procedure, the light beam irradiating each first region 211 is tilted 45 degrees relative to the first alignment material layer 210. Each region 211 corresponds to a light beam, of which the width is the exposing width. A same first region 211 has a same alignment direction and two adjacent first regions 211 located along the row direction have opposite alignment directions. In the present embodiment, the alignment direction for each first region 211 is along the column direction. In this step, two mask processes may be required in the exposing. In a first mask process, the plural first regions 211 are aligned or oriented along a specific direction; in a second mask process, the plural first regions 211 are aligned or oriented along another specific direction. This is illustrated in FIG. 5. The process turns to Step S204.

In Step S204, during an exposing alignment procedure, the light beam irradiating each second region 111 is tilted 45 degrees relative to the second alignment material layer 110. Each region 111 corresponds to a light beam, of which the width is the exposing width. A same second region 111 has

a same alignment direction and two adjacent second regions 111 located along the column direction have opposite alignment directions. In the present embodiment, the alignment direction for each second region 111 is along the row direction. In this step, two mask processes may be required in the exposing. In a first mask process, the plural second regions 111 are aligned or oriented along a specific direction; in a second mask process, the rest of the plural second regions 111 are aligned or oriented along another specific direction. This is illustrated in FIG. 6.

Once the two alignment results in Step S203 and Step S204 are overlapped, a vector multiplication diagram shown in FIG. 7 is obtained, in which the pretilt angle is equal to 45 degrees. FIG. 8 is a diagram showing the alignment effect. The dark line pattern generated in the alignment is located at a region corresponding to a black matrix 100, and therefore it does not affect the aperture ratio.

In addition, both of the first pixel unit and the second pixel unit comprise a red pixel sub unit, a green pixel sub unit, a blue pixel sub unit, and a white pixel sub unit; or both of the first pixel unit and the second pixel unit comprise a red pixel sub unit, a green pixel sub unit, and a blue pixel sub unit. Of course, it is not limited thereto.

In the present embodiment, the length of one pixel unit along the row direction is specified as the width in each exposure of optical alignment such that the shape of dark line pattern is changed. In such a manner, the dark line pattern may be approximately or completely distributed over an area between two adjacent pixel units that is facing the black matrix 100. It is helpful for improving the aperture ratio of the liquid crystal display panel.

While the preferred embodiments of the present invention have been illustrated and described in detail, various modifications and alterations can be made by persons skilled in this art. The embodiment of the present invention is therefore described in an illustrative but not restrictive sense. It is intended that the present invention should not be limited to the particular forms as illustrated, and that all modifications and alterations which maintain the spirit and realm of the present invention are within the scope as defined in the appended claims.

What is claimed is:

1. A liquid crystal alignment method, in which a liquid crystal display panel comprises a TFT (Thin Film Transistor) substrate, a CF (Color Filter) substrate, and a liquid crystal layer located between the TFT substrate and the CF substrate, the TFT substrate comprises a plurality of first pixel units distributed in a rectangular array, the CF substrate comprises a plurality of second pixel units distributed in a rectangular array, each first pixel unit faces one second pixel unit and corresponds thereto, said method comprising the steps of:

- a. coating a first alignment material layer on the TFT substrate, the first alignment material layer having a plurality of first regions, each first region facing one first pixel unit, wherein an orientation of the plural first regions along a row is a row direction and an orientation of the plural first regions along a column is a column direction;
- b. coating a second alignment material layer on the CF substrate, the second alignment material layer having a plurality of second regions, each second region facing one second pixel unit;
- c. utilizing the length of each first region along the row direction as an exposing width and performing an exposing alignment procedure with the exposing width to each first region to form a first alignment layer at the

7

- side of the TFT substrate, wherein a same first region has a same alignment direction and two adjacent first regions located along the row direction have opposite alignment directions; and
- d. utilizing the length of each second region along the column direction as an exposing width and performing an exposing alignment procedure with the exposing width to each second region to form a second alignment layer at the side of the CF substrate, wherein a same second region has a same alignment direction and two adjacent second regions located along the column direction have opposite alignment directions; wherein the alignment direction for each first region is along the column direction and the alignment direction for each second region is along the row direction, wherein both of the first pixel unit and the second pixel unit comprise a red pixel sub unit, a green pixel sub unit, a blue pixel sub unit, and a white pixel sub unit; and wherein the red pixel sub unit, the green pixel sub unit, the blue pixel sub unit, and the white pixel sub unit are arranged as 2x2 columns and rows.
2. The liquid crystal alignment method according to claim 1, wherein the first alignment material layer is formed by coating polyimide.
3. The liquid crystal alignment method according to claim 2, wherein the thickness of the first alignment material layer is 0.02 mm-0.04 mm.
4. The liquid crystal alignment method according to claim 1, wherein the second alignment material layer is formed by coating polyimide.
5. The liquid crystal alignment method according to claim 4, wherein the thickness of the second alignment material layer is 0.03 mm-0.04 mm.
6. The liquid crystal alignment method according to claim 1, wherein in Step d, a light beam tilted 45 degrees relative to the second alignment material layer is used to irradiate in exposing.
7. The liquid crystal alignment method according to claim 1, wherein in Step c, a light beam tilted 45 degrees relative to the first alignment material layer is used to irradiate in exposing.

8

8. A liquid crystal display panel, comprising:
- a TFT (Thin Film Transistor) substrate comprising a plurality of first pixel units distributed in a rectangular array;
- a CF (Color Filter) substrate comprising a plurality of second pixel units distributed in a rectangular array, each first pixel unit facing one second pixel unit and corresponding thereto;
- a liquid crystal layer located between the TFT substrate and the CF substrate;
- a first alignment layer disposed on the side of the TFT substrate that is facing the liquid crystal layer, the first alignment layer having a plurality of first regions, each first region facing one first pixel unit, a same first region having a same alignment direction and two adjacent first regions located along a row direction having opposite alignment directions; and
- a second alignment layer disposed on the side of the CF substrate that is facing the liquid crystal layer, the second alignment layer having a plurality of second regions, each second region facing one second pixel unit, a same second region having a same alignment direction and two adjacent second regions located along a column direction having opposite alignment directions;
- wherein the alignment direction for each first region is along the column direction and the alignment direction for each second region is along the row direction,
- wherein both of the first pixel unit and the second pixel unit comprise a red pixel sub unit, a green pixel sub unit, a blue pixel sub unit, and a white pixel sub unit; and
- wherein the red pixel sub unit, the green pixel sub unit, the blue pixel sub unit, and the white pixel sub unit are arranged as 2x2 columns and rows.
9. The liquid crystal display panel according to claim 8, wherein both of the first alignment layer and the second alignment layer are formed by coating polyimide.

* * * * *

专利名称(译)	液晶取向方法和液晶显示板		
公开(公告)号	US10007150	公开(公告)日	2018-06-26
申请号	US15/118902	申请日	2016-05-17
[标]申请(专利权)人(译)	深圳市华星光电技术有限公司		
申请(专利权)人(译)	深圳市中国星光电科技有限公司.		
当前申请(专利权)人(译)	深圳市中国星光电科技有限公司.		
发明人	YONG, WEINA		
IPC分类号	G02F1/1337 G02F1/1368 G02F1/1335		
CPC分类号	G02F1/133788 G02F1/1368 G02F1/133514 G02F1/133753 G02F1/133723 G02F2201/52 G02F2001/133757 G02F2201/40		
审查员(译)	潘，贾		
优先权	201610227283.2 2016-04-13 CN		
其他公开文献	US20170299925A1		
外部链接	Espacenet		

摘要(译)

本发明提供一种液晶取向方法和液晶显示面板。该方法包括以下步骤：在TFT基板上涂覆第一取向材料层，第一取向材料层具有多个第一区域；在CF基板上涂覆第二取向材料层，第二取向材料层具有多个第二区域；利用沿行方向的每个第一区域的长度作为曝光宽度，并利用对每个第一区域的曝光宽度进行曝光对准程序，以在TFT基板的侧面形成第一对准层。

