




US 20140204326A1

(19) **United States**(12) **Patent Application Publication**
WU et al.(10) **Pub. No.: US 2014/0204326 A1**(43) **Pub. Date: Jul. 24, 2014**(54) **PIXEL ARRAY SUBSTRATE AND LIQUID
CRYSTAL DISPLAY PANEL****Publication Classification**(71) Applicant: **AU Optronics Corporation**, Hsin-Chu
(TW)(51) **Int. Cl.**
G02F 1/1343 (2006.01)(72) Inventors: **Ming-Huei WU**, HSIN-CHU (TW);
Kun-Cheng TIEN, HSIN-CHU (TW);
Shin-Mei GONG, HSIN-CHU (TW);
Jen-Yang CHUNG, HSIN-CHU (TW);
Wei-Chun WEI, HSIN-CHU (TW);
Chien-Huang LIAO, HSIN-CHU (TW)(52) **U.S. Cl.**
CPC **G02F 1/1343** (2013.01)
USPC **349/143**(73) Assignee: **AU Optronics Corporation**, Hsin-Chu
(TW)(21) Appl. No.: **14/041,071**(22) Filed: **Sep. 30, 2013**(30) **Foreign Application Priority Data**

Jan. 22, 2013 (TW) 102102336

(57) **ABSTRACT**

A pixel array substrate with new pixel design and a liquid crystal display panel with the pixel array substrate are provided. The pixel array substrate includes a plurality of data lines, a plurality of scan lines and a plurality of pixels. Each of the pixels comprises a first electrode, a first connecting line, a second electrode and a second connecting line. The first electrode is electrically connected with corresponding data line and scan line through the first connecting line, and having a slit. The second pixel is electrically connected with corresponding data line and scan line through the second connecting line. At least a part of the second connecting line is exposed by the slit of the first electrode.

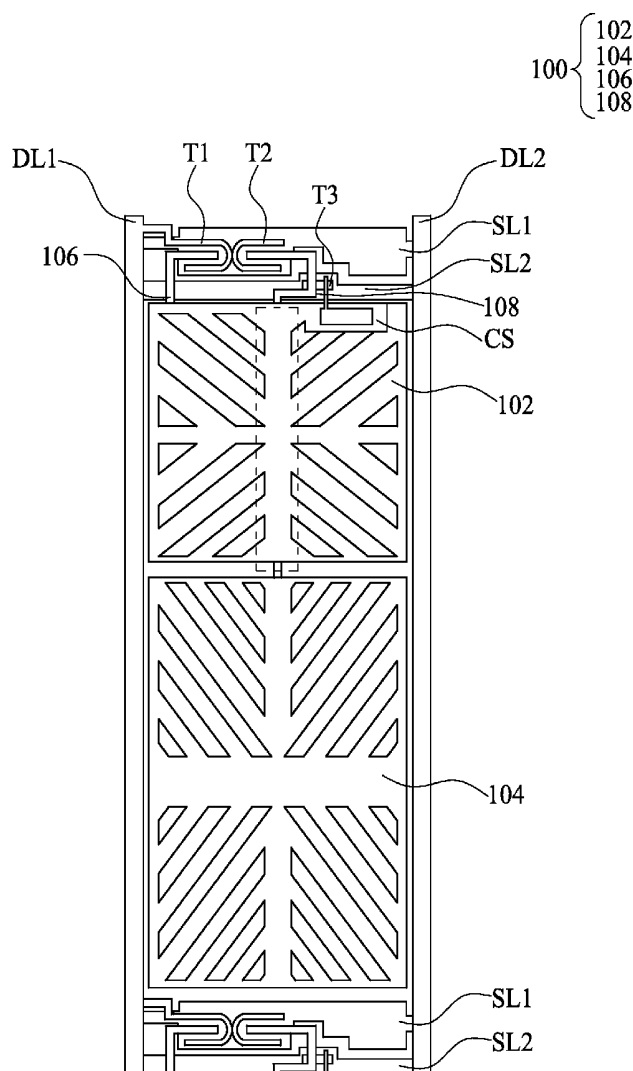

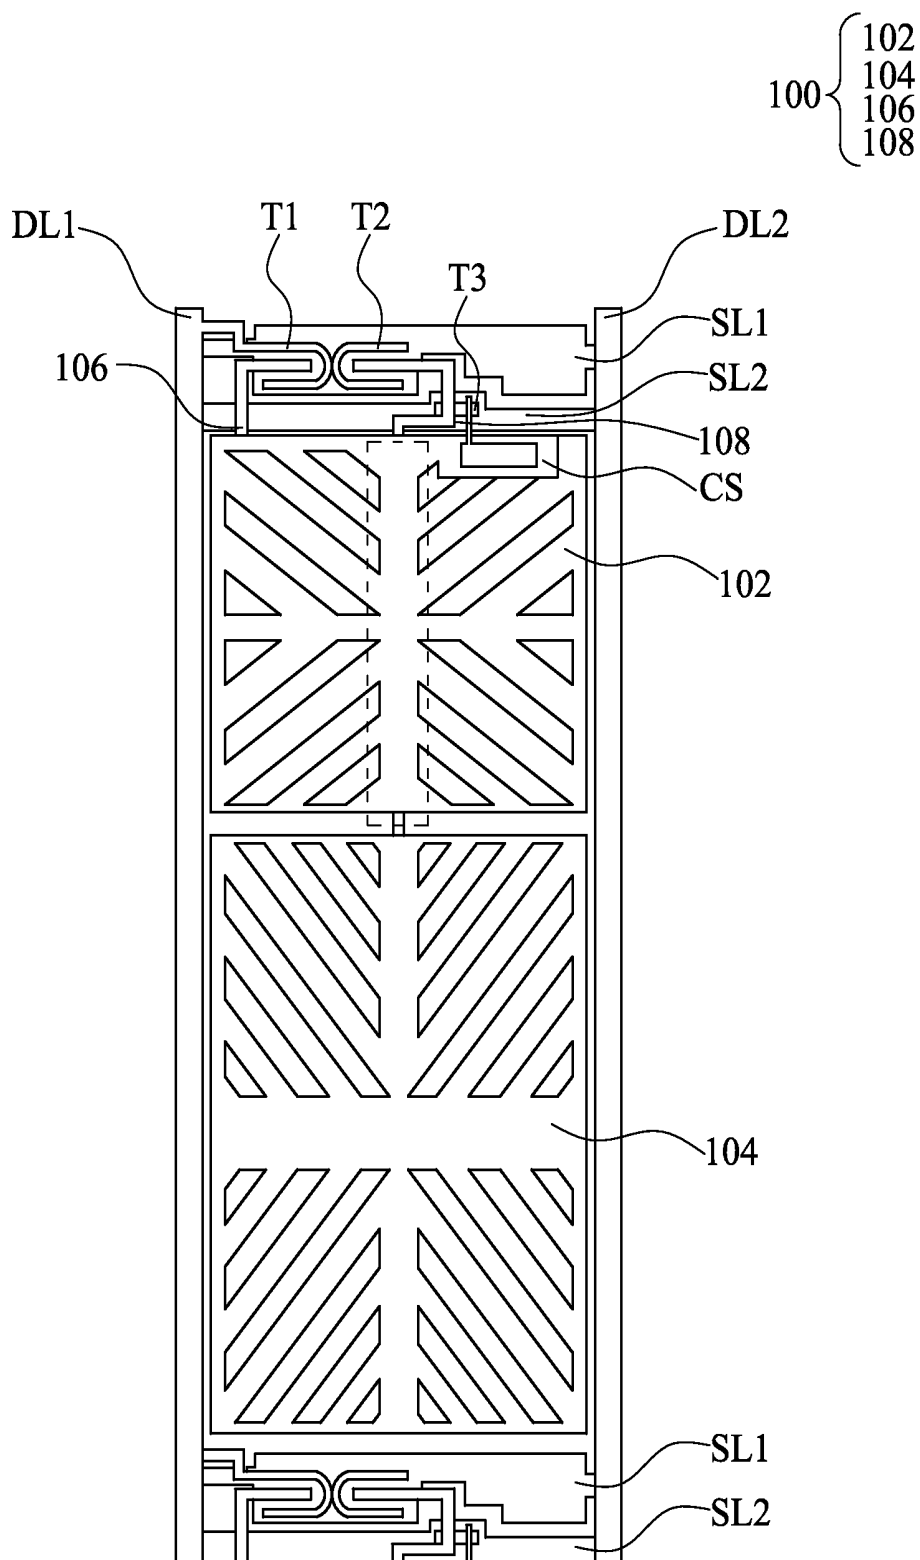


FIG. 1

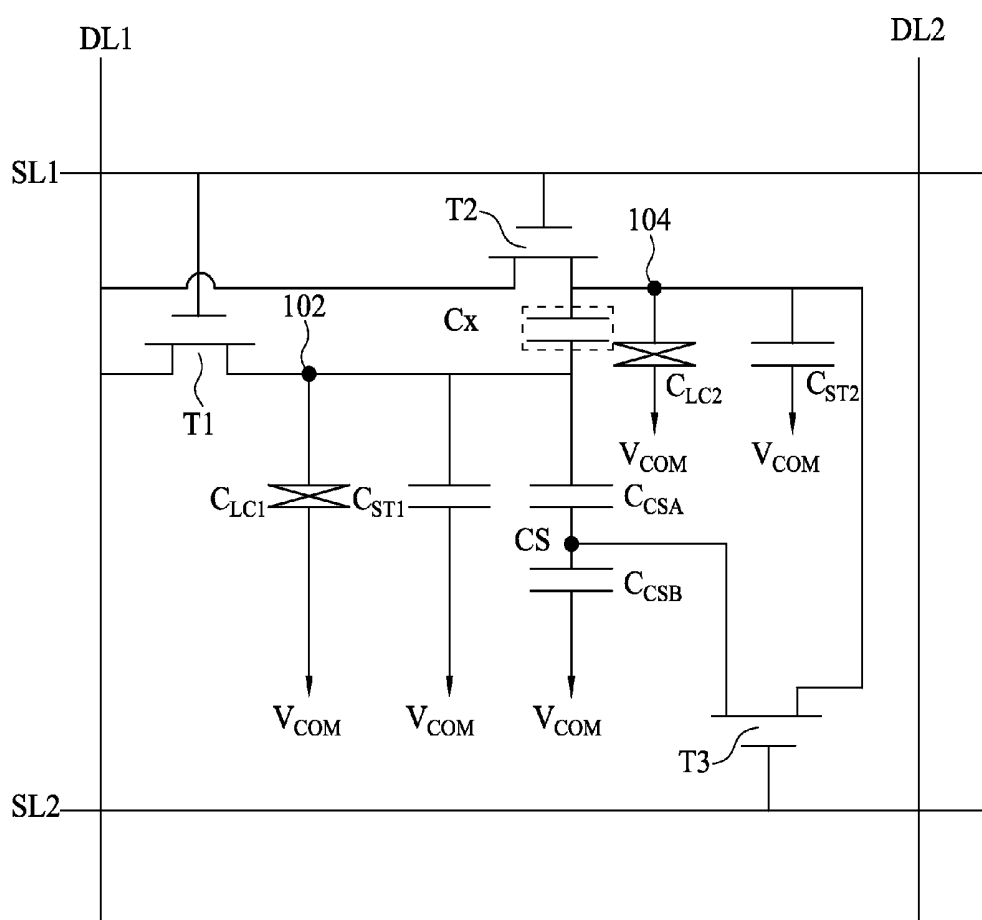


FIG. 2

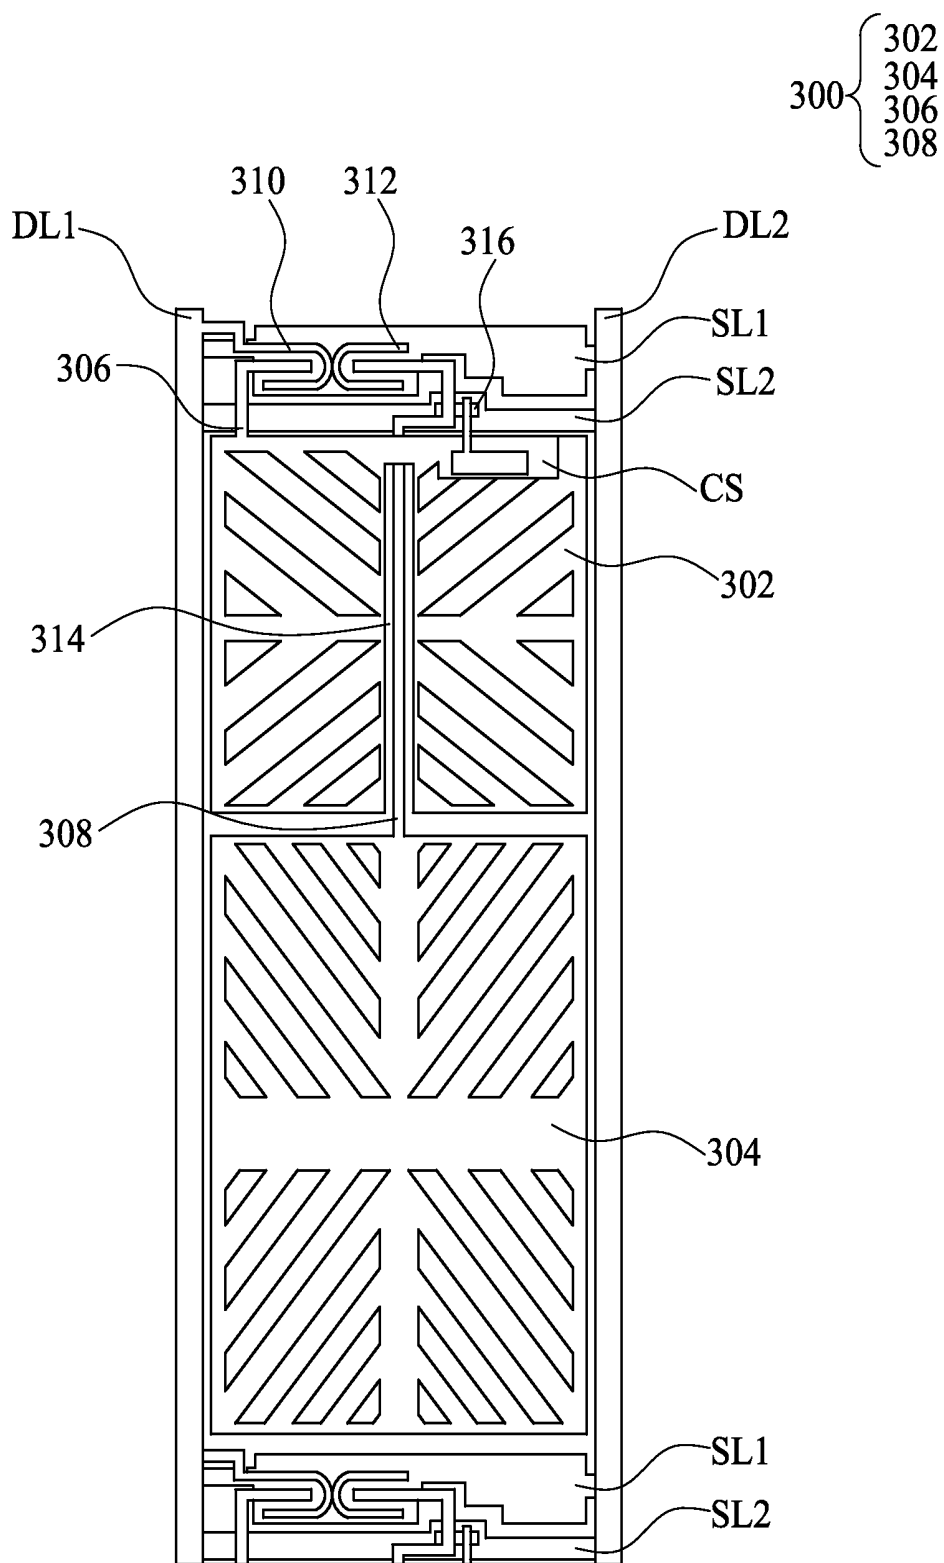


FIG. 3

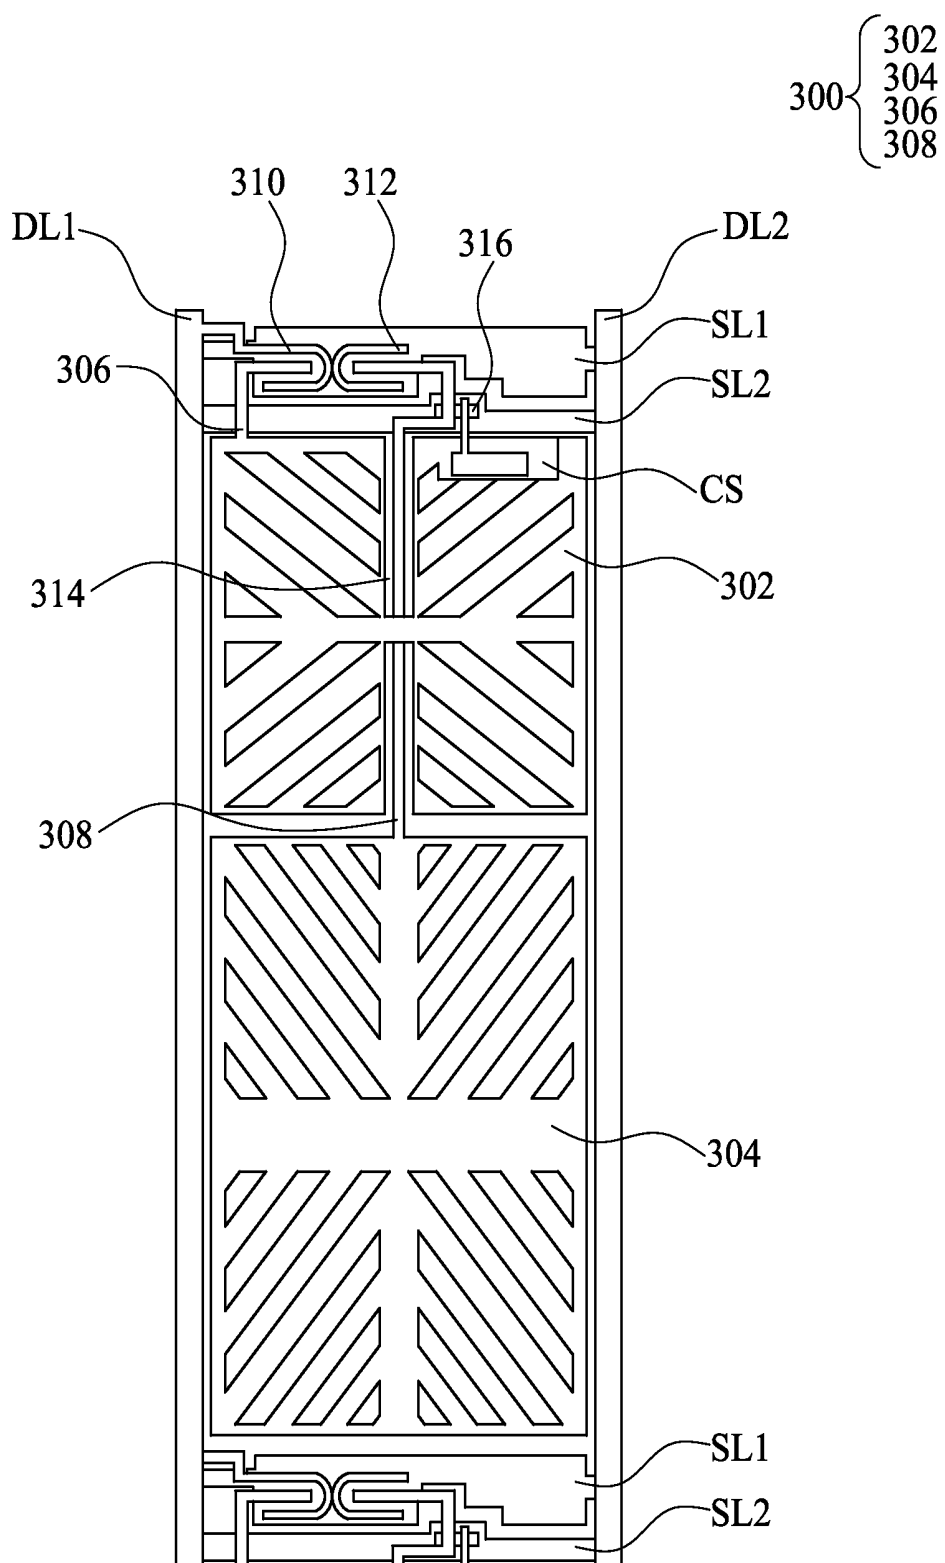


FIG. 4

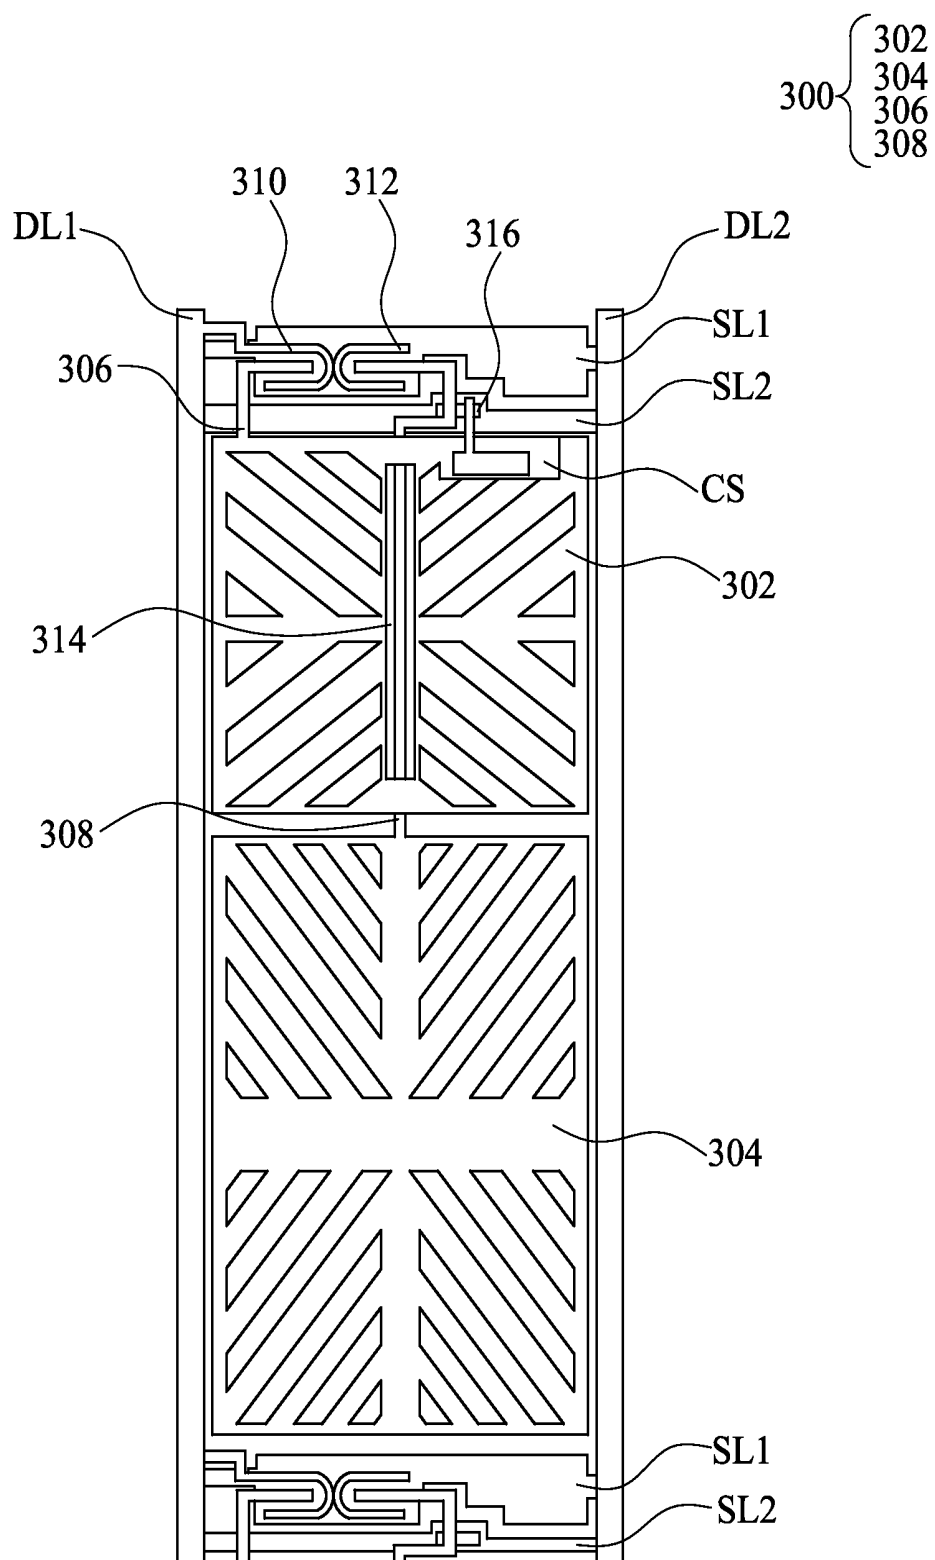


FIG. 5



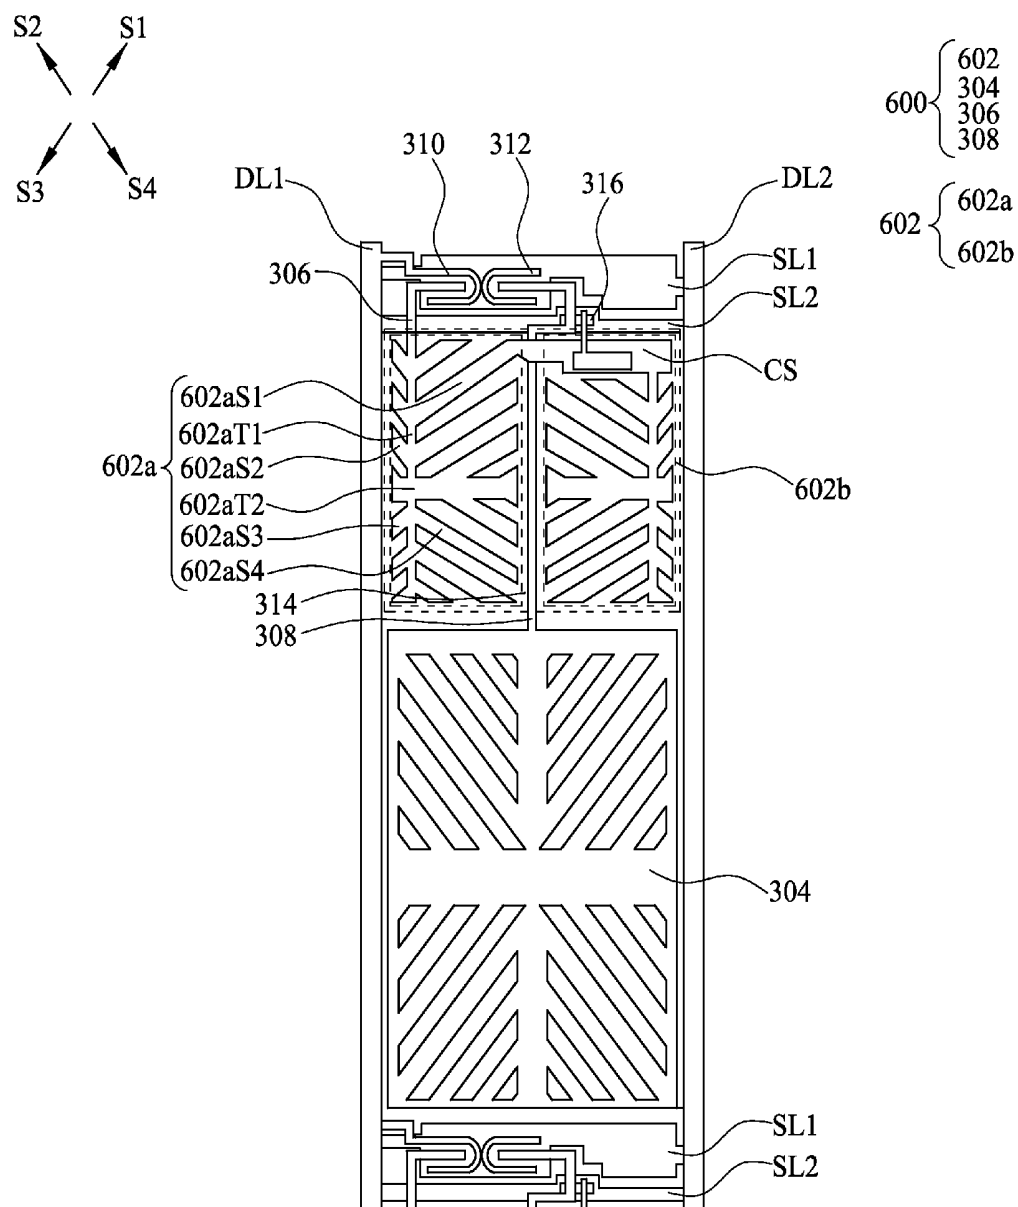


FIG. 6

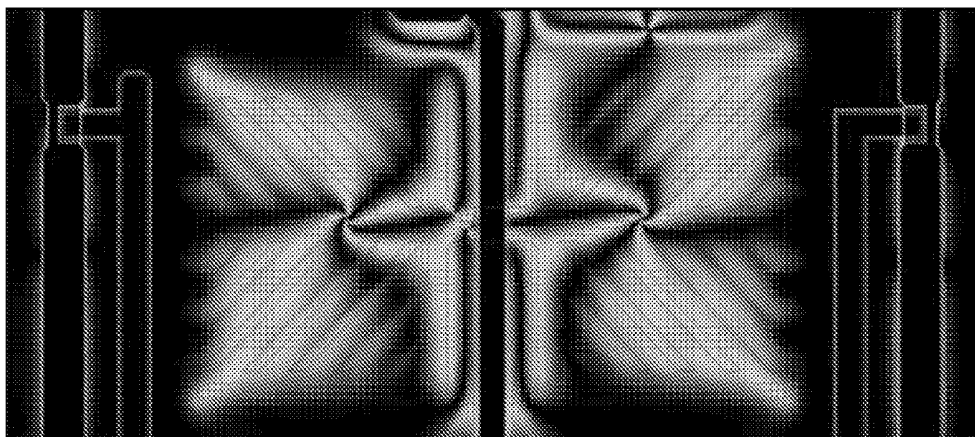

(A)

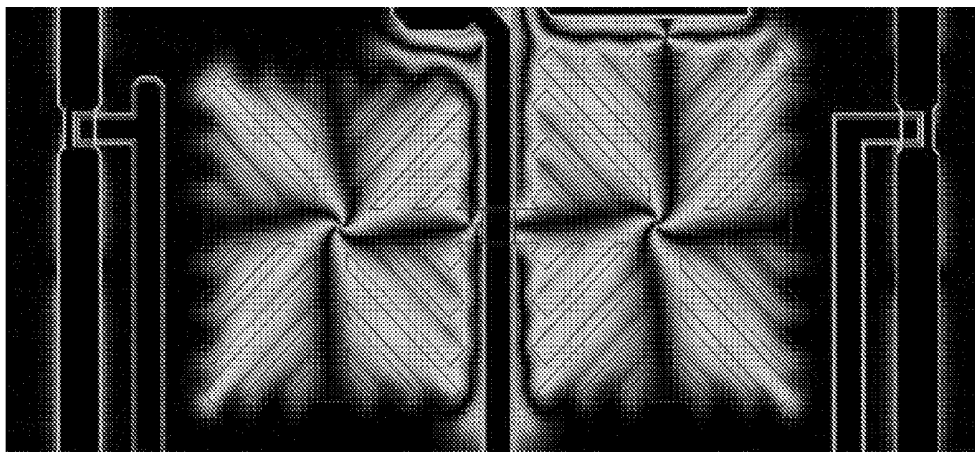

(B)

FIG. 7

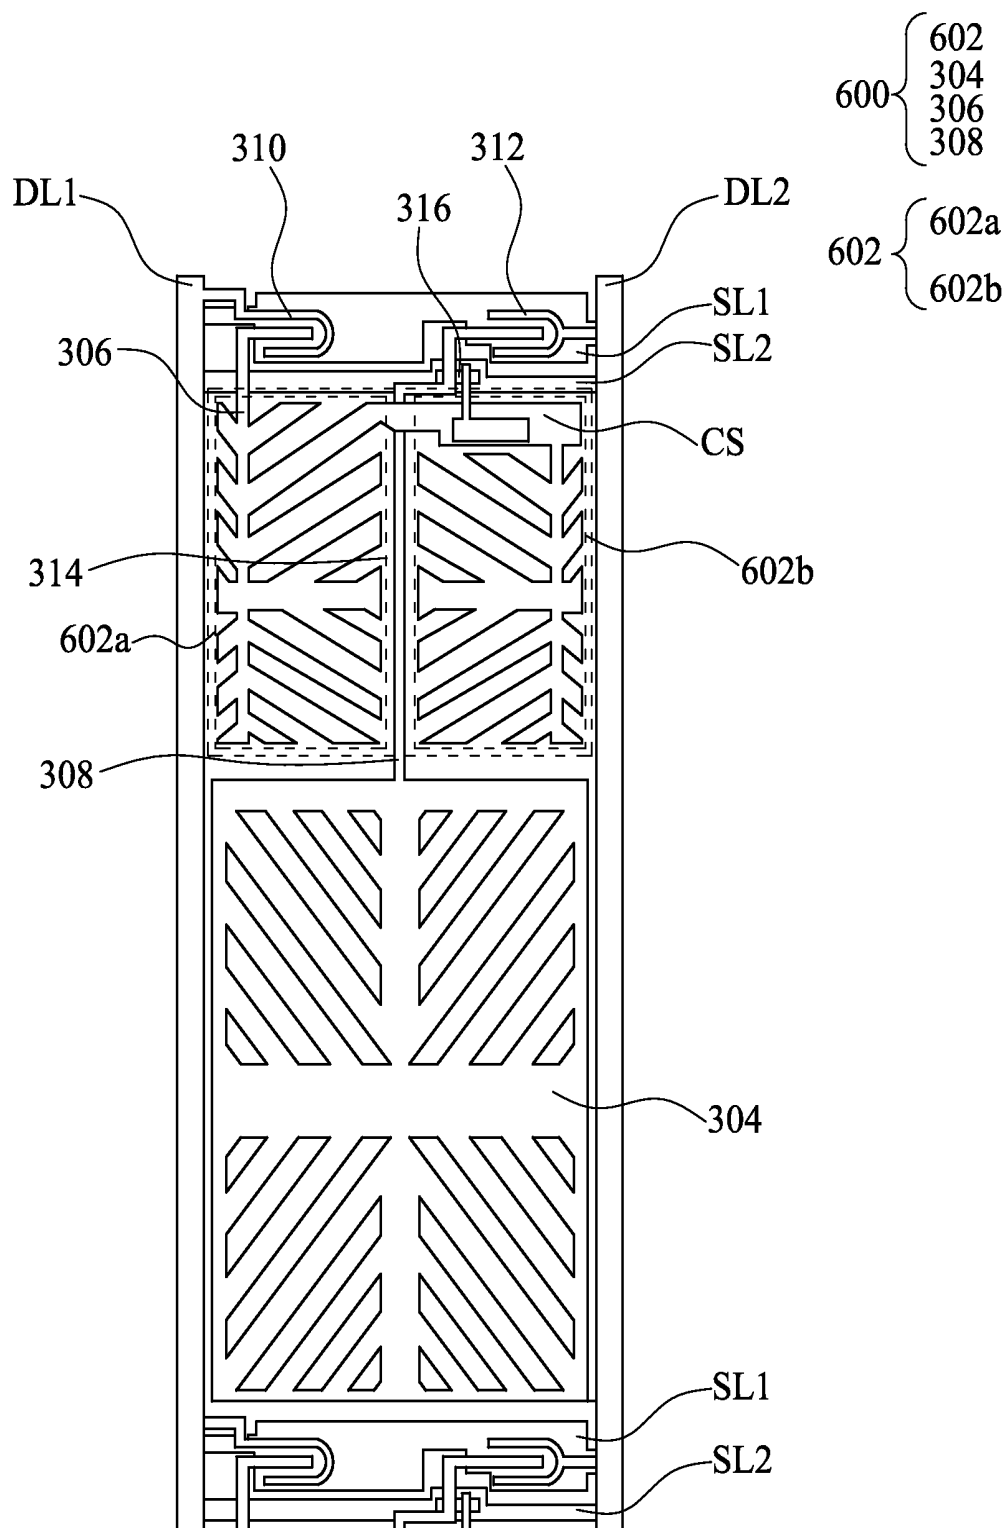


FIG. 8

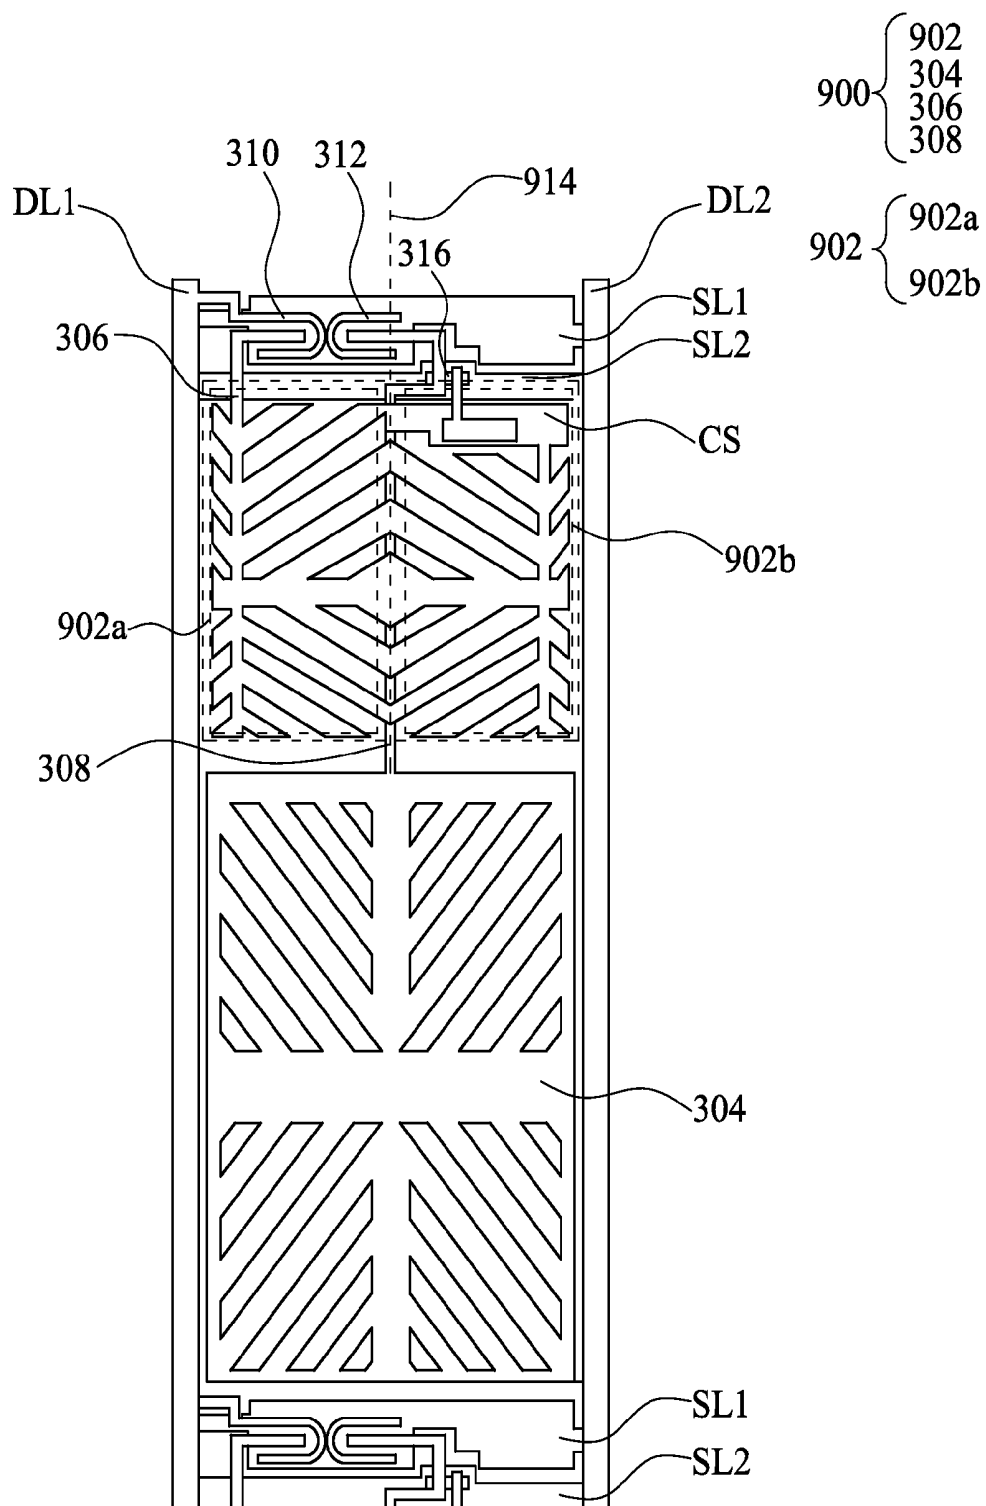


FIG. 9

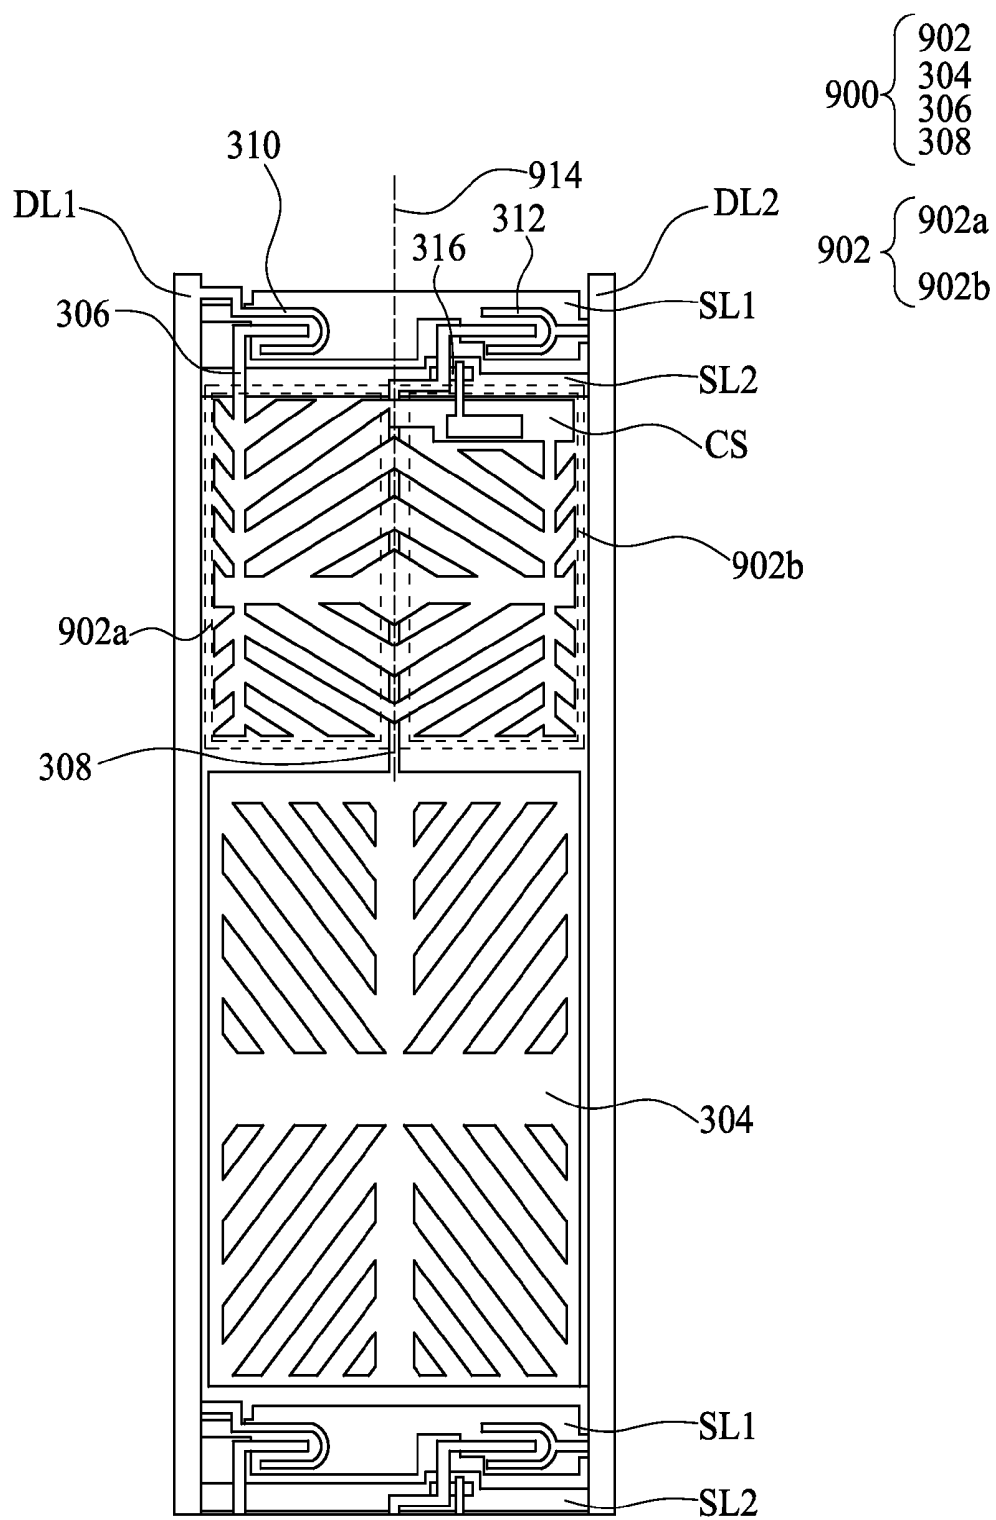


FIG. 10

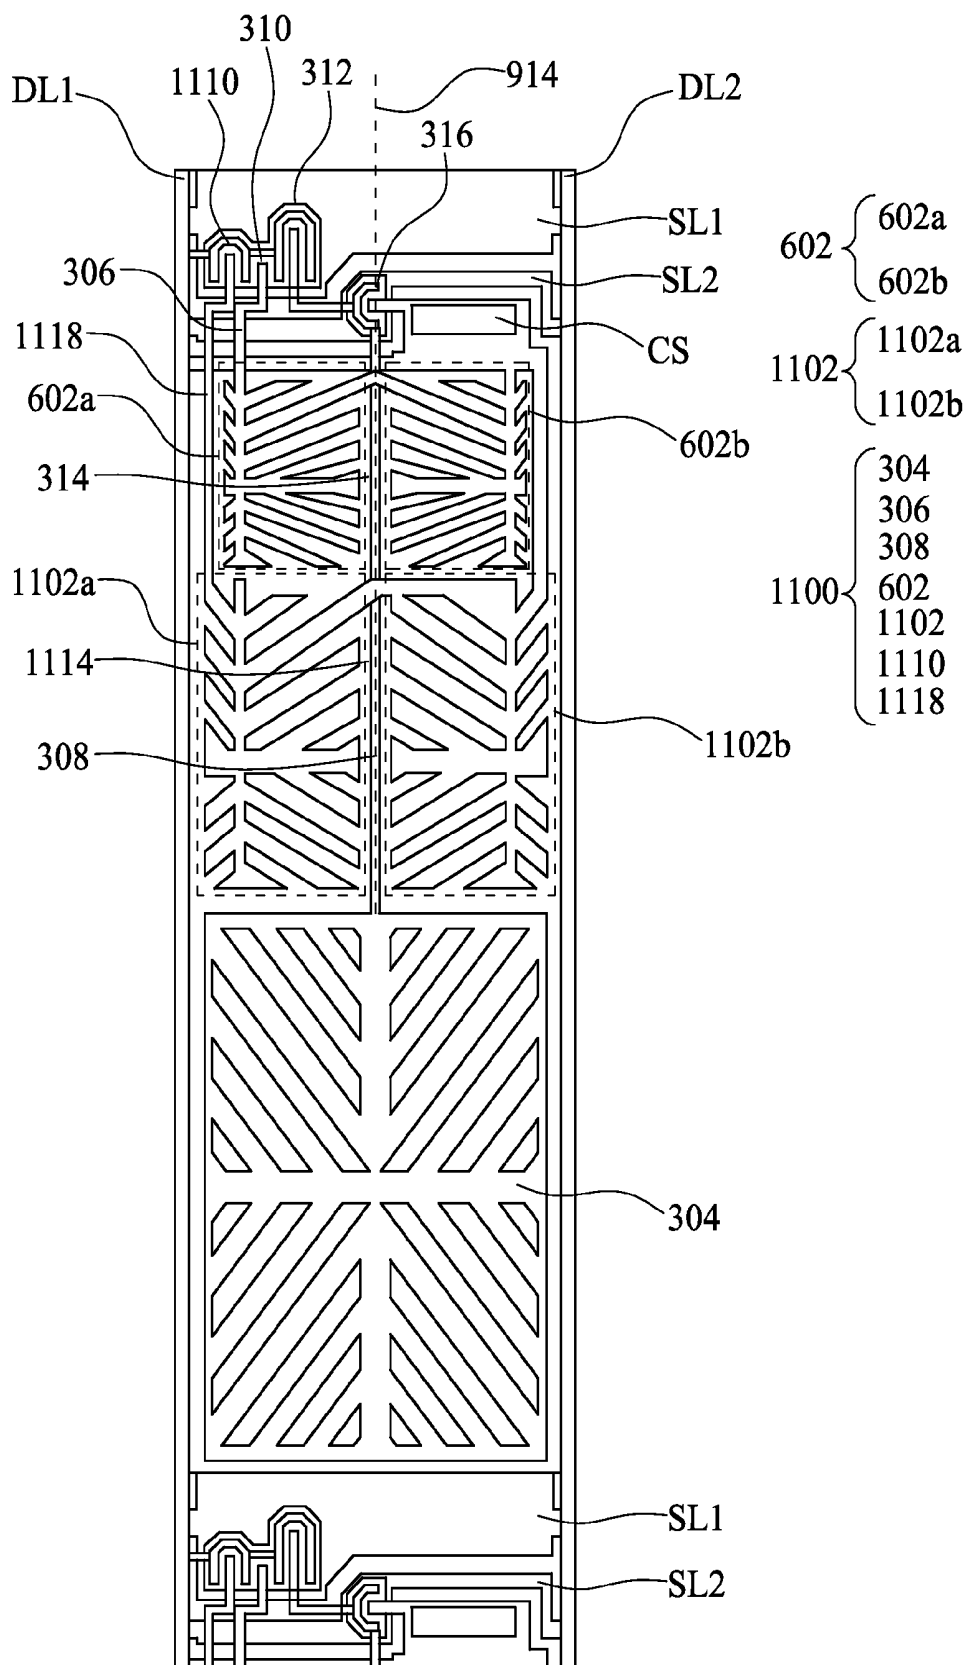


FIG. 11

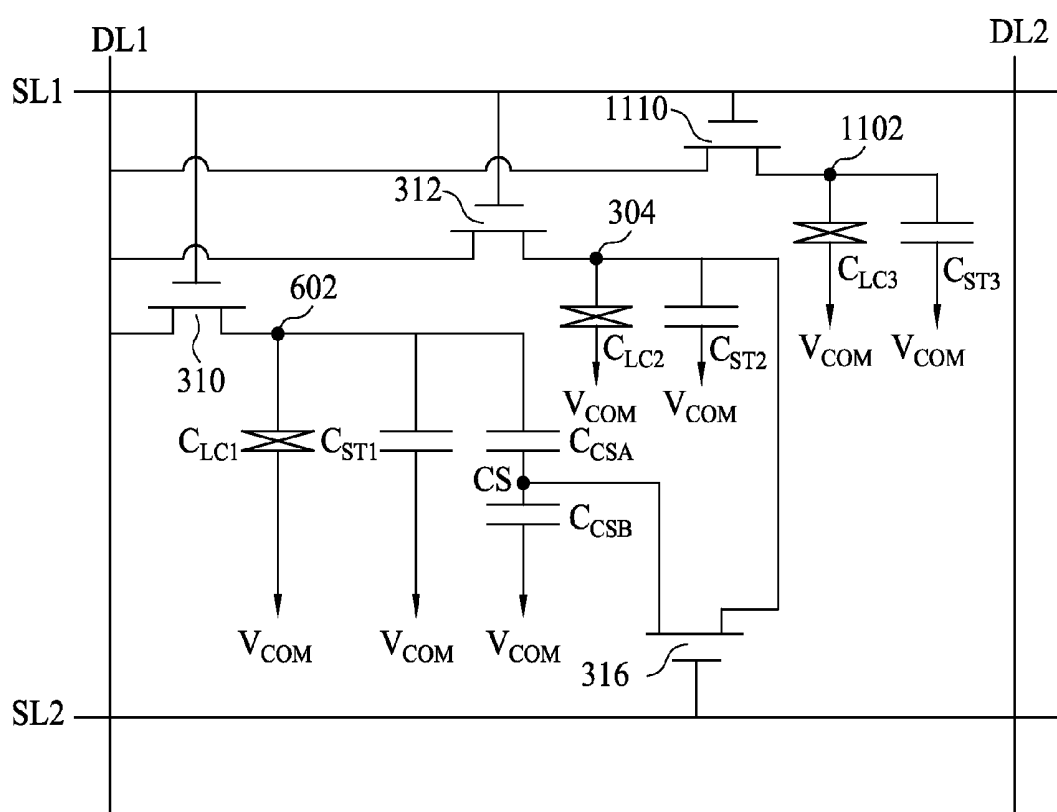


FIG. 12

1300

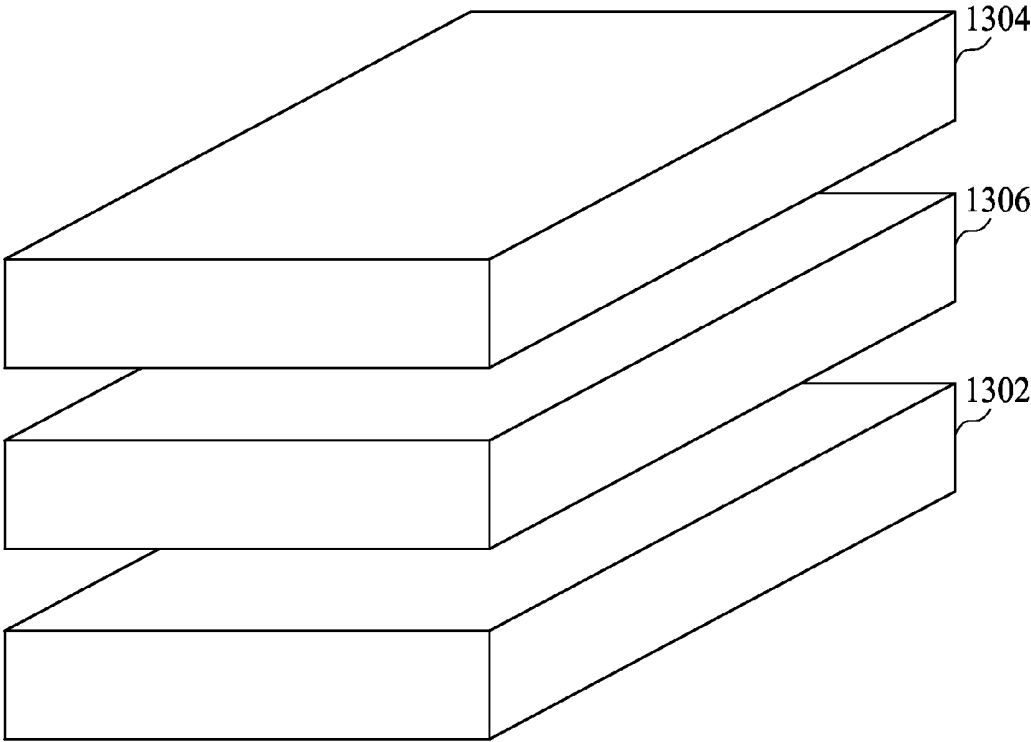


FIG. 13

PIXEL ARRAY SUBSTRATE AND LIQUID CRYSTAL DISPLAY PANEL

RELATED APPLICATIONS

[0001] This application claims priority to Taiwan Application Serial Number 102102336, filed Jan. 22, 2013, which is herein incorporated by reference.

BACKGROUND

[0002] 1. Technical Field

[0003] The present disclosure relates to a substrate, and more particularly, to a pixel array substrate of a display panel.

[0004] 2. Description of Related Art

[0005] Liquid crystal display (LCD) panels have become the mainstream display products because of advantages such as low radiation, low power consumption and compact size. A variety of techniques in the LCD panels are developed corresponding to different needs. Among which, Vertical Alignment (VA) of the wide viewing angle display technology has wider viewing angle than that of Twisted Nematic (TN), fast responding, and high contrast ratio, thus has been widely applied in a LCD panel.

[0006] However, the VA LCD panel is known for its color washout issue. To solve the issue, the pixel area of the pixel array substrate of current VA LCD panels is divided into two parts. As illustrated in FIG. 1 and FIG. 2, FIG. 1 is a top-view of the conventional pixel, and FIG. 2 is the equivalent circuit diagram of the pixel illustrated in FIG. 1. Referring to FIG. 1 and FIG. 2, pixel 100 includes a first pixel electrode 102, a second pixel electrode 104, a first connecting line 106, and a second connecting line 108. The first electrode 102 is electrically connected to its corresponding data line DL1 and scan line SL1 through the first connecting line 106 and the a switch T1; The second pixel electrode 104 is also electrically connected to its corresponding data line DL1 and scan line SL1 through the second connecting line 108 and a switch T2. In addition, pixel 100 also includes a switch T3, storage capacitors C_{ST1} , C_{ST2} , common electrode V_{COM} , liquid crystal capacitors C_{LC1} , C_{LC2} , and charge-sharing capacitor Cs (C_{CSA} and C_{CSB}). Switches T1, T2, and T3 are thin-film transistors (TFT), for example. Liquid crystal capacitors C_{LC1} , C_{LC2} respectively represent the capacitances which are generated between pixel electrode (the first pixel electrode 102 and the second pixel electrode 104) and the electrode(s) applied with V_{COM} voltage on the opposite substrate of the LCD panel (not illustrated in FIG. 1 and FIG. 2). C_{ST1} and C_{ST2} respectively represent the capacitances which are generated between common electrode applied with V_{COM} voltage and each pixel electrode (the first pixel electrode 102 and the second pixel electrode 104) of the pixel array substrate of the LCD panel. Charge-sharing capacitor Cs is an extension from the switch T3, charge-sharing capacitor Cs forms capacitors with other conductive layers, for example, C_{CSA} is the capacitor formed between the first pixel electrode 102 and Cs, and C_{CSB} is the capacitor formed between the common electrode V_{COM} and Cs.

[0007] As to the main display area which corresponds to the first pixel electrode 102, the switch T1 is electrically connected between data line DL1 and the first pixel electrode 102. The switch T1 is also electrically connected to scan line SL1, and a signal passing through scan line SL1 controls the switch T1 to turn on/off. The storage capacitor C_{ST1} is electrically connected between the first pixel electrode 102 and

the common electrode V_{COM} . When the switch T1 turns on, a data signal of data line DL1 is transmitted through the switch T1 to the first electrode 102, so that the storage capacitor C_{ST1} is charged to have corresponding voltage.

[0008] As to the secondary display area which is corresponding to the second pixel electrode 104, the switch T2 is electrically connected between data line DL1 and the second pixel electrode 104. The switch T2 is also electrically connected to scan line SL1, a signal passing through scan line SL1 controls the switch T2 to turn on/off. The storage capacitor C_{ST2} is electrically connected between the second pixel electrode 104 and the common electrode V_{COM} . When the switch T2 turns on, a data signal of data line DL1 is transmitted through the switch T2 to the second electrode 104, so that the storage capacitor C_{ST2} is charged to have corresponding voltage. To solve the issue of color washout of the LCD panel, charge sharing is performed. After the first pixel electrode 102 and the second pixel electrode 104 are charged by the signal from scan line SL1, in next time sequence, the switch T3 turns on by the signal inputted from scan line T3, so as a part of the voltage of the second pixel electrode 104 is shared to the capacitor C_{CSB} and the other part of the voltage of the second pixel electrode 104 is shared to the capacitor C_{CSA} through the switch T3. It results in charge sharing between the first pixel electrode 102 and the second pixel electrode 104 by the charge-sharing capacitor Cs, the voltage of the first pixel electrode 102 increases and that of the second pixel electrode 104 decreases. Therefore, the voltages of the first pixel electrode 102 and the second pixel electrode 104 are different. It causes the tilting angle of liquid crystals corresponding to the first pixel electrode 102 and the second pixel electrode 104 are different within the same pixel 100, so as the brightness within the same pixel 100 can be optimized since the transmittance within the same pixel 100 can be different, thus the issue of color washout can be solved.

[0009] However, continually referring FIG. 1 and FIG. 2, as illustrated in dot lines area of FIG. 1, in the path of the second connecting line 108 connecting to the second pixel electrode 104, part of the path is underpass the first pixel electrode 102. This overlapping structure of the second connecting line 108 and the first pixel electrode 102 in vertical direction will generate an extra coupling capacitance Cx as illustrated in dot lines area of FIG. 2. When the coupling capacitance Cx is generated between the first pixel electrode 102 and the second pixel electrode 104, charge sharing will be weakened. Thus the effects of the voltage increase of the first pixel electrode 102 and the voltage decrease of the second pixel electrode 104 are diminished. Therefore, to increase the voltage difference between the first pixel electrode 102 and the second pixel electrode 104 becomes difficult. In order to maintain the voltage difference between the first pixel electrode 102 and the second pixel electrode 104 to solve the color washout issue, further increase the capacitance of the charge-sharing capacitor Cs to release more electric charge from the second pixel electrode 104 and lower the voltage of the second pixel electrode 104 is generally performed. However, the efficiency of the LCD panel is decreased to maintain the voltage difference between the first pixel electrode 102 and the second pixel electrode 104 in this way.

SUMMARY

[0010] The present disclosure relates to an array substrate of a display panel, which has a whole new design of pixel layout. The coupling capacitance Cx of the pixel array sub-

strate in the present disclosure is much less than that of prior arts, the difficulty of increasing the voltage difference between the first pixel electrode and the second pixel electrode is obviously improved. Therefore, LC efficiency and the open ratio of the pixel array substrate of the present disclosure are improved under the premise of solving the issue of color washout.

[0011] The present disclosure, in one aspect, relates to a pixel array substrate includes a plurality of data lines, a plurality of scan lines, and a plurality of pixels. The plurality of scan lines is crossed to the plurality of data lines to define a plurality of pixel areas. The plurality of pixels is respectively disposed in the plurality of pixel areas, each pixel includes a first pixel electrode, a first connecting line, a second pixel electrode, and a second connecting line. The first pixel electrode is electrically connected to corresponding one of the data lines and one of the scan lines, and the first pixel electrode has a first slit. The first pixel electrode is electrically connected to corresponding data line through the first connecting line. The second pixel electrode is electrically connected to corresponding data line and scan line. The second pixel electrode is electrically connected to corresponding data line through the second connecting line, wherein at least a part of the second connecting line is exposed by the first slit of the first pixel electrode.

[0012] In one embodiment of the present disclosure, the first slit is an open slit.

[0013] In another embodiment of the present disclosure, the first slit is a closed slit.

[0014] In one embodiment of the present disclosure, the first slit is substantially parallel to the plurality of data lines.

[0015] In one embodiment of the present disclosure, the first connecting line and the second connecting line are electrically connected to the same data line.

[0016] In another embodiment of the present disclosure, the first connecting line and the second connecting line are electrically connected to different data lines.

[0017] In one embodiment of the present disclosure, the first pixel electrode includes a first sub-pixel electrode and a second sub-pixel electrode, and the first slit is substantially positioned between the first sub-pixel electrode and the second sub-pixel electrode.

[0018] In one embodiment of the present disclosure, the first sub-pixel electrode and the second sub-pixel electrode are mirror symmetry structures with respect to the first slit.

[0019] In one embodiment of the present disclosure, the first sub-pixel electrode includes a first main electrode, a second main electrode, a plurality of first branch electrodes, a plurality of second branch electrodes, a plurality of third branch electrodes, and a plurality of fourth branch electrodes. The first main electrode and the second main electrode are electrically connected and are substantially orthogonally arranged to define a first area, a second area, a third area and a fourth area. The plurality of first branch electrodes is disposed in the first area. The plurality of second branch electrodes is disposed in the second area. The plurality of third branch electrodes is disposed in the third area. The plurality of fourth branch electrodes is disposed in the fourth area. The plurality of first branch electrodes, the plurality of second branch electrodes, the plurality of third branch electrodes and the plurality of fourth branch electrodes are electrically connected with one of the first main electrode and the second main electrode, the first branch electrodes are arranged parallel to each other, the second branch electrodes are arranged

parallel to each other, the third branch electrodes are arranged parallel to each other and the fourth branch electrodes are arranged parallel to each other, and the plurality of first branch electrodes, the plurality of second branch electrodes, the plurality of third branch electrodes and the plurality of fourth branch electrodes respectively extend to different directions from the first main electrode or the second main electrode, the first sub-pixel electrode and the second sub-pixel electrode are mirror symmetry structures with respect to the first slit.

[0020] In one embodiment of the present disclosure, the first main electrode is substantially parallel to the first slit, and the distance between the first main electrode and the first slit is greater than that of the first main electrode and the data line which is adjacent to the first main electrode.

[0021] In one embodiment of the present disclosure, each pixel further includes a third pixel electrode and a third connecting line. The third pixel electrode is electrically connected to corresponding data line and scan line, and the third pixel electrode has a second slit. The third pixel electrode is electrically connected to corresponding data line through the third connecting line, wherein at least a part of the second connecting line is exposed by the first slit of the first pixel electrode and the second slit of the third pixel electrode.

[0022] In one embodiment of the present disclosure, the third connecting line is disposed on an edge of the first sub-pixel electrode or the second sub-pixel electrode.

[0023] In one embodiment of the present disclosure, the third pixel electrode includes a third sub-pixel electrode and a fourth sub-pixel electrode, the second slit is substantially positioned between the third sub-pixel electrode and the fourth sub-pixel electrode, and the second slit is substantially positioned in the extending line of the first slit.

[0024] In one embodiment of the present disclosure, the first slit and the second slit are substantially parallel to the plurality of data lines, the first sub-pixel electrode and the second sub-pixel electrode are mirror symmetry structures with respect to the first slit, the third sub-pixel electrode and the fourth sub-pixel electrode are mirror symmetry structures with respect to the second slit.

[0025] In one embodiment of the present disclosure, wherein the third sub-pixel electrode and the fourth sub-pixel electrode respectively include a first main electrode, a second main electrode, a plurality of first branch electrodes, a plurality of second branch electrodes, a plurality of third branch electrodes, and a plurality of fourth branch electrodes. The first main electrode and the second main electrode are electrically connected and are substantially orthogonally arranged to define a first area, a second area, a third area and a fourth area.

[0026] The plurality of first branch electrodes is disposed in the first area. The plurality of second branch electrodes is disposed in the second area. The plurality of third branch electrodes is disposed in the third area. The plurality of fourth branch electrodes is disposed in the fourth area, wherein the plurality of first branch electrodes, the plurality of second branch electrodes, the plurality of third branch electrodes and the plurality of fourth branch electrodes are electrically connected with one of the first main electrode and the second main electrode, the first branch electrodes are arranged parallel to each other, the second branch electrodes are arranged parallel to each other, the third branch electrodes are arranged parallel to each other and the fourth branch electrodes are arranged parallel to each other, and the plurality of first

branch electrodes, the plurality of second branch electrodes, the plurality of third branch electrodes and the plurality of fourth branch electrodes respectively extend to different directions from the first main electrode or the second main electrode, the first sub-pixel electrode and the second sub-pixel electrode are mirror symmetry structures with respect to the first slit, the third sub-pixel electrode and the fourth sub-pixel electrode are mirror symmetry structures with respect to the second slit.

[0027] In one embodiment of the present disclosure, the first main electrode of the first sub-pixel electrode is substantially parallel to the first slit, and the distance between the first main electrode and the first slit is greater than that of the first main electrode of the first sub-pixel electrode and the data line which is adjacent to the first main electrode of the first sub-pixel electrode, the first main electrode of the third sub-pixel electrode is substantially parallel to the second slit, and the distance between the first main electrode of the third sub-pixel electrode and the second slit is greater than that of the first main electrode of the third sub-pixel electrode and the data line which is adjacent to the first main electrode of the third sub-pixel electrode.

[0028] In one embodiment of the present disclosure, the pixel array substrate further includes a plurality of first switches and a plurality of second switches. The plurality of first switches respectively disposed on a side of each pixel area, a first end of each first switch is electrically connected to respective first pixel electrode through respective first connecting line, a second end of each first switch is electrically connected to corresponding data line and scan line. The plurality of second switches respectively disposed on the side of each pixel area and electrically connected to corresponding data line and scan line, each second switch is electrically connected to corresponding second pixel electrode through corresponding second connecting line.

[0029] In one embodiment of the present disclosure, each one of the plurality of pixels further includes a charge-sharing capacitor and a third switch. A first end of the charge-sharing capacitor is electrically connected to the first pixel electrode, a second end of the charge-sharing capacitor is electrically connected to the second pixel electrode through the third switch.

[0030] The present disclosure, in another aspect, relates to a pixel array substrate includes a plurality of data lines, a plurality of scan lines, and a plurality of pixels. Each pixel includes a first pixel electrode which is electrically connected to corresponding data line and scan line, the first pixel electrode includes a first sub-pixel electrode and a second sub-pixel electrode. The second sub-pixel electrode electrically connected to the first sub-pixel electrode, wherein the first sub-pixel electrode and the second sub-pixel electrode are mirror symmetry structures with respect to a symmetry axis.

[0031] In one embodiment of the present disclosure, the symmetry axis is substantially parallel to the plurality of data lines.

[0032] In one embodiment of the present disclosure, the distance between the symmetry axis and one adjacent data line is the same as that between the symmetry axis and the other adjacent data line.

[0033] In one embodiment of the present disclosure, the first sub-pixel electrode includes a first main electrode, a second main electrode, a plurality of first branch electrodes, a plurality of second branch electrodes, a plurality of third branch electrodes and a plurality of fourth branch electrodes.

The first main electrode and the second main electrode are electrically connected and are substantially orthogonally arranged to define a first area, a second area, a third area and a fourth area. The plurality of first branch electrodes is disposed in the first area. The plurality of second branch electrodes is disposed in the second area. The plurality of third branch electrodes is disposed in the third area. The plurality of fourth branch electrodes is disposed in the fourth area, wherein the plurality of first branch electrodes, the plurality of second branch electrodes, the plurality of third branch electrodes and the plurality of fourth branch electrodes are electrically connected with one of the first main electrode and the second main electrode, the first branch electrodes are arranged parallel to each other, the second branch electrodes are arranged parallel to each other, the third branch electrodes are arranged parallel to each other and the fourth branch electrodes are arranged parallel to each other, and the plurality of first branch electrodes, the plurality of second branch electrodes, the plurality of third branch electrodes and the plurality of fourth branch electrodes are respectively extend to different directions from the first main electrode or the second main electrode.

[0034] In one embodiment of the present disclosure, the first main electrode is substantially parallel to the symmetry axis, and the distance between the first main electrode and the symmetry axis is greater than that between the first main electrode and the data line which is adjacent to the first main electrode.

[0035] In one embodiment of the present disclosure, the pixel array substrate further includes a second pixel electrode and a second connecting line. The second pixel electrode is electrically connected to corresponding data line and scan line. The second pixel electrode is electrically connected to corresponding data line through the second connecting line, wherein the second connecting line is positioned along the direction of the symmetry axis.

[0036] In one embodiment of the present disclosure, the first pixel electrode and the second pixel electrode are electrically connected to the same data line.

[0037] In another embodiment of the present disclosure, the first pixel electrode and the second pixel electrode are respectively electrically connected to different data lines.

[0038] In one embodiment of the present disclosure, the first pixel electrode has a first slit which is along the direction of the symmetry axis to expose a part of the second connecting line.

[0039] In one embodiment of the present disclosure, the pixel array substrate further includes a third pixel electrode and a third sub-pixel electrode. The third pixel electrode is disposed between the first pixel electrode and the second pixel electrode, and electrically connected to corresponding data line and scan line, the third pixel electrode includes a third sub-pixel electrode and a fourth sub-pixel electrode. The fourth sub-pixel electrode electrically connected to the third sub-pixel electrode, wherein the third sub-pixel electrode and the fourth sub-pixel electrode are mirror symmetry structures with respect to the symmetry axis.

[0040] In one embodiment of the present disclosure, the third sub-pixel electrode and the fourth sub-pixel electrode respectively includes a first main electrode, a second main electrode, a plurality of first branch electrodes, a plurality of second branch electrodes, a plurality of third branch electrodes and a plurality of fourth branch electrodes. The first main electrode and the second main electrode are electrically

connected and are substantially orthogonally arranged to define a first area, a second area, a third area and a fourth area. The plurality of first branch electrodes is disposed in the first area. The plurality of second branch electrodes is disposed in the second area. The plurality of third branch electrodes is disposed in the third area. The plurality of fourth branch electrodes is disposed in the fourth area, wherein the plurality of first branch electrodes, the plurality of second branch electrodes, the plurality of third branch electrodes and the plurality of fourth branch electrodes are electrically connected with one of the first main electrode and the second main electrode, the first branch electrodes are arranged parallel to each other, the second branch electrodes are arranged parallel to each other, the third branch electrodes are arranged parallel to each other and the fourth branch electrodes are arranged parallel to each other, and the plurality of first branch electrodes, the plurality of second branch electrodes, the plurality of third branch electrodes and the plurality of fourth branch electrodes respectively extend to different directions from the first main electrode or the second main electrode.

[0041] In one embodiment of the present disclosure, the first main electrode of the first sub-pixel electrode and the first main electrode of the third sub-pixel electrode are substantially parallel to the symmetry axis, and the distance between the first main electrode and the symmetry axis is greater than that between the first main electrode and adjacent data line.

[0042] In one embodiment of the present disclosure, the first pixel electrode has a first slit which is along the direction of the symmetry axis, and the third pixel electrode has a second slit which is also along the direction of the symmetry axis to expose a part of the second connecting line.

[0043] The present disclosure, in another aspect, relates to a LCD panel, includes the pixel array substrate aforementioned, an opposite substrate, and a liquid crystal layer. The opposite substrate is disposed above the pixel array substrate. The liquid crystal layer is disposed between the pixel array substrate and the opposite substrate.

BRIEF DESCRIPTION OF THE DRAWINGS

[0044] The disclosure may be more fully understood by reading the following detailed description of the embodiment, with reference made to the accompanying drawings as follows:

[0045] FIG. 1 illustrates a top-view of a part of the pixel layout of the conventional array substrate;

[0046] FIG. 2 illustrates the equivalent circuit diagram of the pixel layout of the array substrate illustrated in FIG. 1;

[0047] FIG. 3 illustrates a top-view of a part of one embodiment of the pixel layout of the pixel array substrate of the present disclosure;

[0048] FIG. 4 illustrates a top-view of a part of another embodiment of the pixel layout of the pixel array substrate of the present disclosure;

[0049] FIG. 5 illustrates a top-view of a part of another embodiment of the pixel layout of the pixel array substrate of the present disclosure;

[0050] FIG. 6 illustrates a top-view of a part of another embodiment of the pixel layout of the pixel array substrate of the present disclosure;

[0051] FIG. 7 illustrates the simulation of the transmittance of the pixel array substrate of the present disclosure;

[0052] FIG. 8 illustrates a top-view of a part of another embodiment of the pixel layout of the pixel array substrate of the present disclosure;

[0053] FIG. 9 illustrates a top-view of a part of another embodiment of the pixel layout of the pixel array substrate of the present disclosure;

[0054] FIG. 10 illustrates a top-view of a part of another embodiment of the pixel layout of the pixel array substrate of the present disclosure;

[0055] FIG. 11 illustrates a top-view of a part of another embodiment of the pixel layout of the pixel array substrate of the present disclosure;

[0056] FIG. 12 illustrates the equivalent circuit diagram of the pixel layout of the pixel array substrate of the present disclosure illustrated in FIG. 11; and

[0057] FIG. 13 illustrates a schematic diagram of the LCD panel with the pixel array substrate of the present disclosure.

DETAILED DESCRIPTION

[0058] The present disclosure is described by the following specific embodiments. Those with ordinary skill in the arts can readily understand the other advantages and functions of the present invention after reading the disclosure of this specification. The present disclosure can also be implemented with different embodiments. Various details described in this specification can be modified based on different viewpoints and applications without departing from the scope of the present disclosure.

[0059] As used herein, the singular forms “a,” “an” and “the” include plural referents unless the context clearly dictates otherwise. Therefore, reference to, for example, a data sequence includes aspects having two or more such sequences, unless the context clearly indicates otherwise.

[0060] Reference will now be made in detail to the embodiments of the present disclosure, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers are used in the drawings and the description to refer to the same or like parts.

[0061] Referring FIG. 3, FIG. 3 illustrates a part of one embodiment of the pixel array substrate of the present disclosure. The pixel array substrate of this embodiment includes data lines, scan lines and pixels. The scan lines are crossed to the data lines to define pixel areas. The pixels are respectively disposed in the pixel areas. As illustrated in FIG. 3, two adjacent scan lines SL1, SL2 (the upper group of scan lines SL1, SL2 provides the scan signals to the pixel illustrated in FIG. 3, and the lower group of scan lines SL1, SL2 provides the scan signals to the pixel which is not illustrated in FIG. 3) are crossed to two adjacent data lines DL1, DL2. A pixel 300 is disposed in a pixel area which is defined by two adjacent scan lines SL1 and two adjacent data lines DL1, DL2.

[0062] The pixel 300 includes a first pixel electrode 302, a first connecting line 306, a second pixel electrode 304 and a second connecting line 308. The first pixel electrode 302 is electrically connected to data line DL1 through the first connecting line 306, and the second pixel electrode 304 is electrically connected to data line DL1 through the second connecting line 308. The area of the first pixel electrode 302 and the second pixel electrode 304 may be different. In the present embodiment and the following embodiments illustrated in FIG. 4 and FIG. 5, the area of the second pixel electrode 304 is greater than that of the first pixel electrode 302, however, the present disclosure is not limited thereto. For example, the pattern of the first pixel electrode 302 and the second pixel electrode 304 are both fishbone patterns. In the present embodiment, the first pixel electrode 302 and the second pixel electrode 304 are simultaneously charged by inputting a scan

signal via scan line SL1 to turn on the first switch 310 and the second switch 312 in the same time sequence, and the first pixel electrode 302 and the second pixel electrode 304 are simultaneously charged in the voltage of data line DL1. In next time sequence, the first pixel electrode 302 and the second pixel electrode 304 perform charge sharing, thus the voltage of the first pixel electrode 302 is different from that of the second pixel electrode 304. For example, the way of charge sharing may be that pixel 300 further includes a third switch T3 and charge-sharing capacitor Cs. One end of the charge-sharing capacitor Cs is electrically connected to the first pixel electrode 302, and the other end of the charge-sharing capacitor Cs is electrically connected to the second pixel electrode 304 through the third switch T3. The third switch T3 is turned on by a signal passing through scan line SL2, and the electric charges flow from the second pixel electrode 304 to the capacitor C_{CSA} and C_{CSB} . Therefore the voltage of the first pixel electrode 302 is increased and the voltage of the second pixel electrode 304 is decreased. However, the present disclosure is not limited thereto. It should be noticed that, the first pixel electrode 302 has a first slit 314, and the second connecting line 308 of the second pixel electrode 304, which electrically connects the second pixel electrode 304 and its corresponding data line DL1 and scan line SL1, is exposed by the first slit 314. Therefore, the overlapping structure of the second connecting line 308 and the first pixel electrode 302 in vertical direction is much less than that of the conventional structure. Accordingly, the coupling capacitance Cx induced by the overlapping structure is minimized. As illustrated in FIG. 3 and FIG. 4, the first slit 314 can be an open slit, but not limited to it. As illustrated in FIG. 5, the first slit 314 can be a closed slit, but not limited to it either. When charge sharing is performed to decrease the voltage of the second pixel electrode 304 and increase the voltage of the first pixel electrode 302 through the charge-sharing capacitor, the difficulty of increasing the voltage difference between the first pixel electrode and the second pixel electrode is improved. Since the coupling capacitance Cx in the present embodiment is much less than that of conventional arts, increasing the voltage difference between the first pixel electrode and the second pixel electrode is much easier. Accordingly, it is not necessary to further increase the capacitance of the charge-sharing capacitor Cs to decrease the voltage of the second pixel electrode 304. Therefore, the voltage of the first pixel electrode 302 of the present embodiment is higher than that of conventional arts, the voltage of the second pixel electrode 304 of the present embodiment is also higher than that of conventional arts, and the voltage difference (between the first pixel electrode 302 and the second pixel electrode 304) of the present embodiment is substantially equal to that of conventional arts. Accordingly, the present embodiment of the present disclosure is not only capable to improve the issue of color washout, but also enhance the LC efficiency of the LCD panel.

[0063] Referring to FIG. 6, FIG. 6 is a part of another embodiment of the pixel array substrate of the present disclosure. The pixel array substrate of this embodiment includes data lines, scan lines and pixels. The scan lines are crossed to the data lines to define pixel areas. The pixels are respectively disposed in the pixel areas. That is, each pixel is respectively disposed in each pixel area. As illustrated in FIG. 6, two adjacent scan lines SL1, SL2 (the upper group of scan line SL1, SL2 provides the scan signals to the pixel illustrated in FIG. 6, and the lower group of scan line SL1, SL2 provides

the scan signals to the pixel which is not illustrated) are crossed to two adjacent data line DL1, DL2. A pixel 600 is disposed in a pixel area which is defined by two adjacent scan lines SL1 and two adjacent data lines DL1, DL2. The pixel 600 includes a first pixel electrode 602, a first connecting line 306, a second pixel electrode 304, and a second connecting line 308. The area of the first pixel electrode 302 and the second pixel electrode 304 may be different. In the present embodiment, the area of the second pixel electrode 304 is greater than that of the first pixel electrode 602, however, the present disclosure is not limited thereto. The pattern of the second pixel electrode 304, for example, is the same as the aforementioned second pixel electrode 304 illustrated in FIGS. 3-5. The first pixel electrode 602 is electrically connected to data line DL1 and scan line SL1 through the first connecting line 306 and the first switch 310 respectively. The second pixel electrode 304 is electrically connected to data line DL1 and scan line SL1 through the second connecting line 308 and the second switch 312 respectively. The first pixel electrode 602 has the first slit 314, and the second connecting line 308 of the second pixel electrode 304, which electrically connects the second pixel electrode 304 and its corresponding data line DL1 and scan line SL1, is exposed by the first slit 314. It should be noticed that the first pixel electrode 602 includes the first sub-pixel electrode 602a and the second sub-pixel electrode 602b. The first slit 314 is between the first sub-pixel electrode 602a and the second sub-pixel electrode 602b. The first sub-pixel electrode 602a and the second sub-pixel electrode 602b are mirror symmetry structures with respect to the first slit 314. As illustrated in FIG. 6, the first sub-pixel electrode 602a includes a first main electrode 602aT1, a second main electrode 602aT2, first branch electrodes 602aS1, second branch electrodes 602aS2, third branch electrodes 602aS3 and fourth branch electrodes 602aS4. The first main electrode 602aT1 and the second main electrode 602aT2 are electrically connected and are substantially orthogonally arranged to define a first area, a second area, a third area and a fourth area. The first branch electrodes 602aS1, second branch electrodes 602aS2, third branch electrodes 602aS3 and fourth branch electrodes 602aS4 are respectively disposed in the first area, the second area, the third area and the fourth area. The first branch electrodes 602aS1, second branch electrodes 602aS2, third branch electrodes 602aS3 and fourth branch electrodes 602aS4 are electrically connected with one of the first main electrode 602aT1 and the second main electrode 602aT2. The first branch electrodes 602aS1 are arranged parallel to each other, the second branch electrodes 602aS2 are arranged parallel to each other, the third branch electrodes 602aS3 are arranged parallel to each other and the fourth branch electrodes 602aS4 are arranged parallel to each other. The first branch electrodes 602aS1, the second branch electrodes 602aS2, the third branch electrodes 602aS3 and the fourth branch electrodes 602aS4 are respectively extend to different directions from the first main electrode 602aT1 or the second main electrode 602aT2. To be more specific, each first branch electrode 602aS1 is electrically connected to the first main electrode 602aT1 or the second main electrode 602aT2, and each first branch electrode 602aS1 are arranged in parallel and extends outward along the direction S1. And so on the second branch electrodes 602aS2, the third branch electrodes 602aS3, and the fourth branch electrodes 602aS4 are also arranged similarly to the first branch electrodes 602aS1. The difference among them is only their respective extending directions. In

other word, each second branch electrode **602aS2** are arranged in parallel and extends outward along the direction **S2**; each third branch electrode **602aS3** are arranged in parallel and extends outward along the direction **S3**; and each fourth branch electrode **602aS4** are arranged in parallel and extends outward along the direction **S4**.

[0064] In comparison with the pattern of the first pixel electrode **602** illustrated in FIG. 6 to that of the first pixel electrode **302** illustrated in FIG. 3, the first pixel electrode **602** illustrated in FIG. 6 has more main electrodes (such as the first main electrode **602aT1** and the second main electrode **602aT2**) than that of the first pixel electrode **302** illustrated in FIG. 3. Accordingly, stronger electric field is provided to each branch electrode (such as the first branch electrodes **602aS1**, the second branch electrodes **602aS2**, the third branch electrodes **602aS3**, and the fourth branch electrodes **602aS4** of the first sub-pixel electrode **602a**), thus better control of the tilting angle of the LC molecules which are corresponding to the first pixel electrode **602** is also provided than that of the first pixel electrode **302** illustrated in FIG. 3.

[0065] Referring to FIG. 7, the main electrodes offer stronger electric field than the branch electrodes do. However, the electric field offered by the main electrodes does not possess specific direction as that offered by the branch electrodes. Therefore, the LC molecules corresponding to the main electrodes do not tilt in one specific direction, and the transmittance corresponding to the main electrodes is substantially zero. Accordingly, the positions, which are corresponded to the main electrodes of the LCD panel, usually display black lines.

[0066] FIG. 7(A) illustrates the transmittance simulation of the first pixel electrode **302** (as aforementioned embodiments in FIGS. 3-5). The slit **314** can be regarded as the edge of the domain of the pixel electrode **302**. The electric field at the edge of the domain of the pixel electrode **302** will conflict with that in adjacent data line. Therefore, the controlling of the electric field of the whole pixel electrode is weak. Accordingly, the black lines in vertical direction could randomly appear in any region of the whole pixel electrode. In contrast, FIG. 7(B) illustrates the transmittance simulation of the first pixel electrode having the main electrodes (as the first sub-pixel electrode **602a** and the second sub-pixel electrode **602b** in FIG. 6). Because the main electrodes in vertical direction improve the control of the electric field of the whole pixel electrode, the LC molecules will tilt along the slits which are between the branches of the sub-pixel electrode. The issue of LC molecules tilting conflicts does not occur, hence the black lines in vertical direction can be restricted in the positions along a vertical direction which are corresponded to the main electrodes. Therefore, the first sub-pixel electrode **602a** and the second sub-pixel electrode **602b** (illustrated in FIG. 6) control the positions of the black lines better than the pixel electrode **302** (illustrated in FIG. 3) do.

[0067] Referring to FIG. 6 again, the first main electrode **602aT1** is substantially parallel to the first slit **314**, and the distance between the first main electrode **602aT1** and the first slit **314** is greater than that between the first main electrode **602aT1** and the data line **DL1** which is adjacent to the first main electrode **602aT1**. The first main electrode **602aT1** is substantially between data line **DL1** and the first slit **314**. That is, the first main electrode **602aT1** is disposed at the edge of the pixel area. Therefore, the black lines in vertical direction can be restricted at the edge of the pixel area by the main electrodes in vertical direction. Accordingly, the open ratio of

the pixel is increased. In summary, the embodiment illustrated in FIG. 6 of the present disclosure not only minimizes the issue caused by the coupling capacitor **Cx** and improves the LC efficiency of the LCD panel, but also improves the open ratio of the pixel by restricting the black lines at the edge of the pixel are.

[0068] Referring to FIG. 8, FIG. 8 illustrates a part of the pixel array substrate of another embodiment of the present disclosure. The connections between each element are similar to described above, therefore the details are omitted here. It should be noticed that the first connecting line **306** and the second connecting line **308** are respectively electrically connected to different data lines. The first connecting line **306** is electrically connected to data line **DL1** through the first switch **310**, the second connecting line **308** is electrically connected to data line **DL2** through the second switch **312**. Therefore, the first pixel electrode **602** and the second pixel electrode **304** can be respectively charged with different voltages by data line **DL1** and data line **DL2** in the same time sequence. Specifically, in one time sequence, one scan signal is transmitted by the same scan line **SL1** and the first switch **310** and the second switch **312** are turned on, so that the first pixel electrode **602** and the second pixel electrode **304** can be charged with data line **DL1** and data line **DL2** respectively and possesses different voltages.

[0069] Referring FIG. 9, FIG. 9 illustrates a part of the pixel array substrate of another embodiment of the present disclosure. The pixel array substrate of this embodiment includes data lines, scan lines and pixels. The scan lines are crossed to the data lines to define pixel areas. The pixels are respectively disposed in the pixel areas. Each pixel is respectively disposed in each pixel area. As illustrated in FIG. 9, two adjacent scan lines **SL1**, **SL2** (the upper group of scan line **SL1**, **SL2** provides the scan signals to the pixel illustrated in FIG. 9, and the lower group of scan line **SL1**, **SL2** provides the scan signals to the pixel which is not illustrated in FIG. 9) are crossed to two adjacent data lines **DL1**, **DL2**. A pixel **900** is disposed in the pixel area which is defined by two adjacent scan lines **SL1** and two adjacent data lines **DL1**, **DL2**. The pixel **900** includes a first pixel electrode **902**, a first connecting line **306**, a second pixel electrode **304** and a second connecting line **308**. The first pixel electrode **902** is electrically connected to data line **DL1** and scan line **SL1** through the first connecting line **306** and the first switch **310** respectively, and the second pixel electrode **304** is electrically connected to data line **DL1** and scan line **SL1** through the second connecting line **308** and the second switch **312** respectively. It should be noticed that, the first pixel electrode **902** includes a first sub-pixel electrode **902a** and a second sub-pixel electrode **902b**. The first sub-pixel electrode **902a** and the second sub-pixel electrode **902b** are mirror symmetry structures with respect to a symmetry axis **914**. Two adjacent data lines **DL1**, **DL2** are also mirror symmetry structures with respect to the symmetry axis **914**. The distance between the symmetry axis **914** and the data line **DL1** may be substantially the same as the distance between the symmetry axis **914** and the data line **DL2**. In addition, the first pixel electrode **902** may include the first sub-pixel electrode **902a** and the second sub-pixel electrode **902b** (the same as that illustrated in FIG. 6), and the pattern of the first sub-pixel electrode **902a** and the second sub-pixel electrode **902b** also can be the same as that illustrated in FIG. 6. Therefore, the details are omitted here. However, it should be noticed that, the first pixel electrode **902** illustrated in FIG. 9 does not have the first slit **314** as the first

pixel electrode **602** illustrated in FIG. 6. More specifically, the first sub-pixel electrode **902a** and the second sub-pixel electrode **902b** of the first pixel electrode **902** are not separated as the first sub-pixel electrode **602a** and the second sub-pixel electrode **602b** of the first pixel electrode **602** are separated by the first slit **314**. In contrast, the first sub-pixel electrode **902a** and the second sub-pixel electrode **902b** are connected by some of their branch electrodes. There are slits between those connected branch electrodes to expose part of the second connecting line **308**. As shown in FIG. 9, the first main electrode of the present embodiment can also be disposed at the edge of the pixel area to increase the open ratio of the pixel. Besides, the overlapping of the second connecting line **308** and the first pixel electrode **902** in vertical direction is also less than that of conventional arts (as shown in FIG. 1). It results in that the coupling capacitance C_x generated by the overlapping of the second connecting line **308** and the first pixel electrode **902** is reduced. Accordingly, the pixel array substrate of the present embodiment does not only improve the open ratio within each pixel on the pixel array substrate, but also reduce the issue which is caused by the coupling capacitance C_x in conventional arts. Therefore, the target of solving color washout is achieved, and the LC efficiency of the LCD panel is also improved.

[0070] Referring to FIG. 10, FIG. 10 illustrates a part of the pixel array substrate of another embodiment of the present disclosure. The connections of elements are similar to those described in last paragraph; therefore the details are omitted here. The only difference in the present embodiment is that the first connecting line **306** and the second connecting line **308** are electrically connected to different data lines. Specifically, the first connecting line **306** is electrically connected to data line DL1 through the first switch **310**, and the second connecting line **308** is electrically connected to data line DL2 through the second switch **312**. Therefore, the first pixel electrode **902** and the second pixel electrode **304** can be respectively charged with different voltages by data line DL1 and data line DL2 in the same time sequence. Specifically, in one time sequence, one scan signal is transmitted by the same scan line SL1 and the first switch **310** and the second switch **312** are turned on, so that the first pixel electrode **902** and the second pixel electrode **304** can be charged with data line DL1 and data line DL2 respectively and possesses different voltages.

[0071] Referring to FIG. 11, FIG. 11 illustrates a part of the pixel array substrate of another embodiment of the present disclosure. The elements in FIG. 11 which are the same as those in FIG. 6 are labeled the same. The connections between those elements are also the same as aforementioned, and the details are omitted here. It should be noticed that the pixel in FIG. 11 further includes a third pixel electrode **1102**, a fourth switch **1110** and a third connecting line **1118**. The third pixel electrode **1102** is electrically connected to corresponding data line DL1 through the third connecting line **1118** and the fourth switch **1110**, and the third pixel electrode **1102** has a second slit **1114**. The third pixel electrode **1102** can be disposed between the first pixel electrode **602** and the second pixel electrode **304**. However, the present disclosure is not limited thereto. The third connecting line **1118** may be disposed at the edge of the first pixel electrode **602** or the second pixel electrode **304**, but the present disclosure is still not limited thereto. As long as the third connecting line **1118** is not overlapped with the first pixel electrode **602** and the second pixel electrode **304** in vertical direction, the coupling

capacitance C_x is not induced. Besides, as illustrated in FIG. 12 (FIG. 12 illustrates the equivalent circuit diagram of FIG. 11), the first switch **310** is electrically connected between data line DL1 and the first pixel electrode **602**. The first switch **310** is also electrically connected to scan line SL1, and is controlled by the input signals from scan line SL1. The storage capacitor C_{ST1} is electrically connected between the first pixel electrode **602** and the common electrode V_{COM} . When the first switch **310** is turned on, the data signal of data line DL1 is transmitted to the storage capacitor C_{ST1} and the first pixel electrode **602** through the first switch **310**. The storage capacitor C_{ST1} and the first pixel electrode **602** are charged to corresponding voltages according to the data signals. The second switch **312** is electrically connected between data line DL1 and the second pixel electrode **304**. The second switch **312** is also electrically connected to scan line SL1, and is controlled by the input signals from scan line SL1. The storage capacitor C_{ST2} is electrically connected between the second pixel electrode **304** and the common electrode V_{COM} . When the second switch **312** is turned on, the data signal of data line DL1 is transmitted to the storage capacitor C_{ST2} through the second switch **312**, so that the storage capacitor C_{ST2} is charged to corresponding voltage according to the data signal. The fourth switch **1110** is electrically connected between data line DL1 and the third pixel electrode **1102**. The fourth switch **1110** is also electrically connected to scan line SL1, and is controlled by the input signals from scan line SL1. The storage capacitor C_{ST3} is electrically connected between the third pixel electrode **1102** and the common electrode V_{COM} . When the fourth switch **1110** is turned on, the data signal of data line DL1 is transmitted to the storage capacitor C_{ST3} through the fourth switch **1110**, so that the storage capacitor C_{ST3} is charged to corresponding voltage according to the data signal. Accordingly, the liquid crystal capacitors C_{LC1-3} and the storage capacitors C_{ST1-3} are charged to their corresponding voltages in the same time. Further, to solve the issue of color washout of LCD panels, charge sharing is performed. That is, in next time sequence right after the signal is transmitted by scan line SL1, the first switch **316** is turned on by the signal which is transmitted by scan line SL2. One part of the voltage of the second pixel electrode **304** is shared to the capacitor C_{CSB} and the other part of the voltage of the second pixel electrode **304** is shared to the capacitor C_{CSA} . In other words, charge sharing is performed between the first pixel electrode **602** and the second pixel electrode **304** through the charge-sharing capacitor C_s so that the voltage of the first pixel electrode **602** increases and the voltage of the second pixel electrode **304** decreases. In the other hand, the third pixel electrode **1102** is not relevant to the charge sharing but keeps its original voltage. As a result, the first pixel electrode **602**, the second pixel electrode **304** and the third pixel electrode **1102** possesses different voltages, and the LC molecules of different pixel areas (which are corresponded to the first pixel electrode **602**, the second pixel electrode **304**, and the third pixel electrode **1102** respectively) have different tilting angles. Accordingly, different transmittances within one pixel are achieved, so as the issue of color washout can be improved.

[0072] Referring to FIG. 11, the third pixel electrode **1102** includes a third sub-pixel electrode **1102a** and a fourth sub-pixel electrode **1102b**. The second slit **1114** is substantially disposed between the third sub-pixel electrode **1102a** and the fourth sub-pixel electrode **1102b**, and the second slit **1114** is substantially positioned along the extending line of the first

slit 314. The third sub-pixel electrode 1102a and the fourth sub-pixel electrode 1102b of the third pixel electrode 1102 are similar to the first sub-pixel electrode 602a and the second sub-pixel electrode 602b of the first pixel electrode. The third sub-pixel electrode 1102a and the fourth sub-pixel electrode 1102b are mirror symmetry structures with respect to the second slit 1114, and the pattern of the third sub-pixel electrode 1102a may be the same as that of the first sub-pixel electrode 602a, but not limited to it. It should be noticed that, in the present embodiment, the second connecting line 308 is exposed by both the first slit 314 of the first pixel electrode 602 and the second slit 1114 of the third pixel electrode 1102. Accordingly, the coupling capacitance Cx in the present embodiment is much less than that of conventional arts, the difficulty of increasing the voltage difference between the first pixel electrode and the second pixel electrode is improved. Since the coupling capacitance Cx in the present embodiment is much less than that of conventional arts, increasing the voltage difference between the first pixel electrode and the second pixel electrode is much easier. Accordingly, it is not necessary to further increase the capacitance of the charge-sharing capacitor Cs. The present embodiment of the present disclosure is not only capable to improve the issue of color washout, but also enhance the LC efficiency of the LCD panel to approximately 12.45%. As aforementioned, the locations of the black lines can be also controlled and restricted at the edge of the pixel area by special pattern design of pixel electrodes (602a, 602b, 1102a, and 1102b). Therefore, the open ratio of the pixel can be further increased. In another embodiment of the present disclosure, the structures of the first sub-pixel electrode 602a, the second sub-pixel electrode 602b, the third sub-pixel electrode 1102a and the fourth sub-pixel electrode 1102b can be designed as the structures of the first sub-pixel electrode 902a and the second sub-pixel electrode 902b. That is, the first sub-pixel electrode 602a and the third sub-pixel electrode 1102a are designed as the first sub-pixel electrode 902a, and the second sub-pixel electrode 602b and the fourth sub-pixel electrode 1102b are designed as the second sub-pixel electrode 902b so that the first sub-pixel electrode 602a and the second sub-pixel electrode 602b are mirror symmetry structures with respect to the symmetry axis 914, and the third sub-pixel electrode 1102a and the fourth sub-pixel electrode 1102b are also mirror symmetry structures with respect to the symmetry axis 914. Accordingly, the LC efficiency and the open ratio of the pixel array substrate of the present embodiment are also improved under the premise of solving the issue of color washout.

[0073] Referring to FIG. 13, FIG. 13 illustrates the LCD panel 1300 of the present disclosure. The LCD panel 1300 includes a pixel array substrate 1302, an opposite substrate 1304 and a liquid crystal layer 1306. The pixel array substrate 1302 can be any one of aforementioned embodiments of pixel array substrate of the present disclosure. The opposite substrate 1304 is disposed on the pixel array substrate 1302, and the liquid crystal layer 1306 is disposed between the pixel array substrate 1302 and the opposite substrate 1304. According to the structure of LCD panel 1300, different opposite substrate 1304 can be correspondingly chosen to cope with the LCD panel 1300. The material of the liquid crystal layer 1306 can be chosen the liquid crystals with an adequate dielectric anisotropy ($\Delta\epsilon$), and a birefringence (Δn). The birefringence (Δn) of the liquid crystals can also be coped with an adequate cell gap of the liquid crystal layer 1306 to achieve the predetermined transmittance. The opposite sub-

strate 1304 can optionally further includes a color filter. The opposite substrate 1304 can also be called a color filter substrate. It should be noticed that the pixel array substrate of the present disclosure has a whole new design of pixel layout. Therefore, the coupling capacitance Cx of the pixel array substrate in the present disclosure is much less than that of prior arts, the difficulty of increasing the voltage difference between the first pixel electrode and the second pixel electrode is obviously improved. Accordingly, LC efficiency and the open ratio of the pixel array substrate of the present disclosure are also improved under the premise of solving the issue of color washout.

[0074] Although the present disclosure has been described in considerable detail with reference to certain embodiments thereof, other embodiments are possible. Therefore, the spirit and scope of the appended claims should not be limited to the description of the embodiments contained herein.

[0075] It will be apparent to those ordinarily skilled in the art that various modifications and variations may be made to the structure of the present disclosure without departing from the scope or spirit of the disclosure. In view of the foregoing, it is intended that the present disclosure cover modifications and variations thereof provided they fall within the scope of the following claims.

What is claimed is:

1. A pixel array substrate, comprising:
 - a plurality of data lines;
 - a plurality of scan lines crossed to the plurality of data lines to define a plurality of pixel areas; and
 - a plurality of pixels respectively disposed in the plurality of pixel areas, each of the pixels comprising:
 - a first pixel electrode electrically connected to a corresponding one of the data lines and scan lines, the first pixel electrode having a first slit;
 - a first connecting line, the first pixel electrode electrically connected to corresponding data line through the first connecting line;
 - a second pixel electrode electrically connected to corresponding data line and scan line; and
 - a second connecting line, the second pixel electrode electrically connected to the corresponding data line through the second connecting line, wherein at least a part of the second connecting line is exposed by the first slit of the first pixel electrode.
2. The pixel array substrate of claim 1, wherein the first slit is an open slit.
3. The pixel array substrate of claim 1, wherein the first slit is a closed slit.
4. The pixel array substrate of claim 1, wherein the first slit is substantially parallel to the plurality of data lines.
5. The pixel array substrate of claim 1, wherein the first connecting line and the second connecting line are electrically connected to the same data line.
6. The pixel array substrate of claim 1, wherein the first connecting line and the second connecting line are electrically connected to different data lines.
7. The pixel array substrate of claim 1, wherein the first pixel electrode comprises a first sub-pixel electrode and a second sub-pixel electrode, the first slit is substantially positioned between the first sub-pixel electrode and the second sub-pixel electrode, and the first sub-pixel electrode and the second sub-pixel electrode are mirror symmetry structures with respect to the first slit.

8. The pixel array substrate of claim 7, the first sub-pixel electrode comprises:

- a first main electrode;
- a second main electrode, the first main electrode and the second main electrode being electrically connected and are substantially orthogonally arranged to define a first area, a second area, a third area and a fourth area;
- a plurality of first branch electrodes disposed in the first area;
- a plurality of second branch electrodes disposed in the second area;
- a plurality of third branch electrodes disposed in the third area; and
- a plurality of fourth branch electrodes disposed in the fourth area,

wherein the plurality of first branch electrodes, the plurality of second branch electrodes, the plurality of third branch electrodes and the plurality of fourth branch electrodes are electrically connected with at least one of the first main electrode and the second main electrode, the first branch electrodes are arranged parallel to each other, the second branch electrodes are arranged parallel to each other, the third branch electrodes are arranged parallel to each other and the fourth branch electrodes are arranged parallel to each other, and the plurality of first branch electrodes, the plurality of second branch electrodes, the plurality of third branch electrodes and the plurality of fourth branch electrodes respectively extend to different directions from the first main electrode or the second main electrode, the first sub-pixel electrode and the second sub-pixel electrode are mirror symmetry structures with respect to the first slit, and wherein the first main electrode is substantially parallel to the first slit, and the distance between the first main electrode and the first slit is greater than that between the first main electrode and the data line which is adjacent to the first main electrode.

9. The pixel array substrate of claim 7, each of the pixels further comprising:

- a third pixel electrode electrically connected to corresponding data line and scan line, the third pixel electrode having a second slit; and
- a third connecting line, the third pixel electrode electrically connected to the corresponding data line through the third connecting line;

wherein at least a part of the second connecting line is exposed by the first slit of the first pixel electrode and the second slit of the third pixel electrode.

10. The pixel array substrate of claim 9, wherein the third connecting line is disposed on an edge of the first sub-pixel electrode or the second sub-pixel electrode, the third pixel electrode comprises a third sub-pixel electrode and a fourth sub-pixel electrode, the second slit is substantially positioned between the third sub-pixel electrode and the fourth sub-pixel electrode, and the second slit is substantially positioned along the extending line of the first slit, the first slit and the second slit are substantially parallel to the plurality of data line, the first sub-pixel electrode and the second sub-pixel electrode are mirror symmetry structures with respect to the first slit, the third sub-pixel electrode and the fourth sub-pixel electrode are mirror symmetry structures with respect to the second slit.

11. The pixel array substrate of claim 10, wherein the third sub-pixel electrode and the fourth sub-pixel electrode respectively comprise:

- a first main electrode;
- a second main electrode, the first main electrode and the second main electrode being electrically connected and are substantially orthogonally arranged to define a first area, a second area, a third area and a fourth area;
- a plurality of first branch electrodes disposed in the first area;
- a plurality of second branch electrodes disposed in the second area;
- a plurality of third branch electrodes disposed in the third area; and
- a plurality of fourth branch electrodes disposed in the fourth area,

wherein the plurality of first branch electrodes, the plurality of second branch electrodes, the plurality of third branch electrodes and the plurality of fourth branch electrodes are electrically connected with one of the first main electrodes and the second main electrodes, the first branch electrodes are arranged parallel to each other, the second branch electrodes are arranged parallel to each other, the third branch electrodes are arranged parallel to each other and the fourth branch electrodes are arranged parallel to each other, and the plurality of first branch electrodes, the plurality of second branch electrodes, the plurality of third branch electrodes and the plurality of fourth branch electrodes respectively extend to different directions from the first main electrode or the second main electrode, the first sub-pixel electrode and the second sub-pixel electrode are mirror symmetry structures with respect to the first slit, the third sub-pixel electrode and the fourth sub-pixel electrode are mirror symmetry structures with respect to the second slit, the first main electrode of the first sub-pixel electrode is substantially parallel to the first slit, and the distance between the first main electrode and the first slit is greater than that of the first main electrode of the first sub-pixel electrode and the data line which is adjacent to the first main electrode of the first sub-pixel electrode, the first main electrode of the third sub-pixel electrode is substantially parallel to the second slit, and the distance between the first main electrode of the third sub-pixel electrode and the second slit are greater than that of the first main electrode of the third sub-pixel electrode and the data line which is adjacent to the first main electrode of the third sub-pixel electrode.

12. The pixel array substrate of claim 1, further comprising:

- a plurality of first switches respectively disposed on a side of each of the pixel areas, a first end of each first switch being electrically connected to the respective first pixel electrodes through the first connecting line, a second end of each of the first switches being electrically connected to a corresponding one of the data lines and scan lines; and
- a plurality of second switches respectively disposed on the side of each of the pixel areas and electrically connected to a corresponding one of the data lines and scan lines, each of the second switches being electrically connected to the second pixel electrode through the second connecting line.

13. The pixel array substrate of claim 12, each one of the plurality of pixels further comprising:

- a charge-sharing capacitor; and
- a third switch,

wherein a first end of the charge-sharing capacitor is electrically connected to the first pixel electrode, a second end of the charge-sharing capacitor is electrically connected to the second pixel electrode through the third switch.

14. A pixel array substrate, comprising:

- a plurality of data lines;

- a plurality of scan lines; and

a plurality of pixels, each of the pixels comprising a first pixel electrode electrically connected to a corresponding one of the data lines and scan lines, the first pixel electrode comprising:

- a first sub-pixel electrode; and

a second sub-pixel electrode electrically connected to the first sub-pixel electrode, wherein the first sub-pixel electrode and the second sub-pixel electrode are mirror symmetry structures with respect to a symmetry axis.

15. The pixel array substrate of claim 14, wherein the symmetry axis is substantially parallel to the plurality of data lines, the distance between the symmetry axis and one adjacent data line is the same as that between the symmetry axis and the other adjacent data line.

16. The pixel array substrate of claim 14, the first sub-pixel electrode comprising:

- a first main electrode;

a second main electrode, the first main electrode and the second main electrode being electrically connected and are substantially orthogonally arranged to define a first area, a second area, a third area and a fourth area;

a plurality of first branch electrodes disposed in the first area;

a plurality of second branch electrodes disposed in the second area;

a plurality of third branch electrodes disposed in the third area; and

a plurality of fourth branch electrodes disposed in the fourth area,

wherein the plurality of first branch electrodes, the plurality of second branch electrodes, the plurality of third branch electrodes and the plurality of fourth branch electrodes are electrically connected with one of the first main electrode and the second main electrode, the first branch electrodes are arranged parallel to each other, the second branch electrodes are arranged parallel to each other, the third branch electrodes are arranged parallel to each other and the fourth branch electrodes are arranged parallel to each other, and the plurality of first branch electrodes, the plurality of second branch electrodes, the plurality of third branch electrodes and the plurality of fourth branch electrodes respectively extend to different directions from the first main electrode or the second main electrode, the first main electrode is substantially parallel to the symmetry axis, and the distance between the first main electrode and the symmetry axis is greater than that between the first main electrode and the data line which is adjacent to the first main electrode.

17. The pixel array substrate of claim 14, the pixel array substrate further comprising:

a second pixel electrode electrically connected to a corresponding one of the data lines and scan lines; and

a second connecting line, the second pixel electrode being electrically connected to a corresponding one of the data lines through the second connecting line, wherein the second connecting line is positioned along the direction of the symmetry axis.

18. The pixel array substrate of claim 17, wherein the first pixel electrode has a first slit which is along the direction of the symmetry axis to expose a part of the second connecting line.

19. The pixel array substrate of claim 17, further comprising:

a third pixel electrode disposed between the first pixel electrode and the second pixel electrode, and electrically connected to a corresponding one of the data lines and scan lines, the third pixel electrode comprising:

- a third sub-pixel electrode; and

a fourth sub-pixel electrode electrically connected to the third sub-pixel electrode, wherein the third sub-pixel electrode and the fourth sub-pixel electrode are mirror symmetry structures with respect to the symmetry axis, the third sub-pixel electrode and the fourth sub-pixel electrode respectively comprising:

- a first main electrode;

a second main electrode, the first main electrode and the second main electrode being electrically connected and substantially orthogonally arranged to define a first area, a second area, a third area and a fourth area;

a plurality of first branch electrodes disposed in the first area;

a plurality of second branch electrodes disposed in the second area;

a plurality of third branch electrodes disposed in the third area; and

a plurality of fourth branch electrodes disposed in the fourth area,

wherein the plurality of first branch electrodes, the plurality of second branch electrodes, the plurality of third branch electrodes and the plurality of fourth branch electrodes are electrically connected with one of the first main electrode and the second main electrode, the first branch electrodes are arranged parallel to each other, the second branch electrodes are arranged parallel to each other, the third branch electrodes are arranged parallel to each other and the fourth branch electrodes are arranged parallel to each other, and the plurality of first branch electrodes, the plurality of second branch electrodes, the plurality of third branch electrodes and the plurality of fourth branch electrodes respectively extend to different directions from the first main electrode or the second main electrode.

20. The pixel array substrate of claim 19, wherein the first main electrode of the first sub-pixel electrode and the first main electrode of the third sub-pixel electrode are substantially parallel to the symmetry axis, and the distance between the first main electrode and the symmetry axis is greater than that between the first main electrode and adjacent data line, the first pixel electrode has a first slit which is along the direction of the symmetry axis, the third pixel electrode has a second slit which is also along the direction of the symmetry axis, and a part of the second connecting line is exposed by the first slit and the second slit.

专利名称(译)	像素阵列基板和液晶显示面板		
公开(公告)号	US20140204326A1	公开(公告)日	2014-07-24
申请号	US14/041071	申请日	2013-09-30
[标]申请(专利权)人(译)	友达光电股份有限公司		
申请(专利权)人(译)	友达光电股份有限公司		
当前申请(专利权)人(译)	友达光电股份有限公司		
[标]发明人	WU MING HUEI TIEN KUN CHENG GONG SHIN MEI CHUNG JEN YANG WEI WEI CHUN LIAO CHIEN HUANG		
发明人	WU, MING-HUEI TIEN, KUN-CHENG GONG, SHIN-MEI CHUNG, JEN-YANG WEI, WEI-CHUN LIAO, CHIEN-HUANG		
IPC分类号	G02F1/1343		
CPC分类号	G02F1/1343 G02F1/134309 G02F1/133707 G02F1/136213 G02F1/13624 G02F1/136286 G02F2001/134345 G02F2201/123		
优先权	102102336 2013-01-22 TW		
其他公开文献	US9541796		
外部链接	Espacenet USPTO		

摘要(译)

提供一种具有新像素设计的像素阵列基板和具有该像素阵列基板的液晶显示面板。像素阵列基板包括多条数据线，多条扫描线和多个像素。每个像素包括第一电极，第一连接线，第二电极和第二连接线。第一电极通过第一连接线与相应的数据线和扫描线电连接，并具有狭缝。第二像素通过第二连接线与相应的数据线和扫描线电连接。第二连接线的至少一部分通过第一电极的狭缝暴露。

