



US009542898B2

(12) **United States Patent**
Feng et al.

(10) **Patent No.:** **US 9,542,898 B2**
(45) **Date of Patent:** **Jan. 10, 2017**

(54) **DRIVING METHOD OF A LIQUID CRYSTAL DISPLAY PANEL, A LIQUID CRYSTAL DISPLAY PANEL AND A DISPLAY DEVICE**

(71) Applicants: **BOE TECHNOLOGY GROUP CO., LTD.**, Beijing (CN); **HEFEI BOE OPTOELECTRONICS TECHNOLOGY CO., LTD.**, Hefei, Anhui Province (CN)

(72) Inventors: **Xia Feng**, Beijing (CN); **Jiacheng Huang**, Beijing (CN); **Donghui Wang**, Beijing (CN)

(73) Assignees: **BOE TECHNOLOGY GROUP CO., LTD.**, Beijing (CN); **HEFEI BOE OPTOELECTRONICS TECHNOLOGY CO., LTD.**, Hefei, Anhui Province (CN)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/408,561**

(22) PCT Filed: **Jun. 9, 2014**

(86) PCT No.: **PCT/CN2014/079490**

§ 371 (c)(1),

(2) Date: **Dec. 16, 2014**

(87) PCT Pub. No.: **WO2015/096403**

PCT Pub. Date: **Jul. 2, 2015**

(65) **Prior Publication Data**

US 2016/0293123 A1 Oct. 6, 2016

(30) **Foreign Application Priority Data**

Dec. 26, 2013 (CN) 2013 1 0737029

(51) **Int. Cl.**

G09G 3/36 (2006.01)

(52) **U.S. Cl.**

CPC **G09G 3/3614** (2013.01); **G09G 3/3677** (2013.01); **G09G 2310/027** (2013.01); **G09G 2310/0291** (2013.01); **G09G 2330/021** (2013.01)

(58) **Field of Classification Search**

CPC ... **G09G 3/3614**; **G09G 3/3648**; **G09G 3/3688**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,936,596 A * 8/1999 Yoshida G02F 1/1323
345/87
7,006,114 B2 * 2/2006 Sakaguchi G09G 3/3696
345/100

(Continued)

FOREIGN PATENT DOCUMENTS

CN 101645247 A 2/2010
CN 201716962 U 1/2011

(Continued)

OTHER PUBLICATIONS

International Search Report with English Language Translation, dated Sep. 26, 2014, Application No. PCT/CN2014/079490.

(Continued)


Primary Examiner — Ricardo L Osorio

(74) *Attorney, Agent, or Firm* — Blakely Sokoloff Taylor & Zafman LLP

(57) **ABSTRACT**

This invention provides a liquid crystal display panel, a source driver in the liquid crystal display panel comprises an amplifier whose amplification coefficient is adjustable, the amplifier can adjust a received data signal based on a currently selected amplification coefficient, and output the adjusted data signal to a data line that is currently signally-connected with the amplifier, moreover, the currently selected amplification coefficient is inversely proportional to a rate at which the data line charges a current signally-

(Continued)

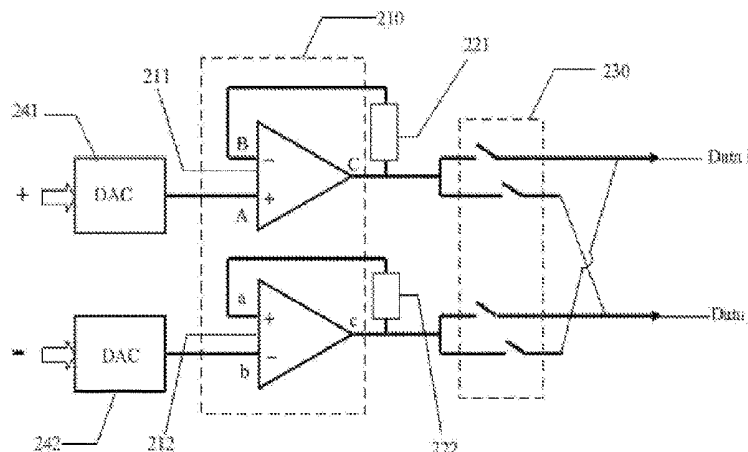

connected sub-pixel unit. For the case that the rate at which the data line charges the sub-pixel unit is relatively low, a relative large amplification coefficient can be selected, thereby nonuniform brightness of the display image caused by a low charging rate of the sub-pixel unit can be avoided; for the case that the rate at which the data line charges the sub-pixel unit is relatively high, a relatively small amplification coefficient is selected, thereby unnecessary power consumption can be saved. This invention further provides a display device comprising such a liquid crystal display panel and a driving method for use in such a liquid crystal display panel.

15 Claims, 6 Drawing Sheets

(56)

References Cited

U.S. PATENT DOCUMENTS

7,646,371	B2 *	1/2010	Maki	G09G 3/3688	345/211
7,746,336	B2 *	6/2010	Morita	G09G 3/3688	345/204

8,174,517	B2 *	5/2012	Morita	G09G 3/2011	345/211
8,896,513	B2 *	11/2014	Bi	H03M 1/682	345/690
9,196,207	B2 *	11/2015	Lee	G09G 3/3677	
9,244,581	B2 *	1/2016	Morein	G06F 3/0412	
2006/0092112	A1	5/2006	Moon		
2009/0015297	A1	1/2009	Chen et al.		
2010/0231617	A1	9/2010	Ueda et al.		

FOREIGN PATENT DOCUMENTS

CN	102063885	A	5/2011
CN	102157136		8/2011
CN	102456310	A	5/2012
CN	203311139	U	11/2013
CN	103676256	A	3/2014
EP	1927888		6/2008

OTHER PUBLICATIONS

Chinese Office Action with English Language Translation, dated Sep. 6, 2015, Chinese Application No. 2013107370293.

Chinese Certificate of Patent, Issued Mar. 2, 2016, Chinese Application No. ZL201310737029.3.

* cited by examiner

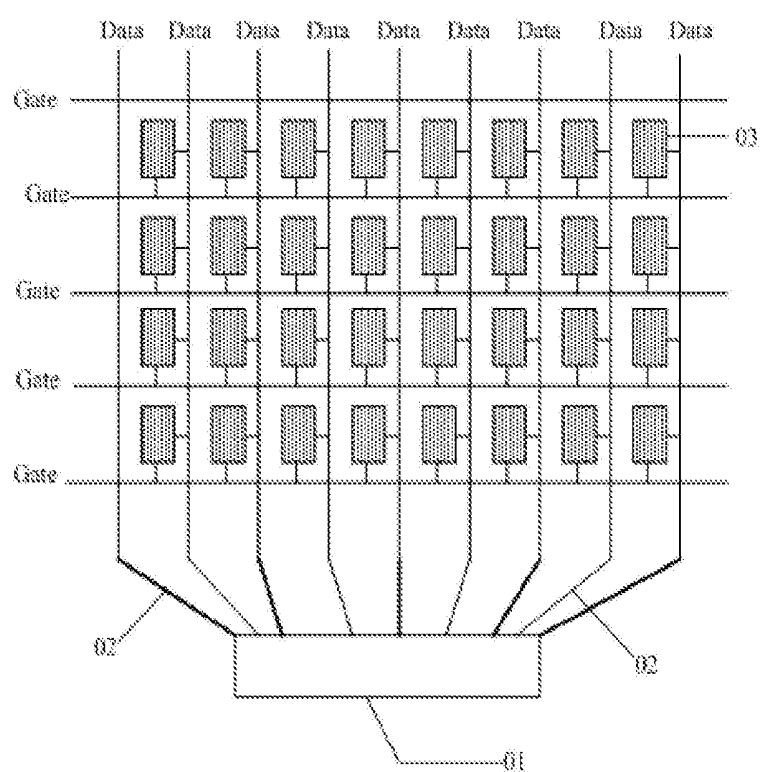


Fig. 1

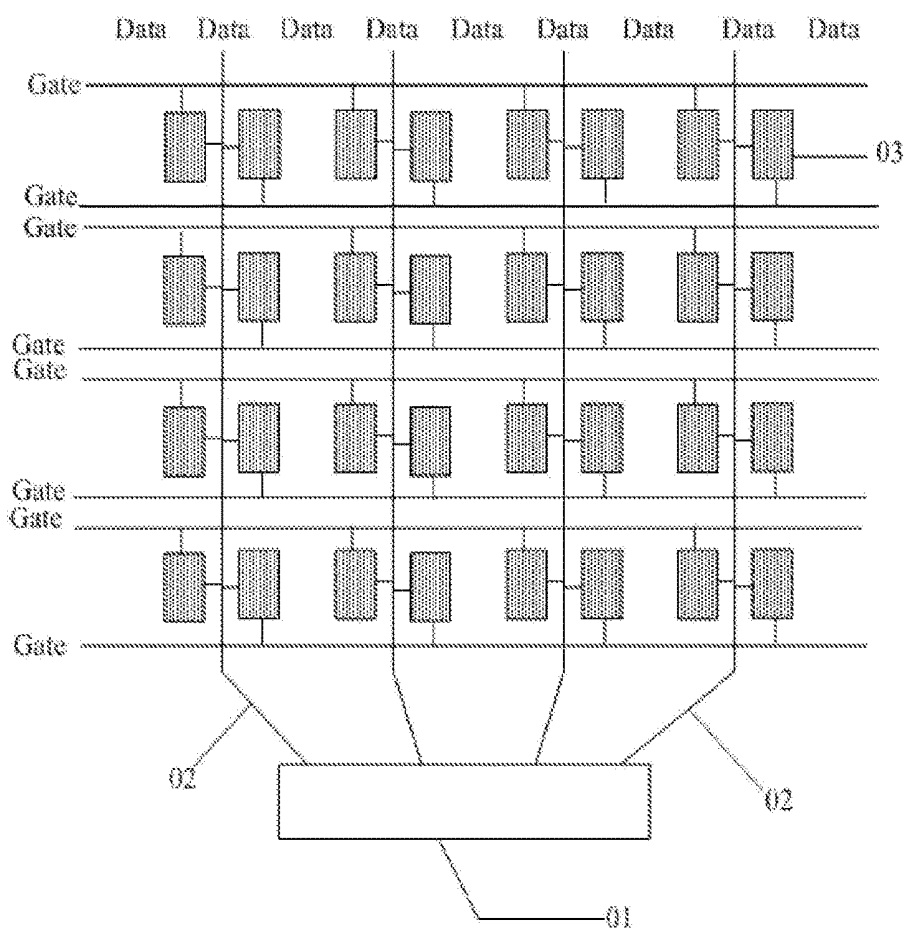


Fig. 2

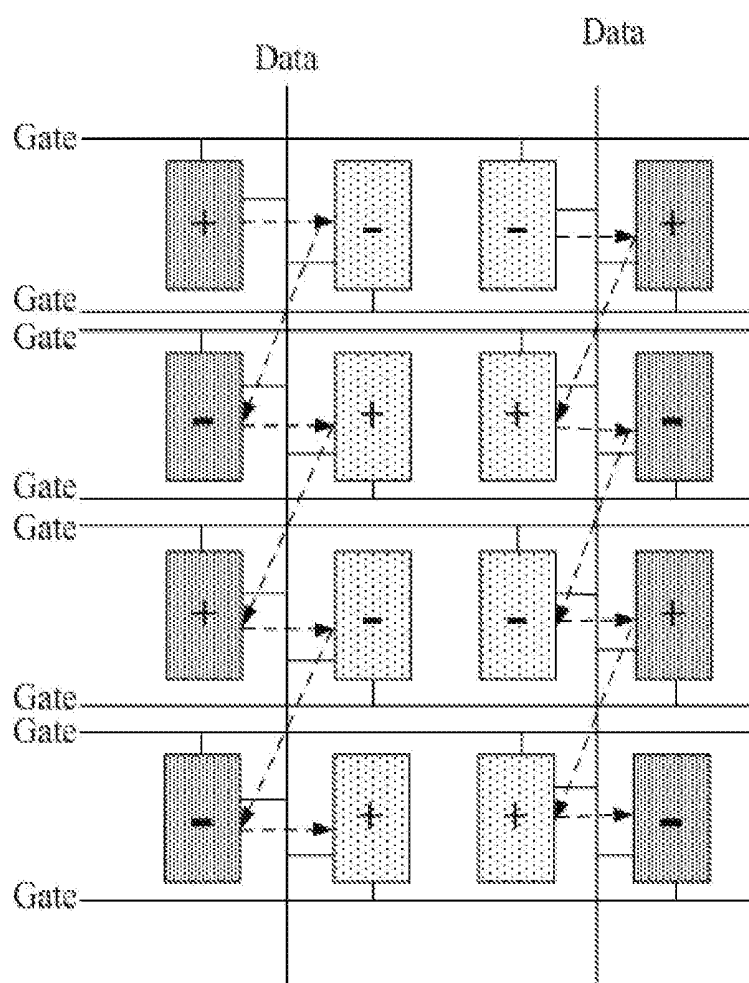


Fig. 3

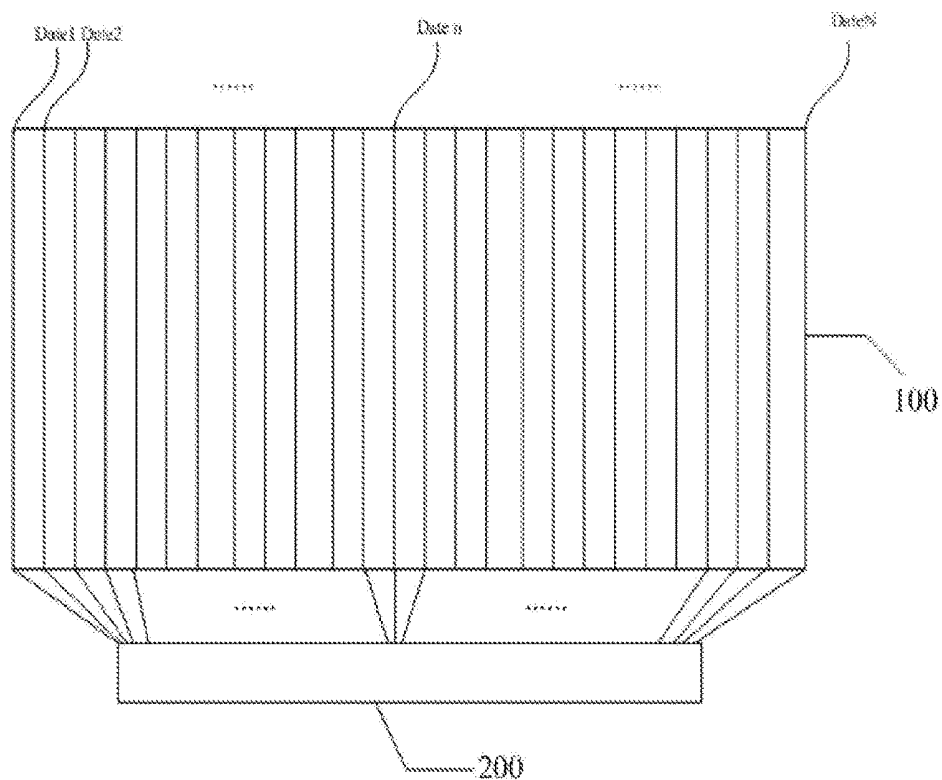


Fig. 4

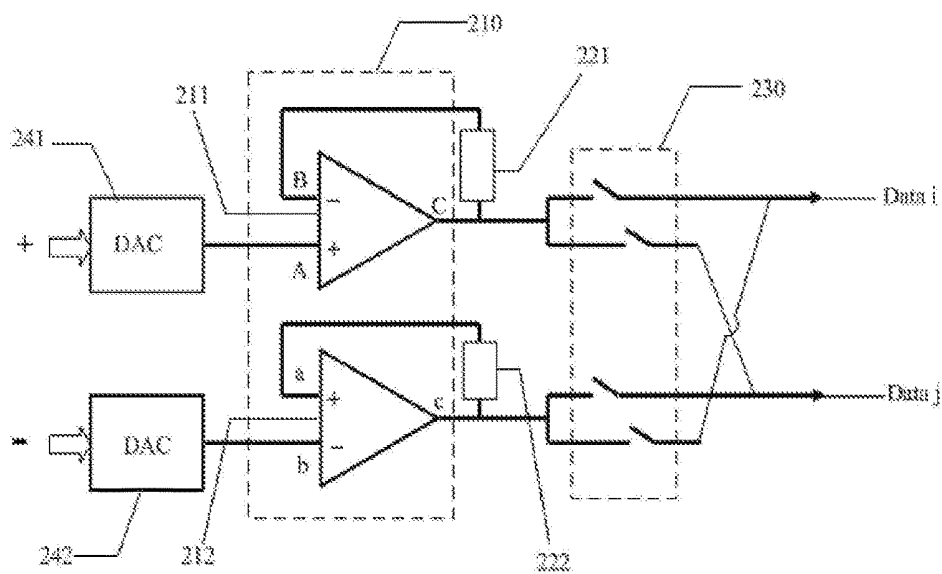


Fig. 5

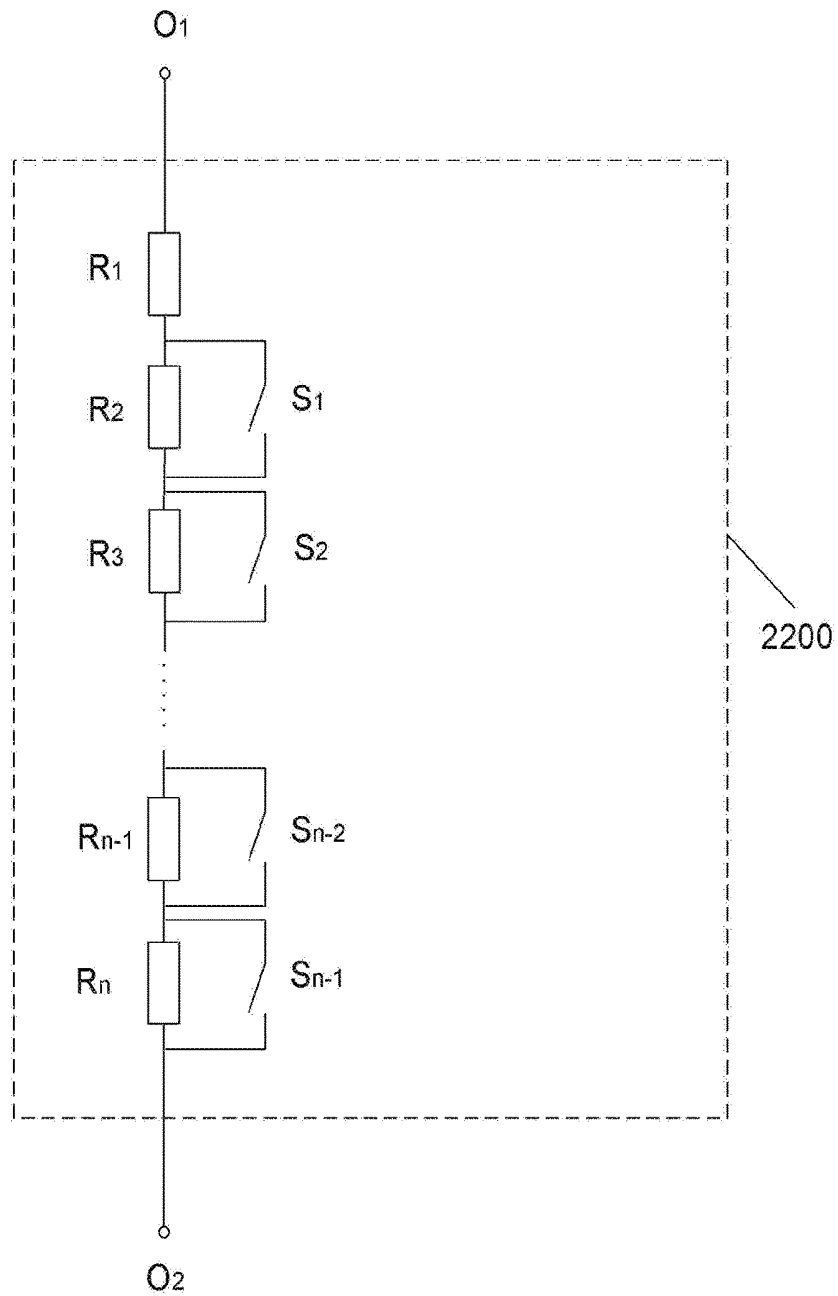


Fig. 6

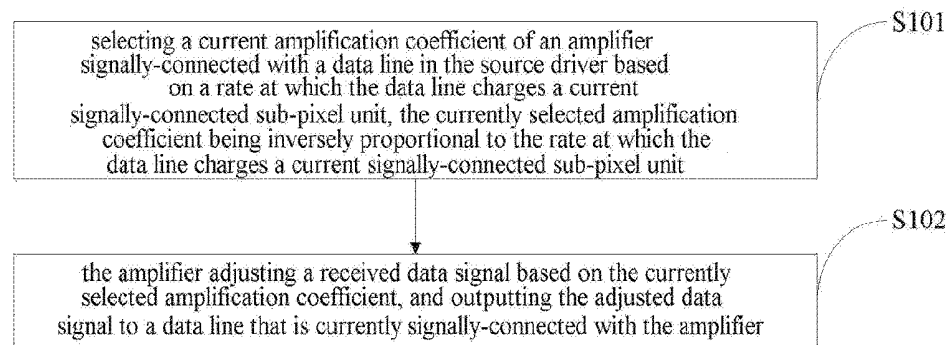


Fig. 7

DRIVING METHOD OF A LIQUID CRYSTAL DISPLAY PANEL, A LIQUID CRYSTAL DISPLAY PANEL AND A DISPLAY DEVICE

FIELD OF THE INVENTION

This invention relates to the field of display technology, particularly to a liquid crystal display panel, a display device comprising such a liquid crystal display panel and a driving method for use in such a liquid crystal display panel.

BACKGROUND OF THE INVENTION

With the development of the display product technology, people's requirement on appearance and size of the display product becomes higher and higher, there are also more and more applications of narrow frame design of the thin film transistor (TFT) liquid crystal display (LCD) panel. At present, most TFT-LCD panels adopt Dual Layer design or Dual Gate design to narrow the frame.

In a liquid crystal display panel of Dual Layer design, as shown in FIG. 1, in order to narrow the frame, a wiring **02** between the source driver (IC) **01** and the data line Data is arranged on different metal layers, i.e., the wiring **02** connecting a data line Data whose serial number is an even number (also called an even numbered data line) is located on a metal layer, the wiring **02** connecting a data line Data whose serial number is an odd number (also called an odd numbered data line) is located on another metal layer. Due to different metal materials used and layer thickness between different metal layers, the resistance between adjacent wirings **02** may be different, consequently, the rates at which adjacent data lines Data charge adjacent sub-pixel units **03** that are signally-connected with them are inconsistent, thereby resulting in bright and dark stripes, i.e. V-Line flaw, on the liquid crystal display panel in image display.

In a liquid crystal display panel of Dual Gate design, as shown in FIG. 2, in order to narrow the frame, the number of the data lines Data is half reduced, two adjacent columns of sub-pixel units **03** constitute a group of sub-pixel unit column, each group of sub-pixel unit columns share a data line Data located between the two columns of sub-pixel units **03**, in this way, the data line Data needs to charge the two adjacent columns of sub-pixel units **03** alternately, and the polarity is opposite, the charging order is as shown by arrows in FIG. 3. From FIG. 2 and FIG. 3 it can be seen that in two columns of sub-pixel units **03** connected with a data line, there is always a column of sub-pixel units whose polarity needs to be reversed when the data line charges it, while the polarity of the other column of sub-pixel units does not need to be reversed when the data line charges it, consequently, the rates at which the same data line Data charges respectively two adjacent columns of sub-pixel units **03** that are signally-connected with it are inconsistent, thereby also resulting in bright and dark stripes, i.e. V-Line flaw, on the liquid crystal display panel in image display.

Therefore, how to solve the problem of nonuniform display image of the liquid crystal display panel caused by inconsistency of the rate at which the data line charges the sub-pixel units is a technical problem to be solved by the skilled person in the art.

SUMMARY OF THE INVENTION

The embodiments of this invention provides a liquid crystal display panel, a display device comprising such a liquid crystal display panel and a driving method for use in

such a liquid crystal display panel, for improving uniformity of the display image of the liquid crystal display panel and reducing unnecessary power consumption.

According to one aspect of this invention, a liquid crystal display panel is provided, comprising an array substrate, data lines located on the array substrate, sub-pixel units signally-connected with the data lines, and a source driver signally-connected with each of the data lines.

The source driver comprises: an amplifier whose amplification coefficient is adjustable, the amplifier being used for adjusting a received data signal based on a currently selected amplification coefficient, and outputting the adjusted data signal to a data line that is currently signally-connected with the amplifier; the currently selected amplification coefficient is inversely proportional to a rate at which the data line charges a current signally-connected sub-pixel unit.

Specifically, when the data line charges a current signally-connected sub-pixel unit at a first rate, the amplifier selects a first amplification coefficient; and when the data line charges the current signally-connected sub-pixel unit at a second rate lower than the first rate, the amplifier selects a second amplification coefficient higher than the first amplification coefficient.

In the above liquid crystal display panel provided in the embodiment of this invention, the source driver comprises an amplifier whose amplification coefficient is adjustable, the amplifier can adjust a received data signal based on a currently selected amplification coefficient, and output the adjusted data signal to a data line that is currently signally-connected with the amplifier, moreover, the currently selected amplification coefficient is inversely proportional to a rate at which the data line charges a current signally-connected sub-pixel unit. Hence, for the case that the rate at which the data line charges the sub-pixel unit is relatively low, a relative large amplification coefficient can be selected, thereby nonuniform brightness of the display image caused by a low charging rate of the sub-pixel unit can be avoided; for the case that the rate at which the data line charges the sub-pixel unit is relatively high, a relatively small amplification coefficient is selected, thereby unnecessary power consumption can be saved.

According to an embodiment of this invention, the amplifier comprises a plurality of positive signal amplifiers and a plurality of negative signal amplifiers.

The source driver further comprises: a first adjustment unit adjusting amplification coefficient of the positive signal amplifier, and a second adjustment unit adjusting amplification coefficient of the negative signal amplifier.

The first adjustment unit is connected between a negative phase signal input end of the positive signal amplifier and an output end of the positive signal amplifier in series; and the second adjustment unit is connected between a positive phase signal input end of the negative signal amplifier and an output end of the negative signal amplifier in series.

According to an embodiment of this invention, the first adjustment unit and the second adjustment unit comprise resistances whose resistance values are adjustable.

According to an embodiment of this invention, the source driver further comprises an output polarity control unit.

An odd numbered data line and an even numbered data line are taken as a group of data lines, the group of data lines are connected with a positive signal amplifier and a negative signal amplifier respectively through the output polarity control unit.

At a first moment, the output polarity control unit turns on the positive signal amplifier and the odd numbered data line,

the output polarity control unit turns on the negative signal amplifier and the even numbered data line.

At a second moment, the output polarity control unit turns on the positive signal amplifier and the even numbered data line, the output polarity control unit turns on the negative signal amplifier and the odd numbered data line.

According to an embodiment of this invention, the source driver further comprises: first digital to analog conversion units in one-to-one correspondence with the plurality of positive signal amplifiers, and second digital to analog conversion units in one-to-one correspondence with the plurality of negative signal amplifiers.

The first digital to analog conversion unit is used for performing digital to analog conversion to a received positive gamma voltage, and outputting the digital to analog converted positive gamma voltage to a positive phase signal input end of a corresponding positive signal amplifier.

The second digital to analog conversion unit is used for performing digital to analog conversion to a received negative gamma voltage, and outputting the digital to analog converted negative gamma voltage to a negative phase signal input end of a corresponding negative signal amplifier.

According to an embodiment of this invention, a data line is signally-connected with a corresponding column of sub-pixel units.

The even numbered data line is signally-connected with the source driver through a first wiring, the odd numbered data line is signally-connected with the source driver through a second wiring, wherein, the first wiring and the second wiring are arranged in different layers on the array substrate.

According to an embodiment of this invention, two adjacent columns of sub-pixel units are taken as a group of sub-pixel unit columns, each group of sub-pixel columns share a data line located between the two columns of sub-pixel units, and there are two gate lines between sub-pixel units of adjacent rows.

According to another aspect of this invention, a display device is provided, comprising a liquid crystal display panel according to the present invention.

According to another aspect of this invention, a driving method of a liquid crystal display panel is provided, comprising:

selecting a current amplification coefficient of an amplifier signally-connected with a data line in the source driver based on a rate at which the data line charges a current signally-connected sub-pixel unit, the currently selected amplification coefficient being inversely proportional to the rate at which the data line charges a current signally-connected sub-pixel unit;

the amplifier adjusting a received data signal based on the currently selected amplification coefficient, and outputting the adjusted data signal to a data line that is currently signally-connected with the amplifier.

Specifically, when the data line charges a current signally-connected sub-pixel unit at a first rate, the amplifier selects a first amplification coefficient; and when the data line charges the current signally-connected sub-pixel unit at a second rate lower than the first rate, the amplifier selects a second amplification coefficient higher than the first amplification coefficient.

In the driving method of a liquid crystal display panel provided in the embodiment of this invention, based on a rate at which a data line charges a current signally-connected sub-pixel unit, a current amplification coefficient of an amplifier signally-connected with the data line in the source

driver can be selected, and the currently selected amplification coefficient is inversely proportional to the rate at which the data line charges a current signally-connected sub-pixel unit; the amplifier adjusts a received data signal based on the currently selected amplification coefficient, and outputs the adjusted data signal to a data line that is currently signally-connected with the amplifier. Hence, for the case that the rate at which the data line charges the sub-pixel unit is relatively low, a relative large amplification coefficient can be selected, thereby nonuniform brightness of the display image caused by a low charging rate of the sub-pixel unit can be avoided; for the case that the rate at which the data line charges the sub-pixel unit is relatively high, a relatively small amplification coefficient is selected, thereby unnecessary power consumption can be saved.

BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 is a schematic view of structure of a liquid crystal display panel of the existing Dual Layer design;

FIG. 2 is a schematic view of structure of a liquid crystal display panel of the existing Dual Gate design;

FIG. 3 is a schematic view of the charging sequence of the data lines charging the pixel units in the liquid crystal display panel as shown in FIG. 2;

FIG. 4 is a schematic view of structure of a liquid crystal display panel provided according to an embodiment of this invention;

FIG. 5 is a schematic view of structure of a source driver in a liquid crystal display panel provided according to an embodiment of this invention;

FIG. 6 is a schematic view of structures of a first adjustment unit and a second adjustment unit in a liquid crystal display panel provided according to an embodiment of this invention;

FIG. 7 is a flow chart of a driving method of a liquid crystal display panel provided according to an embodiment of this invention.

DETAILED DESCRIPTION OF THE INVENTION

Next, the liquid crystal display panel, the display device and the driving method of the liquid crystal display panel provided by the embodiments of this invention will be explained in detail with reference to the drawings.

An embodiment of this invention provides a liquid crystal display panel, as shown in FIG. 4, comprising an array substrate **100**, data lines Data n ($n=1, 2, 3, \dots, N$, N is the number of the data lines) located on the array substrate **100**, sub-pixel units (the structure of the sub-pixel unit is not shown in FIG. 4) signally-connected with the data lines Data n , and a source driver **200** (the specific structure of the source driver is not shown in FIG. 4) signally connected with each of the data lines Data n .

The specific structure of the source driver **200** is as shown in FIG. 5, comprising: an amplifier **210** whose amplification coefficient is adjustable, the amplifier **210** being used for adjusting a received data signal based on a currently selected amplification coefficient, and outputting the adjusted data signal to a data line Data n that is currently signally-connected with the amplifier **210**. The currently selected amplification coefficient is inversely proportional to a rate at which the data line Data n charges a current signally-connected sub-pixel unit.

Specifically, when the data line charges a current signally-connected sub-pixel unit at a first rate, the amplifier **210**

selects a first amplification coefficient; and when the data line charges the current signally-connected sub-pixel unit at a second rate lower than the first rate, the amplifier **210** selects a second amplification coefficient higher than the first amplification coefficient.

In the above liquid crystal display panel provided according to the embodiment of this invention, the source driver comprises an amplifier whose amplification coefficient is adjustable, the amplifier can adjust a received data signal based on a currently selected amplification coefficient, and output the adjusted data signal to a data line that is currently signally-connected with the amplifier, moreover, the currently selected amplification coefficient is inversely proportional to a rate at which the data line charges a current signally-connected sub-pixel unit. Hence, for the case that the rate at which the data line charges the sub-pixel unit is relatively low, a relative large amplification coefficient can be selected, thereby nonuniform brightness of the display image caused by a low charging rate of the sub-pixel unit can be avoided; for the case that the rate at which the data line charges the sub-pixel unit is relatively high, a relatively small amplification coefficient is selected, thereby unnecessary power consumption can be saved.

Preferably, in the above liquid crystal display panel provided according to the embodiment of this invention, as shown in FIG. 5, the amplifier **210** comprises a plurality of positive signal amplifiers **211** and a plurality of negative signal amplifiers **212**.

The source driver **200** further comprises: a first adjustment unit **221** adjusting amplification coefficient of the positive signal amplifier **211**, and a second adjustment unit **222** adjusting amplification coefficient of the negative signal amplifier **212**.

The first adjustment unit **221** is connected between a negative phase signal input end B of the positive signal amplifier **211** and an output end C of the positive signal amplifier **211** in series; and the second adjustment unit **222** is connected between a positive phase signal input end a of the negative signal amplifier **212** and an output end c of the negative signal amplifier in series **212**.

Preferably, in the above liquid crystal display panel provided according to the embodiment of this invention, the first adjustment unit and the second adjustment unit comprise resistances whose resistance values are adjustable.

Specifically, in the above liquid crystal display panel provided by the embodiment of the present invention, the resistance **2200** whose resistance value is adjustable may consist of n fixed resistances R_n and n-1 switch units S_{n-1} as shown in FIG. 6.

Specifically, when the first adjustment unit **221** consists of the resistances **2200** whose resistance values are adjustable as shown in FIG. 6, a first signal port O_1 of the resistance **2200** whose resistance value is adjustable is used for connecting with the output end C of the positive signal amplifier **211**, a second signal port O_2 of the resistance **2200** whose resistance value is adjustable is used for connecting with the negative phase signal input end B of the positive signal amplifier **211**. When the second adjustment unit **222** consists of the resistances **2200** whose resistance values are adjustable as shown in FIG. 6, the first signal port O_1 of the resistance **2200** whose resistance value is adjustable is used for connecting with the output end c of the negative signal amplifier **212**, the second signal port O_2 of the resistance **2200** whose resistance value is adjustable is used for connecting with the positive phase signal input end a of the negative signal amplifier **212**.

Preferably, in the above liquid crystal display panel provided according to the embodiment of this invention, as shown in FIG. 5, the source driver **200** further comprises: an output polarity control unit **230**.

An odd numbered data line Data i (i is an odd number greater than 1 and less than or equal to N) and an even numbered data line Data j (j is an even number greater than 1 and less than or equal to N) are taken as a group of data lines. A group of data lines are connected with a positive signal amplifier **211** and a negative signal amplifier **212** respectively through the output polarity control unit **230**.

At a first moment, the output polarity control unit **230** turns on the positive signal amplifier **211** and the odd numbered data line Data i, the output polarity control unit **230** turns on the negative signal amplifier **212** and the even numbered data line j; and

at a second moment, the output polarity control unit **230** turns on the positive signal amplifier **211** and the even numbered data line Data j, the output polarity control unit **230** turns on the negative signal amplifier **212** and the odd numbered data line Data i.

Preferably, in the above liquid crystal display panel provided according to the embodiment of this invention, an odd numbered data line Data i and an even numbered data line Data j adjacent to each other are preferably taken as a group of data lines, in this way, it is convenient to arrange wirings between the source driver **200** and the data lines Data n, so that the source driver is signally-connected with respective data lines.

Preferably, in the above liquid crystal display panel provided according to the embodiment of this invention, as shown in FIG. 5, the source driver **200** further comprises: first digital to analog conversion unit **241** in one-to-one correspondence with the plurality of positive signal amplifiers **211**, and second digital to analog conversion units **242** in one-to-one correspondence with the plurality of negative signal amplifiers **212**.

The first digital to analog conversion unit **241** is used for performing digital to analog conversion to a received positive gamma voltage, and outputting the digital to analog converted positive gamma voltage to a positive phase signal input end A of a corresponding positive signal amplifier **211**.

The second digital to analog conversion unit **242** is used for performing digital to analog conversion to a received negative gamma voltage, and outputting the digital to analog converted negative gamma voltage to a negative phase signal input end b of a corresponding negative signal amplifier **212**.

Preferably, the above liquid crystal display panel provided according to the embodiment of this invention may be in a dual layer structure design, i.e., in the liquid crystal display panel, a data line is signally-connected with a corresponding column of sub-pixel units.

The even numbered data line is signally-connected with the source driver through a first wiring, the odd numbered data line is signally-connected with the source driver through a second wiring; wherein the first wiring and the second wiring are arranged in different layers on the array substrate.

Specifically, in the above liquid crystal display panel of a dual layer structure design, when the resistance of the first wiring is greater than the resistance of the second wiring, if the amplification coefficient of the amplifiers in the source driver is consistent, the rate at which the even numbered data line charges a column of sub-pixel units that are signally-connected with it will be lower than the rate at which the odd numbered data line charges a column of sub-pixel units that

are signally-connected with it, hence, the amplification coefficient selected by the amplifier in the source driver that is signally-connected with the even numbered data line should be greater than the amplification coefficient selected by the amplifier in the source driver that is signally-connected with the odd numbered data line, thereby enabling the rate at which the data lines charge respective columns of sub-pixel units in the liquid crystal display panel to be consistent, so as to solve the problem of nonuniform display image of the liquid crystal display panel of the existing dual layer structure design.

Similarly, specifically, in the above liquid crystal display panel of dual layer structure design, when the resistance of the first wiring is less than the resistance of the second wiring, the principle is same as the above, which will not be repeated here.

Specifically, in the above liquid crystal display panel provided according to the embodiment of this invention, the first wiring may be arranged in the same layer as the gate electrode on the array substrate, the second wiring may be arranged in the same layer as the source electrode and the drain electrode on the array substrate. Alternatively, the first wiring may be arranged in the same layer as the source electrode and the drain electrode on the array substrate, the second wiring may be arranged in the same layer as the gate electrode on the array substrate, which will not be defined here.

Preferably, the above liquid crystal display panel provided according to the embodiment of this invention may be in a dual gate structure design, i.e., in the liquid crystal display panel, two adjacent columns of sub-pixel units are taken as a group of sub-pixel unit columns, each group of sub-pixel unit columns share a data line located between the two columns of sub-pixel units, and there are two gate lines between the sub-pixel units of adjacent rows.

Specifically, in the above liquid crystal display panel of dual gate structure design, if the amplification coefficients of the amplifiers in the source driver are consistent, in a group of sub-pixel unit columns, it is one data line that charges two columns of sub-pixel units alternately, and the charging polarity is opposite, hence, in the process of charging, the rate at which the data line charges a column of sub-pixel units whose polarity needs to be reversed is lower than the rate at which the data line charges a column of sub-pixel units whose polarity does not need to be reversed, which may result in bright and dark stripes, i.e. V-Line flaw, on the liquid crystal display panel in image display.

Therefore, in the above liquid crystal display panel of dual gate structure design, when the data line charges a column of sub-pixel units whose polarity needs to be reversed, a relatively large amplification coefficient is selected for the amplifier in the source driver that is currently signally-connected with the data line; when the data line charges a column of sub-pixel units whose polarity does not need to be reversed, a relatively small amplification coefficient is selected for the amplifier in the source driver that is currently signally-connected with the data line, thereby enabling the rate at which the data lines charge respective columns of sub-pixel units in the liquid crystal display panel to be consistent, so as to solve the problem of nonuniform display image of the liquid crystal display panel of the existing dual gate structure design.

Based on the same inventive concept, an embodiment of this invention further provides a display device comprising the above liquid crystal display panel provided according to respective embodiments of this invention, the display device may be any product or component such as a mobile tele-

phone, a panel computer, a TV, a display, a laptop, a digital photo frame, a navigator etc. that has the display function. Since the principle of the display device for solving problems is similar as the preceding liquid crystal display panel, the implementation of the display device may make reference to the implementation of the preceding liquid crystal display panel, which will not be repeated.

Based on the same inventive concept, an embodiment of this invention further provides a driving method of a liquid crystal display panel, as shown in FIG. 7, specifically comprising the steps of:

S101, selecting a current amplification coefficient of an amplifier signally-connected with a data line in the source driver based on a rate at which the data line charges a current signally-connected sub-pixel unit, the currently selected amplification coefficient being inversely proportional to the rate at which the data line charges a current signally-connected sub-pixel unit; and

S102, the amplifier adjusting a received data signal based on the currently selected amplification coefficient, and outputting the adjusted data signal to a data line that is currently signally-connected with the amplifier.

In the driving method of a liquid crystal display panel provided in the embodiment of this invention, based on a rate at which a data line charges a current signally-connected sub-pixel unit, a current amplification coefficient of an amplifier signally-connected with the data line in the source driver can be selected, and the currently selected amplification coefficient is inversely proportional to the rate at which the data line charges a current signally-connected sub-pixel unit; the amplifier adjusts a received data signal based on the currently selected amplification coefficient, and outputs the adjusted data signal to a data line that is currently signally-connected with the amplifier. Hence, for the case that the rate at which the data line charges the sub-pixel unit is relatively low, a relative large amplification coefficient can be selected, thereby nonuniform brightness of the display image caused by a low charging rate of the sub-pixel unit can be avoided; for the case that the rate at which the data line charges the sub-pixel unit is relatively high, a relatively small amplification coefficient is selected, thereby unnecessary power consumption can be saved.

The embodiments of this invention provide a liquid crystal display panel, a display device and a driving method of a liquid crystal display panel, in the liquid crystal display panel, the source driver comprises an amplifier whose amplification coefficient is adjustable, the amplifier can adjust a received data signal based on a currently selected amplification coefficient, and output the adjusted data signal to a data line that is currently signally-connected with the amplifier, moreover, the currently selected amplification coefficient is inversely proportional to a rate at which the data line charges a current signally-connected sub-pixel unit. Hence, for the case that the rate at which the data line charges the sub-pixel unit is relatively low, a relative large amplification coefficient can be selected, thereby nonuniform brightness of the display image caused by a low charging rate of the sub-pixel unit can be avoided; for the case that the rate at which the data line charges the sub-pixel unit is relatively high, a relatively small amplification coefficient is selected, thereby unnecessary power consumption can be saved.

Apparently, the skilled person in the art can make various modifications and variants to this invention without departing from the spirit and scope of this invention. In this way, provided that these modifications and variants belong to the

scope of the claims of this invention and the equivalent technology thereof, this invention also intends to cover these modifications and variants.

DRAWINGS OF THE DESCRIPTION

FIG. 7

S101, selecting a current amplification coefficient of an amplifier signally-connected with a data line in the source driver based on a rate at which the data line charges a current signally-connected sub-pixel unit, the currently selected amplification coefficient being inversely proportional to the rate at which the data line charges a current signally-connected sub-pixel unit; and

S102, the amplifier adjusting a received data signal based on the currently selected amplification coefficient, and outputting the adjusted data signal to a data line that is currently signally-connected with the amplifier.

The invention claimed is:

1. A liquid crystal display panel comprising an array substrate, data lines located on the array substrate, sub-pixel units signally-connected with the data lines, and a source driver signally-connected with each of the data lines, wherein:

the source driver comprises an amplifier whose amplification coefficient is adjustable, the amplifier being used for adjusting a received data signal based on a currently selected amplification coefficient, and outputting the adjusted data signal to a data line that is currently signally-connected with the amplifier, wherein the currently selected amplification coefficient is inversely proportional to a rate at which the data line charges a current signally-connected sub-pixel unit.

2. The liquid crystal display panel as claimed in claim 1, wherein the amplifier comprises a plurality of positive signal amplifiers and a plurality of negative signal amplifiers, the source driver further comprises:

a first adjustment unit adjusting amplification coefficient of the positive signal amplifier; and

a second adjustment unit adjusting amplification coefficient of the negative signal amplifier,

the first adjustment unit is connected between a negative phase signal input end of the positive signal amplifier and an output end of the positive signal amplifier in series, and

the second adjustment unit is connected between a positive phase signal input end of the negative signal amplifier and an output end of the negative signal amplifier in series.

3. The liquid crystal display panel as claimed in claim 2, wherein the first adjustment unit and the second adjustment unit comprise resistances whose resistance values are adjustable.

4. The liquid crystal display panel as claimed in claim 2, wherein the source driver further comprises an output polarity control unit,

wherein an odd numbered data line and an even numbered data line are taken as a group of data lines, the group of data lines are connected with a positive signal amplifier and a negative signal amplifier respectively through the output polarity control unit,

at a first moment, the output polarity control unit turns on the positive signal amplifier and the odd numbered data line, the output polarity control unit turns on the negative signal amplifier and the even numbered data line, and

at a second moment, the output polarity control unit turns on the positive signal amplifier and the even numbered data line, the output polarity control unit turns on the negative signal amplifier and the odd numbered data line.

5. The liquid crystal display panel as claimed in claim 4, wherein the source driver further comprises:

first digital to analog conversion units in one-to-one correspondence with the plurality of positive signal amplifiers; and

second digital to analog conversion units in one-to-one correspondence with the plurality of negative signal amplifiers,

the first digital to analog conversion unit being used for performing digital to analog conversion to a received positive gamma voltage, and outputting the digital to analog converted positive gamma voltage to a positive phase signal input end of a corresponding positive signal amplifier;

the second digital to analog conversion unit being used for performing digital to analog conversion to a received negative gamma voltage, and outputting the digital to analog converted negative gamma voltage to a negative phase signal input end of a corresponding negative signal amplifier.

6. The liquid crystal display panel as claimed in claim 1, wherein a data line is signally-connected with a corresponding column of sub-pixel units,

the even numbered data line is signally-connected with the source driver through a first wiring, the odd numbered data line is signally-connected with the source driver through a second wiring, wherein,

the first wiring and the second wiring are arranged in different layers on the array substrate.

7. The liquid crystal display panel as claimed in claim 1, wherein,

two adjacent columns of sub-pixel units are taken as a group of sub-pixel unit columns, each group of sub-pixel columns share a data line located between the two columns of sub-pixel units, and there are two gate lines between sub-pixel units of adjacent rows.

8. A display device comprising a liquid crystal display panel, the liquid crystal display panel comprising an array substrate, data lines located on the array substrate, sub-pixel units signally-connected with the data lines, and a source driver signally connected with each of the data lines, wherein:

the source driver comprises an amplifier whose amplification coefficient is adjustable, the amplifier being used for adjusting a received data signal based on a currently selected amplification coefficient, and outputting the adjusted data signal to a data line that is currently signally-connected with the amplifier, wherein the currently selected amplification coefficient is inversely proportional to a rate at which the data line charges a current signally-connected sub-pixel unit.

9. The display device as claimed in claim 8, wherein the amplifier comprises a plurality of positive signal amplifiers and a plurality of negative signal amplifiers, the source driver further comprises:

a first adjustment unit adjusting amplification coefficient of the positive signal amplifier; and

a second adjustment unit adjusting amplification coefficient of the negative signal amplifier,

11

the first adjustment unit is connected between a negative phase signal input end of the positive signal amplifier and an output end of the positive signal amplifier in series, and

the second adjustment unit is connected between a positive phase signal input end of the negative signal amplifier and an output end of the negative signal amplifier in series.

10. The display device as claimed in claim 9, wherein the first adjustment unit and the second adjustment unit comprise resistances whose resistance values are adjustable.

11. The display device as claimed in claim 9, wherein the source driver further comprises an output polarity control unit,

wherein an odd numbered data line and an even numbered data line are taken as a group of data lines, the group of data lines are connected with a positive signal amplifier and a negative signal amplifier respectively through the output polarity control unit,

at a first moment, the output polarity control unit turns on the positive signal amplifier and the odd numbered data line, the output polarity control unit turns on the negative signal amplifier and the even numbered data line, and

at a second moment, the output polarity control unit turns on the positive signal amplifier and the even numbered data line, the output polarity control unit turns on the negative signal amplifier and the odd numbered data line.

12. The display device as claimed in claim 9, wherein the source driver further comprises:

first digital to analog conversion units in one-to-one correspondence with the plurality of positive signal amplifiers; and

second digital to analog conversion units in one-to-one correspondence with the plurality of negative signal amplifiers,

the first digital to analog conversion unit being used for performing digital to analog conversion to a received

12

positive gamma voltage, and outputting the digital to analog converted positive gamma voltage to a positive phase signal input end of a corresponding positive signal amplifier;

the second digital to analog conversion unit being used for performing digital to analog conversion to a received negative gamma voltage, and outputting the digital to analog converted negative gamma voltage to a negative phase signal input end of a corresponding negative signal amplifier.

13. The display device as claimed in claim 8, wherein a data line is signally-connected with a corresponding column of sub-pixel units,

the even numbered data line is signally-connected with the source driver through a first wiring, the odd numbered data line is signally-connected with the source driver through a second wiring, wherein,

the first wiring and the second wiring are arranged in different layers on the array substrate.

14. The display device as claimed in claim 8, wherein, two adjacent columns of sub-pixel units are taken as a group of sub-pixel unit columns, each group of sub-pixel columns share a data line located between the two columns of sub-pixel units, and there are two gate lines between sub-pixel units of adjacent rows.

15. A driving method of a liquid crystal display panel, comprising:

selecting a current amplification coefficient of an amplifier signally-connected with a data line in the source driver based on a rate at which the data line charges a current signally-connected sub-pixel unit, the currently selected amplification coefficient being inversely proportional to the rate at which the data line charges a current signally-connected sub-pixel unit;

the amplifier adjusting a received data signal based on the currently selected amplification coefficient, and outputting the adjusted data signal to a data line that is currently signally-connected with the amplifier.

* * * * *

专利名称(译)	液晶显示面板的驱动方法，液晶显示面板和显示装置		
公开(公告)号	US9542898	公开(公告)日	2017-01-10
申请号	US14/408561	申请日	2014-06-09
[标]申请(专利权)人(译)	京东方科技集团股份有限公司 合肥京东方光电科技有限公司		
申请(专利权)人(译)	京东方科技集团股份有限公司. 合肥京东方光电科技有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司. 合肥京东方光电科技有限公司.		
[标]发明人	FENG XIA HUANG JIACHENG WANG DONGHUI		
发明人	FENG, XIA HUANG, JIACHENG WANG, DONGHUI		
IPC分类号	G09G3/36		
CPC分类号	G09G3/3614 G09G3/3677 G09G2310/027 G09G2310/0291 G09G2330/021 G09G3/3659 G09G3/3688 G09G2320/0233		
代理机构(译)	布莱克利SOKOLOFF TAYLOR & ZAFMAN LLP		
优先权	201310737029.3 2013-12-26 CN		
其他公开文献	US20160293123A1		
外部链接	Espacenet USPTO		

摘要(译)

本发明提供了一种液晶显示面板，该液晶显示面板中的源极驱动器包括放大系数可调的放大器，该放大器可以基于当前选择的放大系数来调整接收数据信号，并将调整后的数据信号输出当前与放大器信号连接的数据线，此外，当前选择的放大系数与数据线对电流信号连接的子像素单元充电的速率成反比。对于这种情况，子像素单元的数据线电荷相对较低，可以选择相对较大的放大系数，从而可以避免子像素单元的低充电率造成的显示图像的不均匀亮度；对于数据线对子像素单元充电的速率相对较高的情况，选择相对较小的放大系数，从而可以节省不必要的功耗。本发明还提供一种包括这种液晶显示面板的显示装置和用于这种液晶显示器的驱动方法面板。

