



US01016222B2

(12) **United States Patent**
Chae et al.

(10) **Patent No.:** **US 10,162,222 B2**
(45) **Date of Patent:** **Dec. 25, 2018**

(54) **CURVED LIQUID CRYSTAL DISPLAY
DEVICE**

USPC 349/106, 153, 155
See application file for complete search history.

(71) Applicant: **LG DISPLAY CO., LTD.**, Seoul (KR)

(56) **References Cited**

(72) Inventors: **Hee-Young Chae**, Paju-si (KR);
Se-Hong Park, Paju-si (KR); **In-Yeong
Kong**, Paju-si (KR); **Jong-Sin Park**,
Goyang-si (KR); **Ja-Young Pyun**, Seoul
(KR); **Dong-Yoon Lee**, Seoul (KR);
Jae-Woong Youn, Paju-si (KR)

U.S. PATENT DOCUMENTS

6,778,232 B2 * 8/2004 Nakata G02F 1/136227
257/59
2007/0121051 A1 * 5/2007 Yokoyama G02F 1/13394
349/156
2008/0151133 A1 * 6/2008 Kim G02F 1/13338
349/12

(Continued)

(73) Assignee: **LG DISPLAY CO., LTD.**, Seoul (KR)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

FOREIGN PATENT DOCUMENTS

CN 101097336 A 1/2008
CN 101344685 A 1/2009
CN 103713426 A 4/2014

(21) Appl. No.: **14/723,128**

Primary Examiner — Nathanael R Briggs

(22) Filed: **May 27, 2015**

(74) Attorney, Agent, or Firm — Dentons US LLP

(65) **Prior Publication Data**

US 2015/0370116 A1 Dec. 24, 2015

(57) **ABSTRACT**

(30) **Foreign Application Priority Data**

Jun. 24, 2014 (KR) 10-2014-0077044


A curved LCD device includes first and second substrates; gate and data lines in a display area on the first substrate and defining a pixel region; a thin film transistor connected to the gate and data lines; a color filter layer in the pixel region; pixel and common electrodes on the color filter layer; first light-blocking layers in the display area over the first substrate; a second light-blocking layer in a non-display area over the first substrate; first and second column spacers in the display area on the second substrate, wherein the first column spacer has a first height, and the second column spacer has a second height; and a third column spacer in the non-display area on the second substrate and having the second height, wherein the third column spacer is in point-contact with the second light-blocking layer when an external force is applied.

(51) **Int. Cl.**
G02F 1/1339 (2006.01)
G02F 1/1335 (2006.01)
G02F 1/1343 (2006.01)
G02F 1/1362 (2006.01)

(52) **U.S. Cl.**
CPC **G02F 1/13394** (2013.01); **G02F 1/133512**
(2013.01); **G02F 1/134363** (2013.01); **G02F**
2001/13396 (2013.01); **G02F 2001/136222**
(2013.01)

(58) **Field of Classification Search**
CPC G02F 1/13394; G02F 1/133512; G02F
2001/13396; G02F 2001/136222; G02F
2001/13398

15 Claims, 8 Drawing Sheets

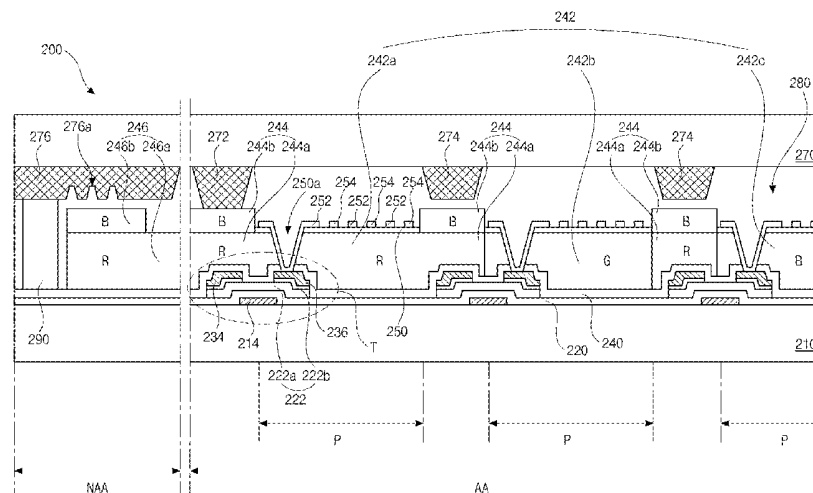


(56)

References Cited

U.S. PATENT DOCUMENTS

2009/0066903	A1 *	3/2009	Yoshida	G02F 1/1339
				349/153
2010/0103354	A1	4/2010	Yu et al.	
2010/0134731	A1	6/2010	Jeon et al.	
2010/0188624	A1 *	7/2010	Lee	G02B 5/201
				349/106
2011/0304805	A1 *	12/2011	Tseng	G02F 1/133512
				349/106
2013/0027647	A1 *	1/2013	Nagashima	G02F 1/13394
				349/123
2014/0092350	A1 *	4/2014	Byeon	G02F 1/1339
				349/106

* cited by examiner

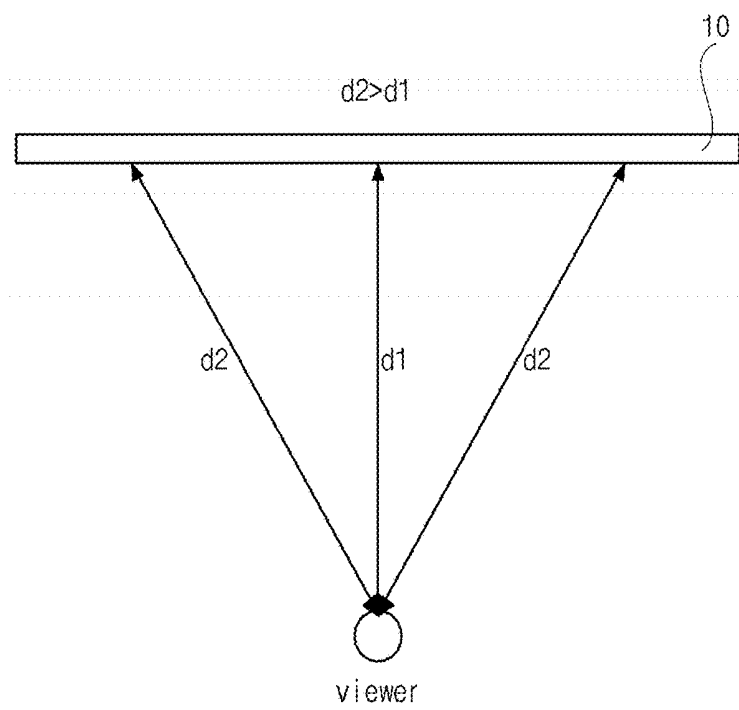**FIG. 1****Related Art**

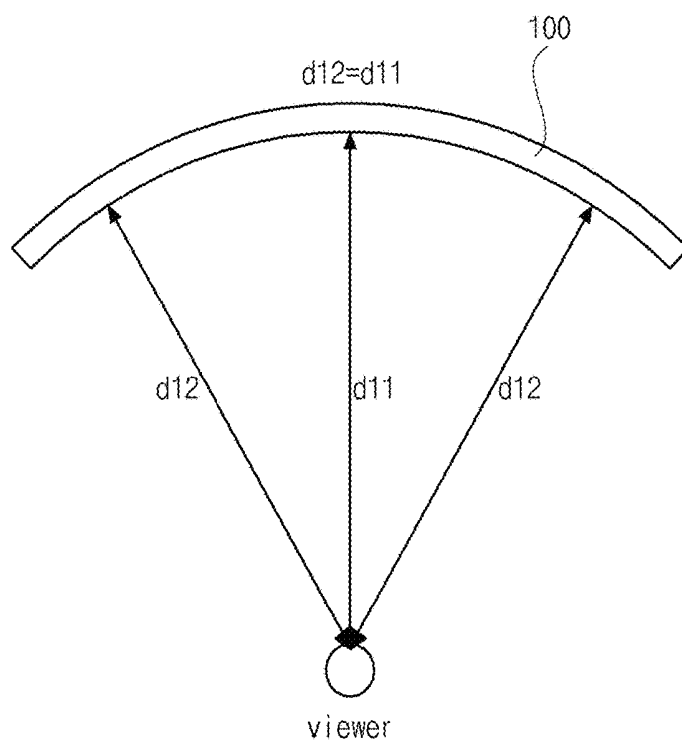


FIG. 2

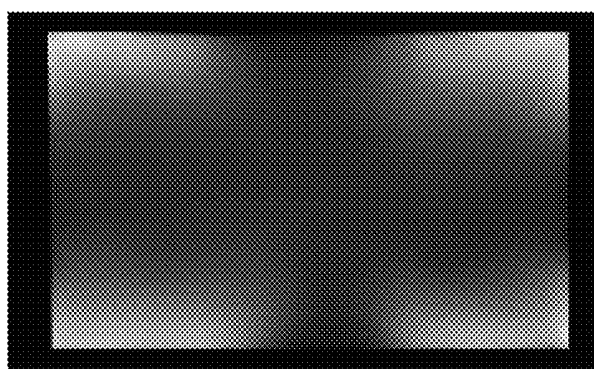
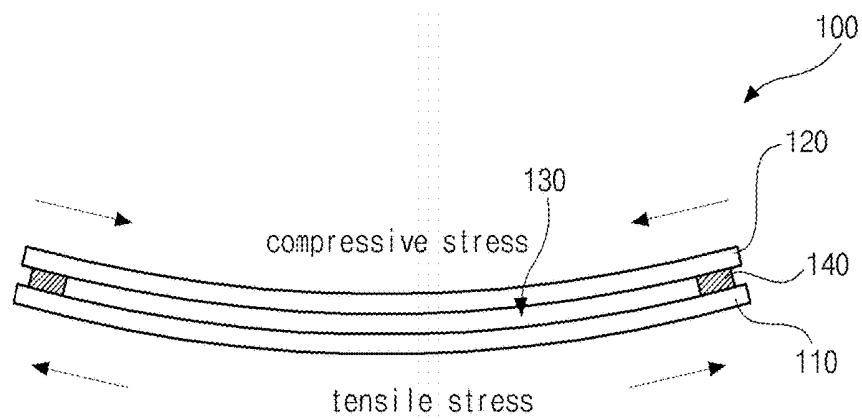
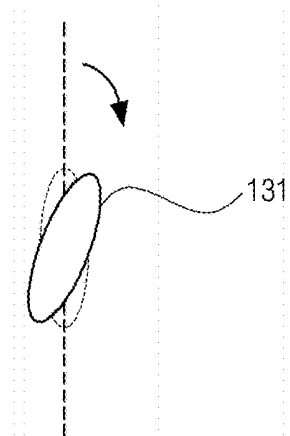


FIG. 3

**FIG. 4****FIG. 5A**

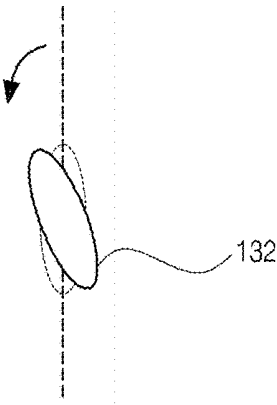


FIG. 5B


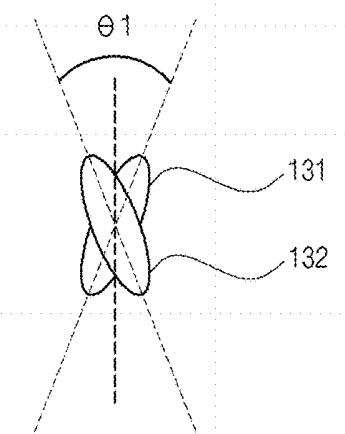


FIG. 5C

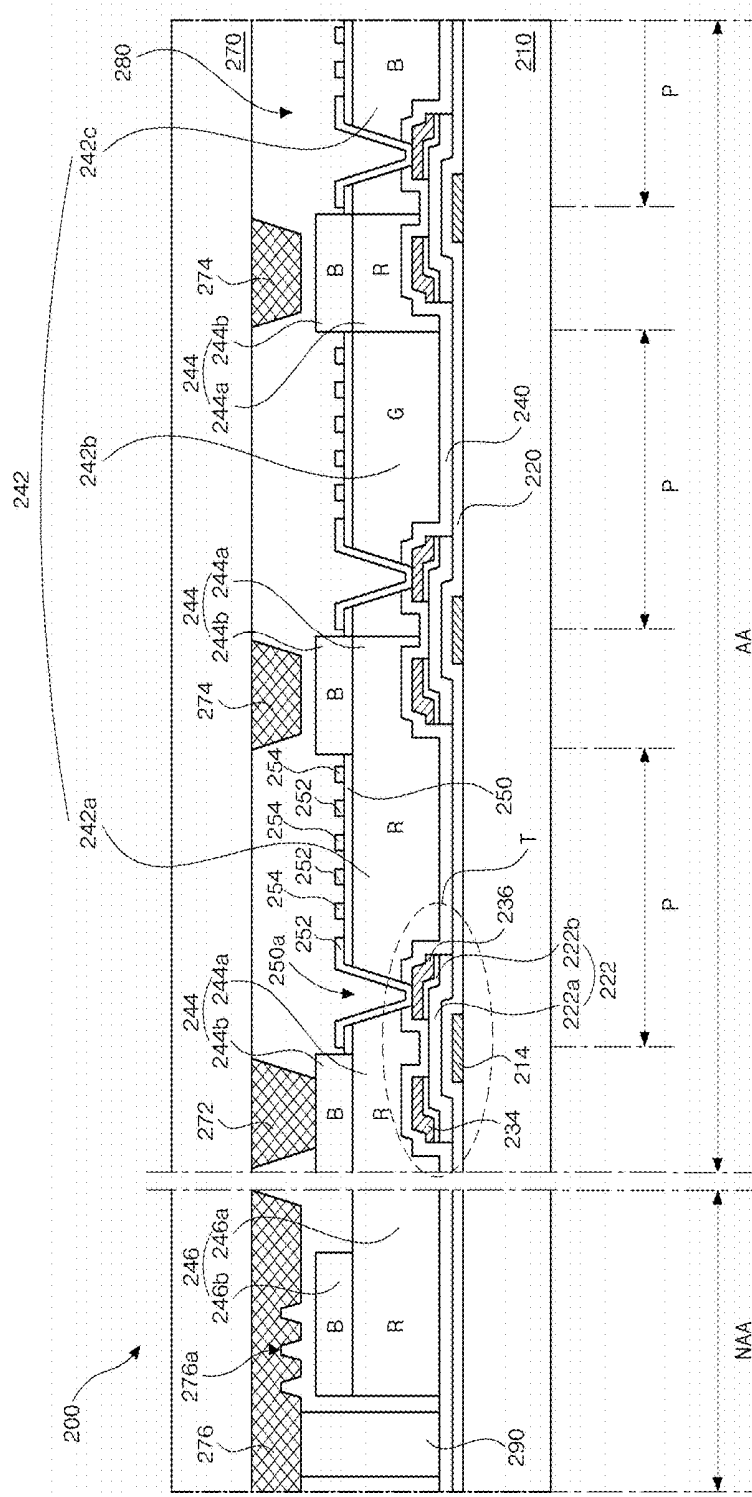

6
6
6

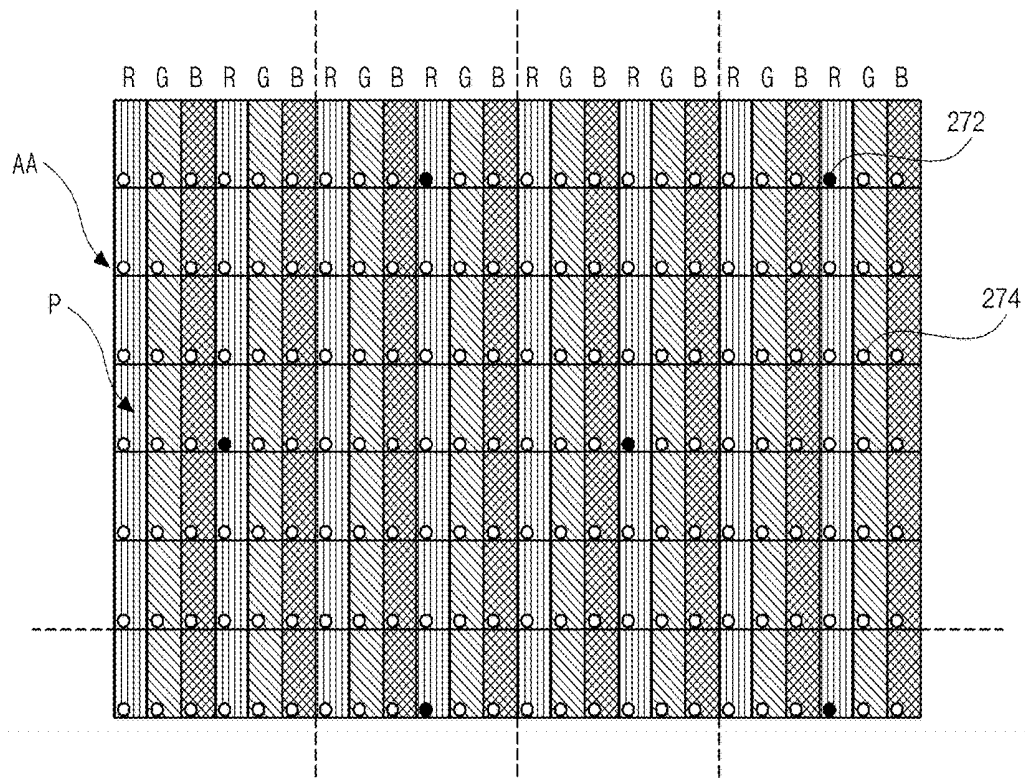


FIG. 7

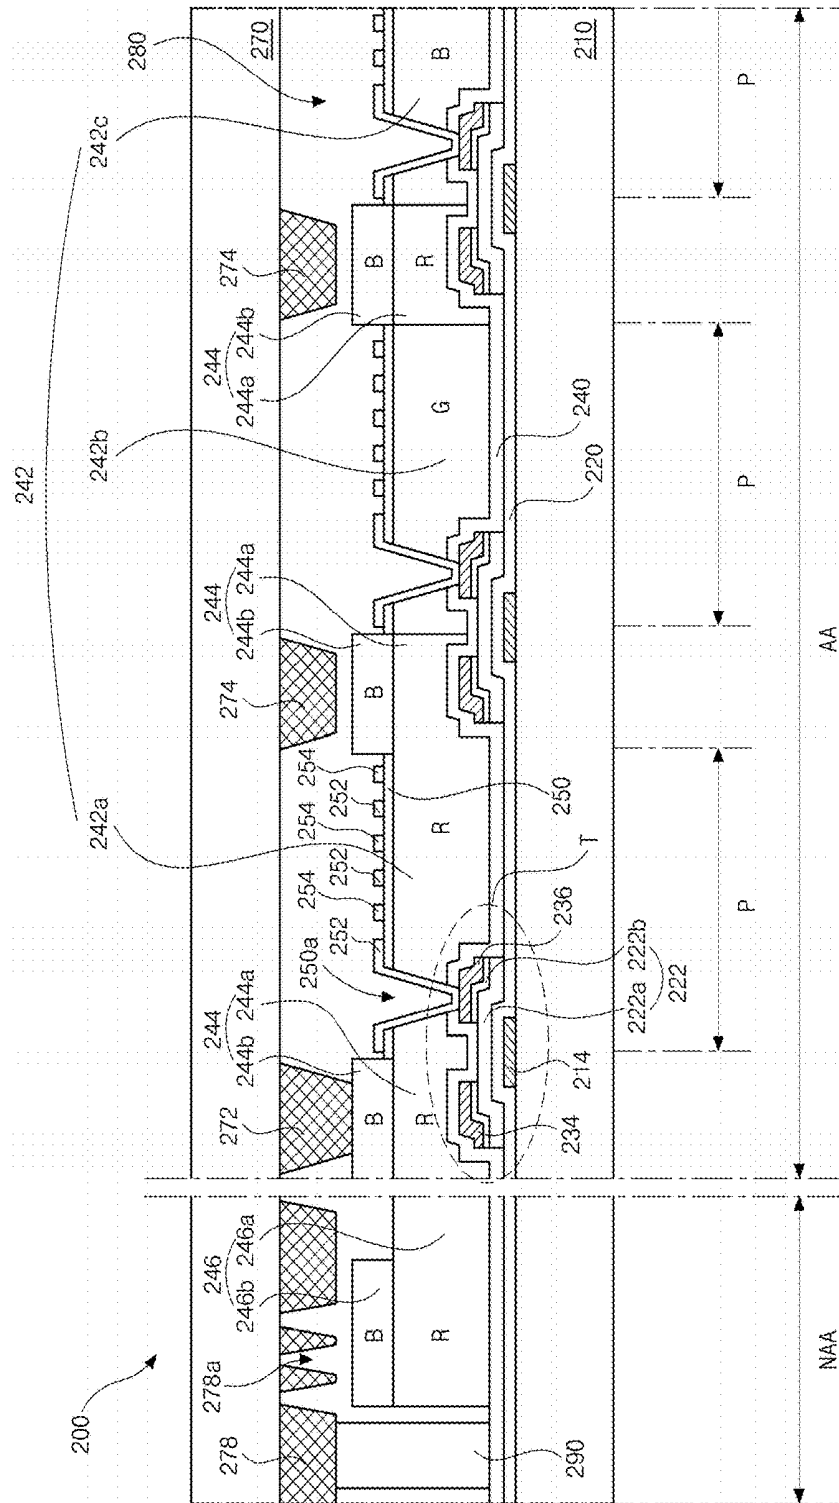


FIG. 8

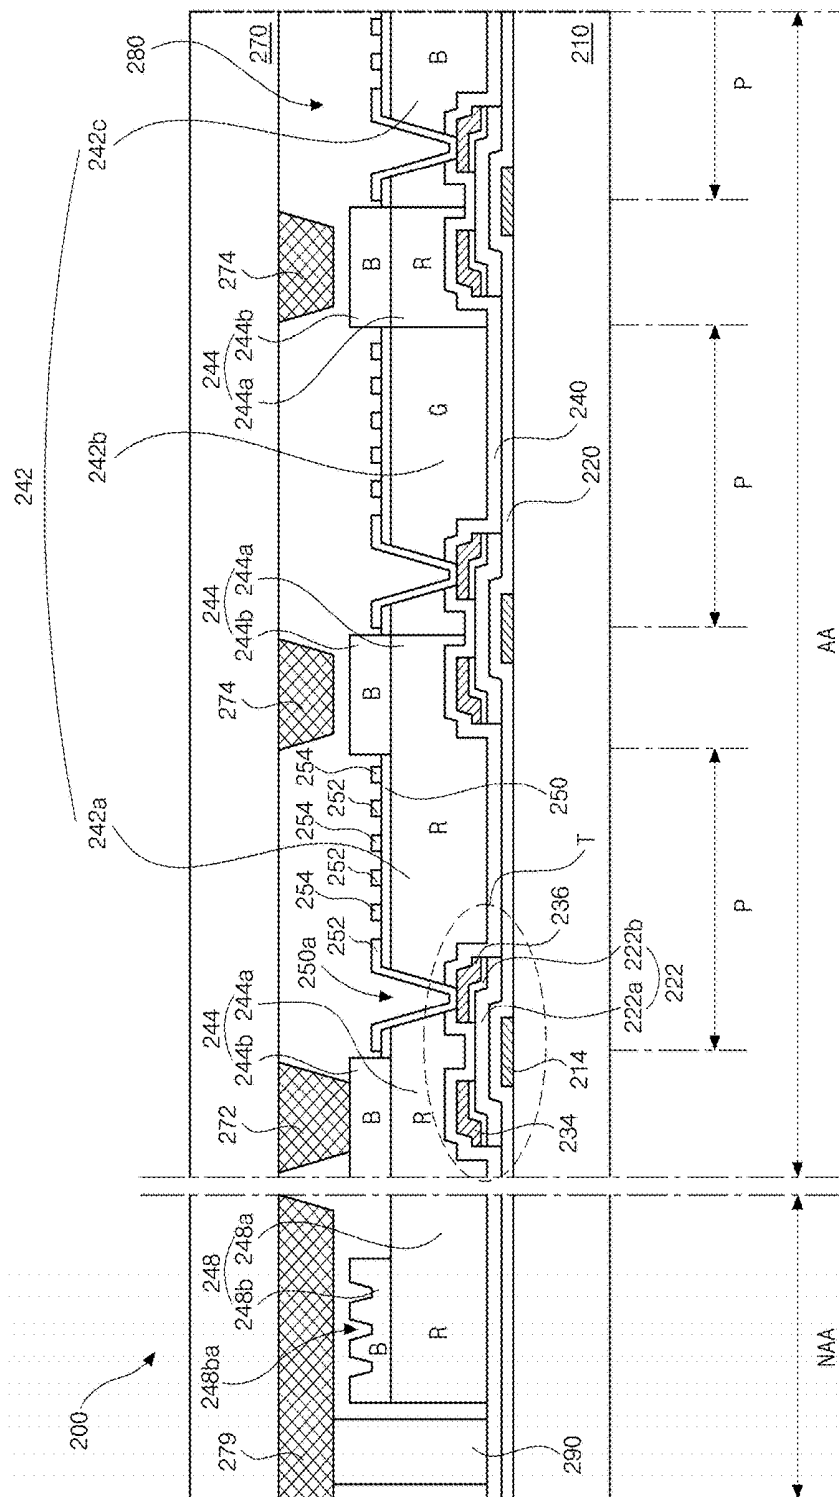


FIG. 9

CURVED LIQUID CRYSTAL DISPLAY DEVICE

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application claims the benefit of Korean Patent Application No. 10-2014-0077044 filed in Korea on Jun. 24, 2014, which is incorporated by reference in its entirety for all purposes as if fully set forth herein.

BACKGROUND

Field of the Disclosure

The present disclosure relates to a liquid crystal display (LCD) device, and more particularly, to a curved LCD device.

Discussion of the Related Art

With rapid development of information technologies, various types of display devices for displaying images have been required. Recently, flat panel display (FPD) devices such as liquid crystal display (LCD) devices, plasma display panel (PDP) devices, and organic light emitting diode display (OLED) devices have been widely developed and applied to various fields.

Among the various types of FPD devices, LCD devices have been widely used because the LCD devices have advantages in lower weight, smaller size, and reduced power consumption compared to other display technologies.

Generally, an LCD device includes two substrates, a liquid crystal layer between the two substrates, and pixel and common electrodes for driving liquid crystal molecules of the liquid crystal layer as part of a liquid crystal display panel. The LCD device further includes a backlight unit to illuminate the liquid crystal display panel. When voltages are applied to the pixel and common electrodes, an electric field is induced between the electrodes, and the liquid crystal molecules are arranged by the electric field. The arrangement of the liquid crystal molecules varies depending on the electric field, and transmittance of light from the backlight passing through the liquid crystal layer is modulated by the position of the molecules. Grayscale images can be displayed by controlling the light transmittance of the liquid crystal material.

The LCD device has been widely used in portable equipment such as cellular phones and multimedia devices, monitors for notebook computers and desktop computers, and large-sized televisions.

However, the LCD device has a problem in that a distance from a viewing point of a viewer to a screen of the LCD device varies depending on locations.

This will be described with reference to FIG. 1.

FIG. 1 is a view schematically illustrating an LCD device according to the related art.

In FIG. 1, since the LCD device 10 is flat, there is a difference between a first distance d1 from a main viewing point of a viewer to a center of the LCD device 10 and a second distance d2 from the main viewing point to a left or right side of the LCD device 10. Namely, the second distance d2 is greater than the first distance d1, and there is a distance deviation in this flat display device.

The distance deviation grows worse as the size of the LCD device 10 increases, and the increased distance deviation decreases a viewer's perceived sense of immersion in an image displayed by the LCD device 10.

SUMMARY

Accordingly, the present invention is directed to a curved LCD device that substantially obviates one or more of the problems due to limitations and disadvantages of the related art.

An object of the present invention is to provide a curved LCD device being capable of solving a distance deviation.

Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

To achieve these and other advantages, and in accordance with the purpose of the present invention, as embodied and broadly described herein, the present invention provides a curved liquid crystal display device including a first substrate and a second substrate where a display area and a non-display area are defined; a liquid crystal layer between the first and the second substrates; a gate line and a data line in the display area on an inner surface of the first substrate and crossing each other to define a pixel region; a thin film transistor connected to the gate line and the data line; a color filter layer in the pixel region of the first substrate and including red, green and blue color filters; a pixel electrode on the color filter layer and connected to the thin film transistor; a common electrode on the color filter layer, spaced apart from and alternating with the pixel electrode; a plurality of first light-blocking layers in the display area over the inner surface of the first substrate, each first light-blocking layer disposed between adjacent pixel regions; a second light-blocking layer in the non-display area over the inner surface of the first substrate; a first column spacer and a second column spacer in the display area on an inner surface of the second substrate, wherein the first column spacer corresponds to one of the first light-blocking layers and has a first height, and the second column spacer corresponds to another of the first light-blocking layers and has a second height; and a third column spacer in the non-display area on the inner surface of the second substrate and having the second height, wherein the third column spacer is in point-contact with the second light-blocking layer when an external force is applied.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

FIG. 1 is a view of schematically illustrating an LCD device according to the related art.

FIG. 2 is a schematic view of a curved LCD device according to a first exemplary embodiment of the present invention.

FIG. 3 is a view showing light leakage in four corners of the LCD device according to the first embodiment of the present invention.

FIG. 4 is a schematic cross-sectional view of a curved LCD device according to the first embodiment of the present invention.

FIG. 5A is a view showing an arrangement of a liquid crystal molecule on a first substrate in a corner region of the curved LCD device according to the first embodiment of the present invention.

FIG. 5B is a view showing an arrangement of a liquid crystal molecule on a second substrate in the corner region of the curved LCD device according to the first embodiment of the present invention.

FIG. 5C is a view showing together the arrangements of the liquid crystal molecules of FIG. 5A and FIG. 5B.

FIG. 6 is a cross-sectional view illustrating a curved LCD device according to a second exemplary embodiment of the present invention.

FIG. 7 is a schematic plan view showing an arrangement of first and second column spacers in a display area of a curved LCD device according to the second embodiment of the present invention.

FIG. 8 is a cross-sectional view illustrating a curved LCD device according to a third exemplary embodiment of the present invention.

FIG. 9 is a cross-sectional view illustrating a curved LCD device according to a fourth exemplary embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Reference will now be made in detail to the preferred embodiments, examples of which are illustrated in the accompanying drawings.

FIG. 2 is a schematic view of a curved LCD device according to a first embodiment of the present invention.

As shown in FIG. 2, a curved LCD device 100 has a curved shape. Namely, a typically flat display device is curved by a predetermined curvature with respect to a center of the display device to have a curved shape.

Accordingly, a first distance d11 from a main viewing point of a viewer to a center of the curved LCD device 100 is substantially equal to a second distance d12 from the main viewing point to a left or right side of the curved LCD device 100, and there is no distance deviation. As a result, the viewer's experience of feeling immersed in the image content is improved.

On the down side, because the curved LCD device 100 according to the first embodiment has a curvature that is artificially formed, as shown in FIG. 3, there is light leakage in four corners of the curved LCD device 100. FIG. 3 illustrates an increase of light transmission in the four corners of the display device when displaying an all-black image.

The light leakage will be described with reference to FIG. 4 and FIGS. 5A to 5C.

FIG. 4 is a schematic cross-sectional view of a curved LCD device according to the first embodiment of the present invention. FIG. 5A is a view showing an arrangement of a liquid crystal molecule on a first substrate in a corner region of the curved LCD device according to the first embodiment of the present invention, FIG. 5B is a view showing an arrangement of a liquid crystal molecule on a second substrate in the corner region of the curved LCD device according to the first embodiment of the present invention, and FIG. 5C is a view showing together the arrangements of the liquid crystal molecules of FIG. 5A and FIG. 5B.

In FIG. 4, the curved LCD device 100 according to the first embodiment of the present invention includes a first substrate 110, a second substrate 120, and a liquid crystal layer 130 between the first and second substrates 110 and 120. A seal pattern 140 is formed in edge areas between the first and second substrates 110 and 120 to prevent the liquid crystal layer 130 from leaking out. A display area for displaying an image and a non-display area surrounding the display area are defined on the first and second substrates 110 and 120.

Although not shown in the figure, a gate line, a data line, a thin film transistor, and a pixel electrode are formed in the display area on an inner surface of the first substrate 110. The gate line and the data line cross each other to define a pixel region. The thin film transistor is connected to the gate line and the data line. The pixel electrode is in the pixel region and is connected to the thin film transistor. In addition, a common electrode may be further formed in the display area on the inner surface of the first substrate 110. The common electrode and the pixel electrode generate an electric field when a voltage is applied.

A color filter layer may also be formed in the display area on the inner surface of the first substrate 110. The color filter layer includes red, green, and blue color filters sequentially arranged, and each color filter corresponds to one pixel region.

The structure may be referred to as a color filter on array structure, i.e., a COT (color on transistor) structure. The LCD device having the COT structure has an advantage of relatively high aperture ratio because the attachment margin, which is a margin of error when two substrates of the LCD device are attached together, can be decreased and a width of a black matrix, which is disposed between adjacent pixel regions and is determined by considering the attachment margin, can be decreased.

Although not shown in the figure, spacers may be formed in the display area on an inner surface of the second substrate 120 such that the spacers are between the first and second substrates 110 and 120 when the first and second substrates 110 and 120 are attached to maintain a uniform distance between the two substrates. Here, the spacers include a gap column spacer and a push column spacer. The gap column spacer has a higher height than the push column spacer. The gap column spacer contacts a top layer on the inner surface of the first substrate 110, and the push column spacer is spaced apart from the top layer on the inner surface of the first substrate 110.

Moreover, an outer column spacer (not shown) may be further formed in the non-display area on the inner surface of the second substrate 120. The outer column spacer may have the same height as the push column spacer and may include a material that absorbs light to minimize light leakage in the non-display area of the curved LCD device.

In the curved LCD device 100, a black matrix on the first substrate 110 or the second substrate 120 may be omitted, and the aperture ratio may be further increased.

Further, first and second alignment layers (not shown) as top layers may be formed on the inner surfaces of the first and second substrates 110 and 120, respectively. The first and second alignment layers have predetermined alignment axes and determine an initial arrangement of liquid crystal molecules of the liquid crystal layer 130. As is common in the art, liquid crystal molecules adjacent to the alignment layers are naturally oriented parallel to grooves formed in the alignment layers. The second alignment layer on the inner surface of the second substrate 120 may be on the gap column spacer and the push column spacer. In this case, the

second alignment layer on the gap column spacer may contact the first alignment layer on the inner surface of the first substrate **110**.

Alternatively, the second alignment layer on the inner surface of the second substrate **120** may be under the gap column spacer and the push column spacer. In this case, the gap column spacer may contact the first alignment layer on the inner surface of the first substrate **110**.

Additionally, first and second polarizers (not shown) are at outer surfaces of the first and second substrates **110** and **120**, respectively. A light-transmission axis of the first polarizer is perpendicular to a light-transmission axis of the second polarizer.

The curved LCD device **100** according to the first embodiment may be changed into a curved state from a flat state.

For example, to attain a curved surface along a transverse direction of the display device, that is, a longer side direction, a flat LCD device is curved toward the second substrate **120** along the transverse direction with respect to the center of the device, and the curved LCD device **100** with a predetermined curvature is obtained. Because the edge areas of the first and second substrates **110** and **120** are attached by the seal pattern **140**, the first and second substrates **110** and **120** move differently when being curved.

Namely, in the curved LCD device **100**, tensile stress is applied to the first substrate **110**, which is curved outside, along the transverse direction, and compressive stress is applied to the second substrate **120**, which is curved inside, along the transverse direction. As the edge areas of the first and second substrates **110** and **120** are fixed by the seal pattern **140**, torsional stress is generated in the edge areas of the first and second substrates **110** and **120**, and the first and second substrates **110** and **120** shift in opposite directions.

As configured, the torsional stress is highest in four corners of the first and second substrates **110** and **120**. The alignment axes of the first and second alignment layers (not shown) are twisted due to the torsional stress, and the arrangement of the liquid crystal molecules adjacent to the inner surfaces of the first and second substrates **110** and **120** is twisted. This twisting of the liquid crystal molecules moves them from their intended orientation and causes light leakage in the four corners of the LCD device. That is, light from the backlight unit that is intended to be blocked by the orientation of the liquid crystal molecules gets transmitted. This unwanted transmitted light causes a reduced contrast ratio in those areas and a non-uniform appearance.

That is, because the alignment axes of the first and second alignment layers in the corner region of the curved LCD device **100** are twisted in opposite directions, the liquid crystal molecule **131** on the inner surface of the first substrate **110** of FIG. 4 rotates clockwise with respect to the initial alignment axis, as shown in FIG. 5A. As shown in FIG. 5B, in the corner region of the curved LCD device **100**, the liquid crystal molecule **132** on the inner surface of the second substrate **120** of FIG. 4 rotates counterclockwise with respect to the initial alignment axis.

Accordingly, as shown in FIG. 5C, the liquid crystal molecule **131** on the inner surface of the first substrate **110** of FIG. 4 and the liquid crystal molecule **132** on the inner surface of the second substrate **120** of FIG. 4 are twisted and arranged to have a first angle $\theta 1$ with respect to each other.

This twisted arrangement of the liquid crystal molecules **131** and **132** causes light leakage. Light that is intended to be blocked is transmitted.

Here, the liquid crystal molecules **131** and **132** are twisted to have a larger twist angle as the stress increases. In the

curved LCD device **100**, when the curvature is formed, the stress applied to the first and second substrates **110** and **120** of FIG. 4 increases due to a surface contact between the outer column spacer and the top layer of the first substrate **110** of FIG. 4 in the non-display area. Thus, stress applied to the liquid crystal molecules **131** and **132** also increases.

In the display area of the curved LCD device **100**, self alignment of the liquid crystal molecules becomes weak because a predetermined quantity of the liquid crystal with a predetermined margin considering error is filled between the first and second substrates **110** and **120** of FIG. 4 and the predetermined quantity of the liquid crystal is less than the ideal quantity of the liquid crystal that is exactly required between the first and second substrates **110** and **120** of FIG. 4. As a result, some of the liquid crystal molecules are misoriented, and light leakage occurs. The light leakage may be shifted to a different portion of the LCD device when a surface of the device is touched because the liquid crystal molecules are not uniformly arranged around the different portion of the LCD device due to the touch, and touch visibility, which is a degree of how much it is seen or noticed when it is touched, may be lowered due to the light leakage.

FIG. 6 is a cross-sectional view illustrating a curved LCD device according to a second embodiment of the present invention.

In FIG. 6, the curved LCD device **200** according to the second embodiment of the present invention includes a first substrate **210**, a second substrate **270** and a liquid crystal layer **280** between the first and second substrates **210** and **270**.

A display area, AA which may be referred to as an active area, and a non-display area NAA, which may be referred to as a non-active area, are defined on the first and second substrates **210** and **270**. An image is displayed in the display area AA, and the non-display area NAA is outside the display area AA. The display area AA may be surrounded by the non-display area NAA. In addition, a plurality of pixel regions P is defined in the display area AA.

A gate line (not shown), a gate electrode **214** and a common line (not shown) are formed in the display area AA on an inner surface of the first substrate **210**. The gate line is formed in a first direction, and the gate electrode **214** is connected to the gate line. The gate electrode **214** may be extended from the gate line or may be part of the gate line.

The common line is formed in the first direction and is parallel to the gate line.

A gate insulating layer **220** is formed on the gate line, the gate electrode **214** and the common line.

A semiconductor layer **222** is formed on the gate insulating layer **220** over the gate electrode **214**. The semiconductor layer **222** includes an active layer **222a** of intrinsic amorphous silicon and ohmic contact layers **222b** of impurity-doped amorphous silicon.

Source and drain electrodes **234** and **236** are formed on the semiconductor layer **222**. The source and drain electrodes **234** and **236** are spaced apart from each other over the semiconductor layer **222**, and the ohmic contact layers **222b** have the same shape as the source and drain electrodes **234** and **236**. The active layer **222a** is exposed between the source and drain electrodes **234** and **236**.

The gate electrode **214**, the semiconductor layer **222**, the source electrode **234** and the drain electrode **236** constitute a thin film transistor T, and the active layer **222a** exposed between the source and drain electrodes **234** and **236** becomes a channel of the thin film transistor T.

Also, a data line (not shown) is formed of the same material and on the same layer as the source and drain

electrodes **234** and **236**. The data line is formed in a second direction perpendicular to the first direction and crosses the gate line to define a pixel region P. The data line is connected to the source electrode **234**. A dummy semiconductor pattern (not shown) having the same structure as the semiconductor layer **222** may be formed under the data line.

A passivation layer **240** is formed on the source and drain electrodes **234** and **236** and the data line. The passivation layer **240** may be formed of an inorganic insulating material such as silicon oxide (SiO₂) or silicon nitride (SiN_x).

A color filter layer **242** is formed on the passivation layer **240**. The color filter layer **242** includes red, green, and blue color filters **242a**, **242b**, and **242c**, respectively. Each color filter **242a**, **242b**, and **242c** corresponds to one pixel region P.

A first light-blocking layer **244** is formed between adjacent pixel regions P. The first light-blocking layer **244** includes a first color pattern **244a** and a second color pattern **244b** on the first color pattern **244a**. The first color pattern **244a** and the second color pattern **244b** may be formed of the same materials as two color filters selected from the red, green, and blue color filters **242a**, **242b**, and **242c**. For example, it is beneficial that the first color pattern **244a** and the second color pattern **244b** may be formed of the same materials as the red color filter **242a** and the blue color filter **242c** to increase the light-blocking effect. Here, the first color pattern **244a** may be formed of the same material as the red color filter **242a**, and the second color pattern **244b** may be formed of the same material as the blue color filter **242c**. The first light-blocking layer may be over the thin film transistor T.

In a portion of the pixel region P where the red color filter **242a** is formed, a part of the red color filter **242a** may be the first color pattern **244a**. In a portion of the pixel region P where the green color filter **242b** or the blue color filter **242c** is formed, the first color pattern **244** is formed of the same material as the red color filter **242a** corresponding to the thin film transistor T.

An overcoat layer **250** is formed on the color filter layer **242**. The overcoat layer **250** has a drain contact hole **250a** exposing the drain electrode **236** with the color filter layer **242** and the passivation layer **240**.

Although the overcoat layer **250** is formed between adjacent first light-blocking layers **244**, more particularly, between adjacent second color patterns **244b** in the figure, the overcoat layer **250** may be formed on the first light-blocking layer **244**, i.e., on the second color pattern **244b**.

A pixel electrode **252** and a common electrode **254** are formed in each pixel region P on the overcoat layer **250**. The pixel electrode **252** contacts the drain electrode **236** through the drain contact hole **250a**, and the common electrode **254** contacts the common line. Patterns of the common electrode **254** are spaced apart from and alternate with patterns of the pixel electrode **252**. The pixel electrode **252** and the common electrode **254** may be formed of a transparent conductive material such as indium tin oxide or indium zinc oxide.

In addition, a second light-blocking layer **246** is formed in the non-display area NAA over the inner surface of the first substrate **210**. Here, the non-display area NAA surrounds the display area AA. The second light-blocking layer **246** may surround the display area AA in the non-display area NAA.

The second light-blocking layer **246** includes a third color pattern **246a** and a fourth color pattern **246b** on the third color pattern **246a**. The third color pattern **246a** may be formed of the same material as the red color filter **242a**, and the fourth color pattern **246b** may be formed of the same material as the blue color filter **242c**. The fourth color pattern

246b may have a smaller size than the third color pattern **246a** due to steps of the layers thereunder, and the fourth color pattern **246b** may partially expose the third color pattern **246a**.

The gate insulating layer **220** and the passivation layer **240** may be formed under the second light-blocking layer **246**.

Meanwhile, a first column spacer **272** and a second column spacer **274** are formed in the display area AA on an inner surface of the second substrate **270**. Each of the first column spacer **272** and the second column spacer **274** corresponds to one of the first light-blocking layers **244** between adjacent pixel regions P.

Here, the first column spacer **272** corresponds to a gap column spacer maintaining a cell gap, i.e., a distance between substrates. The second column spacer **274** corresponds to a push column spacer preventing deformation when pressure is applied to the substrates. The first column spacer **272** has a higher height than the second column spacer **274**. Accordingly, a top surface of the first column spacer **272** contacts the first light-blocking layer **244**, and a top surface of the second column spacer **274** is spaced apart from the first light-blocking layer **244**.

The first column spacer **272** and the second column spacer **274**, which correspond to respective first light-blocking layers **244**, may be over respective thin film transistors T. Here, each thin film transistor T corresponds to one of the first column spacer **272** and the second column spacer **274**.

In addition, a third column spacer **276** is formed in the non-display area NAA on the inner surface of the second substrate **270**. The third column spacer **276** is formed of black resin for absorbing light, and light is absorbed by the third column spacer **276** in the non-display area NAA to thereby prevent light leakage in the non-display area NAA. The third column spacer **276** may be referred to as an outer column spacer.

The third column spacer **276** includes a plurality of depressed portions **276a** at its top surface. The depressed portions **276a** correspond to the fourth color pattern **246b** of the second light-blocking layer **246**. That is, the third column spacer **276** has a flat surface without depressed portions corresponding to the third color pattern **246a** exposed outside the fourth color pattern **246b**, and the depressed portions are not formed in a region where the second light-blocking layer **246** has a single-layered structure to increase the light-blocking effect. The third column spacer **276** has substantially the same height or thickness as the second column spacer **274**.

The depressed portions **276a** may have a shape such as a polygon including a rectangle or a circle in a plan view. A depth of the depressed portions **276a** is smaller than the height of the third column spacer **276**.

Here, the maximum width of the depressed portions **276a** and a distance between adjacent depressed portions **276a** may be less than 25 micrometers. For example, the maximum width of the depressed portions **276a** and the distance between adjacent depressed portions **276a** may be less than 10 micrometers.

The first, second, and third column spacers **272**, **274**, and **276** may be formed through one mask process. Namely, a mask may include a light-blocking portion, a light-transmitting portion, and a half light-transmitting portion. When a photosensitive layer for patterning the first, second, and third column spacers **272**, **274**, and **276** is a positive type where a portion exposed to light is removed after developing, the light-blocking portion corresponds to the first column spacer **272**, the half light-transmitting portion corresponds to the

second column spacer **274** and the third column spacer **276**, and the light-transmitting portion corresponds to the depressed portions **276a** and other regions excluding the first, second, and third column spacers **272**, **274**, and **276**. When formed, the distance between adjacent depressed portions **276a** may be less than 25 micrometers, and thus, the depressed portions **276a** of the third column spacer **276** may have a depth shallower than the height of the third column spacer **276**.

On the other hand, when the photosensitive layer is a negative type where a portion exposed to light remains after developing, the light-transmitting portion corresponds to the first column spacer **272**, the half light-transmitting portion corresponds to the second column spacer **274** and the third column spacer **276**, and the light-blocking portion corresponds to the depressed portions **276a** and other regions excluding the first, second, and third column spacers **272**, **274**, and **276**.

A seal pattern **290** is formed in the non-display area NAA on one of the inner surfaces of the first substrate **210** and the second substrate **270**, and the first and second substrates **210** and **270** are attached through the seal pattern **290** to prevent the liquid crystal layer **280** from leaking. For example, the seal pattern **290** may be between the passivation layer **240** and the third column spacer **276**.

The curved LCD device **200** according to the second embodiment of the present invention has a color filter on array structure or a COT structure where the color filters **242a**, **242b**, and **242c** are formed on the thin film transistor T, and the black matrix is omitted, thereby increasing the aperture ratio.

The first light-blocking layer **244** is formed in the display area AA of the first substrate **210**, and the first light-blocking layer **244** separates the pixel regions P in the display area AA, thereby absorbing light between adjacent pixel regions P and blocking light leakage from adjacent pixel regions P.

In addition, the second light-blocking layer **246** is formed in the non-display area NAA of the first substrate **210**, and the third column spacer **276** are formed in the non-display area NAA of the second substrate **270**, thereby light leakage is prevented in the non-display area NAA.

Namely, the third column spacer **276** formed of black resin may have a relatively low optical density (OD) value as compared with a typical black matrix, and light may be more likely to be transmitted. However, because the second light-blocking layer **246** including the third color pattern **246a** and the fourth color pattern **246b** is formed on the first substrate **210** corresponding to the third column spacer **276**, light absorption is increased in the non-display area NAA, and the light leakage is prevented.

The third column spacer **276** includes the depressed portions **276a** corresponding to the fourth color pattern **246b** of the second light-blocking layer **246**. When the curvature is formed in the curved LCD device according to the second embodiment of the present invention, a force may be applied to the curved LCD device, and the third column spacer **276** may contact the fourth color pattern **246b** of the second light-blocking layer **246**. At this time, since the third column spacer **276** includes the depressed portions **276a**, the third column spacer **276** is in point-contact with the fourth color pattern **246b** of the second light-blocking layer **246** due to the depressed portions **276a**. Accordingly, the stress applied to the first and second substrates **210** and **270** is dispersed as compared with the surface contact, and the stress applied to the liquid crystal molecules of the liquid crystal layer **280** is decreased, whereby the liquid crystal molecules are twisted with a relatively small angle with respect to each other. In

addition, when a surface of the curved LCD device is touched, the third column spacer **276** also may be in point-contact with the fourth color pattern **246b** of the second light-blocking layer **246** due to the depressed portions **276a**. At this time, the stress applied to the liquid crystal molecules also may be decreased.

As a result, when the stress is applied into the non-display area NAA, the stress sensitivity, which may be indicated as a change in light transmittance depending on twist of the liquid crystal molecules when stress is applied, is improved, and the light leakage is reduced.

In the curved LCD device **200**, the touch visibility is improved by controlling the arrangement density of the first and second column spacers **272** and **274**, which is the number of column spacers with respect to the number of pixel regions, in the display area AA.

The arrangement of the first and second column spacers **272** and **274** will be described with reference to FIG. 7. FIG. 7 is a schematic plan view showing an exemplary arrangement of first and second column spacers in a display area of a curved LCD device according to the second embodiment of the present invention.

In FIG. 7, a plurality of pixel regions P are arranged in a matrix form along a first direction (transverse direction) and a second direction (longitudinal direction) in a display area AA. The pixel regions P arranged in the second direction include the same color filter, i.e., one of red, green, and blue color filters R, G, and B, and the pixel region P arranged in the first direction include red, green, and blue pixel regions P, which include the red, green, and blue color filters R, G, and B and are sequentially repeatedly arranged.

One of first and second column spacers **272** and **274** is in each pixel region P, and the number of the second column spacers **274** is greater than the number of the first column spacers **272**.

For example, on the basis of 36 pixel regions P, one first column spacer **272** is formed in one of 36 pixel regions P, and 35 column spacers **274** are formed in the remainder of 36 pixel regions P, respectively.

As stated above, in the curved LCD device **200** of FIG. 6, the arrangement density of the first column spacers **272**, as the gap column spacer, is lowered, and the arrangement density of the second column spacers **274**, as the push column spacer, is increased. Thus, the touch margin, which is a degree of touch without causing light leakage or other problems, is increased, and the touch visibility is improved.

FIG. 8 is a cross-sectional view illustrating a curved LCD device according to a third embodiment of the present invention. The curved LCD device according to the third embodiment has substantially the same structure as the curved LCD device according to the second embodiment except for a third column spacer. The same reference numbers will be used to refer to the same parts as the second embodiment, and explanations for the same parts will be omitted.

In FIG. 8, a third column spacer **278** is formed in the non-display area NAA on the inner surface of the second substrate **270**. The third column spacer **278** is formed of black resin absorbing light to block light leakage in the non-display area NAA. The third column spacer **278** includes a plurality of depressed portions **278a** at its top surface. The depressed portions **278a** correspond to the fourth color pattern **246b** of the second light-blocking layer **246**. That is, the third column spacer **278** has a flat surface without depressed portions corresponding to the third color pattern **246a** exposed outside the fourth color pattern **246b**.

The depressed portions **278a** may have a shape such as a polygon including a rectangle or a circle in a plan view. A depth of the depressed portions **278a** is the same as the height of the third column spacer **278**, and thus, the inner surface of the second substrate **270** is exposed through the depressed portions **278a**.

Here, the maximum width of the depressed portions **278a** and a distance between adjacent depressed portions **278a** may be more than 25 micrometers.

In the curved LCD device **200** according to the third embodiment of the present invention, since the third column spacer **278** includes the depressed portions **278a** corresponding to the fourth color pattern **246b** of the second light-blocking layer **246**, when the curvature is formed in the curved LCD device according to the third embodiment of the present invention, the third column spacer **278** is in point-contact with the fourth color pattern **246b** of the second light-blocking layer **246**. Similar to the second embodiment described above, the stress applied to the first and second substrates **210** and **270** is dispersed, and the stress applied to the liquid crystal molecules of the liquid crystal layer **280** is decreased, as the liquid crystal molecules are twisted with a relatively small angle with respect to each other.

As a result, when the stress of curvature is applied into the non-display area NAA, the stress sensitivity, which may be indicated as a change in light transmittance depending on twist of the liquid crystal molecules when stress is applied, is improved, and the light leakage is reduced.

FIG. 9 is a cross-sectional view illustrating a curved LCD device according to a fourth embodiment of the present invention. The curved LCD device according to the fourth embodiment has substantially the same structure as the curved LCD device according to the second embodiment except for a third column spacer and a second light-blocking layer. The same reference numbers will be used to refer to the same parts as the second embodiment, and explanations for the same parts will be omitted.

In FIG. 9, a second light-blocking layer **248** is formed in the non-display area NAA on the inner surface of the first substrate **210**. Here, the non-display area NAA surrounds the display area AA. The second light-blocking layer **248** may surround the display area AA.

The second light-blocking layer **248** includes a third color pattern **248a** and a fourth color pattern **248b** on the third color pattern **248a**. The third color pattern **248a** may be formed of the same material as the red color filter **242a**, and the fourth color pattern **248b** may be formed of the same material as the blue color filter **242c**. The fourth color pattern **248b** may have a smaller size than the third color pattern **248a** due to steps of the layers thereunder, and the fourth color pattern **248b** may partially expose the third color pattern **248a**. Alternatively, the fourth color pattern **248b** may have the same size as the third color pattern **248a**.

The fourth color pattern **248b** includes a plurality of depressed portions **248ba** at its top surface. The depressed portions **248ba** may have a shape such as a polygon including a rectangle or a circle in a plan view. A depth of the depressed portions **248ba** is smaller than the height of the fourth color pattern **248b**. Here, the maximum width of the depressed portions **248ba** and a distance between adjacent depressed portions **248ba** may be less than 25 micrometers.

The gate insulating layer **220** and the passivation layer **240** may be formed under the second light-blocking layer **248**.

A third column spacer **279** may be formed in the non-display area NAA on the inner surface of the second

substrate **270**. The third column spacer **279** is formed of black resin absorbing light to block light leakage in the non-display area NAA. The third column spacer **279** has a flat surface without depressed portions.

In the curved LCD device **200** according to the fourth embodiment of the present invention, the fourth color pattern **248b** of the second light-blocking layer **248** includes the depressed portions **248ba**, and the third column spacer **279** has the flat surface. Therefore, when the curvature is formed in the curved LCD device according to the fourth embodiment, the third column spacer **279** is in point-contact with the fourth color pattern **248b** of the second light-blocking layer **248**. Accordingly, the stress applied to the first and second substrates **210** and **270** is dispersed, and the stress applied to the liquid crystal molecules of the liquid crystal layer **280** is decreased, as the liquid crystal molecules are twisted with a relatively small angle with respect to each other.

As a result, when the stress due to curvature is applied into the non-display area NAA, the stress sensitivity, which may be indicated as a change in light transmittance depending on twist of the liquid crystal molecules when stress is applied, is improved, and the light leakage is reduced.

In the fourth embodiment, although the depth of the depressed portions **248ba** of the fourth color pattern **248b** is smaller than the height of the fourth color pattern **248b**, the depth of the depressed portions **248ba** of the fourth color pattern **248b** may be the same as the height of the fourth color pattern **248b**, and the top surface of the third color pattern **248a** may be exposed through the depressed portions **248ba** similar to the third embodiment.

In the embodiments of the present invention, the depressed portions are formed in the third column spacer or the second light-blocking layer. Alternatively, embossing structures may be formed in addition to the depressed portions. However, the structure is not limited on this, and any structure for causing a point-contact between the third column spacer and the second light-blocking layer can be used.

In the curved LCD device of the present invention, the distance from the main viewing point of the viewer to the center of the curved LCD device is the same as the distance from the main viewing point to the left or right side of the curved LCD device, and the distance deviation is prevented. Accordingly, the sense of immersion into the displayed imagery by the viewer is improved.

In addition, because the curved LCD device of the present invention has the color filter on array structure (COT), the black matrix can be omitted, and the aperture ratio can be further increased.

Moreover, because the first light-blocking layer of the same material as the color filter is formed in the display area, the first light-blocking layer separates the pixel regions and blocks light leakage outside the pixel region.

Furthermore, the second light-blocking layer of the same material as the color filter is formed in the non-display area, and the outer column spacer of the black resin is also formed in the non-display area, thereby blocking the light leakage in the non-display area. One of the second light-blocking layer and the outer column spacer includes the depressed portions, and the second light-blocking layer is in point-contact with the outer column spacer when the curvature is formed in the curved LCD device. Accordingly, the sensitivity is improved and the aperture ratio is improved in the non-display area.

Also, the arrangement density of the gap column spacers is lowered, and the arrangement density of the push column

13

spacers is increased in the display area. Thus, the touch margin is increased, and the touch visibility is improved.

It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

What is claimed is:

1. A curved liquid crystal display device, comprising:
 - a first substrate and a second substrate where a display area and a non-display area are defined;
 - a liquid crystal between the first and the second substrates;
 - a gate line and a data line in the display area on an inner surface of the first substrate and crossing each other to define a pixel region;
 - a thin film transistor connected to the gate line and the data line;
 - a color filter layer in the pixel region of the first substrate and including red, green, and blue color filters;
 - a pixel electrode on the color filter layer and connected to the thin film transistor;
 - a common electrode on the color filter layer, spaced apart from and alternating with the pixel electrode;
 - a plurality of first light-blocking layers in the display area over an inner surface of the first substrate, each first light-blocking layer being between adjacent pixel regions;
 - a second light-blocking layer in the non-display area over the inner surface of the first substrate;
 - a first column spacer and a second column spacer in the display area on an inner surface of the second substrate, wherein the first column spacer corresponds to one of the first light-blocking layers and has a first height, and the second column spacer corresponds to another of the first light-blocking layers and has a second height; and
 - a third column spacer in the non-display area on the inner surface of the second substrate and having the second height, wherein one of the third column spacer and the second light-blocking layer comprises a flat surface and a plurality of depressed portions and a depth of the depressed portions is smaller than a height of the one of the third column spacer and the second light-blocking layer,
- wherein the first light-blocking layer includes a first color pattern and a second color pattern, and the second light-blocking layer includes a third color pattern and a fourth color pattern,
- wherein the third column spacer is spaced apart from the second light-blocking layer when an external force is not applied, and is in contact with the second light-blocking layer when an external force is applied,
- wherein the first height is greater than the second height,
- wherein an arrangement density of the first column spacer is lower than an arrangement density of the second column spacer, and
- wherein a seal pattern is disposed between the first and second substrates, and a surface of the third column spacer facing the second light-blocking layer is in contact with the seal pattern.
2. The curved liquid crystal display device according to claim 1, wherein the first color pattern and the third color pattern include a same material as the red color filter, and the second color pattern and the fourth color pattern include a same material as the blue color filter.

14

3. The curved liquid crystal display device according to claim 1, wherein the third column spacer includes the plurality of depressed portions.

4. The curved liquid crystal display device according to claim 3, wherein the fourth color pattern has a smaller area than the third color pattern to partially expose the third color pattern, and the depressed portions correspond to the fourth color pattern.

5. The curved liquid crystal display device according to claim 1, wherein the fourth color pattern includes the plurality of depressed portions.

6. The curved liquid crystal display device according to claim 5, wherein the fourth color pattern has a smaller area than the third color pattern to partially expose the third color pattern.

7. The curved liquid crystal display device according to claim 5, wherein the depth of the depressed portions is smaller than a height of the fourth color pattern.

8. The curved liquid crystal display device according to claim 5, wherein the depth of the depressed portions is a same as a height of the fourth color pattern, and the third color pattern is exposed through the depressed portions.

9. The curved liquid crystal display device according to claim 1, wherein the first column spacer is in one of 36 pixel regions, and the second column spacer is in the remainder of the 36 pixel regions.

10. A display device, comprising:

- a first substrate and a second substrate having a display area and a non-display area;

- a first line and a second line are formed on the first substrate and crossing each other to define a pixel region;

- a color filter layer in the pixel region of the first substrate and including red, green, and blue color filters;

- a first light-blocking layer formed on the display area of the first substrate;

- a second light-blocking layer formed on the non-display area of the first substrate;

- a first column spacer formed on the display area of the second substrate and has a first height;

- a second column spacer formed on the display area of the second substrate and has a second height; and

- a third column spacer formed on the non-display area of the second substrate and has a third height, wherein one of the third column spacer and the second light-blocking layer comprises a flat surface and a plurality of depressed portions and a depth of the depressed portions is smaller than a height of the one of the third column spacer and the second light-blocking layer,

- wherein the first column spacer and the third column spacer are corresponding to the first light-blocking layer and the second light-blocking layer respectively, wherein the second light-blocking layer includes same materials as the red and blue color filters,

- wherein the first height of the first column spacer is greater than the third height of the third column spacer, and the first height of the first column spacer is greater than the second height of the second column spacer, wherein an arrangement density of the first column spacer is lower than an arrangement density of the second column spacer, and

- wherein a seal pattern is disposed between the first and second substrates, and a surface of the third column spacer facing the second light-blocking layer is in contact with the seal pattern.

11. The display device according to claim 10, wherein the third column spacer is spaced apart from the second light-

15

blocking layer when an external force is not applied, and is in contact with the second light-blocking layer when an external force is applied.

12. The display device according to claim 10, wherein the third column spacer includes the plurality of depressed portions and the third height of the third column spacer is substantially same as the second height of the second column spacer.

13. An apparatus comprising:

a pair of substrates facing each other and having a display area and a non-display area;

a first light-blocking structure between adjacent pixel regions in the display area on at least one of the substrates, and a second light-blocking structure in the non-display area;

an array of first column spacers on one of the substrates, each of the first column spacers having a first height and configured to be in contact with a surface of the first light-blocking structure to provide a gap distance between the substrates;

an array of second column spacers on the one of the substrates, each of the second column spacers having a second height that is less than that of the first column spacers to substantially maintain the gap distance across portions of the substrates, the specific height being appropriate for accommodating possible physical stress or tension acting on at least one of the substrates; and

an array of third column spacers on at least one of the substrates at the non-display area thereof, each of the third column spacers having a third height, wherein one

16

of the third column spacers and the second light-blocking structure comprises a flat surface and a plurality of depressed portions and a depth of the depressed portions is smaller than a height of the one of the third column spacers and the second light-blocking layer,

wherein the second light-blocking structure in the non-display area includes at least two color filter layers, wherein the first height of the first column spacer is greater than the second height of the second column spacer, and the first height of the first column spacer is greater than the third height of the third column spacer, wherein an arrangement density of the first column spacer is lower than an arrangement density of the second column spacer, and

wherein a seal pattern is disposed between the first and second substrates, and a surface of the third column spacer facing the second light-blocking layer is in contact with the seal pattern.

14. The apparatus of claim 13, wherein the array of third column spacers is configured with light absorbing black resin material in consideration of potential light leakage phenomena at edge or corner portions of the substrates.

15. The apparatus of claim 14, wherein the substrates, first and second light-blocking layers, and the first through third column spacers are implemented in a liquid crystal display (LCD) device, and the physical stress or tension is caused by at least one among a curvature of the LCD device and physical touch contact applied by a user onto a surface of at least one of the substrates.

* * * * *

专利名称(译)	弯曲的液晶显示装置		
公开(公告)号	US10162222	公开(公告)日	2018-12-25
申请号	US14/723128	申请日	2015-05-27
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	CHAE HEE YOUNG PARK SE HONG KONG IN YEONG PARK JONG SIN PYUN JA YOUNG LEE DONG YOON YOUN JAE WOONG		
发明人	CHAE, HEE-YOUNG PARK, SE-HONG KONG, IN-YEONG PARK, JONG-SIN PYUN, JA-YOUNG LEE, DONG-YOON YOUN, JAE-WOONG		
IPC分类号	G02F1/1339 G02F1/1335 G02F1/1343 G02F1/1362		
CPC分类号	G02F1/13394 G02F1/133512 G02F1/134363 G02F2001/136222 G02F2001/13396		
代理机构(译)	DENTONS美国律师事务所		
优先权	1020140077044 2014-06-24 KR		
其他公开文献	US20150370116A1		
外部链接	Espacenet		

摘要(译)

弯曲的LCD装置包括第一和第二基板;栅极和数据线位于第一基板上的显示区域中并限定像素区域;薄膜晶体管连接到栅极和数据线;像素区域中的滤色器层;彩色滤光层上的像素和公共电极;第一基板上方的显示区域中的第一光阻挡层;在第一基板上方的非显示区域中的第二光阻挡层;第二基板上的显示区域中的第一和第二柱状隔离物, 其中第一柱状隔离物具有第一高度, 第二柱状隔离物具有第二高度;第二柱状间隔物位于第二基板上的非显示区域中并具有第二高度, 其中当施加外力时, 第三柱状间隔物与第二光阻挡层点接触。

