



US 20130148061A1

(19) **United States**(12) **Patent Application Publication**
Wang et al.(10) **Pub. No.: US 2013/0148061 A1**(43) **Pub. Date: Jun. 13, 2013**(54) **LIQUID CRYSTAL DISPLAY PANEL AND
LIQUID CRYSTAL DISPLAY**(75) Inventors: **Shijun Wang**, Beijing (CN); **Xiaochuan
Chen**, Beijing (CN)(73) Assignee: **BEIJING BOE
OPTOELECTRONICS
TECHNOLOGY CO., LTD.**, Beijing
(CN)(21) Appl. No.: **13/699,565**(22) PCT Filed: **Aug. 1, 2012**(86) PCT No.: **PCT/CN2012/079530**

§ 371 (c)(1),

(2), (4) Date: **Nov. 21, 2012**(30) **Foreign Application Priority Data**

Aug. 2, 2011 (CN) 201110219762.7

Publication Classification(51) **Int. Cl.****G02F 1/1343**


(2006.01)

(52) **U.S. Cl.**CPC **G02F 1/134309** (2013.01)USPC **349/106**

(57)

ABSTRACT

The embodiment of present invention discloses a liquid crystal display panel and a liquid crystal display. The liquid crystal display panel comprises: a color filter substrate and an array substrate, which are assembled oppositely to form a cell; a liquid crystal layer provided between the color filter substrate and the array substrate; and a layered structure adapted to drive rotation of liquid crystal in the liquid crystal layer and comprising a gate metallic layer, a pixel electrode layer and a common electrode layer, wherein the gate metallic layer comprises a gate wiring, the common electrode layer comprises a first auxiliary electrode and a common electrode that are electrically-insulated, the pixel electrode layer comprises a pixel electrode, and the common electrode and the pixel electrodes are used to form an electric field for driving the liquid crystal; and wherein the first auxiliary electrode and the gate wiring are electrically connected so as to be connected in parallel in circuit.

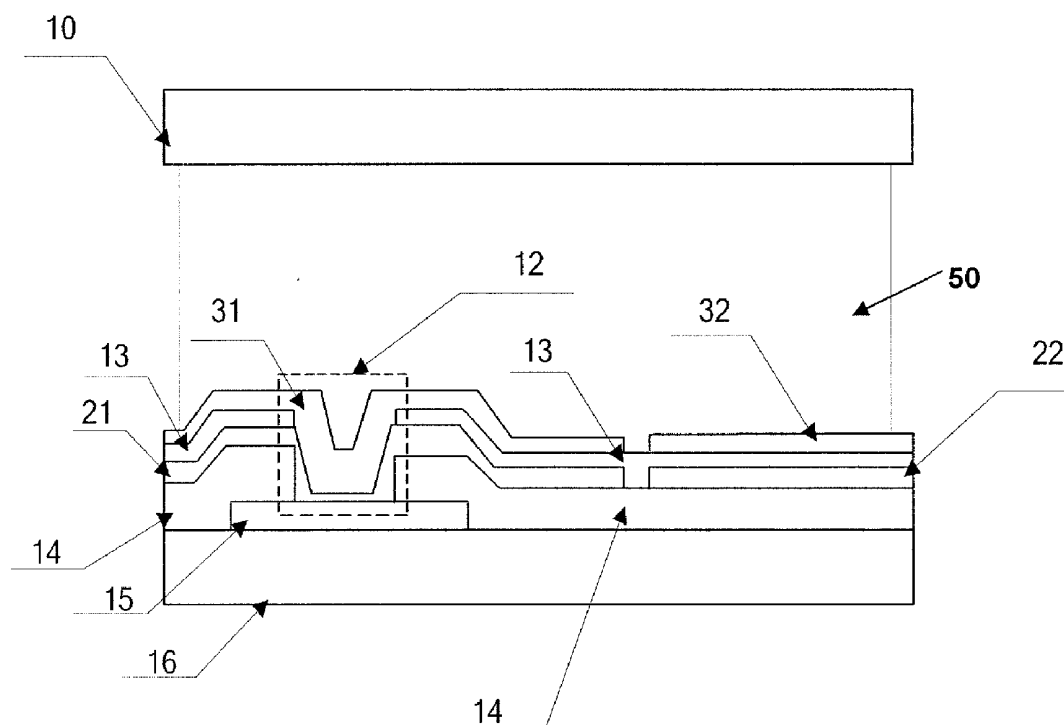

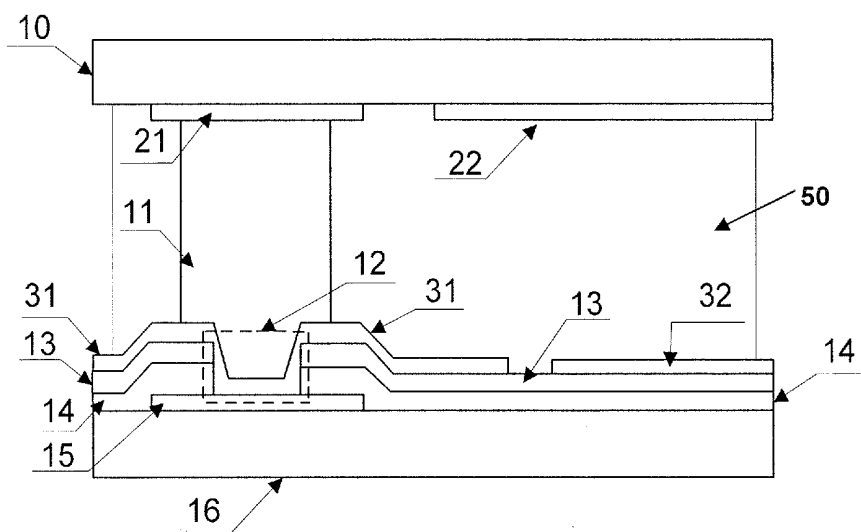


FIG.1

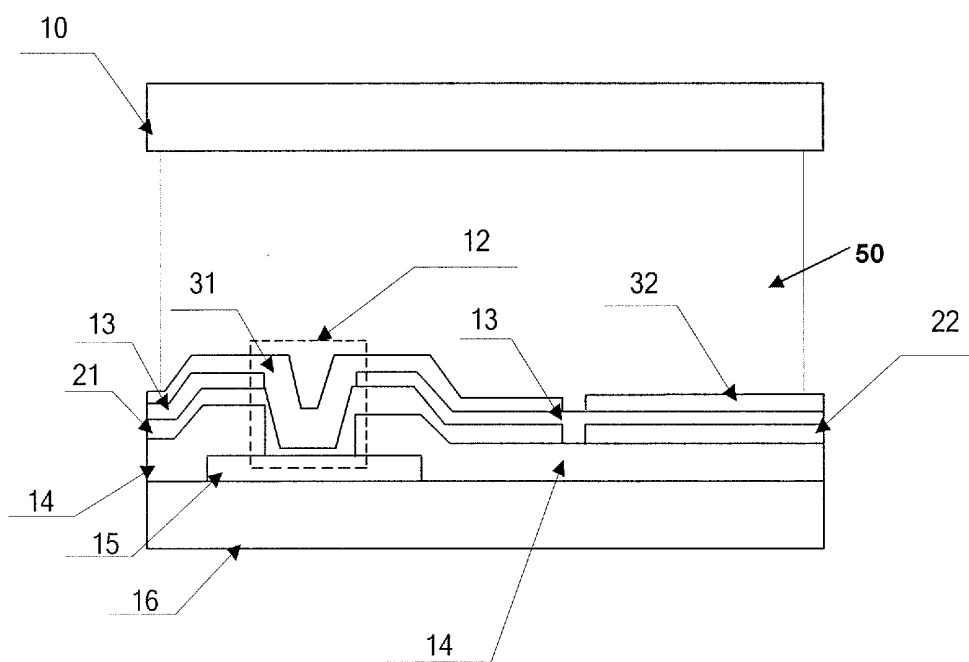


FIG.2

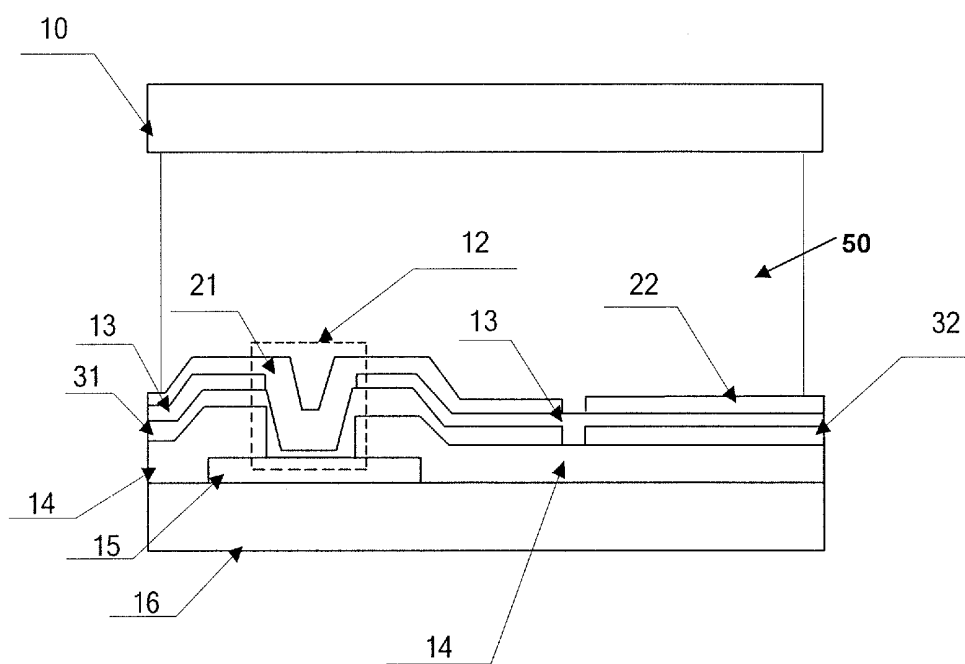


FIG.3

LIQUID CRYSTAL DISPLAY PANEL AND LIQUID CRYSTAL DISPLAY

TECHNICAL FIELD

[0001] Embodiments of present invention relates to a liquid crystal display panel and a liquid crystal display.

BACKGROUND

[0002] In traditional technology, a propel link gate (PLG) wiring in the liquid crystal display panel is mainly used to transmit the signals output from the source integrated circuit (IC) to the gate IC, or to transmit the signals between at least two gate ICs. Usually, the PLG wiring is arranged at the periphery of a liquid crystal display panel, and prepared on the same layer as a gate line, the bottom electrode line of a storage capacitor. The manufacturing process is as follows: preparing a metallic film on the array substrate, and forming a gate line, a storage capacitor electrode line as well as a PLG wiring through a patterning process.

[0003] Because the resistance of the PLG wiring is required to be less than an upper limit value so as not to impact picture quality of a liquid crystal display, at least the following matters were found by the inventor in the process of designing and preparing the above PLG wiring.

[0004] Firstly, in designing a PLG wiring, and in order that the designed PLG wiring has resistance less than the upper limit value, an extremely fine mapping for the PLG wiring is needed when drawing a PCB layout, and further, the shape of the PLG wiring needs to be modified continuously to meet the requirement for the upper limit value, which increases the complication of the design of a PCB layout; secondly, during an actual manufacturing process, technical deviation sometimes causes the resistance of the PLG wiring to be greater than the upper limit value, and in order to avoid such technical deviation, the requirements for the manufacture technology are improved.

SUMMARY

[0005] An embodiment of present invention provides a liquid crystal display panel, composing: a color filter substrate and an array substrate, which are assembled oppositely to form a cell; a liquid crystal layer provided between the color filter substrate and the array substrate; and a layered structure adapted to drive rotation of liquid crystal in the liquid crystal layer and comprising a gate metallic layer, a pixel electrode layer and a common electrode layer, wherein the gate metallic layer comprises a gate wiring, the common electrode layer comprises a first auxiliary electrode and a common electrode that are electrically-insulated, the pixel electrode layer comprises a pixel electrode, and the common electrode and the pixel electrodes are used to form an electric field for driving the liquid crystal; wherein the first auxiliary electrode and the gate wiring are electrically connected so as to be connected in parallel in circuit.

[0006] An embodiment of present invention also provides a liquid crystal display composing the above liquid crystal display panel.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] In order to clearly illustrate the technical solution of the embodiments of the invention, the drawings needed for the description of the embodiments or the prior art will be briefly described in the following; it is obvious that the

described drawings are only related to some embodiments of the invention and thus are not limitative of the invention.

[0008] FIG. 1 is a structural schematic view of a liquid crystal display panel provided by a first embodiment;

[0009] FIG. 2 is a structural schematic view of a liquid crystal display panel provided by an embodiment; and

[0010] FIG. 3 is a structural schematic view of a liquid crystal display panel provided by a third embodiment.

DETAILED DESCRIPTION

[0011] A clearly and full description about the technical solution in the embodiments of the present invention will be prepared in the following in conjunction with drawings, and apparently, the described embodiments are only part of the described embodiments, but not the all of the embodiments. Based on the described embodiments of present invention, all the other embodiments achieved by those skilled in the art without any creative work belong to the protective scope of the present invention.

[0012] An embodiment of the present invention provide a liquid crystal display panel and a liquid crystal display, in which a PLG wiring can be prepared with less complicated design and manufacturing technology precision.

[0013] By forming the common electrode layer comprising a first auxiliary electrode and a common electrode which are electrically-insulated from each other, and electrically connecting the first auxiliary electrode and the PLG wiring in parallel, the resistance of the circuit portion including the PLG wiring can be reduced to the resistance obtained by connecting the PLG wiring per se and the first auxiliary electrode in parallel, the fineness for patterning the PLG wiring when designing the PLG wiring can be lowered greatly, the compact of the degraded technology upon resistance of the PLG wiring can be overcome as well, and therefore the purpose of reducing design complexity as well as the technology precision is achieved. Embodiment 1 The embodiment of the present invention provides a liquid crystal display panel, as shown in FIG. 1. The liquid crystal display panel comprises: a color filter substrate **10** and an array substrate **16** which are assembled oppositely to form a cell; a liquid crystal layer **50** arranged between the color filter substrate **10** and the array substrate **16**; and a layered structure used for driving rotation of liquid crystal in the liquid crystal layer **50**. The layered structure comprises a gate metallic layer, a pixel electrode layer as well as a common electrode layer. The Gate metallic layer comprises a PLG wiring **15**; the common electrode layer comprises a first auxiliary electrode **21** and a common electrode **22** which are electrically-insulated from each other; and the first auxiliary electrode **21** and The PLG wiring **15** are electrically connected. The PLG wiring **15** is, for example, formed in a periphery area of the liquid crystal panel outside of a display area.

[0014] The first auxiliary electrode **21** and the PLG wiring **15** are electrically connected, that is, the PLG wiring **15** and the first auxiliary electrode **21** in the circuit are connected in parallel. In this way, the resistance of the circuit portion including the PLG wiring **15** may be effectively reduced, thus reaching the goal of lowering the design complexity of the PLG wiring **15** and its manufacturing technology precision.

[0015] Further, in the case of the liquid crystal display panel shown in FIG. 1, the common electrode layer is formed on the color filter substrate **10**, the pixel electrode layer is formed on the array substrate **16** and comprises a pixel electrode **32**. The liquid crystal display panel of such configuration drives the

rotation of liquid crystal by forming a vertical electric field between the common electrode in the common electrode layer and the pixel electrode in the pixel electrode layer. Therefore, such a liquid crystal display panel is one of vertical electric field driving type. In this embodiment, the pixel electrode layer also comprises a second auxiliary electrode 31 which is electrically-insulated from the pixel electrode 32.

[0016] The above common electrode 22 in the common electrode layer and a pixel electrode 32 in the pixel electrode layer are formed for each sub-pixel in the display area of the liquid crystal panel, and each sub-pixel comprises the common electrode 22 and the pixel electrode 32. In this case, the electrical connection between the first auxiliary electrode 21 and the PLG wiring 15 may be formed in the following manner. The first auxiliary electrode 21 and the second auxiliary electrode 31 is electrically connected, and the second auxiliary electrode 31 is, for example, electrically connected to the PLG wiring 15 through a via hole 12.

[0017] Specifically, the above layered structure may be produced as follows.

[0018] There is provided the array substrate 16, which comprises a gate metallic layer comprising the PLG wiring, a gate insulating layer, an active layer, a source-drain metallic layer, a protective layer formed thereon in this order. The PLG wiring 15 is covered by the gate insulating layer 14 and the protective layer 13 at the edge of the array substrate 16, as shown in FIG. 1; The via hole 12 is prepared in respective layers right over the PLG wiring through a patterning process, so as to expose a portion of the PLG wiring; next, the pixel electrode layer is prepared on the array substrate formed with via hole 12, and the pixel electrode layer is divided into a second auxiliary electrode 31 and a pixel electrode 32, which are electrically-insulated from each other by a patterning process.

[0019] For example, in this liquid crystal display panel, the electrical connection between the first auxiliary electrode 21 and the second auxiliary electrode 31 may be achieved in the following manner. The first auxiliary electrode 21 is electrically connected to the second auxiliary electrode 31 with conductive adhesive 11; for example, the conductive adhesive 11 is anisotropic conductive adhesive; the anisotropic conductive adhesive is, for example, conductive in the vertical direction but not conductive in the transverse direction. One example of the conductive adhesive 11 is sealant adhesive (seal glue) blended with Au balls.

[0020] This embodiment of the present invention also provides a liquid crystal display employing the above liquid crystal display panel. The liquid crystal display comprises a liquid crystal display panel. With reference to FIG. 1, the liquid crystal display panel comprises: a color filter substrate 10 and an array substrate 16 which are assembled oppositely to form a cell; a liquid crystal layer 50 arranged between the color filter substrate 10 and the array substrate 16; and a layered structure used for driving rotation of liquid crystal in the liquid crystal layer 50. The layered structure comprises a gate metallic layer, a pixel electrode layer as well as a common electrode layer. The gate metallic layer comprises a propel link gate (PLG) wiring 15. The common electrode layer comprises a first auxiliary electrode 21 and a common electrode 22 which are electrically-insulated from each other. The first auxiliary electrode 21 and the PLG wiring 15 are electrically connected.

[0021] The first auxiliary electrode 21 and the PLG wiring are electrically connected, that is, the PLG wiring 15 and the

first auxiliary electrode 21 in the circuit are connected in parallel; in this way, it's possible to reduce the resistance of the circuit portion including the PLG wiring 15, thus reaching the goal of lowering the design complexity of the PLG wiring 15 and its manufacturing precision.

[0022] Further, in the liquid crystal display, the common electrode layer is formed on the color filter substrate 10, the pixel electrode layer is formed on the array substrate 16 and comprises a pixel electrode 32. The liquid crystal display panel of such configuration drives the rotation of liquid crystal by forming a vertical electric field between the common electrode in the common electrode layer and the pixel electrode in the pixel electrode layer. In this embodiment, the pixel electrode layer further comprises a second auxiliary electrode 31 which is electrically-insulated from the pixel electrode 32.

[0023] In this case, the electrical connection between the first auxiliary electrode 21 and the PLG wiring 15 may be formed in the following manner. The first auxiliary electrode 21 and the second auxiliary electrode 31 is electrically connected, and the second auxiliary electrode 31 is electrically connected to the PLG wiring 15 through a via hole 12.

[0024] The layered structure in the liquid crystal display of this embodiment can be produced by the manufacturing method described referring to the liquid crystal display panel shown in FIG. 1, which description is omitted here.

[0025] For example, in the liquid crystal display, the electrical connection between the first auxiliary electrode 21 and the second auxiliary electrode 31 may be achieved in the following manner. The first auxiliary electrode 21 is electrically connected to the second auxiliary electrode 31 by conductive adhesive 11. For example, the conductive adhesive 11 is anisotropic conductive adhesive; the anisotropic conductive adhesive is, for example, conductive in the vertical direction but not conductive in the transverse direction. One example of the conductive adhesive 11 is sealant adhesive (seal glue) blended with Au balls.

[0026] In the liquid crystal display panel and the liquid crystal display provided by the embodiment of the present invention, the first auxiliary electrode 21 is electrically connected to the second auxiliary electrode 31 through the conductive adhesive 11, and the second auxiliary electrode 31 is electrically connected to the PLG wiring 15 through the via hole 12; in this way, the electric connection between the PLG wiring 15 and the first auxiliary electrode 21 is established, that is, the first auxiliary electrode 21 and the PLG wiring 15 in this circuit is connected in parallel, thus it's possible to reduce the resistance of circuit portion including the PLG wiring 15, and reach the goal of lowering the design complexity of the PLG wiring and its manufacturing technology precision.

Embodiment 2

[0027] The embodiment of the present invention presents a liquid crystal display panel, as shown in FIG. 2. The liquid crystal display panel comprises: a color filter substrate 10 and an array substrate 16 which are assembled oppositely to form a cell; a liquid crystal layer 50 arranged between the color filter substrate 10 and the array substrate 16; and a layered structure used for driving rotation of liquid crystal in the liquid crystal layer 50. The layered structure comprises a gate metallic layer, a pixel electrode layer as well as a common electrode layer. The gate metallic layer comprises a propel link gate (PLG) wiring 15; the common electrode layer com-

prises a first auxiliary electrode **21** and a common electrode **22** which are electrically-insulated from each other; and the first auxiliary electrode **21** and the PLG wiring **15** are electrically connected. The PLG wiring **15** is formed, for example, in a periphery area of the liquid crystal panel outside of a display area.

[0028] Further, in the case of the liquid crystal display panel shown in FIG. 2, both the common electrode layer and the pixel electrode layer are formed on the array substrate **16**, and the common electrode layer is below the pixel electrode layer, and the pixel electrode layer comprises a pixel electrode. The liquid crystal display panel of such configuration drives the rotation of liquid crystal by forming a fringe field between the common electrode in the common electrode layer and the pixel electrode in the pixel electrode layer. Therefore, such liquid crystal display panel is one fringe electrical field switching type. In such a liquid crystal display panel, the first auxiliary electrode **21** and the PLG wiring **15** is, for example, electrically connected with the first auxiliary electrode **21** being electrically connected to the PLG wiring **15** through the via hole **12**.

[0029] Here “below” means the location closer to the array substrate **16**. The common electrode layer is placed below the pixel electrode layer, that is, the common electrode layer is closer to the array substrate **16** than the pixel electrode layer.

[0030] The above common electrode **22** in the common electrode layer and a pixel electrode **32** in the pixel electrode layer are formed for each sub-pixel in the display area of the liquid crystal panel, and each sub-pixel comprises the common electrode **22** and the pixel electrode **32**. In addition, the pixel electrode **32** may be formed with slits (not shown) so as to expose the common electrode **22** of the slits. Or, the common electrode **22** may further be formed with slits.

[0031] Specifically, the following method may be referred to for producing the layered structure of the liquid crystal display panel shown in FIG. 2.

[0032] There is provided an array substrate on which a gate metallic layer, a gate insulating layer, and an active layer are formed in this order. As shown in FIG. 2, the PLG wiring **15** is formed on the edge of the array substrate **16** and covered by the gate insulating layer **14**; a via hole **12** is formed right over the PLG wiring **15** by a patterning process; next, a common electrode layer is formed on the array substrate formed with the via hole **12**, and the common electrode layer is divided into a first auxiliary electrode **21** and a common electrode **22** which are electrically-insulated from each other by a patterning process; a first protective layer, a source-drain metallic layer, a second protective layer and a pixel electrode layer are formed on the array substrate formed with common electrode layer; and the protective layer **13** in FIG. 2 comprises the first protective layer and the second protective layer.

[0033] In order to further reduce the resistance of the circuit portion including the PLG wiring, as shown in FIG. 2, the pixel electrode layer comprises the pixel electrode **32** and the second auxiliary electrode **31** which is electrically-insulated from the pixel electrode **32**.

[0034] The first auxiliary electrode **21** is electrically connected to the second auxiliary electrode **31** through the second via hole **12**.

[0035] Apparently, here the PLG wiring, the first auxiliary electrode **21**, and the second auxiliary electrode **31** are connected in parallel in the circuit, thus reaching the goal of further reducing the resistance of the circuit portion including the PLG wiring.

[0036] This embodiment of the Present invention also provides a liquid crystal display employing the above liquid crystal display panel. The liquid crystal display comprises a liquid crystal display panel. With reference to FIG. 2, the liquid crystal display panel comprises: a color filter substrate **10** and an array substrate **16** which are assembled oppositely to form a cell; a liquid crystal layer **50** arranged between the color filter substrate **10** and the array substrate **16**; and a layered structure used for driving rotation of liquid crystal in the liquid crystal layer **50**. The layered structure comprises a gate metallic layer, a pixel electrode layer as well as a common electrode layer. The gate metallic layer comprises a propel link gate (PLG) wiring **15**; the common electrode layer comprises a first auxiliary electrode **21** and the common electrode **22** which are electrically-insulated from each other; and the first auxiliary electrode **21** and the PLG wiring **15** are electrically connected.

[0037] Further, both the common electrode layer and the pixel electrode layer are formed on the array substrate **16**, and the common electrode layer is below the pixel electrode layer, the pixel electrode layer comprises pixel electrode. The liquid crystal display panel of such configuration drives the rotation of liquid crystal by forming a fringe field between the common electrode in the common electrode layer and the pixel electrode in the pixel electrode layer. In such a liquid crystal display panel, the first auxiliary electrode **21** and the PLG wiring **15** is, for example, electrically connected with the first auxiliary electrode **21** being electrically connected to the PLG wiring **15** through a first via hole **12**.

[0038] Here “below” means the location closer to the array substrate **16**. The common electrode layer is placed below the pixel electrode layer, that is, the common electrode layer is closer to the array substrate **16** than the pixel electrode layer.

[0039] In order to further reduce the resistance of the circuit portion including the PLG wiring, as shown in FIG. 2, the pixel electrode layer further comprises a second auxiliary electrode **31** which is electrically-insulated from the pixel electrode **32**.

[0040] The second auxiliary electrode **32** is electrically connected to the first auxiliary electrode **21** through a second via hole **12**.

[0041] Here the PLG wiring **15** and the first auxiliary electrode **21**, the second auxiliary electrode **31** are connected in parallel in circuit, thus reaching the goal of further reducing the resistance of the circuit portion including the PLG wiring.

[0042] It's necessary to be noted that the layered structure in the liquid crystal display of this embodiment may be produced by the manufacturing method described with reference to the liquid crystal display panel shown in FIG. 2, which description is omitted here.

[0043] This embodiment of the present invention provides a liquid crystal display panel and a liquid crystal display, in which the first auxiliary electrode **21** can be directly electrically connected to the PLG wiring **15** through the first via hole **12**, that is, the first auxiliary electrode **21** and the PLG wiring in the circuit are connected in parallel, thereby reducing the resistance of the circuit portion including the PLG wiring **15** and further reaching the goal of lowering the design complexity of the PLG wiring and its manufacturing technology precision.

Embodiment 3

[0044] The embodiment of the present invention presents a liquid crystal display panel, as shown in FIG. 3. The liquid

crystal display panel comprises: a color filter substrate **10** and an array substrate **16** which are assembled oppositely to form a cell; a liquid crystal layer **50** arranged between the color filter substrate **10** and the array substrate **16**; and a layered structure used for driving rotation of liquid crystal in the liquid crystal layer **50**. The layered structure comprises a gate metallic layer, a pixel electrode layer as well as a common electrode layer. The gate metallic layer comprises a propel link gate (PLG) wiring **15**; the common electrode layer comprises a first auxiliary electrode **21** and a common electrode **22** which are electrically-insulated to each other; and the first auxiliary electrode **21** and the PLG wiring **15** are electrically connected. The PLG wiring **15** is formed, for example, in a periphery area of the liquid crystal panel outside of a display area.

[0045] Further, in the liquid crystal display panel shown in FIG. 3, both the common electrode layer and the pixel electrode layer are formed on the array substrate **16**, and the pixel electrode layer is below the common electrode layer and comprises a pixel electrode. The liquid crystal display panel of such configuration also drives rotation of liquid crystal by a fringe field formed between the common electrode in the common electrode layer and the pixel electrode in the pixel electrode layer, which is similar to the liquid crystal display panel provided in the second embodiment. Therefore, such liquid crystal display panel is one fringe electrical field switching type. In such a liquid crystal display panel, the pixel electrode layer further comprises a second auxiliary electrode **31** which is electrically-insulated from the pixel electrode **32**.

[0046] Further, the electric connection between the first auxiliary electrode **21** and the PLG wiring **15** may be established in the following manner. The first auxiliary electrode **21** and the second auxiliary electrode **31** is electrically connected through the second via hole **12**, and the second auxiliary electrode **31** is electrically connected to the PLG wiring **15** through a first via hole **12**.

[0047] Here “below” means the location closer to the array substrate **16**; the pixel electrode layer is placed below the pixel electrode layer, that is, the pixel electrode layer is closer to the array substrate **16** than the common electrode layer.

[0048] The above common electrode **22** in the common electrode layer and a pixel electrode **32** in the pixel electrode layer are formed for each sub-pixel in the display area of the liquid crystal panel, that is, each sub-pixel comprises the common electrode **22** and the pixel electrode **32**. In addition, the common electrode **22** may be formed with slits (not shown) so as to expose the pixel electrode **32** in the slits. Otherwise, the pixel electrode **32** may further be formed with slits.

[0049] Specifically, the following method may be referred to for producing the layered structure of the liquid crystal display panel shown in FIG. 3.

[0050] There is provided an array substrate which comprising a gate metallic layer including a PLG wiring, a gate insulating layer, and an active layer formed thereon in this order. The PLG wiring **15** is covered by the gate insulating layer **14** at the edge of the array substrate, as shown in FIG. 3; A via hole **12** is prepared right over the PLG by a patterning process; next, the pixel electrode layer is prepared on the array substrate formed with a via hole **12**, and the pixel electrode layer is divided into the second auxiliary electrode **31** and the pixel electrode **32** which are electrically-insulated from each other by a patterning process; a source-drain metallic layer and a protective layer **13** are formed on the array

substrate formed with the pixel electrode layer, and a second via hole **12** is formed at the location of the first via hole **12** on the protective layer **13** by using a same mask plate as that for forming the first via hole **12**; a common electrode layer is formed on the array substrate formed with the second via hole **12**, and the common electrode layer is divided into a first auxiliary electrode **21** and a common electrode **22** which are electrically-insulated from each other by a patterning process.

[0051] This embodiment of the present invention also provides a liquid crystal display employing the above liquid crystal display panel. The liquid crystal display comprises a liquid crystal display panel. With reference to FIG. 1, the liquid crystal display panel comprises: a color filter substrate **10** and an array substrate **16** which are assembled oppositely to form a cell; a liquid crystal layer **50** arranged between the color filter substrate **10** and the array substrate **16**; and a layered structure used for driving rotation of liquid crystal in the liquid crystal layer **50**. The layered structure comprises a gate metallic layer, a pixel electrode layer as well as a common electrode layer. The gate metallic layer comprises a propel link gate (PLG) wiring **15**; the common electrode layer comprises a first auxiliary electrode **21** and a common electrode **22** which are electrically-insulated from each other; and the first auxiliary electrode **21** and the PLG wiring **15** are electrically connected.

[0052] Further, in the liquid crystal display panel shown in FIG. 3, both the common electrode layer and the pixel electrode layer are formed on the array substrate **16**, and the pixel electrode layer is below the common electrode layer and comprises a pixel electrode. The liquid crystal display panel of such configuration also drives rotation of liquid crystal by the fringe field formed between the common electrode in the common electrode layer and the pixel electrode in the pixel electrode layer, which is similar to the liquid crystal display panel provided in the second embodiment; In such a liquid crystal display panel, the pixel electrode layer further comprises a second auxiliary electrode **31** which is electrically-insulated from the pixel electrode **32**.

[0053] Further, the electric connection between the first auxiliary electrode **21** and the PLG wiring **15** may be established in the following manner. The first auxiliary electrode **21** and the second auxiliary electrode **31** is electrically connected through a second via hole **12**, and the second auxiliary electrode **31** is electrically connected to the PLG wiring **15** through a first via hole **12**.

[0054] Here “below” means the location closer to the array substrate **16**; the pixel electrode layer is placed below the pixel electrode layer, that is, the pixel electrode layer is closer to the array substrate **16** than the common electrode layer is.

[0055] It's necessary to be noted that the layered structure in the liquid crystal display of this embodiment may be produced by the manufacturing method described with reference to the liquid crystal display panel shown in FIG. 3, which description is omitted here.

[0056] This embodiment of the present invention provides a liquid crystal display panel and a liquid crystal display, in which the first auxiliary electrode **21** can be electrically connected to the second auxiliary electrode **31** through the second via hole **12**, and the second auxiliary electrode **31** is electrically connected to the PLG wiring **15** through the first via hole **12**, such that the first auxiliary electrode **21** and the PLG wiring **15** are electrically connected, that is, the first auxiliary electrode **21** and the PLG wiring **15** in the circuit are

connected in parallel and thus reaching the goal of lowering the design complexity of the PLG wiring **15** and its manufacturing technology precision.

[0057] All the above are just certain embodiments of the present invention, but the scope of the present invention is not limited thereto, and various changes and alternation can be easily obtained by those skilled in the art within the disclosed technical scope by this invention, all of which should be encompassed in the protection reach of the present invention. Hence, the protecting scope of the present invention should be accord with the protection scope of the claims.

1. A liquid crystal display panel, comprising:
 - a color filter substrate and an array substrate, which are assembled oppositely to form a cell;
 - a liquid crystal layer provided between the color filter substrate and the array substrate; and
 - a layered structure adapted to drive rotation of liquid crystal in the liquid crystal layer and comprising a gate metallic layer, a pixel electrode layer and a common electrode layer,
 wherein the gate metallic layer comprises a gate wiring, the common electrode layer comprises a first auxiliary electrode and a common electrode that are electrically-insulated, the pixel electrode layer comprises a pixel electrode, and the common electrode and the pixel electrodes are used to form an electric field for driving the liquid crystal; and wherein the first auxiliary electrode and the gate wiring are electrically connected so as to be connected in parallel in circuit.
2. The liquid crystal display panel according to claim 1, wherein the common electrode layer is formed onto the color filter substrate, and the pixel electrode layer is formed onto the array substrate.
3. The liquid crystal display panel according to claim 2, wherein the pixel electrode layer further comprises a second auxiliary electrode electrically-insulated from the pixel electrode, and
 - the first auxiliary electrode and the second auxiliary electrode are electrically connected, and the second auxiliary electrode are electrically connected to the gate wiring through a via hole.

4. The liquid crystal display panel according to claim 3, wherein the first auxiliary electrode and the second auxiliary electrode are electrically connected through conductive adhesive.

5. The liquid crystal display panel according to claim 4, wherein the conductive adhesive is anisotropic conductive adhesive.

6. The liquid crystal display panel according to claim 1, wherein the common electrode layer and the pixel electrode layer are both formed above the array substrate, and the common electrode layer is below the pixel electrode layer; and

the first auxiliary electrode is directly electrically connected to the gate wiring through a first via hole.

7. The liquid crystal display panel according to claim 6, wherein the pixel electrode layer further comprises a second auxiliary electrode electrically-insulated from the pixel electrode; and the second auxiliary electrode is electrically connected to the first auxiliary electrode through a second via hole.

8. The liquid crystal display panel according to claim 7, wherein the pixel electrode is formed with slits.

9. The liquid crystal display panel according to claim 1, wherein the common electrode layer and the pixel electrode layer are both formed above the array substrate, and the common electrode layer is below the pixel electrode layer; the pixel electrode layer further comprises a second auxiliary electrode electrically-insulated from the pixel electrode; and

the first auxiliary electrode and the second auxiliary electrode are electrically connected through a second via hole, and the second auxiliary electrode are electrically connected to the gate wiring through a first via hole.

10. The liquid crystal display panel according to claim 9, wherein the common electrode is formed with slits.

11. A liquid crystal display comprising the liquid crystal display panel according to claim 1.

* * * * *

专利名称(译)	液晶显示面板和液晶显示器		
公开(公告)号	US20130148061A1	公开(公告)日	2013-06-13
申请号	US13/699565	申请日	2012-08-01
[标]申请(专利权)人(译)	王世军 陈小川		
申请(专利权)人(译)	王，使君 陈，周小川		
当前申请(专利权)人(译)	北京京东方光电科技有限公司.		
[标]发明人	WANG SHIJUN CHEN XIAOCHUAN		
发明人	WANG, SHIJUN CHEN, XIAOCHUAN		
IPC分类号	G02F1/1343		
CPC分类号	G02F1/134309 G02F1/136286 G02F2201/121 G02F2001/134372 G02F2001/13629 G02F2001/134318 G02F1/1345		
优先权	201110219762.7 2011-08-02 CN		
其他公开文献	US9176346		
外部链接	Espacenet USPTO		

摘要(译)

本发明实施例公开了一种液晶显示面板和液晶显示器。液晶显示面板包括：滤色器基板和阵列基板，它们相对组装以形成单元；液晶层设置在滤色器基板和阵列基板之间；分层结构，适于驱动液晶层中的液晶旋转，包括栅极金属层，像素电极层和公共电极层，其中栅极金属层包括栅极布线，公共电极层包括第一栅极金属层所述辅助电极和公共电极电绝缘，所述像素电极层包括像素电极，所述公共电极和所述像素电极用于形成用于驱动所述液晶的电场；并且其中第一辅助电极和栅极布线电连接，以便在电路中并联连接。

