



US 20150085230A1

(19) **United States**(12) **Patent Application Publication**
Guo(10) **Pub. No.: US 2015/0085230 A1**(43) **Pub. Date: Mar. 26, 2015**(54) **LIQUID CRYSTAL PANEL, DISPLAY DEVICE,
AND PROCESS FOR MANUFACTURING
LIQUID CRYSTAL PANEL****Publication Classification**(71) Applicants: **BOE TECHNOLOGY GROUP CO.,
LTD.**, Beijing (CN); **BEIJING BOE
OPTOELECTRONICS
TECHNOLOGY CO., LTD.**, Beijing
(CN)(72) Inventor: **Renwei Guo**, Beijing (CN)(73) Assignees: **BOE TECHNOLOGY GROUP CO.,
LTD.**, Beijing (CN); **BEIJING BOE
OPTOELECTRONICS
TECHNOLOGY CO., LTD.**, Beijing
(CN)(21) Appl. No.: **14/366,440**(22) PCT Filed: **Apr. 28, 2013**(86) PCT No.: **PCT/CN2013/074964**

§ 371 (c)(1),

(2) Date: **Jun. 18, 2014**(30) **Foreign Application Priority Data**

Mar. 18, 2013 (CN) 2013 10086390.4

(51) **Int. Cl.**


<i>G02F 1/1368</i>	(2006.01)
<i>G02F 1/1335</i>	(2006.01)
<i>G02F 1/1341</i>	(2006.01)
<i>C09K 19/30</i>	(2006.01)
<i>B32B 37/10</i>	(2006.01)
<i>B32B 38/00</i>	(2006.01)
<i>C09K 19/56</i>	(2006.01)
<i>G02F 1/1337</i>	(2006.01)
<i>B32B 37/24</i>	(2006.01)

(52) **U.S. Cl.**CPC *G02F 1/1368* (2013.01); *G02F 1/1337*
(2013.01); *G02F 1/133514* (2013.01); *G02F*
1/1341 (2013.01); *B32B 37/24* (2013.01);
B32B 37/1018 (2013.01); *B32B 38/0008*
(2013.01); *C09K 19/56* (2013.01); *C09K*
19/3068 (2013.01); *G02F 2001/133354*
(2013.01)USPC **349/106**; 349/183; 156/275.5

(57)

ABSTRACT

Embodiments of the invention provide a liquid crystal panel, a display device, and a process for manufacturing the liquid crystal panel. The liquid crystal panel includes cell-assembled array substrate and colored substrate, and a liquid crystal layer between the array substrate and the colored layer, wherein the liquid crystal layer includes a dual frequency liquid crystal and a polymer network anchoring the dual frequency liquid crystal, wherein the polymer network is formed by polymerization of liquid crystalline ultraviolet polymerizable monomers.

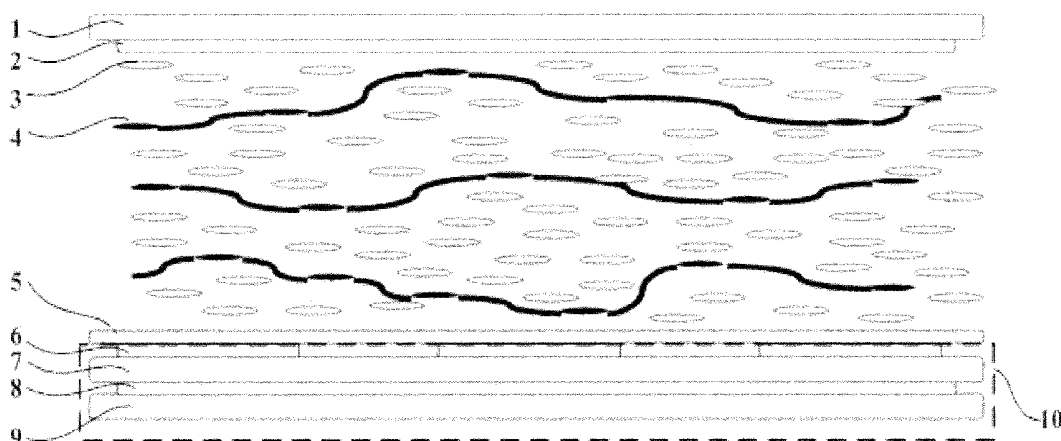

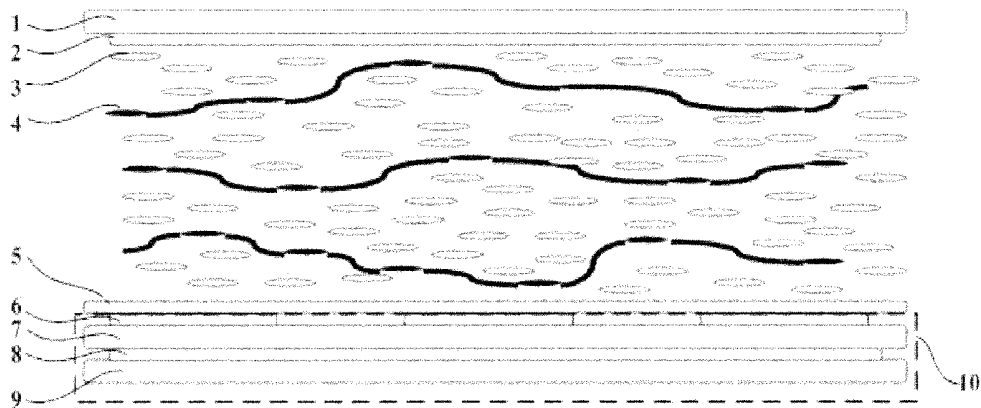


FIG. 1

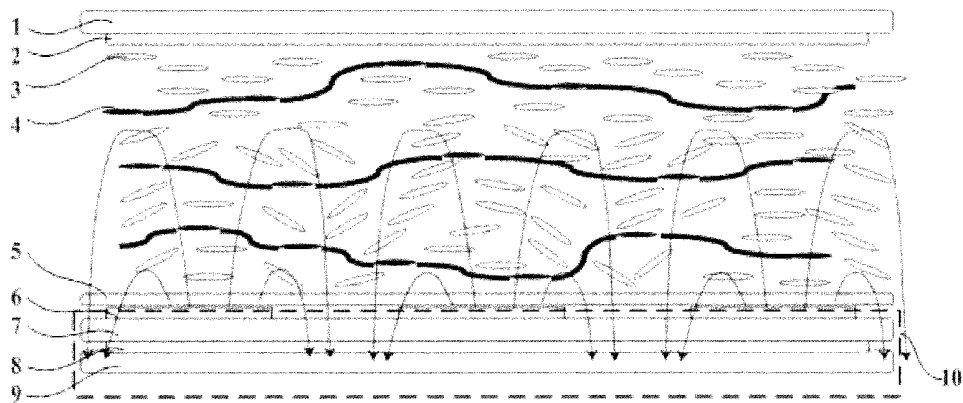


FIG. 2

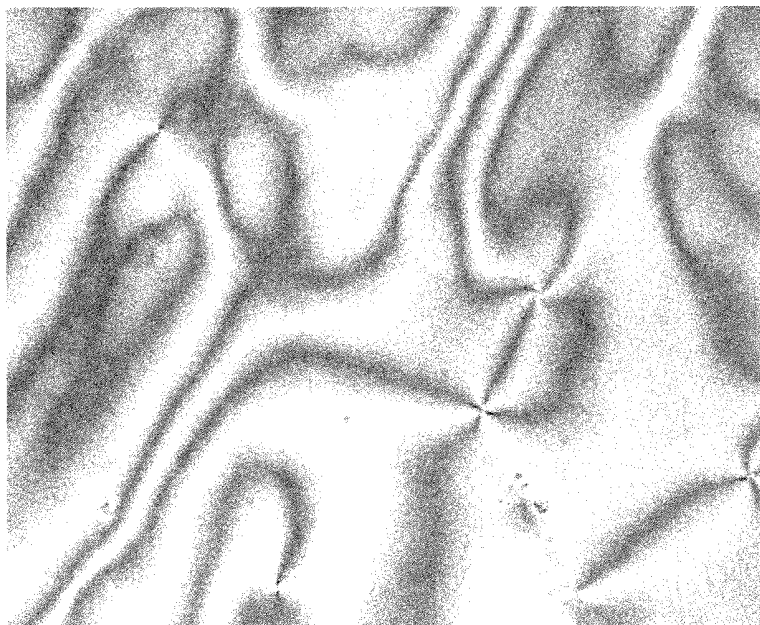


FIG. 3

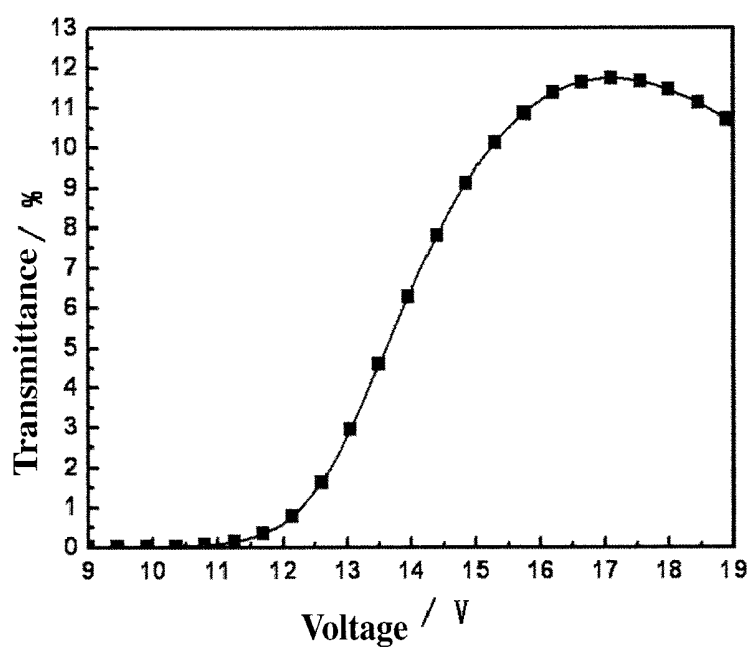


FIG. 4

LIQUID CRYSTAL PANEL, DISPLAY DEVICE, AND PROCESS FOR MANUFACTURING LIQUID CRYSTAL PANEL

TECHNICAL FIELD

[0001] Embodiments of the invention relate to a liquid crystal panel, a display device, and a process for manufacturing the liquid crystal panel.

BACKGROUND

[0002] In flat panel display devices, the thin film transistor liquid crystal display (TFT-LCD) has the advantages of small volume, low energy consumption, relatively low manufacturing cost, and low radiation, etc., thus takes the leading role in the current flat panel display market. Currently, the display modes for TFT-LCD are primarily the twisted nematic (TN) mode, vertical alignment (VA) mode, in-plane switching (IPS) mode, and advanced super dimension switch (AD-SDS or ADS) mode, etc.

[0003] An ADS mode based display forms a multi-dimensional electric field by the electric field generated at the edge of the common electrode within the same plane and the electric field generated between the common electrode layer and the plate electrode layer, enabling liquid crystal molecules of all orientations right above the common electrodes and between the common electrodes within the liquid crystal cell, so as to improve the working efficiency of the liquid crystal and increase the transmissive efficiency. The advanced super dimension switch technique can improve the graphic quality of TFT-LCD, enabling advantages such as high definition, high transmissivity, low energy consumption, wide visual angle, high aperture ration, low color difference, no push Mura, and the like.

[0004] Based on differences in the molecular arrangement, liquid crystals can be divided into nematic liquid crystals, smectic liquid crystals, and cholesteric liquid crystals, and the like. Currently, nematic liquid crystals are widely used in TFT-LCD, whereas use of other kinds of liquid crystals is limited. Nematic liquid crystals can be divided into positive nematic liquid crystals, negative nematic liquid crystals, and dual frequency liquid crystals. Where an electrophilic group is at the end of the long axis of a rod-like liquid crystal molecule, the dielectric constant of the liquid crystal ($\Delta\epsilon$) is larger than zero, and the liquid crystal is positive. Where an electrophilic group is at the end of the short axis of a rod-like liquid crystal molecule, $\Delta\epsilon$ is smaller than zero, and the liquid crystal is negative. Positive nematic liquid crystals are primarily used for display modes such as TN, ADS, IPS, and the like. Negative nematic liquid crystals are primarily used for modes such as VA and the like. For dual frequency liquid crystals, where it is under the action of the low frequency electric field, $\Delta\epsilon$ is larger than zero, and the liquid crystal exhibits a positive dielectricity. Where it is under the action of the high frequency electric field, $\Delta\epsilon$ is smaller than zero, and the liquid crystal exhibits a negative dielectricity. Because the dual frequency liquid crystal exhibits different electricity with the change of the electric field frequency, it may cause abnormality in the arrangement of the dual frequency liquid crystal molecules, and therefore it is difficult for applying to the liquid crystal display.

SUMMARY

[0005] One embodiment of the invention provides a liquid crystal panel comprising cell-assembled array substrate and colored substrate, and a liquid crystal layer between the array substrate and the colored substrate; the liquid crystal layer

comprises a dual frequency liquid crystal and a polymer network anchoring the dual frequency liquid crystal, wherein the polymer network is formed by polymerization of liquid crystalline ultraviolet polymerizable monomers.

[0006] Another embodiment of the invention provides a display device comprising the aforesaid liquid crystal panel.

[0007] Still another embodiment of the invention provides a method for manufacturing the liquid crystal panel comprising forming a mixture by mixing, away from light, of 90%~98% by weight of dual frequency liquid crystal, 1~9% by weight of liquid crystalline ultraviolet polymerizable monomers, and 0.1%~1% by weight of a photoinitiator; de-foaming the mixture; dripping the de-foamed mixture onto the array substrate, coating a sealant on the color filter substrate, and align an array substrate and a color filter substrate under vacuum to form a liquid crystal cell; ultraviolet light radiating the liquid crystal cell to cause the polymerization of the liquid crystalline ultraviolet polymerizable monomers to form a polymer network; and heating the liquid crystal cell after the ultraviolet light radiation.

DESCRIPTION OF DRAWINGS

[0008] In order to more clearly illustrate the technical solution of the embodiment of the invention, the figure of the embodiment was briefly introduced below. Apparently, the figures in the following description merely relate to some embodiments of the invention, rather than limit the invention.

[0009] FIG. 1 is a structural diagram of the liquid crystal panel of ADS mode provided by an embodiment of the invention without electricity.

[0010] FIG. 2 is a structural diagram of the liquid crystal panel of ADS mode provided by an embodiment of the invention with electricity.

[0011] FIG. 3 is a polarized microscopy diagram of the liquid crystal layer of the liquid crystal panel of ADS mode provided by an embodiment of the invention.

[0012] FIG. 4 is the voltage vs. transmissivity plot of the liquid crystal panel of ADS mode provided by an embodiment of the invention.

REFERENCE NUMERALS FOR THE DRAWINGS

[0013] 1: color filter substrate; 2: first parallel alignment layer; 3: dual frequency liquid crystals 4: polymer network; 5: second parallel alignment layer; 6: common electrode; 7: insulator layer; 8: pixel electrode; 9: transparent substrate 10: array substrate

DETAILED DESCRIPTION

[0014] In order to make the object, the technical solutions and the advantages of the invention clearer, the technical solutions of the invention was described in a clear and complete manner in relation to the figures of the invention below. Apparently, the described embodiments are merely some, rather than all embodiments of the invention. All other embodiments obtainable by a person of ordinary skill in the art based on the embodiments of the invention described without inventive work fall into the scope of the invention.

[0015] Embodiments of the invention provide a crystal liquid panel, a dual frequency liquid crystal is applied to the liquid crystal display by controlling the arrangement of the dual frequency molecules, thereby optimizing the display of the liquid crystal panel. Embodiments of the invention further provide a method for manufacturing the liquid crystal panel and a display device comprising the aforesaid liquid crystal panel.

[0016] In the embodiments of the invention, the dual frequency liquid crystal is anchored by the polymer network generated by liquid crystalline ultraviolet light polymerizable monomers in the liquid crystal layer, which can induce the arrangement of the dual frequency liquid crystals, thereby applying the dual frequency liquid crystal to the liquid crystal display, so as to optimize the display of the liquid crystal panel.

[0017] FIG. 1 is a structural diagram of the liquid crystal panel of ADS mode provided by an embodiment of the invention without electricity. The liquid crystal panel provided by the embodiment of the invention is described below in relation to FIG. 1.


[0018] As shown in FIG. 1, the liquid crystal panel provided in an embodiment of the invention may comprise an array substrate 10 and a color filter substrate 1 that are cell-assembled together, and a liquid crystal layer between the array substrate 10 and the color filter substrate 1, wherein the liquid crystal layer may comprise a dual frequency liquid crystal 3 and a polymer network 4 which anchors the dual frequency liquid crystal 3, wherein the polymer network 4 is formed by polymerization of the liquid crystalline ultraviolet light polymerizable monomers.

[0019] In the liquid crystal layer of the liquid crystal panel provided in the embodiment of the invention, the dual frequency liquid crystal molecule is anchored in the polymer network formed by polymerization of liquid crystalline ultraviolet polymerizable monomers. Because the liquid crystalline polymer network can interact with the dual frequency

the orientation of the dual frequency liquid crystal molecule becomes abnormal, a high frequency electric field can be applied, so that the dual frequency liquid crystal exhibits negative dielectricity, and the long axis of the dual frequency liquid crystal molecule is arranged perpendicular to the tangential direction of the electric field line, which facilitates the dual frequency liquid crystal molecules to recover the initial parallel orientation structure. Therefore, in the liquid crystal panel provided in an embodiment of the invention, the arrangement of dual frequency liquid crystal molecules can be controlled by changing the frequency of the external electric field, thereby enabling controllable manipulation of the dual frequency liquid crystal molecules within the liquid crystal panel, so as to optimize the display of the liquid crystal panel. Moreover, because the dual frequency liquid crystal is anchored in the polymer network, when a low frequency electric field is applied, the dual frequency liquid crystal molecule can rapidly rotate to the desired angle under the action of the electric field, thereby improving the response rate of the dual frequency liquid crystal molecules, so as to shorten the response time of the display device.

[0020] In an embodiment of the invention, the frequency f of the low frequency electric field is higher than 100 Hertz and lower than 2000 Hertz (that is, $100 \text{ Hz} < f < 2000 \text{ Hz}$), and the frequency f of the high frequency electric field is higher than or equal to 2000 Hertz and lower than or equal to 30000 Hertz (that is, $2000 \text{ Hz} \leq f \leq 30000 \text{ Hz}$).


[0021] In an embodiment of the invention, for example, the chemical structural formula of the liquid crystalline ultraviolet light polymerizable monomers is:

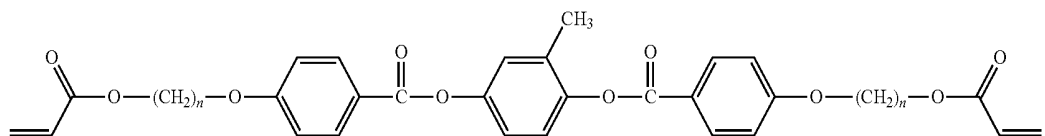

liquid crystal by applied force between molecules, thereby enabling the dual frequency liquid crystal molecules to arrange into a parallel orientation structure, and limit the slipping of the dual frequency liquid crystal molecules in the upper-lower, left-right, forward-backward directions, thereby enabling the dual frequency liquid crystals to be applied in the liquid crystal display. On the other hand, because the dual frequency liquid crystal can exhibit positive dielectricity under the low frequency electric field, and the liquid crystal display is usually conducted under the low frequency electric field, the dual frequency liquid crystal can be applied to liquid crystal panels to which positive liquid crystal can be applied such as TN mode, IPS mode, or ADS mode, under the low frequency electric field. In an embodiment of the invention, for example, the dual frequency liquid crystal can be applied to a liquid crystal panel of ADS mode.

wherein $n=3, 4, 5, 6, 7$ or 8 .

[0022] In an embodiment of the invention, the liquid crystalline ultraviolet light polymerizable monomers may be versatile. It may form a polymer network under the ultraviolet radiation, for example, the molecule has a structure of carbon-carbon double bond at an end, and this monomer needs to be liquid crystalline so as to be capable of more efficiently dissolving in liquid crystal molecules. A liquid crystalline monomer, like a liquid crystal molecule, can exhibit different orientations under the action of different orientation agents. After the liquid crystalline ultraviolet polymerizable monomers forms a polymer network, the arrangement of the dual frequency liquid crystal molecules within it can be fixed by way of anchoring force. For example, in an embodiment of the invention, a molecule having the chemical structural formula of

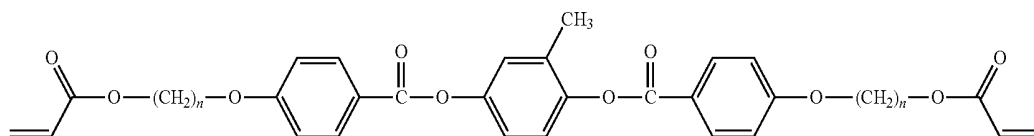

In a liquid crystal panel of ADS mode, the long axis of the dual frequency liquid crystal molecule can be arranged along the tangential direction of the electric field line. In addition, if


can be used as the liquid crystalline ultraviolet polymerizable monomers, wherein $n=3, 4, 5, 6, 7$ or 8 . In an embodiment of the invention, the monomer can be subject to different struc-

tural modifications, as long as it does not affect its liquid crystallinity and its property for forming polymer network. In such a monomer, where $n=3$, the chemical name of the monomer is 1,4-bis(4-(6'-acryloyloxypropoxy)benzoyloxy)-2-toluene; where $n=4$, the chemical name of the monomer is 1,4-bis(4-(6'-acryloyloxybutoxy)benzoyloxy)-2-toluene; where $n=5$, the chemical name of the monomer is 1,4-bis(4-(6'-acryloyloxy-pentoxyl)benzoyloxy)-2-toluene; where $n=6$, the chemical name of the monomer is 1,4-bis(4-(6'-acryloyloxyhexoxyl)benzoyloxy)-2-toluene; where $n=7$, the chemical name of the monomer is 1,4-bis(4-(6'-acryloyloxyheptoxyl)benzoyloxy)-2-toluene; and where $n=8$, the chemical name of the monomer is 1,4-bis(4-(6'-acryloyloxyoctoxyl)benzoyloxy)-2-toluene.

[0023] In an embodiment of the invention, for example, the dual frequency liquid crystal may be a mixed liquid crystal

and/or chloro functionality. The liquid crystal molecule of this structure has an electrophilic group in the short axis, thereby exhibiting the property of a dual frequency liquid crystal. In an embodiment of the invention, for example, a fluoro containing dual frequency liquid crystal molecule may be employed. Because the dual frequency molecule of a single type has a high melting point and is not suitable for use in a liquid crystal panel, therefore, a mixed liquid crystal formed by a plurality of kinds of fluorine containing dual frequency liquid crystal molecules may be employed in the liquid crystal layer of the liquid crystal panel provided in an embodiment of the invention.

[0025] In an embodiment of the invention, for example, the fluorine containing dual frequency liquid crystal molecules in the mixed liquid crystal may comprise:

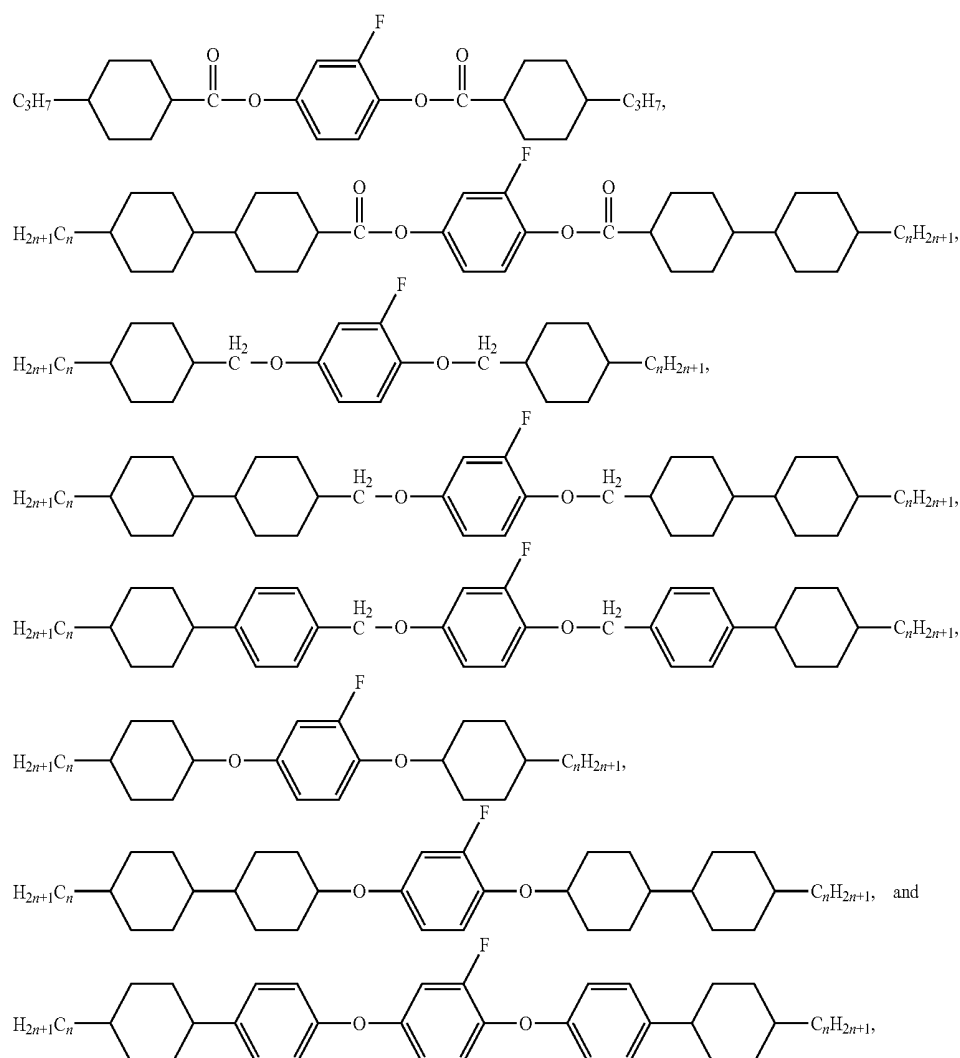

obtained by a plurality of kinds of fluorine containing dual frequency liquid crystal molecules.

[0024] In the structure of the dual frequency liquid crystal, the long axis of the liquid crystal molecule is dispersed with the combination of a benzene ring, hexane, and ester group (or ether linkage), wherein the benzene ring within the molecule may have electrophilic groups such as fluoro function-

wherein $n=3, 4, 5, 6, 7$ or 8 , but the embodiments of the invention are not limited to this.

[0026] In the invention, for each one of the aforesaid eight fluorine containing dual frequency liquid crystal molecules, n can be selected from $3, 4, 5, 6, 7$ or 8 . In a mixed liquid crystal formed from the aforesaid eight fluorine containing dual frequency liquid crystal molecules, the number "n" of each

fluorine containing dual frequency liquid crystal molecule can be selected as the same or different, and the embodiments of the invention are not limited to this. For example, in an embodiment of the invention, the number “n” can be selected as the same in the eight fluorine containing dual frequency liquid crystal molecules that form the mixed liquid crystal.

[0027] In an embodiment of the invention, the range of the display temperature of the aforesaid eight fluorine containing dual frequency liquid crystal molecules are -30° – 80° .

[0028] In an embodiment of the invention, the range of the weight percentage of each kind of fluorine containing dual frequency liquid crystal molecules in the mixed liquid crystal is 5%–15%. In an embodiment of the invention, for example, the weight percentage of each kind of fluorine containing dual frequency liquid crystal molecules in the mixed liquid crystal is 12.5%.

[0029] In an embodiment of the invention, the range of the weight percentage of each kind of fluorine containing dual frequency liquid crystal molecules in the mixed liquid crystal can be 5%–15%, and the weight percentage of each fluorine containing dual frequency liquid crystal molecule may be the same or different, and the embodiments of the invention are not limited to this. In some embodiments of the invention, for example, where $n=4$, the weight percentages of the aforesaid eight fluorine containing dual frequency liquid crystal molecules are 13%, 10%, 15%, 10%, 13%, 14%, 13% and 12%, respectively; where $n=5$, the weight percentages of the aforesaid eight fluorine containing dual frequency liquid crystal molecules are 5%, 11%, 14%, 15%, 13%, 14%, 15% and 13%, respectively; where $n=6$, the weight percentages of the aforesaid eight fluorine containing dual frequency liquid crystal molecules are 15%, 8%, 10%, 15%, 13%, 14%, 12% and 13%. In some embodiments of the invention, the weight percentage of each of the aforesaid eight fluorine containing dual frequency liquid crystal molecules in the mixed liquid crystal is 12.5%, that is, they have the same weight percentage. After mixing, the melting point of the dual frequency liquid crystal molecule decreases, and is suitable for use in the liquid crystal display.

[0030] Again refer to FIG. 1. The liquid crystal panel provided by an embodiment of the invention may further comprise a first parallel alignment layer 2 disposed on the side of the color filter substrate 1 facing the liquid crystal layer, and a second parallel alignment layer 5 disposed on the side of the array substrate 10 facing the liquid crystal layer.

[0031] In an embodiment of the invention, because the first parallel alignment layer 2 and the second parallel alignment layer 5 are formed on the color filter substrate 1 and the array substrate 10, respectively, the molecular long axis directions of the liquid crystalline ultraviolet polymerizable monomers and the dual frequency liquid crystal molecule are both arranged parallel to the substrate. After ultraviolet light radiation, the liquid crystalline ultraviolet polymerizable monomers undergoes polymerization to form the polymer network 4, which can fix the dual frequency liquid crystal molecules by the action of the anchoring force to make them still arranged parallel to the substrate along the molecular long axis direction, thereby allowing normal orientation of the dual frequency liquid crystal molecules and optimizing the display of the liquid crystal panel.

[0032] The liquid crystal panel provided in an embodiment of the invention may be applied to TN mode, VA mode, IPS mode or ADS mode. For example, the liquid crystal panel provided in an embodiment of the invention may be applied to

ADS mode. Please again refer to FIG. 1, the ADS mode liquid crystal panel provided by an embodiment of the invention may further comprise: a pixel electrode 8 formed on the transparent substrate 9, an insulation layer formed on the pixel electrode 8, and a silt-like common electrode 6 formed on the insulation layer 7.

[0033] One illustrative example is used to explain the mechanism of the display of the ADS mode liquid crystal panel provided in an embodiment of the invention. As shown in FIG. 1, without electricity, in the liquid crystal panel, after the action of the parallel alignment layer, all long axes of the dual frequency liquid crystal molecules will be arranged parallel to the substrate; moreover, because the ultraviolet polymerizable monomer has liquid crystallinity, the molecules of this monomer will also be arranged parallel to the substrate. After initiation by the photoinitiator, the ultraviolet light polymerizable monomers will form a polymer network, which can fix the direction of the arrangement of the long axes of the liquid crystal molecules by the action of the anchoring force. FIG. 2 is a structural diagram of the liquid crystal panel of ADS mode provided by an embodiment of the invention with electricity, wherein by using a low frequency electric field, the dual frequency liquid crystal molecule exhibits positive dielectricity. As shown in FIG. 2, with electricity, an electric field is generated at the edge of the common electrode 6, and the dual frequency liquid crystal molecules will be arranged along the tangential direction of the electric field line and rotate. After withdrawal of the electric field, because the polymer network has an anchoring action on the liquid crystal molecules, the liquid crystal molecules resume their states before the electricity under the action of the polymer network. By the action of the switching on and off of the electric field, the liquid crystal molecules may rotate or recover, thereby achieving the object of liquid crystal display.

[0034] Embodiments of the invention further provide a display device comprising any one of the aforesaid liquid crystal panel. In an embodiment of the invention, the display device may be any product or component having display function such as liquid crystal panel, e-paper, OLED panel, liquid crystal TV, liquid crystal display, digital frame, cellular phone, tablet computer, and the like. By using the aforesaid liquid crystal panel in the display device, the display of the display device can be optimized.

[0035] The embodiments of the invention further provide a process for manufacturing the liquid crystal panel comprising:

[0036] forming a mixture by mixing, away from light, of 90%–98% by weight of dual frequency liquid crystal, 1%–9% by weight of liquid crystalline ultraviolet polymerizable monomers, and 0.1%–1% by weight of a photoinitiator;

[0037] de-foaming the mixture;

[0038] dripping the de-foamed mixture onto the array substrate, coating a sealant on the color filter substrate, and align the array substrate and the color filter substrate under vacuum to form a liquid crystal cell;

[0039] ultraviolet light radiating the liquid crystal cell to cause the polymerization of the liquid crystalline ultraviolet polymerizable monomers to form a polymer network; and

[0040] heating the liquid crystal cell after the ultraviolet light radiation.

[0041] In an embodiment of the invention, because the liquid crystalline ultraviolet polymerizable monomers in the liquid crystal layer undergoes polymerization to form a polymer network that can anchor the dual frequency liquid crystal

molecule, therefore it allows the uniform arrangement of the dual frequency liquid crystals, thereby allowing the dual frequency to be applied in the liquid crystal panel, and optimizing the display of the liquid crystal panel by actions of the low frequency electric field on the display of the dual frequency liquid crystal and the high frequency electric field on the orientation of the dual frequency liquid crystal.

[0042] In an embodiment of the invention, the dual frequency liquid crystal may be a mixed crystal by mixing fluoro containing dual frequency liquid crystal molecules. For example, the fluoro containing dual frequency liquid crystal molecules may be selected from the eight fluoro containing dual frequency molecules. The liquid crystalline ultraviolet polymerizable monomers may also be selected from the liquid crystalline ultraviolet polymerizable monomers in the liquid crystal layer of the aforesaid liquid crystal panel. The photoinitiator may be selected from common photoinitiators, such as α,α -diethoxyacetophenone, α -hydroxyalkylphenone, or α -aminoalkylphenone.

[0043] In an embodiment of the invention, 90%~98% by weight of the dual frequency liquid crystal, 1~9% by weight of the liquid crystalline ultraviolet polymerizable monomers, and 0.1%~1% by weight of the photoinitiator are mixed away from light to form the mixture. For example, the mixing can be conducted using the aforesaid weight ratio: 90% by weight of the dual frequency liquid crystal, 9% by weight of the liquid crystalline ultraviolet polymerizable monomers, and 1% by weight of the photoinitiator are mixed away from light to form the mixture, or 95% by weight of the dual frequency liquid crystal, 4.9% by weight of the liquid crystalline ultraviolet polymerizable monomers, and 0.1% by weight of the photoinitiator are mixed away from light to form the mixture, or 98% by weight of the dual frequency liquid crystal, 1% by weight of the liquid crystalline ultraviolet polymerizable monomers, and 1% by weight of the photoinitiator are mixed away from light to form the mixture.

[0044] In an embodiment of the invention, for example, the intensity of the ultraviolet light radiation is 1~80 mW/cm², and the duration of the radiation is 5~200 minutes.

[0045] In an embodiment of the invention, for example, the mixture is de-foamed for a duration of 1~3 hours.

[0046] In an embodiment of the invention, dripping the de-foamed mixture onto the array substrate before coating the sealant onto the color filter substrate may further comprising performing parallel alignment treatment on the array substrate and the color filter substrate, respectively.

[0047] The method for manufacturing the ADS mode liquid crystal panel as shown in FIG. 1 is illustrated below in reference to illustrative examples. The flow chart for the manufacturing process may comprise the following steps:

[0048] Step 101, the same weight of the aforesaid eight fluorine containing dual frequency liquid crystal molecules are mixed to form a mixed liquid crystal;

[0049] Step 102, the mixed liquid crystal, the liquid crystalline ultraviolet polymerizable monomers and the photoinitiator are mixed to form a mixture, wherein the weight percentage of the mixed liquid crystal is 90~98%, the weight percentage of the liquid crystalline ultraviolet polymerizable monomers is 1~9%, and the weight percentage of the photoinitiator is 0.1~1%;

[0050] Step 103, the mixture is placed in a de-foamer for de-foaming treatment for a duration of 1~3 hours;

[0051] Step 104, the de-foamed mixture is dripped onto the array substrate, the sealant is coated onto the color filter

substrate, and the liquid crystal cell is formed by aligning the array substrate and the color filter substrate under vacuum;

[0052] Step 105, the liquid crystal cell is subject to ultraviolet light radiation to allow the liquid crystalline ultraviolet polymerizable monomers to undergo polymerization to form a polymer network, as well as allow the ultraviolet polymerizable monomer in the sealant to polymerize; and

[0053] Step 106, the liquid crystal cell radiated by ultraviolet light is heated to allow the polymerization of the heat polymerizable monomers in the sealant to allow the array substrate to bind to the color filter substrate.


[0054] In an embodiment of the invention, the polymer network formed by polymerization of the liquid crystalline ultraviolet polymerizable monomers can anchor the arrangement of the dual frequency liquid crystal molecules, thereby allowing the dual frequency liquid crystal to be applied to the liquid crystal panel. It was detected that the range of the display temperature of the liquid crystal panel is between -30° and 80°, and the liquid crystal panel thus prepared can be used for display under normal temperature. As shown in FIG. 3, FIG. 3 is a polarized microscopy diagram of the liquid crystal layer of the liquid crystal panel of ADS mode provided by an embodiment of the invention, in which obvious schlieren texture can be seen. Schlieren texture is a specific property for nematic liquid crystals. That this liquid crystal layer has this schlieren texture indicates that the liquid crystal layer can be used for liquid crystal display. FIG. 4 is the voltage vs. transmissivity plot of the liquid crystal panel of ADS mode provided by an embodiment of the invention, which is obtained by testing the liquid crystal panel using a liquid crystal comprehensive tester, and is measured under the low frequency state. From FIG. 4, it can be seen that the maximal transmissivity of the liquid crystal panel is close to 12%, and the driving voltage at that time is close to 16V. Moreover, during the application of the voltage, initially the transmissivity of the liquid crystal panel is small. With the increase of the driving voltage, the transmissivity of the liquid crystal panel also increases. After passing the peak, the transmissivity of the liquid crystal panel will slightly decrease. After electricity is removed, the transmissivity of the liquid crystal panel is also close to 0. This kind of voltage-transmissivity curve complies with the relation between the voltage and transmissivity of ADS mode liquid crystal panels. This also indicates that the liquid crystal panels prepared by the methods provided in an embodiment of the invention can be applied to the ADS mode.

[0055] Finally, it shall be illustrated that the aforesaid examples are merely used to illustrate the technical solutions of the invention, rather than limit them. Although the invention is illustrated in details in reference to the aforesaid examples, a person of ordinary skill in the art shall appreciate that modifications can still be made to the technical solutions recited in the aforesaid examples, or equivalent substitutions can be made to some technical features, while such modifications or substitutions will not make the nature of the corresponding technical solutions depart from the spirits and scopes of the technical solutions of the examples of the invention.

1. A liquid crystal panel comprising cell-assembled array substrate and colored substrate, and a liquid crystal layer between the array substrate and the colored substrate,

wherein the liquid crystal layer comprises a dual frequency liquid crystal and a polymer network anchoring the dual frequency liquid crystal, and wherein the polymer network is formed by polymerization of liquid crystalline ultraviolet polymerizable monomers.

2. The liquid crystal panel according to claim 1, wherein a chemical structural formula of liquid crystalline ultraviolet polymerizable monomers is:

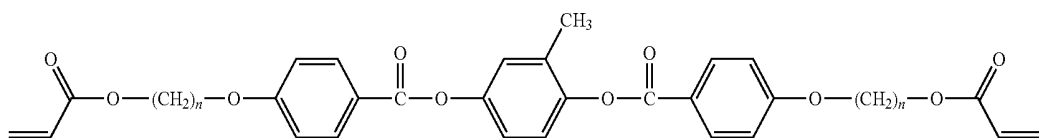


wherein $n=3, 4, 5, 6, 7$ or 8 .

3. The liquid crystal panel according to claim 1, wherein the dual frequency liquid crystal is a mixed liquid crystal obtained by a plurality of kinds of fluorine containing dual frequency liquid crystal molecules.

4. The liquid crystal panel according to claim 3, wherein the fluorine containing dual frequency liquid crystal molecules in the mixed liquid crystal comprise:

6. The liquid crystal panel according to claim 5, wherein the weight percentage of each kind of fluorine containing dual frequency liquid crystal molecules in the mixed liquid crystal is 12.5%.

7. The liquid crystal panel according to claim 1, further comprising a first parallel alignment layer disposed on a side of the color filter substrate facing the liquid crystal layer, and

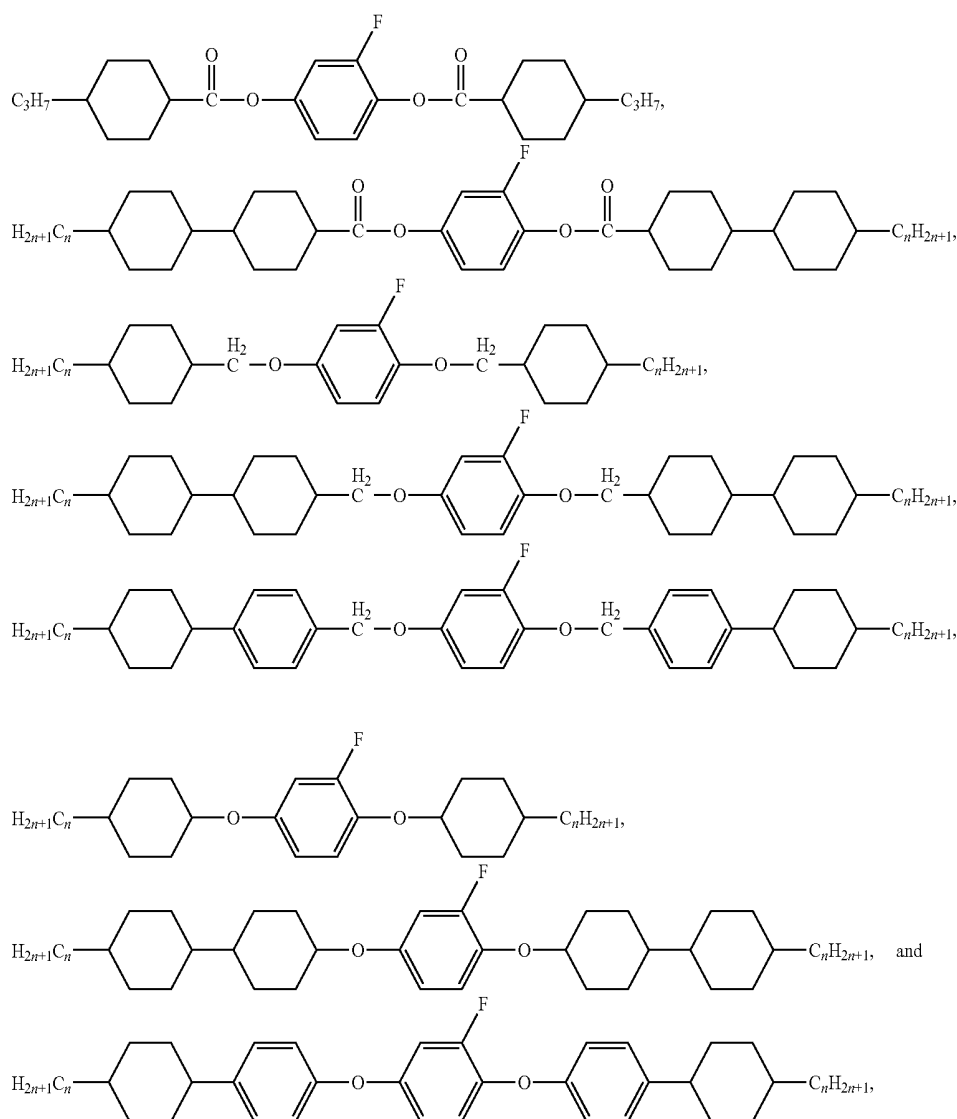

wherein $n=3, 4, 5, 6, 7$ or 8 .

5. The liquid crystal panel according to claim 4, wherein a range of the weight percentage of each kind of fluorine containing dual frequency liquid crystal molecules in the mixed liquid crystal is 5%-15%.

a second parallel alignment layer disposed on a side of the array substrate facing the liquid crystal layer.

8. A display device comprising the liquid crystal panel according to claim 1.

9. A process for manufacturing the liquid crystal panel comprising:

forming a mixture by mixing, away from light, of 90%-98% by weight of dual frequency liquid crystal, 1%-9% by weight of liquid crystalline ultraviolet polymerizable monomers, and 0.1%-1% by weight of a photoinitiator; de-foaming the mixture;

dripping the de-foamed mixture onto an array substrate, coating a sealant on the color filter substrate, and align the array substrate and a color filter substrate under vacuum to form a liquid crystal cell;

ultraviolet light radiating the liquid crystal cell to cause polymerization of the liquid crystalline ultraviolet polymerizable monomers to form a polymer network; and heating the liquid crystal cell after the ultraviolet light radiation.

10. The process for preparing the liquid crystal panel according to claim 9, wherein an intensity of the ultraviolet light radiation is 1-80 mW/cm², and a duration of the radiation is 5-200 minutes.

11. The process for preparing the liquid crystal panel according to claim 9, wherein the mixture is de-foamed for a duration of 1-3 hours.

12. The process for preparing the liquid crystal panel according to claim 9, wherein dripping the de-foamed mixture onto the array substrate before coating the sealant onto the color filter substrate further comprises performing parallel alignment treatment on the array substrate and the color filter substrate, respectively.

13. The liquid crystal panel according to claim 2, further comprising a first parallel alignment layer disposed on a side of the color filter substrate facing the liquid crystal layer, and a second parallel alignment layer disposed on a side of the array substrate facing the liquid crystal layer.

14. The liquid crystal panel according to claim 3, further comprising a first parallel alignment layer disposed on a side of the color filter substrate facing the liquid crystal layer, and a second parallel alignment layer disposed on a side of the array substrate facing the liquid crystal layer.

15. The liquid crystal panel according to claim 4, further comprising a first parallel alignment layer disposed on a side of the color filter substrate facing the liquid crystal layer, and a second parallel alignment layer disposed on a side of the array substrate facing the liquid crystal layer.

16. The liquid crystal panel according to claim 5, further comprising a first parallel alignment layer disposed on a side of the color filter substrate facing the liquid crystal layer, and a second parallel alignment layer disposed on a side of the array substrate facing the liquid crystal layer.

17. The liquid crystal panel according to claim 6, further comprising a first parallel alignment layer disposed on a side of the color filter substrate facing the liquid crystal layer, and a second parallel alignment layer disposed on a side of the array substrate facing the liquid crystal layer.

18. The process for preparing the liquid crystal panel according to claim 10, wherein dripping the de-foamed mixture onto the array substrate before coating the sealant onto the color filter substrate further comprises performing parallel alignment treatment on the array substrate and the color filter substrate, respectively.

19. The process for preparing the liquid crystal panel according to claim 11, wherein dripping the de-foamed mixture onto the array substrate before coating the sealant onto the color filter substrate further comprises performing parallel alignment treatment on the array substrate and the color filter substrate, respectively.

* * * * *

专利名称(译)	液晶面板，显示装置和液晶面板的制造方法		
公开(公告)号	US20150085230A1	公开(公告)日	2015-03-26
申请号	US14/366440	申请日	2013-04-28
[标]申请(专利权)人(译)	京东方科技集团股份有限公司 北京京东方光电科技有限公司		
申请(专利权)人(译)	京东方科技集团股份有限公司. 北京京东方光电科技有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司. 北京京东方光电科技有限公司.		
[标]发明人	GUO RENWEI		
发明人	GUO, RENWEI		
IPC分类号	G02F1/1368 G02F1/1335 G02F1/1341 C09K19/30 B32B37/10 B32B38/00 C09K19/56 G02F1/1337 B32B37/24		
CPC分类号	G02F1/1368 G02F1/1337 G02F1/133514 G02F1/1341 B32B37/24 B32B37/1018 B32B2457/202 C09K19/56 C09K19/3068 G02F2001/133354 G02F2001/13415 B32B2037/243 B32B38/0008 C09K19/2007 C09K2019/0448 C09K2019/2078 G02F1/1334 G02F2001/13775		
优先权	201310086390.4 2013-03-18 CN		
其他公开文献	US9588391		
外部链接	Espacenet USPTO		

摘要(译)

本发明的实施例提供了一种液晶面板，显示装置和制造液晶面板的方法。液晶面板包括单元组装阵列基板和彩色基板，以及阵列基板和彩色基板之间的液晶层，其中液晶层包括双频液晶和锚定双频液晶的聚合物网络，其中聚合物网络是通过液晶紫外可聚合单体的聚合形成的。

CPC *G02F 1/1368* (2013.01); *G02F 1/1337* (2013.01); *G02F 1/133514* (2013.01); *G02F 1/1341* (2013.01); *B32B 37/24* (2013.01); *B32B 37/1018* (2013.01); *B32B 38/0008* (2013.01); *C09K 19/56* (2013.01); *C09K 19/3068* (2013.01); *G02F 2001/133354* (2013.01)
USPC 349/106; 349/183; 156/275.5