



US 20150302808A1

(19) **United States**

(12) **Patent Application Publication**
WANG et al.

(10) **Pub. No.: US 2015/0302808 A1**

(43) **Pub. Date: Oct. 22, 2015**

(54) **LIQUID CRYSTAL DISPLAY PANEL AND DRIVING METHOD THEREOF, AND DISPLAY DEVICE**

(71) Applicant: **BOE TECHNOLOGY GROUP CO., LTD.**, Beijing (CN)

(72) Inventors: **Qiangtao WANG**, Beijing (CN); **Hyunsic CHOI**, Beijing (CN); **Zheng FANG**, Beijing (CN); **Yunyun TIAN**, Beijing (CN)

(21) Appl. No.: **14/381,735**

(22) PCT Filed: **Dec. 5, 2013**

(86) PCT No.: **PCT/CN2013/088666**

§ 371 (c)(1),

(2) Date: **Aug. 28, 2014**

(30) **Foreign Application Priority Data**

Aug. 7, 2013 (CN) 201310342197.2


Publication Classification

(51) **Int. Cl.**
G09G 3/36 (2006.01)
G02F 1/1335 (2006.01)
G02F 1/1362 (2006.01)

(52) **U.S. Cl.**
CPC **G09G 3/3607** (2013.01); **G02F 1/136209** (2013.01); **G02F 1/136286** (2013.01); **G02F 1/133514** (2013.01); **G09G 3/3614** (2013.01); **G02F 2001/136222** (2013.01); **G09G 2300/0452** (2013.01); **G09G 2300/08** (2013.01); **G09G 2310/027** (2013.01); **G09G 2320/0233** (2013.01); **G09G 2330/023** (2013.01)

(57) **ABSTRACT**

In the invention, as the arrangement of the color filters of the sub-pixel units of every two adjacent pixel units in the row direction, from at least one group composed of two adjacent columns of pixel units in the row direction, is changed, so that the color filters of two adjacent sub-pixel units in the row direction, which belong to different two pixel units, have the same color. Moreover, position of the data line connected with the sub-pixel units with color filters of the same color is changed, so that the data line is provided at a side of one of the sub-pixel units with color filters of the same color far away from the other one thereof. Therefore, while the color mixing phenomenon is avoided, a part of the black matrix, which should be provided between the two adjacent sub-pixel units in the row direction, may be omitted.

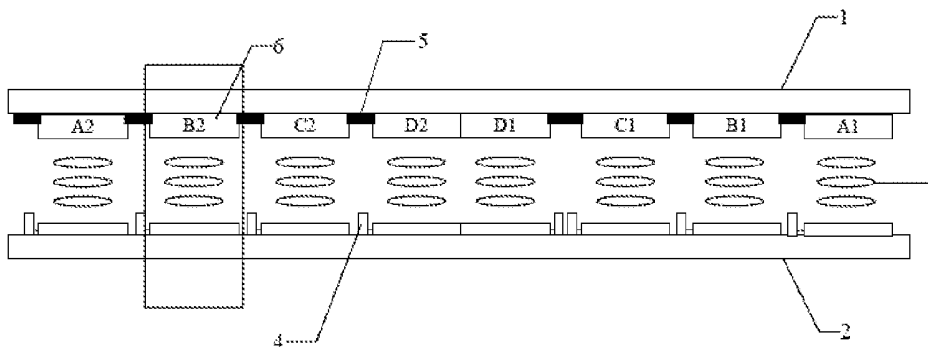

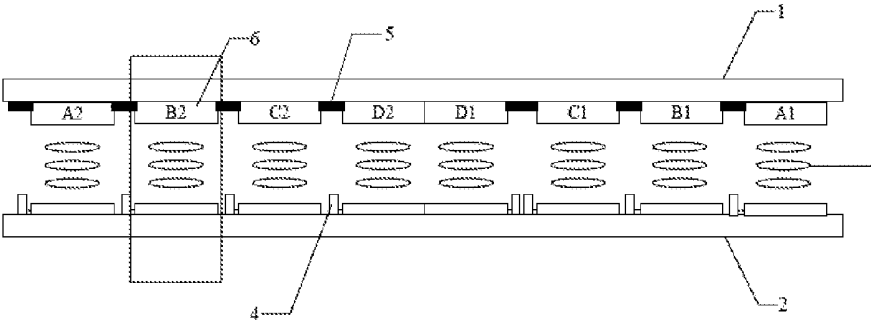


FIG.1

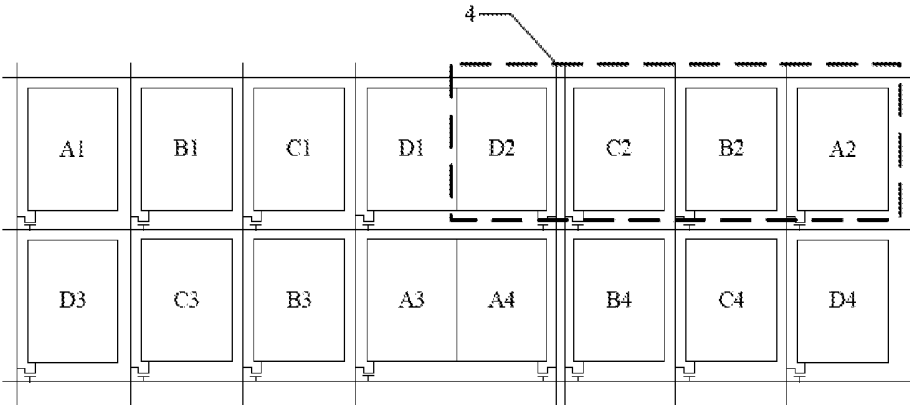


FIG.2

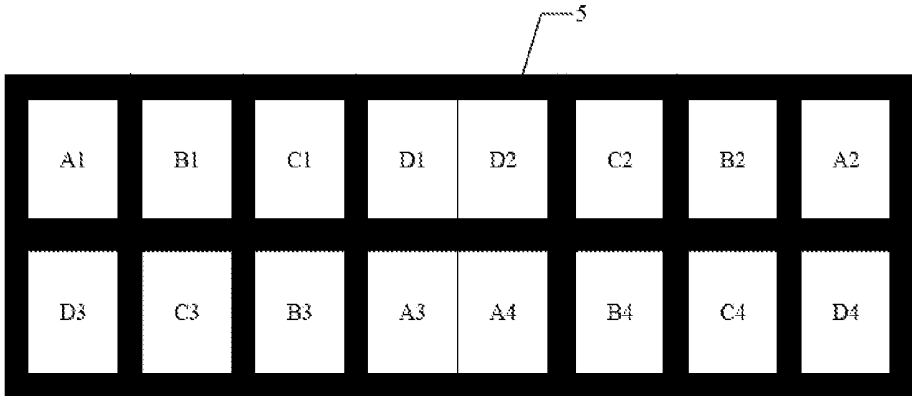


FIG.3

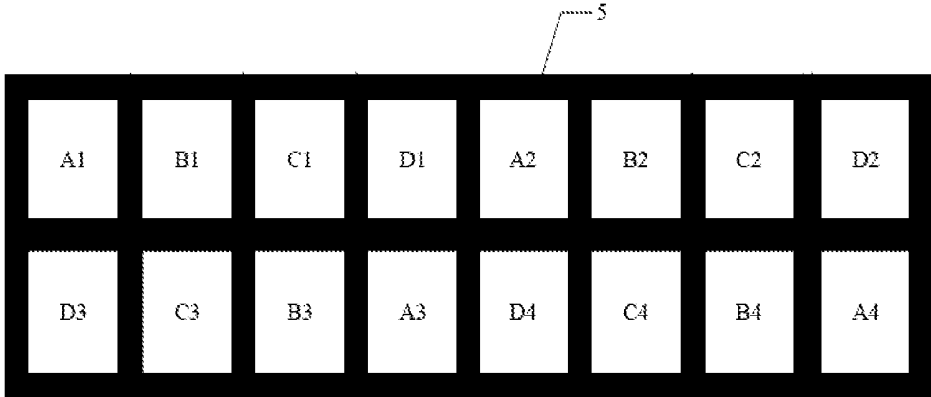


FIG.4

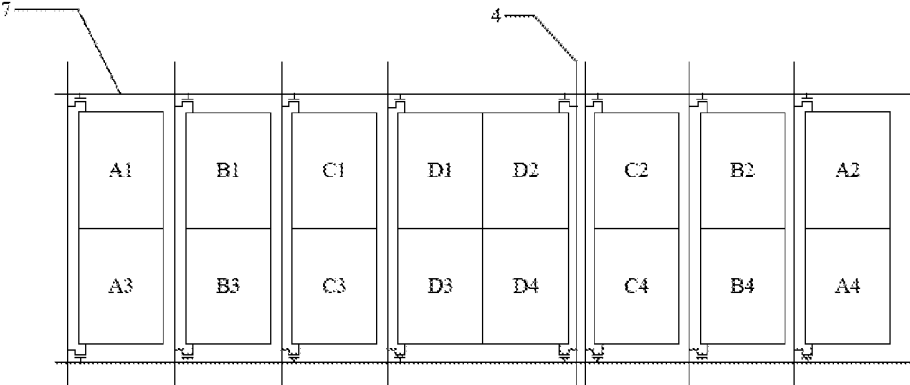


FIG. 5

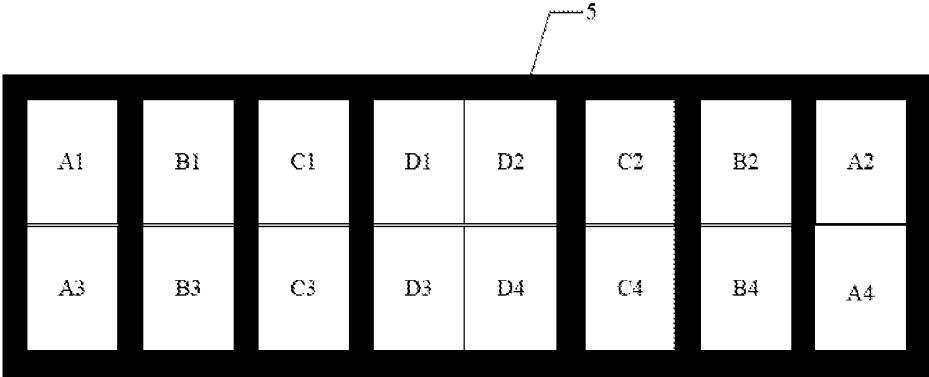


FIG. 6

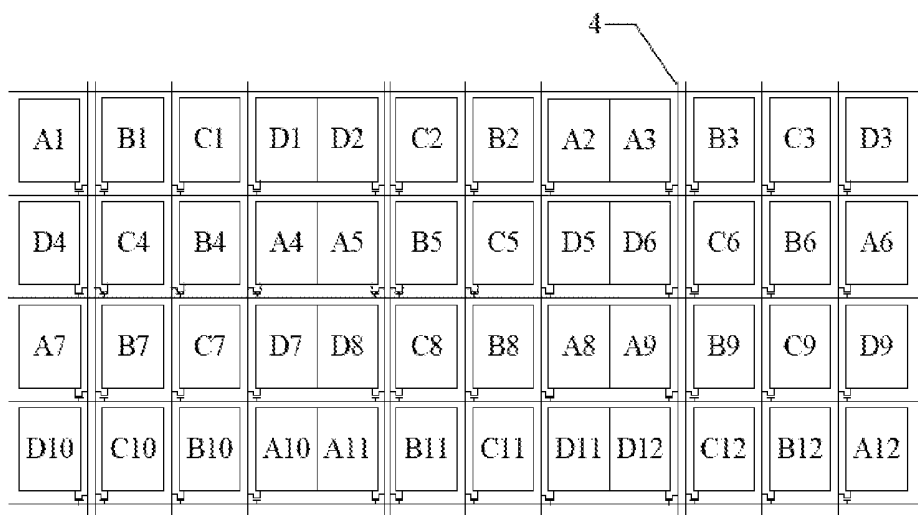


FIG. 7

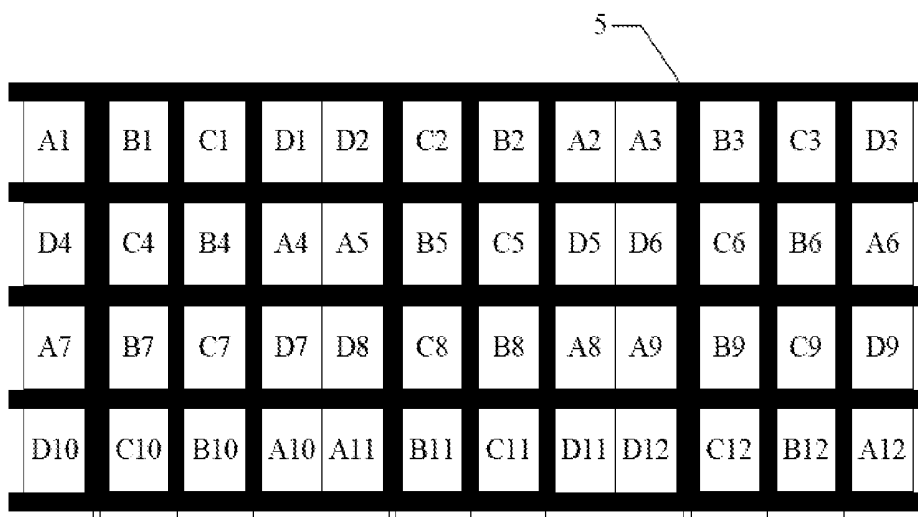


FIG. 8

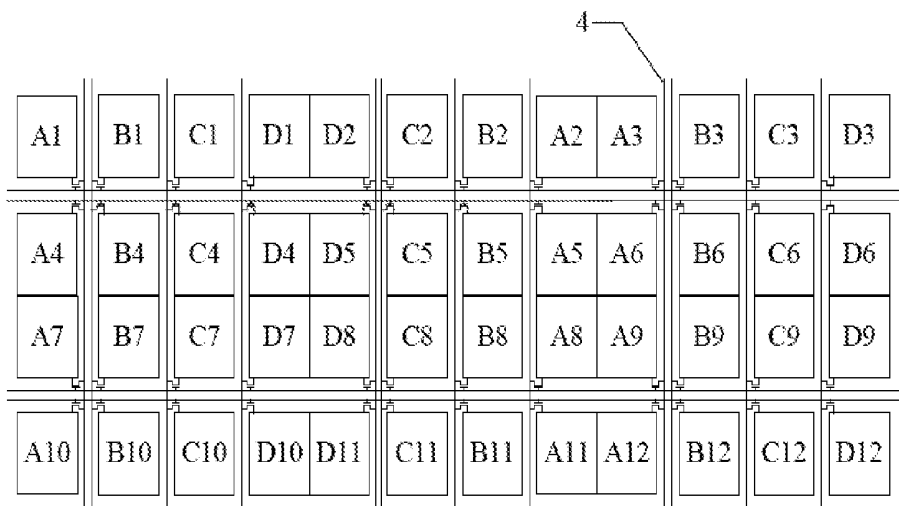


FIG. 9

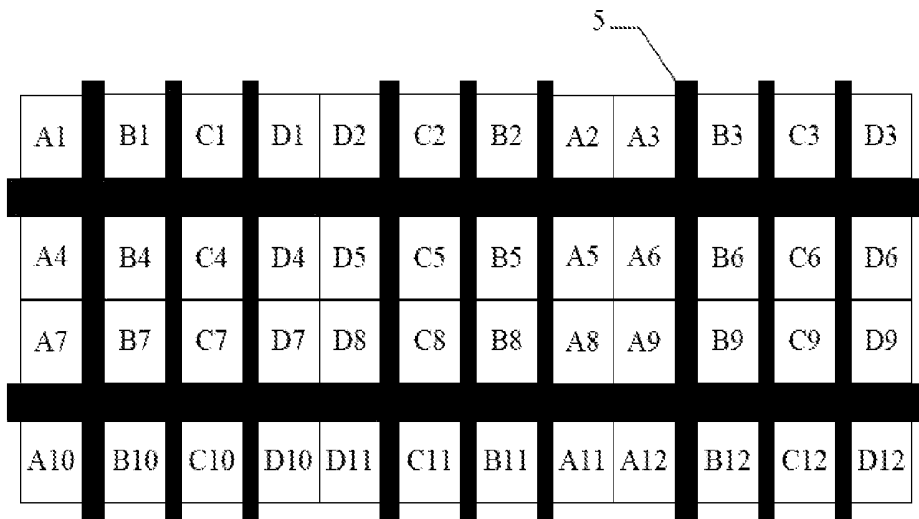


FIG. 10

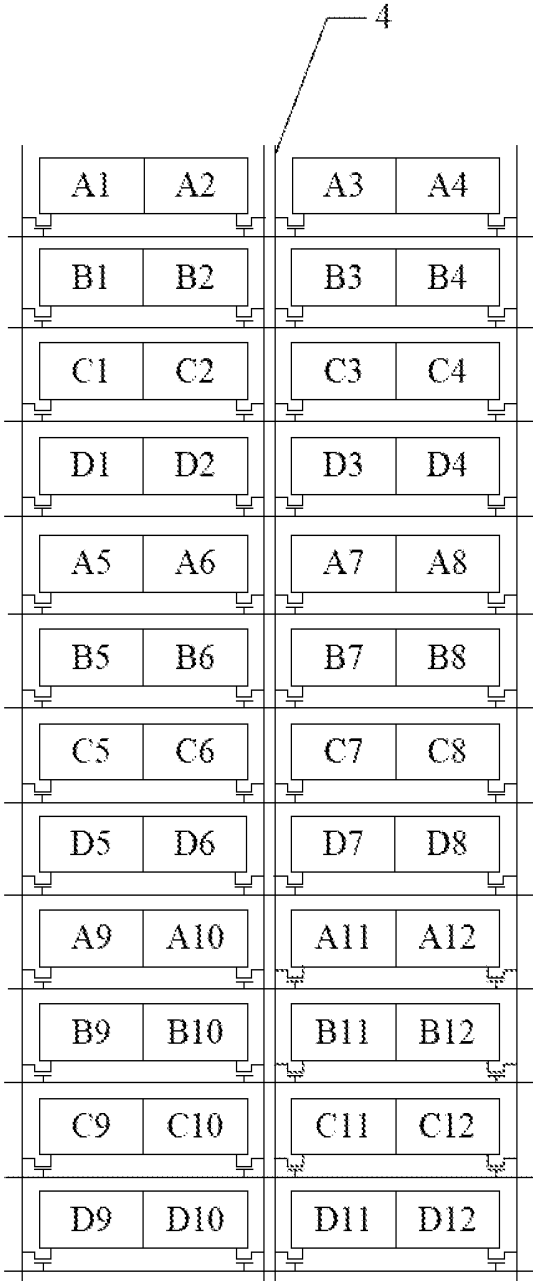


FIG.11

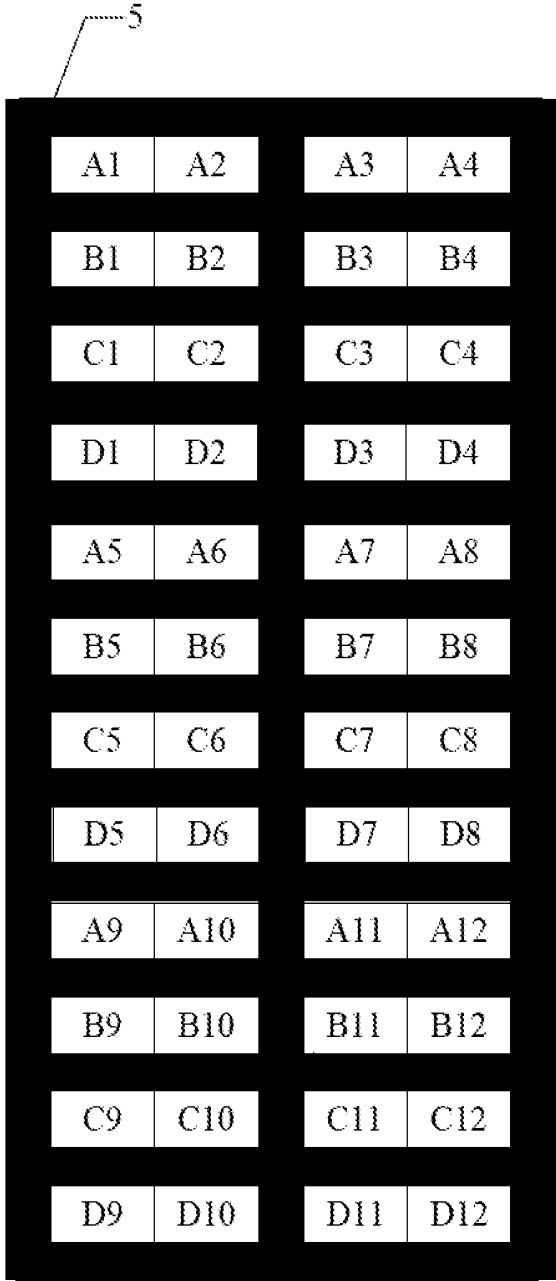


FIG.12

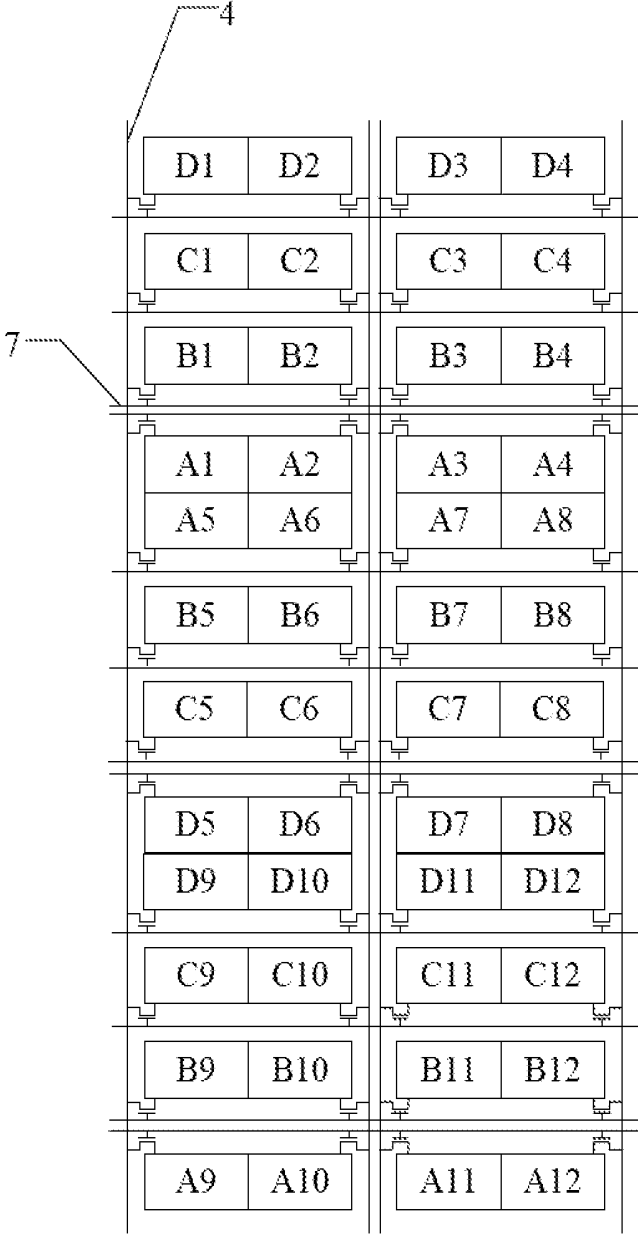


FIG.13

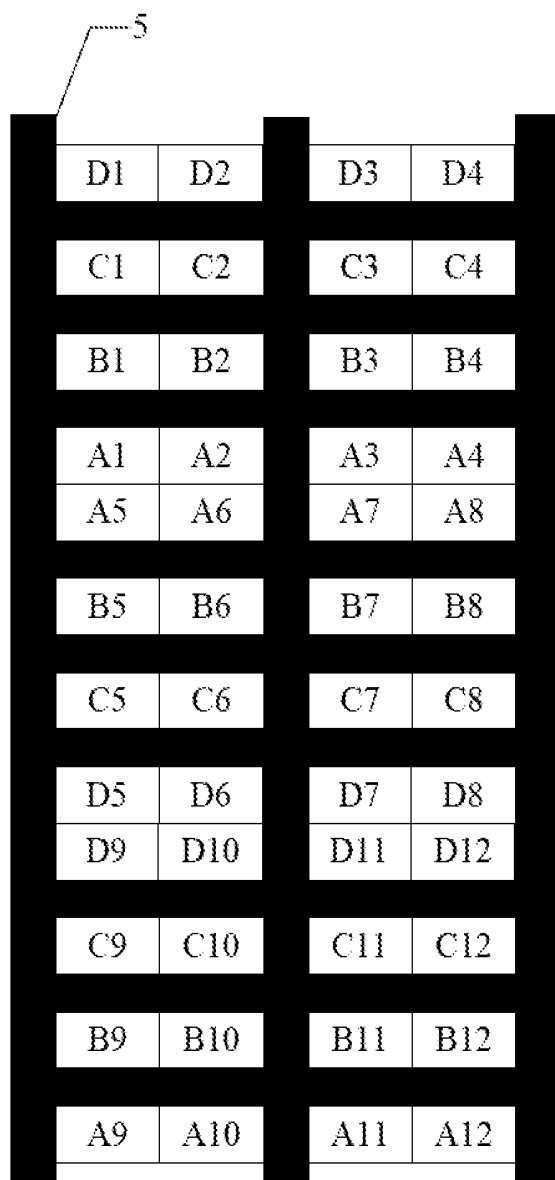


FIG.14

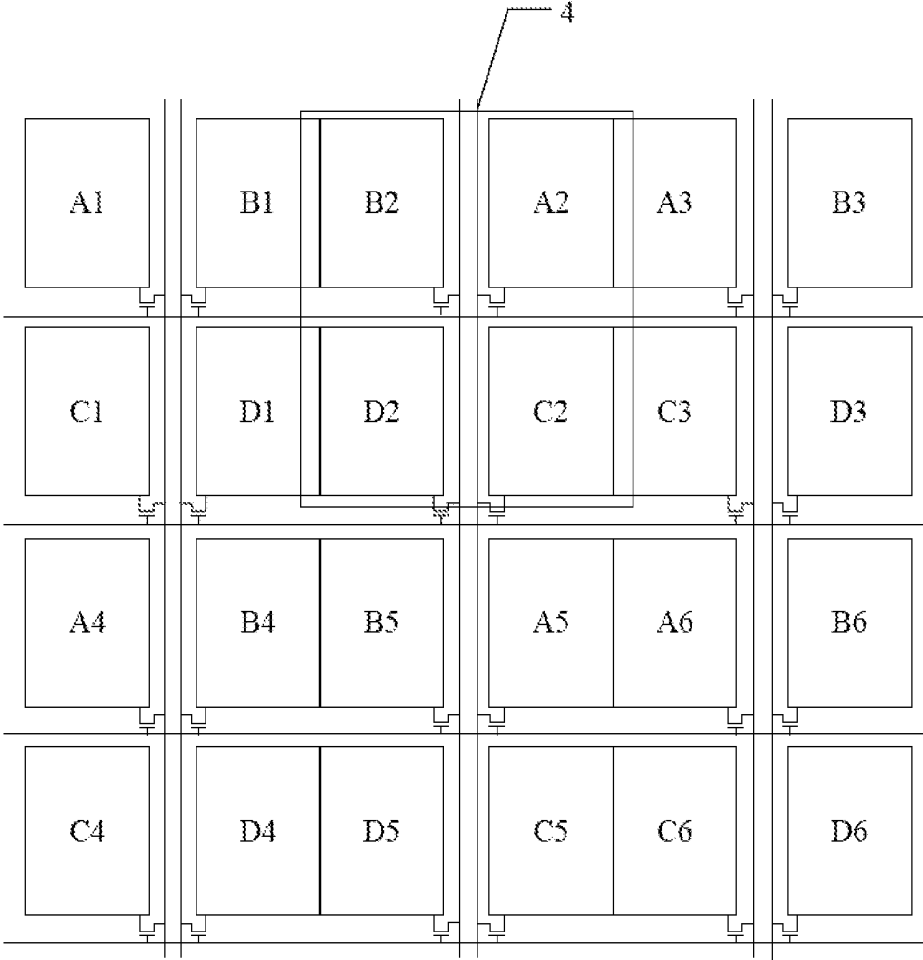


FIG.15

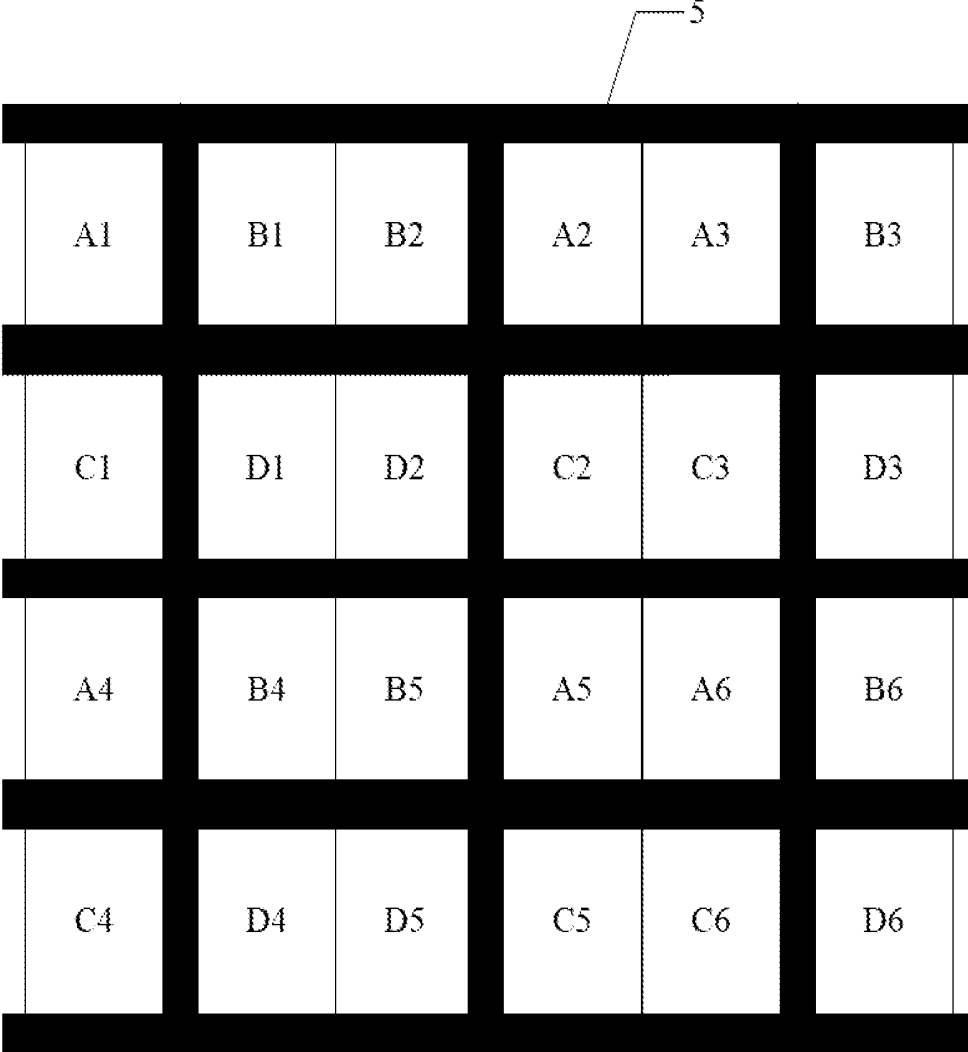


FIG.16

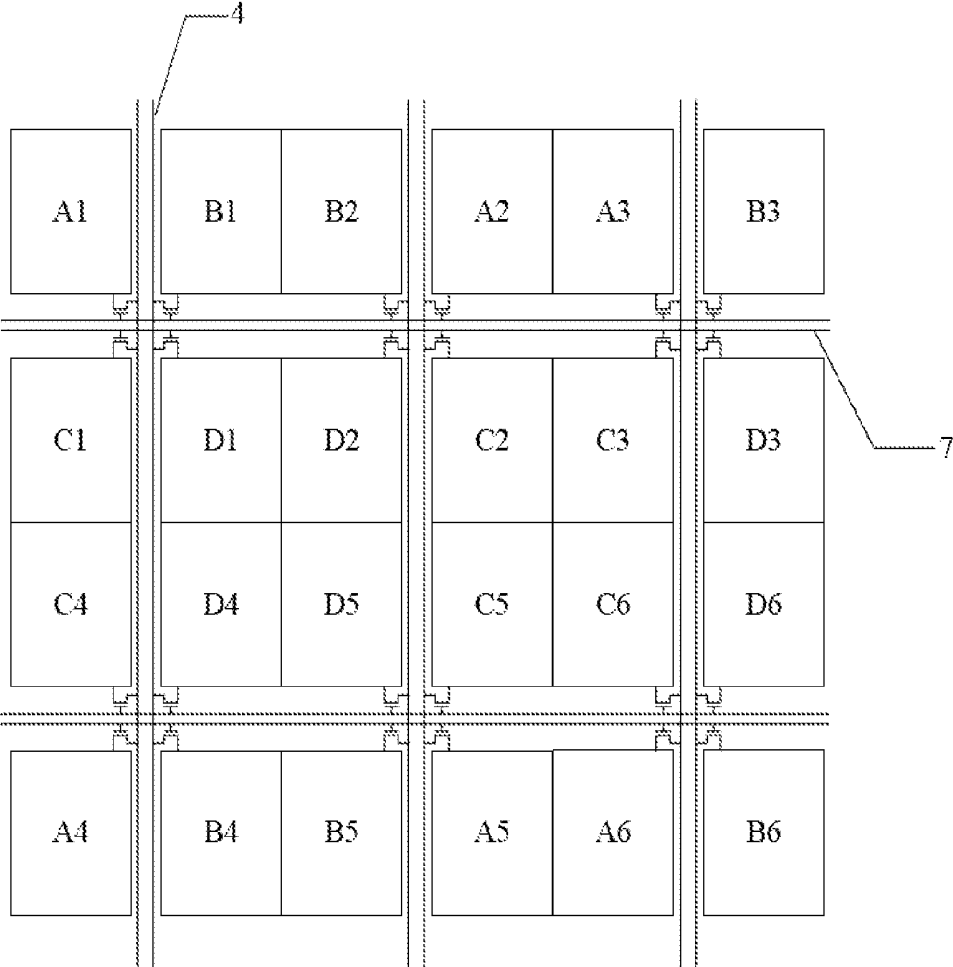


FIG.17

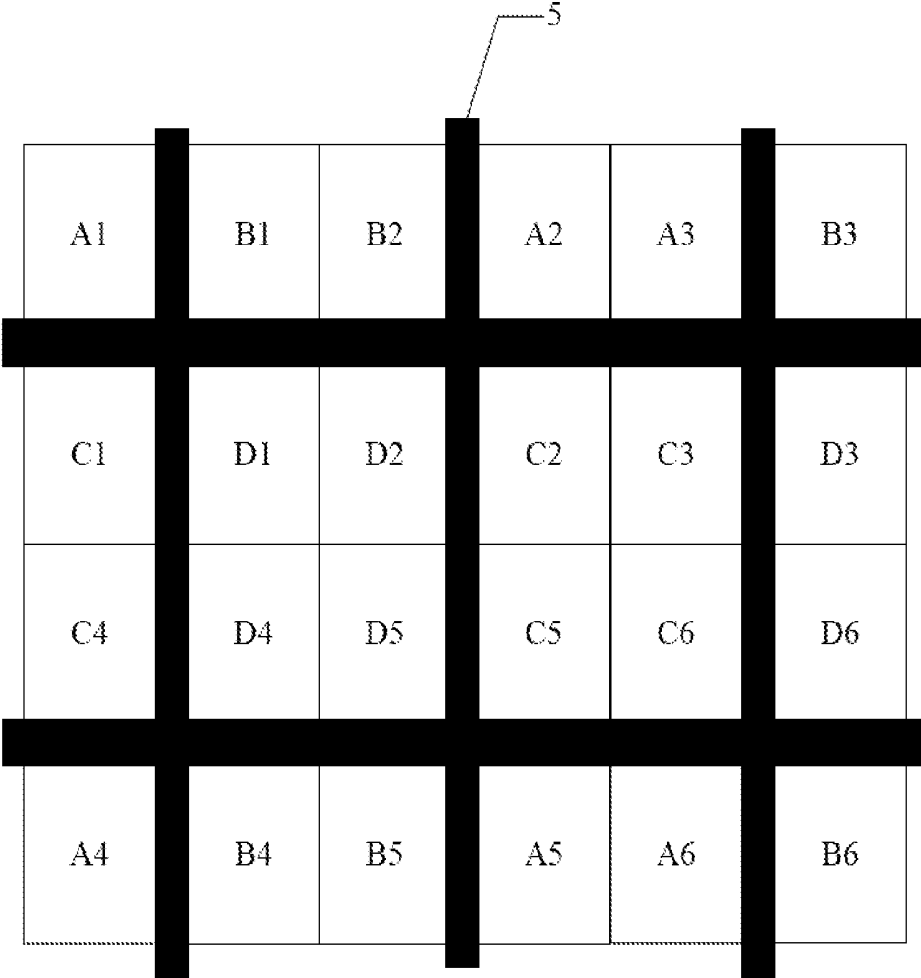


FIG. 18

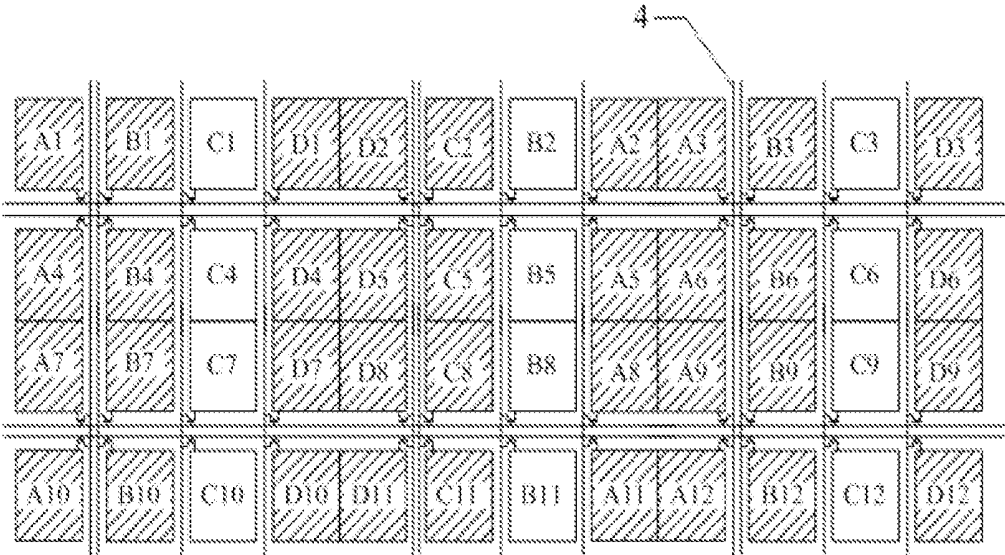


FIG.19

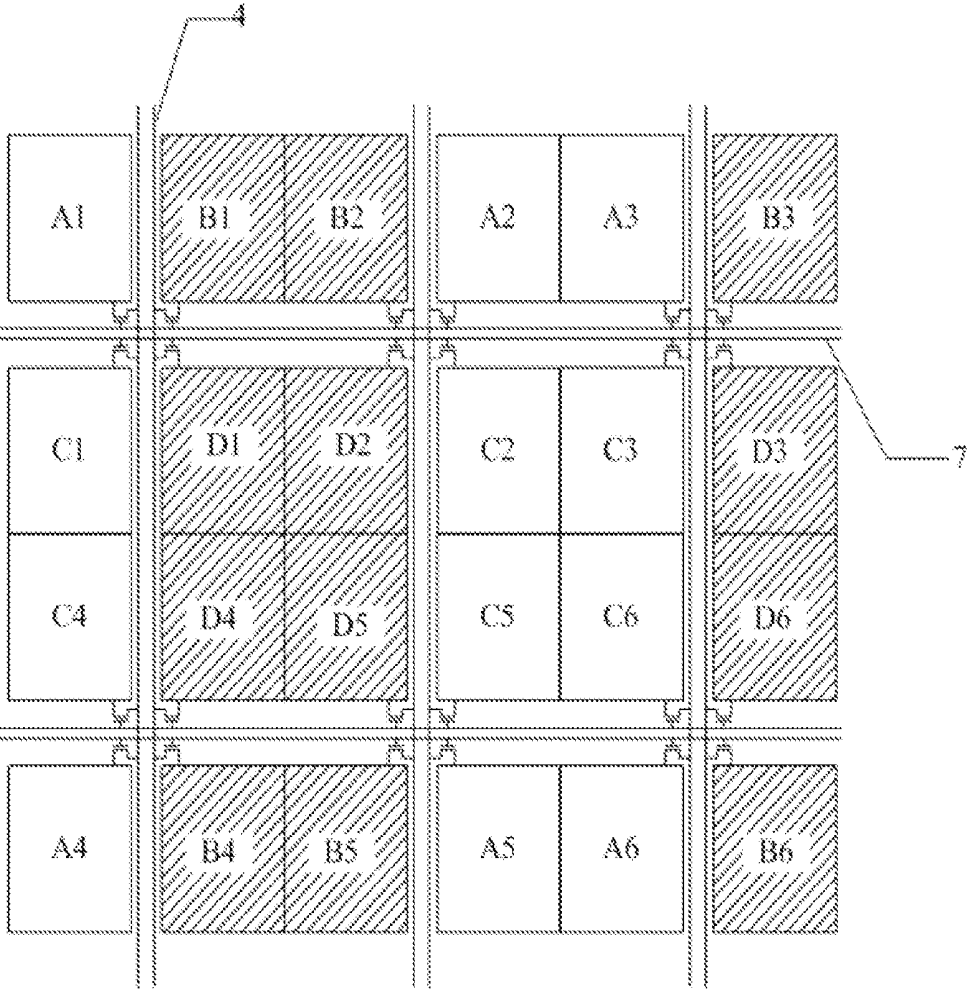


FIG.20

LIQUID CRYSTAL DISPLAY PANEL AND DRIVING METHOD THEREOF, AND DISPLAY DEVICE

TECHNICAL FIELD

[0001] The present invention relates to the field of display technology, and particularly, to a liquid crystal display panel and a driving method thereof, and a display device.

BACKGROUND ART

[0002] A liquid crystal display panel is mainly composed of an array substrate, an opposite substrate and liquid crystal molecules provided between the array substrate and the opposite substrate. The liquid crystal display panel is provided with a plurality of pixel units arranged in a matrix therein, each of the pixel units is composed of four sub-pixel units with color filters of different colors, and generally, the color filters for the four sub-pixel units are RGBW, RGBY or RGBC filters. Specifically, the array substrate is provided with gate lines, data lines, thin film transistors (TFTs) and pixel electrodes thereon. The opposite substrate is provided with a black matrix, color resins (generally, including RGBW, RGBY or RGBC resins) and a common electrode. When the gate line is applied with a scan signal of high level, the TFTs connected with the gate line are turned on, a grey scale signal carried by the data line is applied to the pixel electrodes via the TFTs, thus an electric field is generated between the pixel electrodes and the common electrode to control the liquid crystal molecules to deflect, thereby the liquid crystal molecules modulate the transmitted backlight so that the transmitted backlight may be incident onto the color resins on the opposite substrate in different intensities, the color resins may exhibit light of needed colors due to their different transmittances for light in different spectral bands.

[0003] Currently, in order to obtain a wide color gamut and a colorful display of excellent image quality, a common means is to thicken the color resins of the liquid crystal display panel, however, the thickened color resin may cause the light transmission ratios of the sub-pixel units to decrease, which will affect the display brightness of the liquid crystal display panel. While the display brightness of the liquid crystal display panel may be guaranteed by increasing the brightness of the backlight source of the liquid crystal display panel, the backlight source with high brightness may increase the power consumption of the entire liquid crystal module. In addition, the light transmission ratios of the sub-pixel units may be guaranteed by increasing the aperture ratios of the sub-pixel units, however, due to the limitation of the process accuracy of aligning and assembling the cell for the liquid crystal display panel, it is necessary to ensure that the black matrix has a width larger than the light-leaking area of the sub-pixel unit and the process accuracy, which is adverse to improving the aperture ratios of the sub-pixel units. Moreover, with the development of the liquid crystal display device of high resolution, the aperture ratio of the sub-pixel unit is further decreased.

[0004] Hence, how to increase the display brightness of the liquid crystal display panel with low power consumption has become a problem to be solved.

SUMMARY

[0005] In view of above, the invention provides a liquid crystal display panel and a driving method thereof, and a

display device, which can increase the display brightness of the liquid crystal display panel with low power consumption.

[0006] An embodiment of the invention provides a liquid crystal display panel which comprises an opposite substrate, an array substrate and a liquid crystal layer provided between the array substrate and the opposite substrate, and comprises a plurality of pixel units arranged in a matrix, each of the pixel units is composed of four sub-pixel units with different color filters, wherein

[0007] the plurality of pixel units are divided into groups, each of which includes two adjacent columns of pixel units in a row direction, wherein each column includes one or more adjacent pixel units in a column direction and there is no pixel unit simultaneously belonging to two groups, and in at least one of the groups, two adjacent sub-pixel units in the row direction of every two adjacent pixel units in the row direction have color filters of the same color, and the two adjacent sub-pixel units in the row direction with the color filters of the same color belong to different pixel units, the adjacent sub-pixel units in the adjacent pixel units in the row direction in each group form two columns of sub-pixel units, a data line for supplying a grey scale signal for one column of the two columns of sub-pixel units is provided at a side of the one column of sub-pixel units far away from the other column of the two columns of sub-pixel units; and

[0008] a black matrix with a plurality of opening areas is provided on a side of the opposite substrate or the array substrate facing to the liquid crystal layer, wherein every two adjacent sub-pixel units in the row direction correspond to the same opening area in the pattern of the black matrix.

[0009] In the above liquid crystal display panel in the invention, as the arrangement of the color filters of the sub-pixel units of every two adjacent pixel units in the row direction, from the at least one group composed of two adjacent columns of pixel units in the row direction, is changed, so that the color filters of two adjacent sub-pixel units in the row direction, which belong to different two pixel units, have the same color. Moreover, position of the data line connected with the sub-pixel units with color filters of the same color is changed, so that the data line is provided at a side of one of the sub-pixel units with color filters of the same color far away from the other one thereof. Therefore, while the color mixing phenomenon is avoided, a part of the black matrix, which should be provided between the two adjacent sub-pixel units in the row direction, may be omitted, that is, for the two adjacent sub-pixel units in the row direction, only one opening area may be provided in the pattern of black matrix. The aperture ratio of each sub-pixel unit can be increased by decreasing area of the pattern of the black matrix, the light transmission ratio of each sub-pixel unit is increased accordingly, thus the display brightness of the liquid crystal display panel is improved. In addition, as no color mixing phenomenon occurs between the two adjacent sub-pixel units in the row direction with color filters of the same color, distances liquid crystals to be driven by the pixel electrodes can be increased, and the operation efficiency of the liquid crystal display device can be increased.

[0010] Furthermore, in the liquid crystal display panel, the plurality of pixel units are divided into sets, each of which includes two adjacent rows of pixel units in a column direction, wherein each row includes one or more adjacent pixel units in the row direction and there is no pixel unit simultaneously belonging to two sets, and in at least one of the sets, two adjacent sub-pixel units in the column direction of every

two adjacent pixel units in the column direction have color filters with the same color, and the two adjacent sub-pixel units in the column direction with the color filters of the same color belong to different pixel units, the adjacent sub-pixel units in the column direction of the adjacent pixel units in the column direction in each set form two rows of sub-pixel units, a gate line for supplying a scan signal for one of the two rows of sub-pixel units is provided at a side of the one row of sub-pixel units far away from the other one of the two rows of sub-pixel units.

[0011] Preferably, in order to further improve the display brightness of the liquid crystal display panel, in the liquid crystal display panel, one opening area is provided in the pattern of the black matrix to correspond to the two adjacent sub-pixel units in the column direction.

[0012] Specifically, in the liquid crystal display panel in the embodiment of the invention, the four sub-pixel units in the pixel unit are arranged in the row direction.

[0013] Preferably, when the four sub-pixel units in the pixel unit are arranged in the row direction, in order to decrease area of the pattern area of the black matrix corresponding to the data lines at most to improve the display brightness of the liquid crystal display panel, in each group composed of two adjacent columns of pixel units in the row direction, two adjacent sub-pixel units in the row direction of every two adjacent pixel units in the row direction have color filters with the same color, and the two adjacent sub-pixel units in the row direction with the color filters of the same color belong to different pixel units.

[0014] Furthermore, when the four sub-pixel units in the pixel unit are arranged in the row direction, in order to decrease area of the pattern of the black matrix corresponding to the gate lines at most to improve the display brightness of the liquid crystal display panel, in each set composed of two adjacent rows of pixel units in the column direction, two adjacent sub-pixel units in the column direction of every two adjacent pixel units in the column direction have color filters of the same color.

[0015] Specifically, in the liquid crystal display panel in the embodiment of the invention, the four sub-pixel units in the pixel unit are arranged in the column direction.

[0016] Preferably, when the four sub-pixel units in the pixel unit are arranged in the column direction, in order to decrease area of the pattern of the black matrix corresponding to the data lines at most to improve the display brightness of the liquid crystal display panel, in each group composed of two adjacent columns of pixel units in the row direction, two adjacent sub-pixel units in the row direction of every two adjacent pixel units in the row direction have color filters of the same color.

[0017] Furthermore, when the four sub-pixel units in the pixel unit are arranged in the column direction, in order to decrease area of the pattern of the black matrix corresponding to the gate lines at most to improve the display brightness of the liquid crystal display panel, in each set composed of two adjacent rows of pixel units in the column direction, two adjacent sub-pixel units in the column direction of every two adjacent pixel units in the column direction have color filters of the same color, and the two adjacent sub-pixel units in the column direction with the color filters of the same color belong to different pixel units.

[0018] Specifically, in the liquid crystal display panel in the embodiment of the invention, the four sub-pixel units in each pixel unit are arranged in a matrix.

[0019] Preferably, when the four sub-pixel units in each pixel unit are arranged in a matrix, in order to decrease area of the pattern of the black matrix corresponding to the data lines at most to improve the display brightness of the liquid crystal display panel, in each group composed of two adjacent columns of pixel units in the row direction, two adjacent sub-pixel units in the row direction of every two adjacent pixel units in the row direction have color filters of the same color, and the two adjacent sub-pixel units in the row direction with the color filters of the same color belong to different pixel units.

[0020] Furthermore, when the four sub-pixel units in each pixel unit are arranged in a matrix, in order to decrease area of the pattern of the black matrix corresponding to the gate lines at most to improve the display brightness of the liquid crystal display panel, in each set composed of two adjacent rows of pixel units adjacent in the column direction, two adjacent sub-pixel units in the column direction of every two adjacent pixel units in the column direction have color filters of the same color, and the two adjacent sub-pixel units in the column direction with the color filters of the same color belong to different pixel units.

[0021] An embodiment of the invention also provides a display device comprising the above liquid crystal display panel.

[0022] With respect to the embodiment of the above liquid crystal display panel in the invention, the invention provides a driving method of the liquid crystal display panel comprising:

[0023] in a time period for displaying a frame, applying grey scale signals with the same polarity to two columns of sub-pixel units including two adjacent sub-pixel units in the row direction with the color filters of the same color;

[0024] applying grey scale signals with the same polarity to two columns of sub-pixel units with two data lines provided therebetween; and

[0025] applying grey scale signals with the opposite polarities to two columns of sub-pixel units with only one data line provided therebetween.

[0026] The invention provides a driving method of the liquid crystal display panel, wherein four sub-pixel units in each pixel unit are arranged in the column direction and arranged in a matrix, the driving method comprises:

[0027] in a time period for displaying a frame, applying grey scale signals with the same polarity to two columns of sub-pixel units including two adjacent sub-pixel units in the row direction with the color filters of the same color; and

[0028] applying grey scale signals with the opposite polarities to two columns of sub-pixel units with two data lines provided therebetween.

BRIEF DESCRIPTION OF THE DRAWINGS

[0029] FIG. 1 is a structural diagram of a liquid crystal display panel in an embodiment of the invention;

[0030] FIG. 2 is a first structural diagram of an array substrate in the liquid crystal display panel in an embodiment of the invention;

[0031] FIG. 3 is a first structural diagram of an opposite substrate in the liquid crystal display panel in an embodiment of the invention;

[0032] FIG. 4 is a structural diagram of the opposite substrate in the liquid crystal display panel in the prior art;

[0033] FIG. 5 is a second structural diagram of an array substrate in the liquid crystal display panel in an embodiment of the invention;

[0034] FIG. 6 is a second structural diagram of an opposite substrate in the liquid crystal display panel in an embodiment of the invention;

[0035] FIG. 7 is a first structural diagram of an array substrate in the liquid crystal display panel in the embodiment 1 of the invention;

[0036] FIG. 8 is a first structural diagram of an opposite substrate in the liquid crystal display panel in the embodiment 1 of the invention;

[0037] FIG. 9 is a second structural diagram of an array substrate in the liquid crystal display panel in the embodiment 1 of the invention;

[0038] FIG. 10 is a second structural diagram of an opposite substrate in the liquid crystal display panel in the embodiment 1 of the invention;

[0039] FIG. 11 is a first structural diagram of an array substrate in the liquid crystal display panel in the embodiment 2 of the invention;

[0040] FIG. 12 is a first structural diagram of an opposite substrate in the liquid crystal display panel in the embodiment 2 of the invention;

[0041] FIG. 13 is a second structural diagram of the array substrate in the liquid crystal display panel in the embodiment 2 of the invention;

[0042] FIG. 14 is a second structural diagram of the opposite substrate in the liquid crystal display panel in the embodiment 2 of the invention;

[0043] FIG. 15 is a first structural diagram of the array substrate in the liquid crystal display panel in the embodiment 3 of the invention;

[0044] FIG. 16 is a first structural diagram of the opposite substrate in the liquid crystal display panel in the embodiment 3 of the invention;

[0045] FIG. 17 is a second structural diagram of the array substrate in the liquid crystal display panel in the embodiment 3 of the invention;

[0046] FIG. 18 is a second structural diagram of the opposite substrate in the liquid crystal display panel in the embodiment 3 of the invention;

[0047] FIG. 19 is a diagram illustrating a case when a driving method of the liquid crystal panel in the embodiment of the invention is applied to the structure in FIG. 9; and

[0048] FIG. 20 is a diagram illustrating a case when a driving method of the liquid crystal panel in the embodiment of the invention is applied to the structure in FIG. 17.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0049] Hereinafter, embodiments of the liquid crystal display panel and the driving method thereof, and the display device will be described in conjunction with the drawings.

[0050] Shapes and thicknesses of film layers in the drawings do not reflect the real scales of the array substrate or the opposite substrate, and they are intended to just illustrate the invention.

[0051] An embodiment of the invention provides a liquid crystal display panel, as shown in FIG. 1, which comprises an opposite substrate 1, an array substrate 2 and a liquid crystal layer 3 provided between the array substrate 2 and the opposite substrate 1. The liquid crystal display panel has a plurality of pixel units arranged in a matrix (FIG. 1 shows two pixel

units, that is a pixel unit composed of A1, B1, C1 and D1 sub-pixel units, and a pixel unit composed of A2, B2, C2 and D2 sub-pixel units), each of the pixel units is composed of four sub-pixel units with color filters of different colors, as indicated by a dotted line frame in FIG. 1. In FIG. 1, the sub-pixel units composing each of the pixel units are represented by A1, B1, C1 and D1 and A2, B2, C2 and D2, wherein A1 and A2, B1 and B2, C1 and C2, and D1 and D2 may represent any one color of RGBW, RGBY or RGBC.

[0052] FIG. 2 is a top view of the array substrate 2, the pixel units are grouped so that each group is composed of two columns of pixel units which are adjacent in the row direction, as shown in FIG. 2, the dotted line frame represents a pixel unit, and one group may be just composed of two adjacent pixel units in the same row or two adjacent columns of pixel units in a plurality of adjacent rows, and there is no pixel unit simultaneously belonging to two groups. In at least one of the groups, two adjacent sub-pixel units in the row direction in every two adjacent pixel units in the row direction (D1 and D2, A3 and A4) have color filters of the same color, and the two sub-pixel units D1 and D2, and A3 and A4 with the color filters of the same color, which are adjacent in the row direction, belong to different pixel units. The adjacent sub-pixel units in the adjacent pixel units in the row direction in each group form two columns of sub-pixel units, a data line 4 for supplying a grey scale signal for one column of the two columns of sub-pixel units is provided at a side of the one column of sub-pixel units far away from the other column of the two columns of sub-pixel units, that is, no data line is provided between D1 and D2 and between A3 and A4, but two data lines 4 are provided between D2 and C2 and between A4 and B4.

[0053] A black matrix 5 with a plurality of opening areas is provided on a side of the opposite substrate 1 or the array substrate 2 facing to the liquid crystal layer 3, as shown in FIG. 3, one opening area is provided to correspond to two adjacent sub-pixel units D1 and D2 in the row direction in the pattern of the black matrix 5, that is, no pattern of the black matrix 5 is provided between D1 and D2.

[0054] In the liquid crystal display pane of the invention, as the arrangement of the color filters of the adjacent sub-pixel units in the row direction of every two adjacent pixel units in the row direction, from at least one group composed of two adjacent columns of pixel units in the row direction, is changed, so that the color filters of two adjacent sub-pixel units D1 and D2, A3 and A4 in the row direction, which belong to two different pixel units, have the same color. Moreover, position of the data line 4 connected with the sub-pixel units with color filters of the same color D1 and D2, A3 and A4 is changed, so that the data line 4 is provided at a gap far away from the gap between the sub-pixel units with color filters of the same color D1 and D2, A3 and A4, for example, the data line 4 for sub-pixel units D2 and A4 is provided between the sub-pixel units D2 and C2 and between the sub-pixel units A4 and B4. Therefore, while the color mixing phenomenon is avoided, the part of the black matrix 5, which should be provided between the two adjacent sub-pixel units in the row direction, may be omitted, that is, for the two adjacent sub-pixel units in the row direction, only one opening area may be provided in the pattern of black matrix 5. Compared to the arrangement of the sub-pixel units of pixel units and the pattern of the black matrix 5 shown in FIG. 4 in the prior art, in the invention, the aperture ratio of the sub-pixel units can be increased by decreasing area of the pattern

of the black matrix 5, the light transmission ratio of each sub-pixel unit is increased accordingly, thus the display brightness of the liquid crystal display panel is improved. In addition, as no color mixing phenomenon occurs between the two adjacent sub-pixel units in the row direction with color filters of the same color D1 and D2, and A3 and A4, distances between pixel electrodes thereof can be reduced, thereby the amount of the liquid crystals to be driven by the pixel electrodes can be increased, and the operation efficiency of the liquid crystal display device can be increased.

[0055] In specifically implementing the liquid crystal display panel in the embodiment of the invention, color resins 6 deciding colors of the color filters for the sub-pixel units, as shown in FIG. 1, may be provided at a side of the opposite substrate 1 facing to the liquid crystal layer 3, or may be provided at a side of the array substrate 2 facing to the opposite substrate 1, and which will not be limited herein. In addition, in specifically implementing the liquid crystal display panel in the embodiment of the invention, when one opening area of the pattern of the black matrix correspond to a plurality of sub-pixel units with color filters of the same color, color resins corresponding to these sub-pixel units may be provided separately, or may be provided as a whole, which will not be limited herein.

[0056] The black matrix 5 is used to shield the data lines and the gate lines so as to avoid light leakage and color mixing phenomenon, as shown in FIG. 1, the black matrix 5 may be provided at a side of the opposite substrate 1 facing to the liquid crystal layer 3, or at a side of the array substrate 2 facing to the opposite substrate 1, which will not be limited herein.

[0057] Further, in the liquid crystal display panel in the invention, on the basis of changing the positions of the data lines, positions of the gate lines may be changed. Specifically, as shown in FIG. 5, the plurality of pixel units are divided into sets, each of which may be composed of two rows of pixel units in the adjacent columns (one set may be just composed of two adjacent pixel units in the same column or two adjacent rows of pixel units in a plurality of adjacent columns), and there is no pixel unit simultaneously belonging to two sets. In at least one of the sets, two adjacent sub-pixel units in every two adjacent pixel units in the column direction (A1 and A3, B1 and B3, C1 and C3, D1 and D3, A2 and A4, B2 and B4, C2 and C4, and D2 and D4) have color filters of the same color, and the two adjacent sub-pixel units with the color filters of the same color in the column direction (A1 and A3, B1 and B3, C1 and C3, D1 and D3, A2 and A4, B2 and B4, C2 and C4, and D2 and D4) belong to different pixel units, the adjacent sub-pixel units in the column direction of the adjacent pixel units in the column direction in each set form two rows of sub-pixel units, a gate line 7 for supplying a scan signal for one row of the two rows of sub-pixel units is provided at a side of the one row of sub-pixel units far away from the other row of the two rows of sub-pixel units. That is, no gate line is provided between A1 and A3, B1 and B3, C1 and C3, A2 and A4, B2 and B4, C2 and C4, and D2 and D4.

[0058] In the case that the liquid crystal display panel in the invention adopts the structure in FIG. 5, position of the gate line 7 connected with the sub-pixel units with color filters of the same color A1 and A3, B1 and B3, C1 and C3, D1 and D3, A2 and A4, B2 and B4, C2 and C4, and D2 and D4 is changed, so that while the color mixing phenomenon is avoided, as shown in FIG. 6, a part of the black matrix 5, which should be provided between the two adjacent rows of sub-pixel units in the column direction, may be omitted, that is, for the two

adjacent sub-pixel units in the column direction, only one opening area may be provided in the pattern of black matrix 5, for example, one opening area is provided in the pattern of the black matrix 5 for sub-pixel units A1 and A3, thus the aperture ratio of the sub-pixel units can be increased by decreasing area of the pattern of the black matrix 5, the light transmission ratio of each sub-pixel unit is increased accordingly, thus the display brightness of the liquid crystal display panel is improved. In addition, as no color mixing phenomenon occurs between the two adjacent sub-pixel units in the column direction with color filters of the same color A1 and A3, B1 and B3, C1 and C3, D1 and D3, A2 and A4, B2 and B4, C2 and C4, and D2 and D4, respectively, distances between pixel electrodes thereof can be reduced, thereby the amount of the liquid crystals to be driven by the pixel electrodes can be increased, and the operation efficiency of the liquid crystal display device can be increased.

[0059] In specifically implementing the liquid crystal display panel in the invention, the four sub-pixel units composing the pixel unit may be either arranged in the row direction of the pixel units or in the column direction of the pixel units, which will not be limited herein.

[0060] Hereinafter, through three specific embodiments, the implementation of the liquid crystal display panel in the invention adopting both above manners will be described in detail.

Embodiment 1

Four Sub-Pixel Units of Each Pixel Unit are Arranged in a Row Direction of the Pixel Units

[0061] Specifically, in the 4×3 pixel units shown in FIG. 7, in every two adjacent columns of pixel units, the colors of the color filters of two adjacent sub-pixel units in the row direction of every two adjacent pixel units in the row direction are provided to be the same, and the two adjacent sub-pixel units in the row direction belong to two different pixel units. For example, in the pixel units in the first column and the second column shown in FIG. 7, the color filters of the sub-pixel units D1 and D2, A4 and A5, D7 and D8, A10 and A11 have the same color, respectively.

[0062] The arrangement of the data lines 4 in the array substrate can be optimized at most as follows: the arrangement of the color filters of the adjacent sub-pixel units in the row direction of every two adjacent pixel units in the row direction, from each group composed of two adjacent columns of pixel units in the row direction, is changed, so that the color filters of two adjacent sub-pixel units in the row direction, which belong to two different pixel units, have the same color, and, positions of the data lines 4 connected with the sub-pixel units with color filters of the same color are changed, so that the data lines 4 are provided at sides of the sub-pixel units with color filters of the same color far away from the gaps therebetween.

[0063] Corresponding to the structure shown in FIG. 7, FIG. 8 shows a pattern of the black matrix 5, while the color mixing phenomenon is avoided, for two adjacent sub-pixel units in the row direction, only one opening area may be provided in the pattern of black matrix 5, that is a part of the black matrix 5, which should be provided between the two adjacent sub-pixel units in the row direction with color filters of the same color, may be omitted, for example, as shown in FIG. 8, parts of the pattern of the black matrix for gaps between the sub-pixel units D1 and D2, A4 and A5, D7 and

D8, A10 and A11 in the first column of pixel units and the second column of pixel units can be omitted.

[0064] Further, on the basis of the structure in FIG. 7, the positions of the gate lines may be changed. As shown in FIG. 9, in each set composed of two adjacent rows of pixel units in the column direction, the color filters of two adjacent sub-pixel units in the column direction in every two adjacent pixel units in the column direction are provided to have the same color, for example, as shown in FIG. 9, in the second row of pixel units and the third row of pixel units, the colors of the color filters of the sub-pixel units A4 and A7, B4 and B7 . . . D6 and D9 are the same, respectively.

[0065] The arrangement of the gate lines 7 in the array substrate can be optimized at most as follows: the arrangement of the color filters of the adjacent sub-pixel units in the column direction of every two adjacent pixel units in the column direction, from each set composed of two adjacent rows of pixel units in the column direction, is changed, so that the color filters of two adjacent sub-pixel units in the column direction, which belong to two different pixel units, have the same color, and, positions of the gate lines 7 connected with the sub-pixel units with color filters of the same color are changed, so that the gate lines 7 are provided at sides of the sub-pixel units with color filters of the same color far away from the gaps therebetween.

[0066] Corresponding to the structure shown in FIG. 9, FIG. 10 shows a pattern of the black matrix 5, while the color mixing phenomenon is avoided, for two adjacent sub-pixel units in the column direction, only one opening area may be provided in the pattern of black matrix 5, that is, a part of the black matrix 5, which should be provided between the two adjacent sub-pixel units in the column direction with color filters of the same color, may be omitted, for example, as shown in FIG. 10, parts of the pattern of the black matrix for gaps between the sub-pixel units A4 and A7, B4 and B7 . . . D6 and D9 in the second row of pixel units and the third row of pixel units can be omitted.

[0067] It can be seen from FIG. 10, for four sub-pixel units which are adjacent in the row and column directions, the colors of the color filters of four sub-pixel units D4, D5, D7 and D8 belonging to four different pixel units are the same, thus there is only one opening area in the pattern of the black matrix 5 which corresponds to above four sub-pixel units D4, D5, D7 and D8, thus the aperture ratio of the sub-pixel unit can be increased at most, the light transmission ratio of each sub-pixel unit is increased accordingly, thus the display brightness of the liquid crystal display panel is improved at most. In addition, as no color mixing phenomenon occurs among the four adjacent sub-pixel units D4, D5, D7 and D8, distances between pixel electrodes thereof can be reduced, thereby the amount of the liquid crystals to be driven by the pixel electrodes can be increased, and the operation efficiency of the liquid crystal display device can be increased.

Embodiment 2

Four Sub-Pixel Units of Each Pixel Unit are Arranged in a Column Direction of the Pixel Units

[0068] Specifically, in the 3×4 pixel units shown in FIG. 11, in each group composed of two adjacent columns of pixel units in the row direction, the colors of the color filters of two adjacent sub-pixel units in the row direction in every two adjacent pixel units in the row direction are provided to be the same. For example, in the pixel units in the first column and

the second column as shown in FIG. 11, the color filters of the sub-pixel units A1 and A2, B1 and B2 . . . D9 and D10 have the same color, respectively.

[0069] The arrangement of the data lines 4 in the array substrate can be optimized at most as follows: the arrangement of the color filters of the adjacent sub-pixel units in the row direction of every two adjacent pixel units in the row direction, from each group composed of two adjacent columns of pixel units in the row direction, is changed, so that the color filters of two adjacent sub-pixel units in the row direction, which belong to two different pixel units, have the same color, and, positions of the data lines 4 connected with the sub-pixel units with color filters of the same color are changed, so that the data lines 4 are provided at sides of the sub-pixel units with color filters of the same color far away from the gaps therebetween.

[0070] Corresponding to the structure shown in FIG. 11, FIG. 12 shows a pattern of the black matrix 5, while the color mixing phenomenon is avoided, for two adjacent sub-pixel units in the row direction, only one opening area may be provided in the pattern of black matrix 5, that is, a part of the black matrix 5, which should be provided between the two adjacent sub-pixel units in the row direction with color filters of the same color, may be omitted, for example, as shown in FIG. 12, parts of the pattern of the black matrix for gaps between the sub-pixel units A1 and A2, B1 and B2 . . . D9 and D10 in the first column of pixel units and the second column of pixel units can be omitted.

[0071] Further, on the basis of the structure in FIG. 11, the positions of the gate lines may be changed. As shown in FIG. 13, in each group composed of two adjacent rows of pixel units in the column direction, the color filters of two adjacent sub-pixel units in the column direction in every two adjacent pixel units in the column direction are provided to have the same color and the two adjacent sub-pixel units in the column direction with color filters of the same color belong to two different pixel units, for example, in the first row of pixel units and the second row of pixel units shown in FIG. 13, the colors of the color filters of the sub-pixel units A1 and A5, A2 and A6, A3 and A7, A4 and A8 are the same respectively.

[0072] The arrangement of the gate lines 7 in the array substrate can be optimized at most as follows: the arrangement of the color filters of the adjacent sub-pixel units in the column direction of every two pixel units in the column direction, from each set composed of two adjacent rows of pixel units in the column direction, is changed, so that the color filters of two adjacent sub-pixel units in the column direction, which belong to two different pixel units, have the same color, and, positions of the gate lines 7 connected with the sub-pixel units with color filters of the same color are changed, so that the gate lines 7 are provided at sides of the sub-pixel units with color filters of the same color far away from the gaps therebetween.

[0073] Corresponding to the structure shown in FIG. 13, FIG. 14 shows a pattern of the black matrix 5, while the color mixing phenomenon is avoided, for two adjacent sub-pixel units in the column direction, only one opening area may be provided in the pattern of black matrix 5, that is, a part of the black matrix 5, which should be provided between the two adjacent sub-pixel units in the column direction with color filters of the same color, may be omitted, for example, as shown in FIG. 14, parts of the pattern of the black matrix for gaps between the sub-pixel units A1 and A5, A2 and A6, A3

and A7, A4 and A8 in the first row of pixel units and the second row of pixel units can be omitted.

[0074] It can be seen from FIG. 14, for four sub-pixel units which are adjacent in the row and column directions, the colors of the color filters of four sub-pixel units A1, A2, A5 and A6 belonging to four different pixel units are the same, thus there is only one opening area in the pattern of the black matrix 5 which corresponds to above four sub-pixel units A1, A2, A5 and A6, thus the aperture ratio of each sub-pixel unit can be increased at most, the light transmission ratio of each sub-pixel unit is increased accordingly, thus the display brightness of the liquid crystal display panel is improved at most in addition, as no color mixing phenomenon occurs among the four adjacent sub-pixel units A1, A2, A5 and A6, distances between pixel electrodes thereof can be reduced, thereby the amount of the liquid crystals to be driven by the pixel electrodes can be increased, and the operation efficiency of the liquid crystal display device can be increased.

Embodiment 3

Four Sub-Pixel Units of Each Pixel Unit are Arranged in a Matrix

[0075] Specifically, in the 2×3 pixel units shown in FIG. 15, in every two adjacent columns of pixel units in the row direction, the colors of the color filters of two adjacent sub-pixel units in the row direction in every two adjacent pixel units in the row direction are provided to be the same, and the two adjacent sub-pixel units in the row direction with color filters of the same color belong to two different pixel units. For example, in the pixel units in the first column and the second column as shown in FIG. 15, the color filters of the sub-pixel units B1 and B2, D1 and D2, B4 and B5, D4 and D5 have the same color, respectively.

[0076] The arrangement of the data lines 4 in the array substrate can be optimized at most as follows: the arrangement of the color filters of the sub-pixel units in the row direction of every two adjacent pixel units in the row direction, from two adjacent columns of pixel units in the row direction, is changed, so that the color filters of two adjacent sub-pixel units in the row direction, which belong to two different pixel units, have the same color, and, positions of the data lines 4 connected with the sub-pixel units with color filters of the same color are changed, so that the data lines 4 are provided at sides of the sub-pixel units with color filters of the same color far away from the gaps therebetween.

[0077] Corresponding to the structure shown in FIG. 15, FIG. 16 shows a pattern of the black matrix 5, while the color mixing phenomenon is avoided, for two adjacent sub-pixel units in the row direction, only one opening area may be provided in the pattern of black matrix 5, that is, a part of the black matrix 5, which should be provided between the two adjacent sub-pixel units in the row direction with color filters of the same color, may be omitted, for example, as shown in FIG. 16, parts of the pattern of the black matrix for gaps between the sub-pixel units B1 and B2, D1 and D2, B4 and B5, D4 and D5 in the first column of pixel units and the second column of pixel units can be omitted.

[0078] Further, on the basis of the structure in FIG. 15, the positions of the gate lines may be changed. As shown in FIG. 17, in two rows of pixel units which are adjacent, the color filters of two adjacent sub-pixel units in the column direction of every two adjacent pixel units in the column direction are provided to have the same color and the two adjacent sub-

pixel units in the column direction with color filters of the same color belong to two different pixel units, for example, in the second row of sub-pixel units and the third row of sub-pixel units shown in FIG. 17, the colors of the color filters of the sub-pixel units C1 and C4, D1 and D4 . . . D3 and D6 are the same respectively.

[0079] The arrangement of the gate lines 7 in the array substrate can be optimized at most as follows: the arrangement of the color filters of the sub-pixel units of the adjacent sub-pixel units in the column direction, from two adjacent rows of pixel units, is changed, so that the color filters of two adjacent sub-pixel units in the column direction, which belong to two different pixel units, have the same color, and, positions of the gate lines 7 connected with the sub-pixel units with color filters of the same color are changed, so that the gate lines 7 are provided at sides of the sub-pixel units with color filters of the same color far away from the gaps therebetween.

[0080] Corresponding to the structure shown in FIG. 17, FIG. 18 shows a pattern of the black matrix 5, while the color mixing phenomenon is avoided, for two adjacent sub-pixel units in the column direction, only one opening area may be provided in the pattern of black matrix 5, that is, a part of the black matrix 5, which should be provided between the two adjacent sub-pixel units in the column direction with color filters of the same color, may be omitted, for example, as shown in FIG. 18, parts of the pattern of the black matrix for gaps between the sub-pixel units C1 and C4, D1 and D4 . . . D3 and D6 in the first row of pixel units and the second row of pixel units can be omitted.

[0081] It can be seen from FIG. 18, for four sub-pixel units which are adjacent in the row and column directions, the colors of the color filters of four sub-pixel units D1, D2, D4 and D5 belonging to four different pixel units are the same, thus there is only one opening area in the pattern of the black matrix 5 which corresponds to above four sub-pixel units D1, D2, D4 and D5, thus the aperture ratio of each sub-pixel unit can be increased at most, the light transmission ratio of each sub-pixel unit is increased accordingly, thus the display brightness of the liquid crystal display panel is improved at most. In addition, as no color mixing phenomenon occurs among the four adjacent sub-pixel units D1, D2, D4 and D5, distances between pixel electrodes thereof can be reduced, thereby the amount of the liquid crystals to be driven by the pixel electrodes can be increased, and the operation efficiency of the liquid crystal display device can be increased.

[0082] Accordingly, an embodiment of the invention provides a driving method of the above liquid crystal display panel, the driving method comprises:

[0083] in a time period for displaying a frame, applying grey scale signals with the same polarity to two columns of sub-pixel units including two adjacent sub-pixel units in the row direction with the color filters of the same color;

[0084] applying grey scale signals with the same polarity to two columns of sub-pixel units with two data lines provided therebetween; and

[0085] applying grey scale signals with the opposite polarities to two columns of sub-pixel units with only one data line provided therebetween.

[0086] When the driving method is applied to the liquid crystal display panel of the invention, as in the liquid crystal display panel, the data lines connected with two columns of sub-pixel units composed of every two adjacent sub-pixel units in the row direction with color filters of the same color

are provided at sides of the two columns of sub-pixel units far away from a gap between the two adjacent columns of sub-pixel units, thereby no data line is provided at the gap between the two adjacent columns of sub-pixel units, thus an interval between the two adjacent sub-pixel units in the row direction in the two columns of sub-pixel units is relatively small, which may readily cause signal interference therebetween. Therefore, in a time period for displaying a frame, it is necessary to ensure that the polarities of signals applied to two adjacent sub-pixel units in the row direction with color filters of the same color are the same, therefore the signal interference between the two adjacent sub-pixel units in the row direction with a small interval therebetween can be avoided. Taking the arrangement of the sub-pixel units in FIG. 19 as an example. As shown in FIG. 19, the polarities of signals applied to the fourth and the fifth columns of sub-pixel units are the same, the polarities of signals applied to the eighth and the ninth columns of sub-pixel units are the same, wherein the sub-pixel units applied with signals of the same polarity in FIG. 19 are filled with the same pattern.

[0087] Meanwhile, in the liquid crystal display panel in the invention, as there is a case wherein two data lines are provided at a gap between the corresponding sub-pixel units. As shown in FIG. 19, in the case that two data lines are provided at each of three gaps among gaps between sub-pixel units, as the grey scale signals transmitted in the two data lines at one gap are likely to interfere with each other, therefore, in a time period for displaying a frame, it is necessary to ensure that the polarities of the grey scale signals transmitted in two data lines at the same gap between the sub-pixel units are the same, therefore the signal interference between the two data lines can be avoided. As shown in FIG. 19, the polarities of signals applied to the first and second columns of sub-pixel units connected with two data lines provided at a gap therebetween are the same.

[0088] On the basis of the above, for example as shown in FIG. 19, there are cases wherein only one data line is provided at a gap between the sub-pixel units, and at this time, in order to realize polarity reversion driving in column of the sub-pixel units in the liquid crystal display panel, in a time period for displaying a frame, grey scale signals with opposite polarities may be applied to two columns of sub-pixel units between which there is only one data line, for example, the polarities of signals applied to the second and the third columns of sub-pixel units are opposite in FIG. 19.

[0089] In addition, for the liquid crystal display panel in the invention wherein four sub-pixel units in the pixel unit are arranged in a column direction of the pixel units, the embodiment of the invention provides a driving method for the liquid crystal display panel, which comprises:

[0090] in a time period for displaying a frame, applying grey scale signals with the same polarity to two columns of sub-pixel units including two adjacent sub-pixel units in the row direction with the color filters of the same color; and

[0091] applying grey scale signals with the opposite polarities to two columns of sub-pixel units with two data lines provided therebetween.

[0092] When the driving method is applied to the liquid crystal display panel of the invention, as the data lines connected with two columns of sub-pixel units composed of every two adjacent sub-pixel units in the row direction with color filters of the same color are provided at sides of the two columns of sub-pixel units far away from a gap between the two adjacent columns of sub-pixel units, thereby no data line

is provided at the gap between the two adjacent columns of sub-pixel units, thus an interval between the two adjacent sub-pixel units in the row direction in the two columns of sub-pixel units is relatively small, which may cause signal interference therebetween. Therefore, in a time period for displaying a frame, it is necessary to ensure that the polarities of two adjacent sub-pixel units in the row direction with color filters of the same color are the same, therefore the signal interference between the two adjacent sub-pixel units in the row direction can be avoided. Taking the arrangement of the sub-pixel units in FIG. 17 as an example, as shown in FIG. 20, the polarities of signals applied to the second and the third columns of sub-pixel units are the same, wherein the sub-pixel units with the same polarity in FIG. 20 are filled with the same pattern.

[0093] At the same time, in order to realize polarity reversion driving in column of the sub-pixel units in the liquid crystal display panel, in a time period for displaying a frame, it is necessary to ensure that grey scale signals with opposite polarities are applied to two data lines between the sub-pixel units, for example, the polarities of signals applied to the first and second columns of sub-pixel units are opposite in FIG. 20.

[0094] On the basis of the same concept, embodiments of the invention also provide a display device comprising the above liquid crystal display panel in the invention, the display device may be a mobile phone, a pad computer, a television, a display, a notebook computer, a digital image frame, a navigator and any other product or part with displaying function. Embodiments of the display device may be referred to above embodiments of the liquid crystal display panel, which will not be repeated herein.

[0095] In the liquid crystal display panel and the driving method thereof, and the display device in the invention, as the arrangement of the color filters of the sub-pixel units of every two adjacent pixel units in the row direction, inform at least one group composed of two adjacent columns of pixel units in the row direction, is changed, so that the color filters of two adjacent sub-pixel units in the row direction, which belong to different two pixel units, have the same color. Moreover, position of the data line connected with the sub-pixel units with color filters of the same color is changed, so that the data line is provided at a side of one of the sub-pixel units with color filters of the same color far away from the other one thereof. Therefore, while the color mixing phenomenon is avoided, the part of the black matrix, which should be provided between the two adjacent sub-pixel units in the row direction, may be omitted, that is, for the two adjacent sub-pixel units in the row direction, only one opening area may be provided in the pattern of black matrix. The aperture ratio of each sub-pixel units can be increased by decreasing area of the pattern of the black matrix, the light transmission ratio of each sub-pixel unit is increased accordingly, thus the display brightness of the liquid crystal display panel is improved. In addition, as no color mixing phenomenon occurs between the two adjacent sub-pixel units in the row direction with color filters of the same color, distances between pixel electrodes thereof can be reduced, thereby the amount of the liquid crystals to be driven by the pixel electrodes can be increased, and the operation efficiency of the liquid crystal display device can be increased.

[0096] Obviously, the person skilled in the art can make various variations and modifications without departing from the spirit and scope of the present invention. Therefore, if

these variations and modifications belong to the scope of the claims of present invention and the scope of equivalent technical solutions thereof, the invention intends to comprise these variations and modifications.

1-15. (canceled)

16. A liquid crystal display panel, which comprises an opposite substrate, an array substrate and a liquid crystal layer provided between the array substrate and the opposite substrate, and comprises a plurality of pixel units arranged in a matrix, each of the pixel units is composed of four sub-pixel units with different color filters, wherein

the plurality of pixel units are divided into groups, each of which includes two adjacent columns of pixel units in a row direction, wherein each column includes one or more adjacent pixel units in a column direction and there is no pixel unit simultaneously belonging to two groups, and in at least one of the groups, two adjacent sub-pixel units in the row direction of every two adjacent pixel units in the row direction have color filters of the same color, and the two adjacent sub-pixel units in the row direction with the color filters of the same color belong to different pixel units, the adjacent sub-pixel units in the adjacent pixel units in the row direction in each group form two columns of sub-pixel units, a data line for supplying a grey scale signal for one of the two columns of sub-pixel units is provided at a side of the one column of sub-pixel units far away from the other one of the two columns of sub-pixel units; and

a black matrix with a plurality of opening areas is provided on a side of the opposite substrate or the array substrate facing to the liquid crystal layer, wherein every two adjacent sub-pixel units in the row direction correspond to the same opening area in the pattern of the black matrix.

17. The liquid crystal display panel of claim **16**, wherein the plurality of pixel units are divided into sets, each of which includes two adjacent rows of pixel units in a column direction, wherein each row includes one or more adjacent pixel units in the row direction and there is no pixel unit simultaneously belonging to two sets, and in at least one of the sets, two adjacent sub-pixel units in the column direction of every two adjacent pixel units in the column direction have color filters of the same color, and the two adjacent sub-pixel units in the column direction with the color filters of the same color belong to different pixel units, the adjacent sub-pixel units in the column direction of the adjacent pixel units in the column direction in each set form two rows of sub-pixel units, a gate line for supplying a scan signal for one of the two rows of sub-pixel units is provided at a side of the one row of sub-pixel units far away from the other one of the two rows of sub-pixel units.

18. The liquid crystal display panel of claim **17**, wherein one opening area is provided in the pattern of the black matrix to correspond to the two adjacent sub-pixel units in the column direction.

19. The liquid crystal display panel of claim **18**, wherein the four sub-pixel units in each pixel unit are arranged in the row direction.

20. The liquid crystal display panel of claim **19**, wherein in each group composed of two adjacent columns of pixel units in the row direction, two adjacent sub-pixel units in the row direction of every two adjacent pixel units in the row direction have color filters of the same color, and the two sub-pixel

units in the row direction with the color filters of the same color belong to different pixel units.

21. The liquid crystal display panel of claim **20**, wherein in each set composed of two adjacent rows of pixel units in the column direction, two adjacent sub-pixel units in the column direction of every two pixel units which are adjacent in the column direction have color filters of the same color.

22. The liquid crystal display panel of claim **18**, wherein the four sub-pixel units in each pixel unit are arranged in the column direction.

23. The liquid crystal display panel of claim **22**, wherein in each group composed of two adjacent columns of pixel units in the row direction, two adjacent sub-pixel units in the row direction of every two adjacent pixel units in the row direction have color filters of the same color.

24. The liquid crystal display panel of claim **23**, wherein in each set composed of two adjacent rows of pixel units in the column, two adjacent sub-pixel units in the column direction of every two adjacent pixel units in the column direction have color filters of the same color, and the two sub-pixel units in the column direction with the color filters of the same color belong to different pixel units.

25. The liquid crystal display panel of claim **18**, wherein the four sub-pixel units in each pixel unit are arranged in a matrix.

26. The liquid crystal display panel of claim **25**, wherein in each group composed of two adjacent columns of pixel units in the row direction, two adjacent sub-pixel units in the row direction of every two adjacent pixel units in the row direction have color filters of the same color, and the two adjacent sub-pixel units in the row direction with the color filters of the same color belong to different pixel units.

27. The liquid crystal display panel of claim **26**, wherein in each set composed of two adjacent rows of pixel units in the column direction, two adjacent sub-pixel units in the column direction of every two adjacent pixel units in the column direction have color filters of the same color, and the two adjacent sub-pixel units in the column direction with the color filters of the same color belong to different pixel units.

28. A display device comprising the liquid crystal display panel of claim **16**.

29. A display device comprising the liquid crystal display panel of claim **17**.

30. A driving method for the liquid crystal display panel of claim **16**, comprising:

in a time period for displaying a frame, applying grey scale signal with the same polarity to two columns of sub-pixel units including two adjacent sub-pixel units in the row direction with the color filters of the same color; applying grey scale signals with the same polarity to two columns of sub-pixel units with two data lines provided therebetween; and

applying grey scale signals with the opposite polarities to two columns of sub-pixel units with only one data line provided therebetween.

31. A driving method for the liquid crystal display panel of claim **17**, comprising:

in a time period for displaying a frame, applying grey scale signal with the same polarity to two columns of sub-pixel units including two adjacent sub-pixel units in the row direction with the color filters of the same color;

applying grey scale signals with the same polarity to two columns of sub-pixel units with two data lines provided therebetween; and

applying grey scale signals with the opposite polarities to two columns of sub-pixel units with only one data line provided therebetween.

32. A driving method for the liquid crystal display panel of claim **23** comprising:

in a time period for displaying a frame, applying grey scale signals with the same polarity to two columns of sub-pixel units including two adjacent sub-pixel units in the row direction with the color filters of the same color; and applying grey scale signals with the opposite polarities to two columns of sub-pixel units with two data lines provided therebetween.

33. A driving method for the liquid crystal display panel of claim **24** comprising:

in a time period for displaying a frame, applying grey scale signals with the same polarity to two columns of sub-pixel units including two adjacent sub-pixel units in the row direction with the color filters of the same color; and applying grey scale signals with the opposite polarities to two columns of sub-pixel units with two data lines provided therebetween.

34. A driving method for the liquid crystal display panel of claim **26** comprising:

in a time period for displaying a frame, applying grey scale signals with the same polarity to two columns of sub-pixel units including two adjacent sub-pixel units in the row direction with the color filters of the same color; and applying grey scale signals with the opposite polarities to two columns of sub-pixel units with two data lines provided therebetween.

35. A driving method for the liquid crystal display panel of claim **27** comprising:

in a time period for displaying a frame, applying grey scale signals with the same polarity to two columns of sub-pixel units including two adjacent sub-pixel units in the row direction with the color filters of the same color; and applying grey scale signals with the opposite polarities to two columns of sub-pixel units with two data lines provided there between.

* * * * *

专利名称(译)	液晶显示面板及其驱动方法和显示装置		
公开(公告)号	US20150302808A1	公开(公告)日	2015-10-22
申请号	US14/381735	申请日	2013-12-05
[标]申请(专利权)人(译)	京东方科技集团股份有限公司		
申请(专利权)人(译)	京东方科技集团股份有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司.		
[标]发明人	WANG QIANGTAO CHOI HYUNSIC FANG ZHENG TIAN YUNYUN		
发明人	WANG, QIANGTAO CHOI, HYUNSIC FANG, ZHENG TIAN, YUNYUN		
IPC分类号	G09G3/36 G02F1/1335 G02F1/1362		
CPC分类号	G09G3/3607 G02F1/136209 G02F1/136286 G02F1/133514 G09G3/3614 G09G2330/023 G09G2300/0452 G09G2300/08 G09G2310/027 G09G2320/0233 G02F2001/136222 G02F1/1335 G02F1/133512 G02F2201/40 G02F2201/52 G09G3/36 G09G3/3648 G09G2300/0426		
优先权	201310342197.2 2013-08-07 CN		
其他公开文献	US9378690		
外部链接	Espacenet USPTO		

摘要(译)

在本发明中，由于在行方向上每两个相邻像素单元的子像素单元的滤色器的布置，从行方向上的两个相邻列像素单元组成的至少一个组被改变，所以行方向上的两个相邻子像素单元的滤色器属于不同的两个像素单元，具有相同的颜色。此外，改变了与子像素单元连接的数据线与相同颜色的滤色器的位置，使得数据线设置在一个子像素单元的一侧，具有相同颜色的滤色器。远离另一个。因此，在避免混色现象的同时，可以省略应该在行方向上在两个相邻的子像素单元之间提供的黑矩阵的一部分。

