



US 20120169966A1


(19) **United States**(12) **Patent Application Publication**
LU(10) **Pub. No.: US 2012/0169966 A1**(43) **Pub. Date: Jul. 5, 2012**(54) **GRATING SHEET, LCD DEVICE AND
METHODS FOR MANUFACTURING
GRATING SHEET AND LCD PANEL****Publication Classification**

- (51) **Int. Cl.**
G02F 1/13357 (2006.01)
G02B 1/10 (2006.01)
G02B 27/44 (2006.01)
- (52) **U.S. Cl.** **349/62; 359/568; 427/163.1; 216/24**
- (57) **ABSTRACT**

(75) **Inventor:** Linlin LU, Beijing (CN)(73) **Assignee:** BEIJING BOE
OPTOELECTRONICS
TECHNOLOGY CO., LTD.,
Beijing (CN)(21) **Appl. No.:** 13/334,889(22) **Filed:** Dec. 22, 2011(30) **Foreign Application Priority Data**

Dec. 31, 2010 (CN) 201010620524.2

A grating sheet, a LCD device and methods for manufacturing the grating sheet and a liquid crystal display panel are provided. The grating sheet comprises a plurality of primary color gratings in parallel, each of which comprises a red R sub-grating, a green G sub-grating and a blue B sub-grating in parallel, and each sub-grating comprises an opening area and a reflective region disposed around the opening area and corresponds to a pixel unit on a sub-array substrate. The grating sheet, the liquid crystal display panel and methods for manufacturing the grating sheet and a liquid crystal display panel may be applicable to a system with a liquid crystal display.

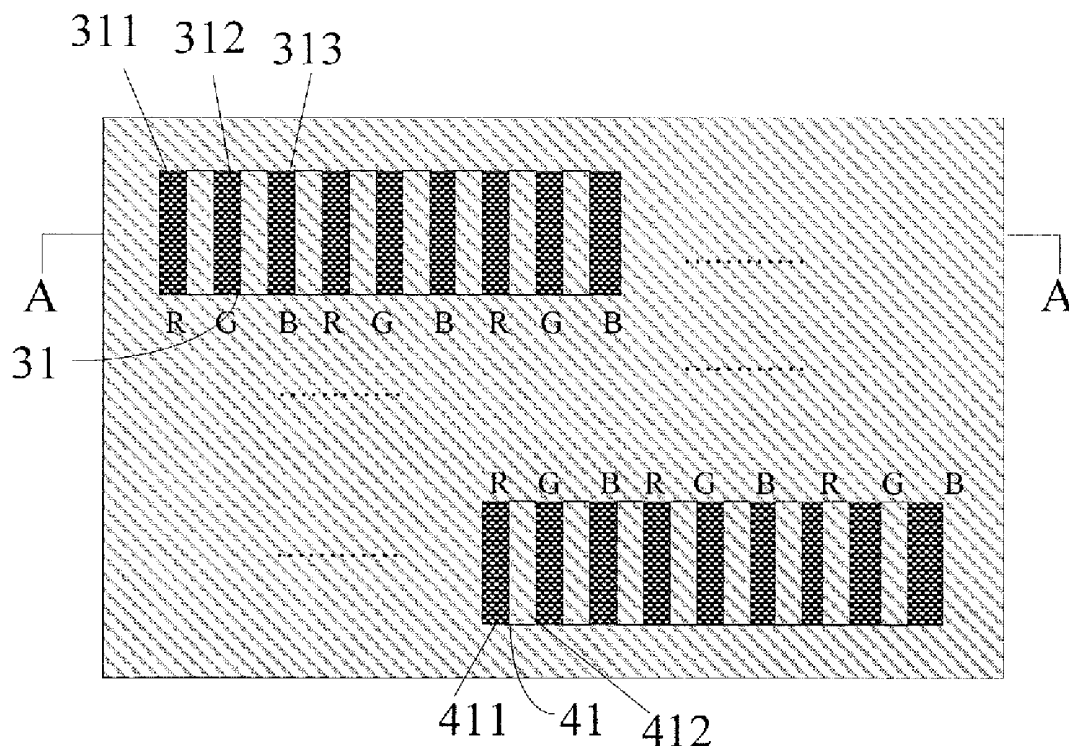

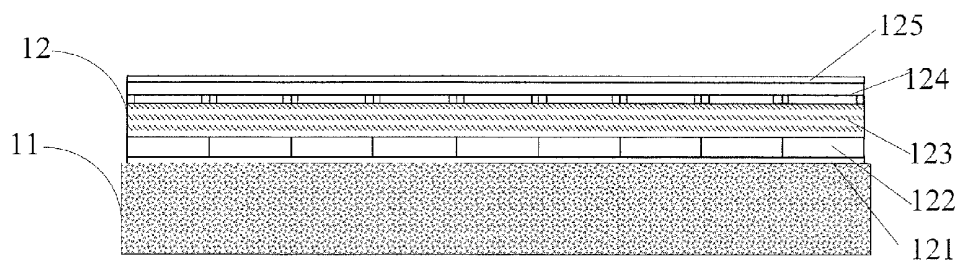


Fig.1

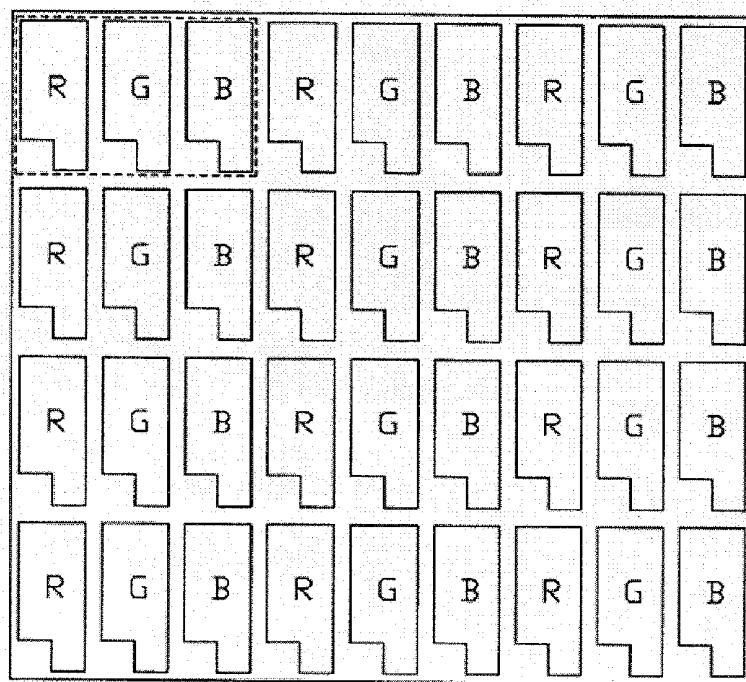


Fig.2

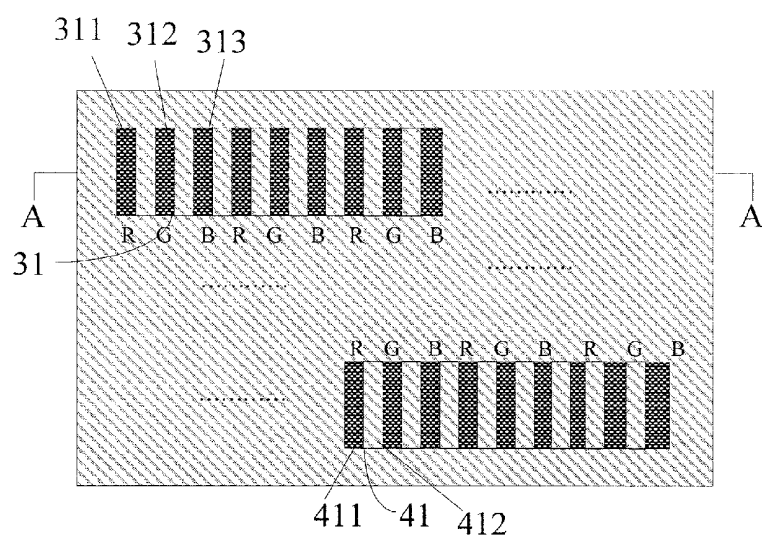


Fig.3

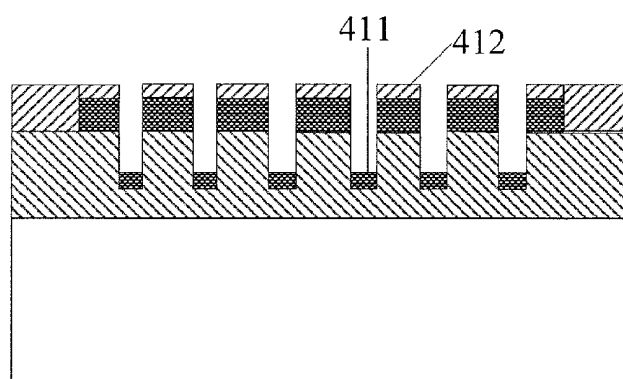


Fig.4(a)

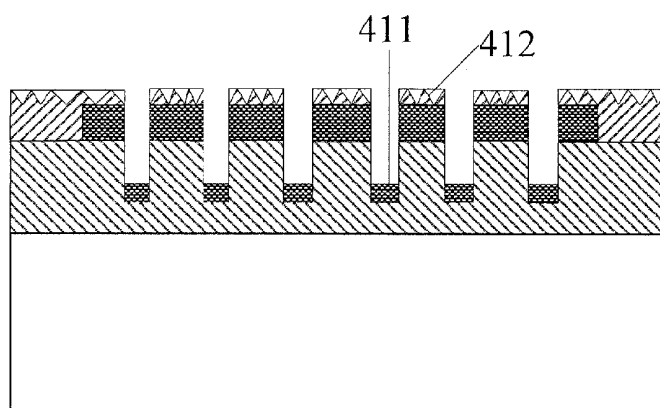


Fig. 4(b)

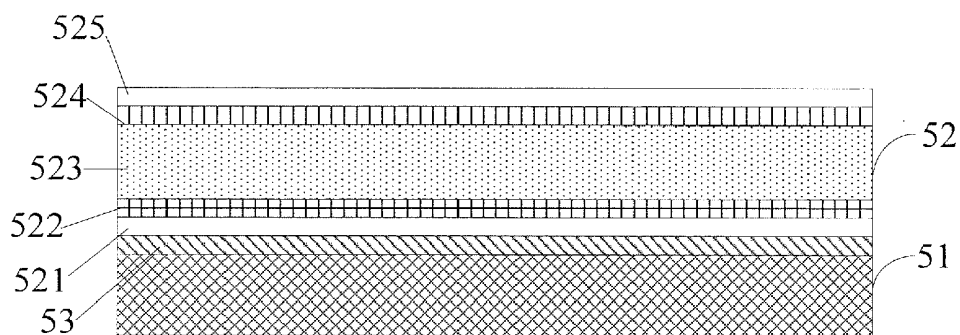


Fig. 5(a)

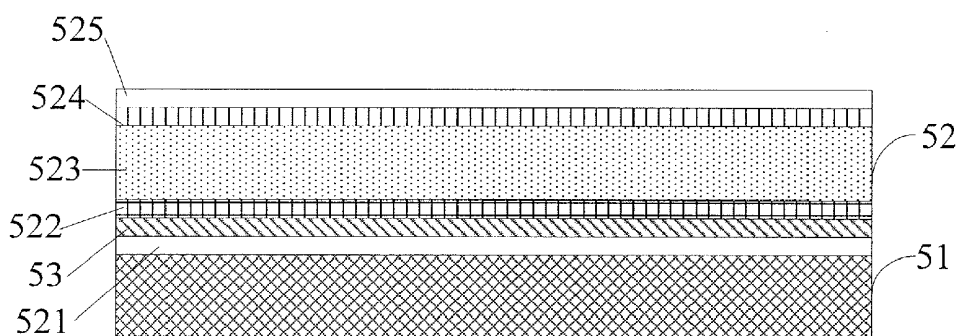


Fig.5(b)

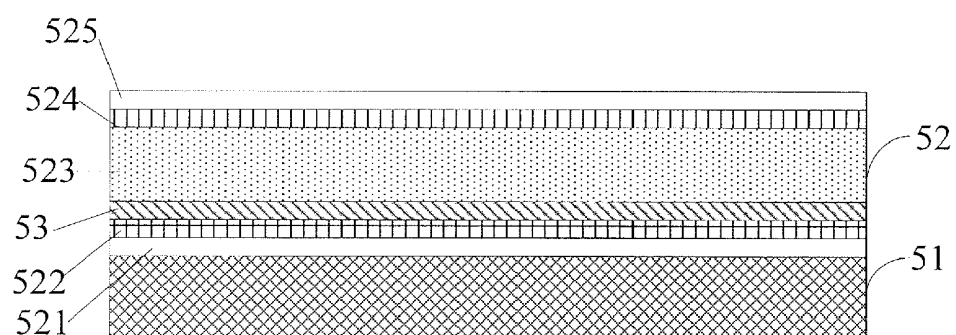


Fig.5(c)

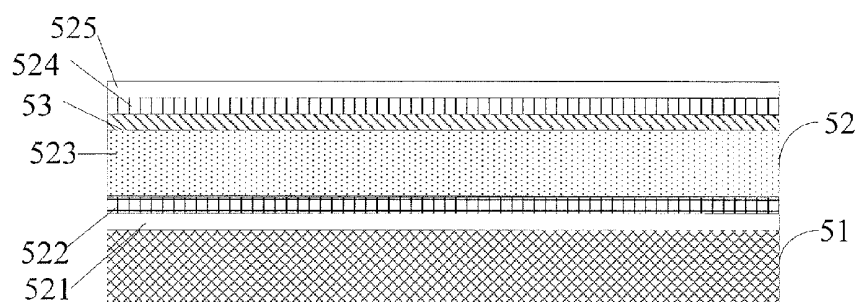


Fig. 5(d)

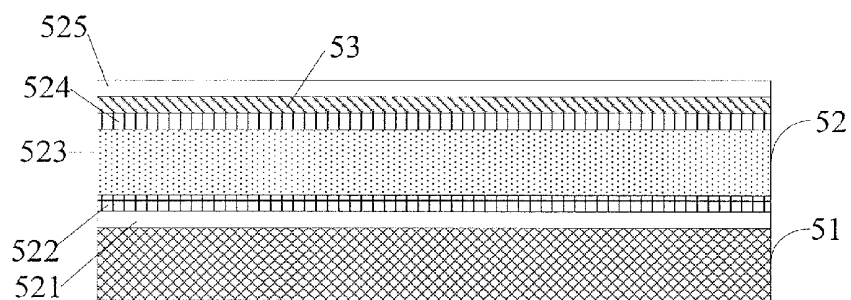


Fig. 5(e)

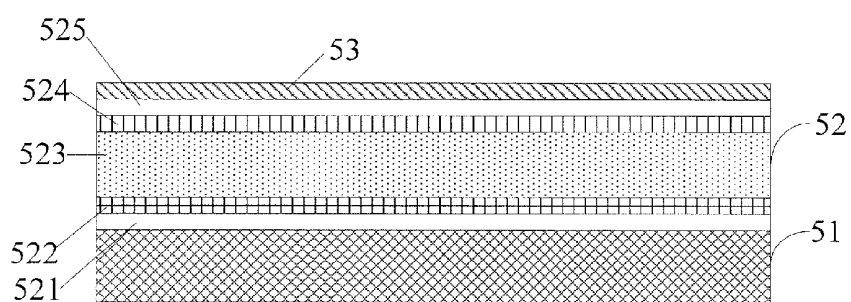


Fig. 5(f)

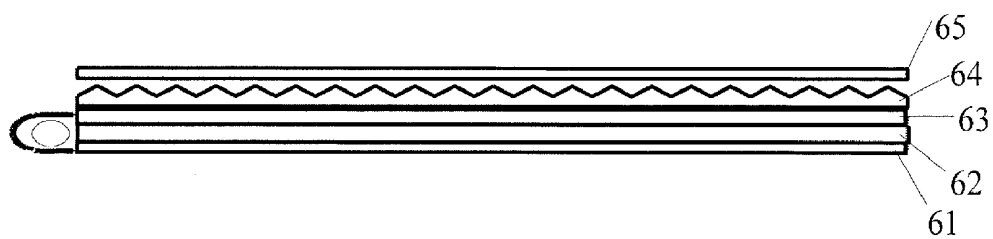


Fig. 6

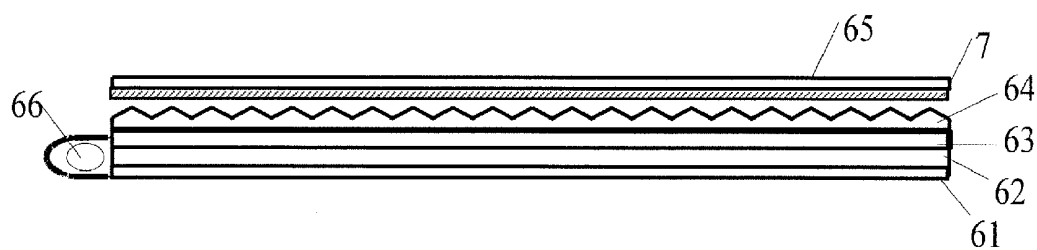


Fig. 7

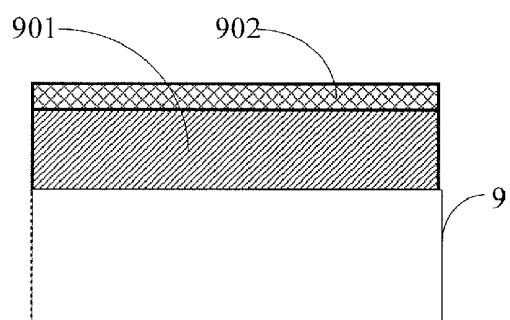


Fig. 8(a)

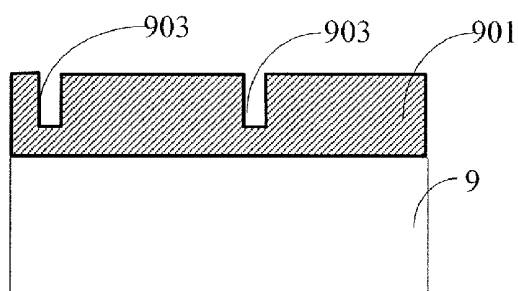


Fig.8(b)

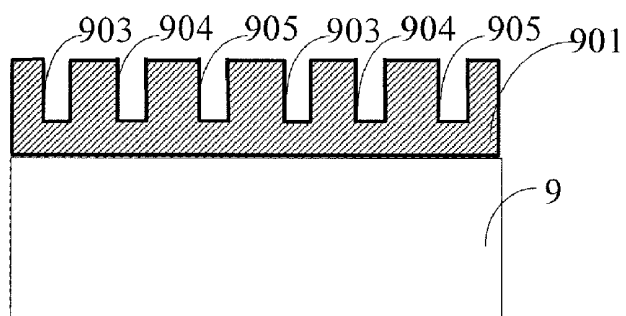


Fig.8(c)

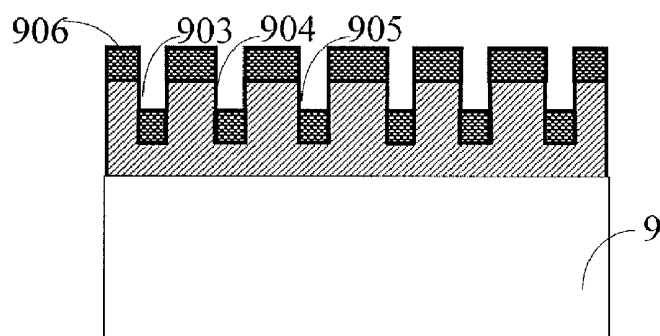


Fig.8(d)

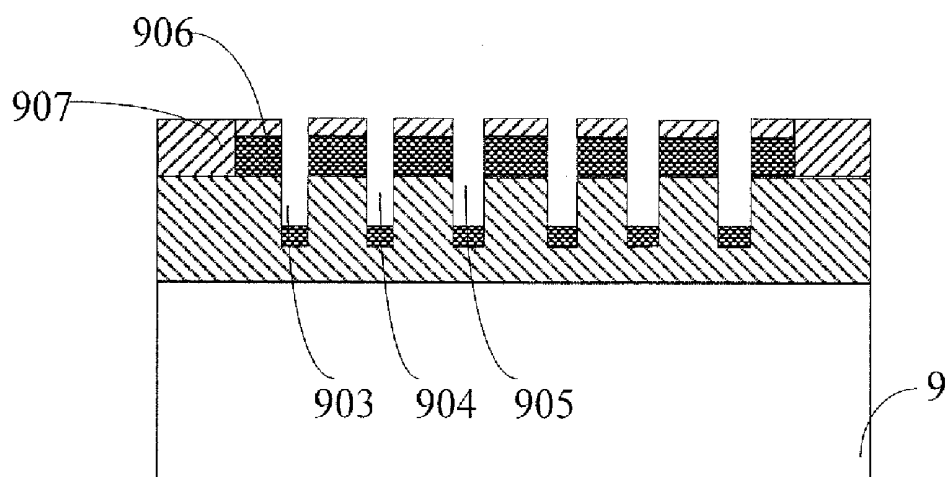


Fig.8(e1)

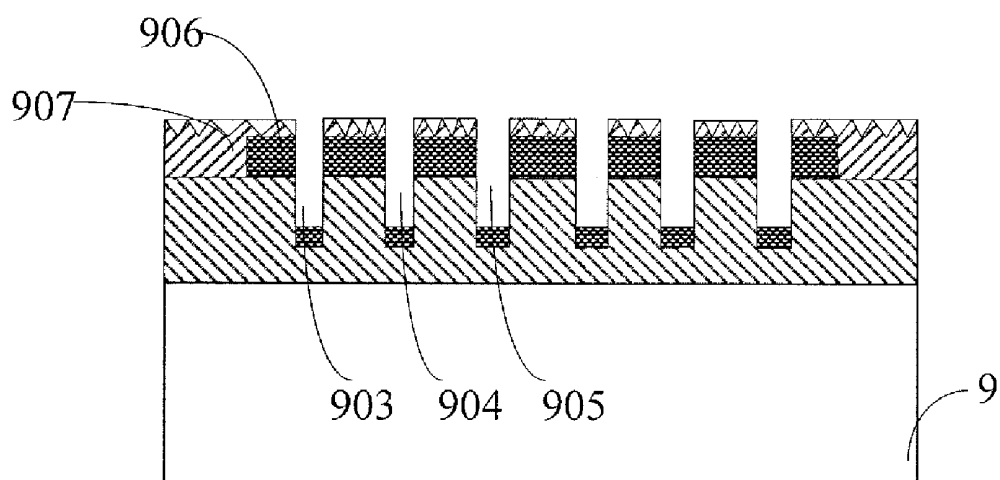


Fig.8(e2)

GRATING SHEET, LCD DEVICE AND METHODS FOR MANUFACTURING GRATING SHEET AND LCD PANEL

BACKGROUND

[0001] Embodiments of the disclosure relate to a grating sheet, a liquid crystal display (LCD) device, and methods for manufacturing a grating sheet and a LCD panel.

[0002] As shown in FIG. 1, an existing LCD device comprises a backlight module 11 and a liquid crystal cell 12, which comprises a lower polarizing film 121, a thin film transistor (TFT) array substrate 122, a liquid crystal layer 123, a color filter substrate 124 and an upper polarizing film 125. A liquid crystal display panel comprises the TFT array substrate 122, the liquid crystal layer 123 and the color filter substrate 124. The backlight module 11 provides a white light source, and the light emitted from the backlight module 11 first passes through the lower polarizing film 121 so as to become polarized light, then sequentially passes through the array substrate 122, the liquid crystal layer 123 and the color filter substrate 124 and becomes R (red), G (green) and B (blue) primary color light using R, G and B sub-pixels on the color filter substrate 124, and finally exits from the upper polarizing film 125. Images may be displayed by controlling orientation angles of the liquid crystal molecules in the liquid crystal layer 123 for transmitting light.

[0003] A conventional LCD device generates the R, G, B primary color light by using the R, G, B sub-pixels on a color filter substrate comprising a plurality of R, G, B sub-pixels disposed parallel with one another and in an array, as shown in FIG. 2. Black matrix regions are formed around opening areas of the R, G, B sub-pixels for blocking light, thus light will be totally absorbed when the light is incident onto the black matrix region, therefore part of light emitted from the backlight module may be wasted so that a utilization ratio of the light is relatively low.

SUMMARY

[0004] Embodiments of the present application provide a grating sheet, a LCD device and methods for manufacturing the grating sheet and a liquid crystal display panel, which can prevent part of light emitted from the backlight module from being absorbed by a black matrix and thus wasted so that a utilization ratio of the light is relatively high.

[0005] According to an aspect of the disclosure, a grating sheet is provided, which comprises a plurality of primary color gratings disposed parallel with one another, wherein each primary color grating comprises a red (R) sub-grating, a green (G) sub-grating, and a blue (B) sub-grating parallel with one another, and wherein each sub-grating comprises an opening area with a metal layer for diffraction therein and with a reflective region disposed around and corresponds to a pixel unit.

[0006] According to an aspect of the disclosure, a liquid crystal display (LCD) device is provided, comprising: a liquid crystal cell, comprising an upper polarizing film, a liquid crystal display panel, and a bottom polarizing film from top to bottom, wherein the liquid crystal display panel comprises an array substrate, an opposing substrate and a liquid crystal layer interposed between the array substrate and the opposing substrate; and the above-described grating sheet, wherein the grating sheet is provided at a light exiting side of the backlight module.

[0007] According to an aspect of the disclosure, a method for manufacturing a grating sheet is provided, wherein the method comprises: sequentially depositing a silicon nitride film on a base substrate, forming a red (R) sub-wire grating, a green (G) sub-wire grating and a blue (B) sub-wire grating by a patterning process and then coating a metal film on the base substrate to form a red (R) sub-grating, a green (G) sub-grating and a blue (B) sub-grating parallel with one another; and forming a reflective film on the base substrate, and forming a reflective region around the opening area of each sub-grating by a patterning process.

[0008] According to an aspect of the disclosure, a method for manufacturing a liquid crystal display panel is provided, wherein it comprise: forming an opposing substrate with only a transparent conductive film deposited thereon; forming an array substrate on which a data line and a gate line are crosses with each other and define a pixel unit; forming the grating sheet according to embodiments of the disclosure, wherein the grating sheet is formed on a glass substrate, an array substrate or an opposing substrate; attaching the array substrate and the grating sheet or attaching the opposing substrate and the grating sheet when the grating sheet is formed on the glass substrate; and when the grating sheet is formed on the array substrate or the opposing substrate, attaching the array substrate and the opposing substrate.

[0009] Further scope of applicability of the present disclosure will become apparent from the detailed description given hereinafter. However, it should be understood that the detailed description and specific examples, while indicating preferred embodiments of the disclosure, are given by way of illustration only, since various changes and modifications within the spirit and scope of the disclosure will become apparent to those skilled in the art from the following detailed description.

BRIEF DESCRIPTION OF THE DRAWINGS

[0010] The present disclosure will become more fully understood from the detailed description given hereinafter and the accompanying drawings which are given by way of illustration only, and thus are not limitative of the present disclosure and wherein:

[0011] FIG. 1 is a schematic structural view of the LCD device in the related art.

[0012] FIG. 2 is a top view of the opposing substrate in the LCD device as shown in FIG. 1.

[0013] FIG. 3 is a schematic structural view of a grating sheet according to an embodiment of the present disclosure.

[0014] FIG. 4(a) is a first cross-sectional view of the grating sheet as shown in FIG. 3.

[0015] FIG. 4(b) is a second cross-sectional view of the grating sheet as shown in FIG. 3.

[0016] FIG. 5(a) is a schematic structural view of the LCD device according to an embodiment of the disclosure.

[0017] FIG. 5(b) is a schematic structural view of the LCD device according to another embodiment of the disclosure.

[0018] FIG. 5(c) is a schematic structural view of the LCD device according to another embodiment of the disclosure.

[0019] FIG. 5(d) is a schematic structural view of the LCD device according to another embodiment of the disclosure.

[0020] FIG. 5(e) is a schematic structural view of the LCD device according to another embodiment of the disclosure.

[0021] FIG. 5(f) is a schematic structural view of the LCD device according to another embodiment of the disclosure.

[0022] FIG. 6 is a schematic structural view of an exemplary backlight module in the LCD device as shown in FIGS. 5(a) to 5(f).

[0023] FIG. 7 is a schematic structural view of another exemplary backlight module in the LCD device as shown in FIGS. 5(a) to 5(f).

[0024] FIGS. 8(a) to 8(e2) show the process of manufacturing a grating sheet according to still another embodiment of the disclosure.

DETAILED DESCRIPTION

[0025] To make objectives, technical solutions and advantages provided by the embodiments of the present disclosure more clearly, a clear and full description will be made to the technical solutions of embodiments of present disclosure hereinafter in connection with the accompanying drawings. Apparently, rather than all the embodiments, embodiments to be described are only a part of embodiments of present disclosure. Based on the embodiments of the present disclosure, other embodiments conceived by those skilled in the art without inventive work would fall within the scope of present disclosure.

[0026] Embodiments of the disclosure provides a grating sheet, a liquid crystal display (LCD) device and the method for manufacturing the grating sheet and the liquid crystal display panel to prevent part of light emitted from a backlight module from being absorbed by a black matrix region and thus being wasted, which causes a relatively low utilization ratio.

[0027] As shown in FIG. 3, a grating sheet provided by an embodiment of the disclosure comprises a plurality of primary color grating 31 disposed parallel with one another, and each primary color grating 31 comprises an R (red) sub-grating 311, a G (green) sub-grating 312 and a B (blue) sub-grating 313 disposed parallel with one another. As shown in FIGS. 4(a) to 4(b), each sub-grating 41 comprises an opening area 411 with a metal layer for diffraction therein and a reflective region 412 disposed around the opening area 411. Each of the sub-grating corresponds to a pixel unit on an array substrate.

[0028] In the present embodiment, the reflective region may be a specular (or mirror) type reflective region as shown in FIG. 4(a) or a prism type reflective region as shown in FIG. 4(b). For example, the reflective region is a prism type reflective region such that the light intensity reflected from the reflective region is uniform.

[0029] According to the optical principle, gratings with different widths and intervals can be used for selecting light having different wavelengths, that is, for transmitting light having specific wavelengths. The R, G, B primary color light required for the LCD device for display can be accordingly obtained by adjusting the design parameters of grating sheets based on such optical principle. In the present embodiment, the R, G, B primary color light may be selectively transmitted by using sub-gratings having the same period length but different opening area widths, so as to form an R sub-grating, a G sub-grating and a B sub-grating. For example, if the metal layer for diffraction is an aluminum metal layer, the design parameters of the grating sheet may be determined as follows:

[0030] R sub-grating: $l=0.813\text{ }\mu\text{m}$, $\Phi=20\%$, $t=80\text{ nm}$, $d=20\text{ nm}$;

[0031] G sub-grating: $l=0.813\text{ }\mu\text{m}$, $\Phi=36\%$, $t=60\text{ nm}$, $d=40\text{ nm}$;

[0032] B sub-grating: $l=0.813\text{ }\mu\text{m}$, $\Phi=47\%$, $t=40\text{ nm}$, $d=60\text{ nm}$;

[0033] wherein “ l ” is a period length of a sub-grating, “ Φ ” is a duty cycle and $\Phi=w/l$, “ w ” is an opening width of a sub-grating opening area, “ t ” is a thickness of the metal layer for diffraction on the sub-grating, and “ d ” is an interval between the opening area and the reflective region.

[0034] It should be noted that the design of the R, G, B sub-gratings are not limited to the above-described one. In another example, the design may include the same period length, the same duty cycle and different material for forming the metal layer so as to achieve R, G, B sub-gratings, and unnecessary details will not be given here for simplicity. For example, the thickness of the metal layer of the R sub-gratings is in the range of 75-85 nm; the thickness of the metal layer of the G sub-gratings is in the range of 55-65 nm; and the thickness of the metal layer of the B sub-gratings is in the range of 35-45 nm; the material of the metal layers of the sub-gratings may be aluminum, copper, chromium, and the like.

[0035] Since the grating sheet provided by embodiment of the disclosure comprises a plurality of parallel disposed primary color gratings comprising an R (red) sub-grating, a G (green) sub-grating and a B (blue) sub-grating, each of which comprises an opening area and a reflective region disposed around the opening area and corresponds to a pixel unit on the array substrate, thereby the grating sheet can display R, G, B colors. Since each sub-grating further comprises a reflective region so that the light emitted from the backlight module and not passing through the grating sheet is reflected from the reflective region back to the backlight module, and further reflected to the grating sheet by the backlight module, thereby the light which does not pass through the grating sheet initially can be utilized again; this configuration can solve the problem that a portion of light emitted from the backlight module is absorbed by a black matrix region and thus wasted, which causes a relatively low utilization ratio.

[0036] As shown in FIGS. 5(a)-5(b), a LCD device provided by an embodiment of the disclosure comprises a backlight module 51 and a liquid crystal cell 52 comprising a lower polarizing film 521, a thin film transistor array substrate 522, a liquid crystal layer 523, an opposing substrate 524 and an upper polarizing film 525. The TFT array substrate 522, the liquid crystal layer 523, and the opposing substrate 524 constitute a liquid crystal display panel; the liquid crystal layer 523 is interposed between the substrates provided opposite to each other. The LCD device further comprises a grating sheet 53 provided by aforesaid embodiment, which is provided at a light exiting side of the backlight module 51.

[0037] According to one embodiment of the disclosure as shown in FIG. 5(a), the grating sheet 53 is provided between the backlight module 51 and the lower polarizing film 521. The backlight module 51 provides a white light source, and light emitted from the backlight module 51 first passes through the grating sheet 53 to obtain R, G, B primary color light, wherein the light which does not pass through the grating sheet 53 is reflected back to the backlight module 51 and then for example a prism film in the backlight module 11 reflects the light, reflected back from the grating sheet 53, to the grating sheet 53 again. The R, G, B primary color light obtained by passing through the grating sheet 53 then passes through the lower polarizing film 521 to be changed into polarized light, then the array substrate 522, the liquid crystal layer 523, and the opposing substrate 524 with only a trans-

parent conductive layer disposed thereon, and finally exits from the upper polarizing film 525. Images can be displayed by controlling orientation angles of the liquid crystal molecules in the liquid crystal layer 523 during transmitting light.

[0038] According to another embodiment of the disclosure as shown in FIG. 5(b), the grating sheet 53 is provided between the lower polarizing film 521 and the liquid crystal display panel. The backlight module 51 provides a white light source, and light emitted from the backlight module 51 first passes through the lower polarizing film 521 to be changed into polarized light, then the polarized light passes through the grating sheet 53 to obtain R, G, B primary color light, wherein the light which does not pass through the grating sheet 53 is reflected back to the backlight module 51 and then for example a prism film in the backlight module 51 reflects the light, reflected back by the grating sheet 53, to the grating sheet 53 again. The R, G, B primary color light obtained by the grating sheet 53 passes through the array substrate 522, the liquid crystal layer 523, and the opposing substrate 524 with only a transparent conductive layer disposed thereon, and finally exits from the upper polarizing film 525. Images can be displayed by controlling orientation angles of the liquid crystal molecules in the liquid crystal layer 523 during transmitting light.

[0039] According to another embodiment of the disclosure as shown in FIG. 5(c), the grating sheet 53 is provided between the array substrate 522 and liquid crystal layer 523 of the liquid crystal display panel. The backlight module 51 provides a white light source, and light emitted from the backlight module 51 first passes through the lower polarizing film 521 to be changed into polarized light, and then passes through the array substrate 522, the grating sheet 53, the liquid crystal layer 523 and the opposing substrate 524 to obtain the R, G, B primary color light with the grating sheet 53, wherein the light which does not pass through the grating sheet 53 is reflected back to the backlight module 51 and then for example a prism film in the backlight module 51 reflects the light, reflected back by the grating sheet 53, to the grating sheet 53 again; and the light finally exits from the upper polarizing film 525. Images can be displayed by controlling orientation angles of the liquid crystal molecules in the liquid crystal layer 523 during transmitting light.

[0040] According to another embodiment of the disclosure as shown in FIG. 5(d), the grating sheet 53 is provided between the opposing substrate 524 and liquid crystal layer 523 of the liquid crystal display panel. The backlight module 51 provides a white light source, and light emitted from the backlight module 51 first passes through the lower polarizing film 521 to be changed into polarized light, and then passes through the array substrate 522, the liquid crystal layer 523, the polarizing film 53 and the opposing substrate 524 to obtain the R, G, B primary color light with the grating sheet 53, wherein the light which does not pass through the grating sheet 53 is reflected back to the backlight module 51 and then for example a prism film in the backlight module 51 reflects the light, reflected back by the grating sheet 53, to the grating sheet 53 again; and finally exits from the upper polarizing film 525. Images can be displayed by controlling orientation angles of the liquid crystal molecules in the liquid crystal layer 523 during transmitting light.

[0041] According to another embodiment of the disclosure as shown in FIG. 5(e), the grating sheet 53 is provided between the liquid crystal display panel and the upper polarizing film 524. The backlight module 51 provides a white

light source, and the light emitted from the backlight module 51 first passes through the lower polarizing film 521 to be changed into polarized light, next passes through the array substrate 522, the liquid crystal layer 523, and the opposing substrate 524 with only one transparent conductive layer disposed thereon, and then through the grating sheet 53 to obtain the R, G, B primary color light, wherein the light which does not pass through the grating sheet 53 is reflected to the backlight module 11 and for example the prism film in the backlight module 11 reflects the light, reflected back by the grating sheet 53, to the grating sheet 53 again, and then the R, G, B primary color light which is obtained by the grating sheet 53 finally exits from the upper polarizing film 525. Images can be displayed by controlling orientation angles of the liquid crystal molecules in the liquid crystal layer 523 during transmitting light.

[0042] According to another embodiment of the disclosure as shown in FIG. 5(f), the grating sheet 53 is provided at the light exiting side of the upper polarizing film 524. The backlight module 51 provides a white light source, and the light emitted from the backlight module 51 firstly passes through the lower polarizing film 521 to be changed into polarized light, then passes through the array substrate 522, the liquid crystal layer 523, and the opposing substrate 524 with only one transparent conductive layer disposed thereon, exits from the upper polarizing film 525, and finally passes through the grating sheet 53 to obtain R, G, B primary color light, wherein the light which does not pass through the grating sheet 53 is reflected to the backlight module 51 and then for example the prism film therein reflects the light, reflected back by the grating sheet 53, to the grating sheet 53 again. Images can be displayed by controlling orientation angles of the liquid crystal molecules in the liquid crystal layer 523 during transmitting light.

[0043] Preferably, the grating sheet 53 is disposed between the light incident side of the liquid crystal layer and the light exiting side of the backlight module in the liquid crystal display panel, as shown in FIGS. 5(a)-5(c), thereby preventing part of the light emitted from the backlight module from passing through the liquid crystal layer twice to be reflected onto the backlight module, which may cause the light confusion due to the light reversion by the liquid crystal layer.

[0044] It should be noted that the above described embodiments are explained by taking the TFT array substrate of the liquid crystal display panel as the light incident side of the liquid crystal display panel as an example; however, it can also be explained by taking the opposing substrate in the liquid crystal display panel as the light incident side of the liquid crystal display panel as an example where the light path is similar to that in the aforesaid embodiments, which will not be described in detail here for simplicity. If the opposing substrate encounters the light emitted from the backlight module before the grating sheet, the opposing substrate is only disposed with a transparent conductive layer.

[0045] As shown in FIG. 6, the backlight module comprises a reflective plate 61, a light guide plate 62, a diffuser plate 63, a prism film 64 and a protection film 65 from bottom to top in order; a light source 66 is disposed on a side of the light guide plate 62 or under the light guide plate 62. The light reflected back by the grating sheet may be reflected to the upper grating sheet again by the prism film 64 of the backlight module; however, the reflectivity of the prism film 64 generally is lower than that of the planar mirror. Furthermore, in order that the light reflected from the reflective region may be more

effectively utilized again, as shown in FIG. 7, a reflective film 7 may be disposed between then protection film 65 and the prism film 64 of the backlight module. In another example, in order to reduce cost, the light exiting side surface of the protection film 65 of the backlight module in FIG. 6 may be subject to a mirror finish treatment so that the light exiting side surface of the protection film 65 of the backlight module is of a mirror type surface.

[0046] According to the LCD device provided by the embodiment of the disclosure, since the grating sheets comprise a plurality of parallel disposed primary color gratings comprising an R (red) sub-grating, a G (green) sub-grating and a B (blue) sub-grating, each of which comprises an opening area and a reflective region disposed around the opening area and corresponds to a pixel unit on the array substrate, thereby the grating sheets can display R, G, B colors. Since each sub-grating further comprises a reflective region so that the light emitted from the backlight module and then not passing through the grating sheet is reflected from the reflective region onto the backlight module, and further reflected to the grating sheet by the backlight module, thus the light which does not pass through the grating sheets initially can be utilized again, preventing part of the light emitted from the backlight module from being absorbed by the black matrix region and thus wasted and causing a low utilization ratio.

[0047] A method for manufacturing the grating sheet according to an embodiment of the disclosure comprises the following steps.

[0048] Step 801, sequentially depositing a silicon nitride film on a base substrate, forming an R (red) sub-wire grating, a G (green) sub-wire grating, and a B (blue) sub-wire grating by a patterning process and then coating a metallic film on the substrate to form an R (red) sub-grating, a G (green) sub-grating, and a B (blue) sub-grating parallel with one another.

[0049] In the present embodiment, the base substrate may be a transparent substrate such as a glass substrate or a plastic substrate, an opposing substrate only with a transparent conductive film deposited thereon, or a finished array substrate. In the present embodiment, the metallic film for diffraction may be an aluminum metallic film which has a high extinction ratio and a high luminous flux, and the design parameters of the grating sheet are as follows:

[0050] R sub-grating: $l=0.813\mu\text{m}$, $\Phi=20\%$, $t=80\text{ nm}$, $d=20\text{ nm}$;

[0051] G sub-grating: $l=0.813\mu\text{m}$, $\Phi=36\%$, $t=60\text{ nm}$, $d=40\text{ nm}$;

[0052] B sub-grating: $l=0.813\mu\text{m}$, $\Phi=47\%$, $t=40\text{ nm}$, $d=60\text{ nm}$;

[0053] wherein “ l ” is a period length of a sub-grating, “ Φ ” is a duty cycle and $\Phi=w/l$. “ w ” is an opening width of a sub-grating opening area, “ t ” is a thickness of the metal layer for diffraction on the sub-grating, and “ d ” is an interval between the opening area and the reflective region.

[0054] Step 802, depositing a reflective film on the base substrate, forming a reflective region by a patterning process, wherein the reflective region is disposed around the opening area of each sub-grating.

[0055] Another method for manufacturing the grating sheet according to another embodiment of the disclosure comprises the following steps.

[0056] As shown in FIG. 8(a), firstly, depositing a silicon nitride film 901 on a base substrate 9 by chemical vapor deposition (CVD) process, and then spinning coating a layer of photoresist 902 on the silicon nitride film 901.

[0057] As shown in FIG. 8(b), next, forming a red R sub-wire grating 903 by an exposure, developing and etching process, and then removing the remaining photoresist 902.

[0058] As shown in FIG. 9(c), then repeating the steps as shown in FIGS. 8(a) and 8(b) on the base substrate to form a G sub-wire grating 904 and a B sub-wire grating 905 in sequence.

[0059] As shown in FIG. 9(d), forming an aluminum metal film 906 on the surface of the substrate for example by a magnetron sputtering apparatus to form an R sub-grating 903, a G sub-grating 904 and a B sub-grating 905 parallel with one another.

[0060] As shown in FIGS. 8(e1) and 8(e2), finally, depositing a reflective film on the substrate, and then forming a reflective region 907 around the opening area of each sub-grating by a patterning process.

[0061] Depositing a reflective film on the base substrate by a patterning process to form a reflective region as shown in FIG. 8(e1) for example comprises the following steps: depositing a reflective film on the substrate; spinning coating a photoresist film on the reflective film; exposing an opening area of each sub-grating by performing an exposure, develop and etching process to the base substrate and then removing the remaining photoresist on the substrate.

[0062] Or, depositing a reflective film on the substrate and forming a reflective region by a patterning process as shown in FIG. 8(e2) for example comprises: stamping by using a mold with prism patterns to form a prism type reflective film before spinning coating a photoresist film on the reflective film in addition to the steps as shown in FIG. 8(e1). Thus the light intensity reflected from the reflective region is uniform.

[0063] It should be noted that the substrate may be a transparent substrate such as a glass substrate or a plastic substrate, an opposing substrate, or an array substrate. If the base substrate is an opposing substrate, the opposing substrate is only with a transparent conductive film deposited thereon. If the base substrate is an array substrate, the method further comprises depositing a transparent conductive film on the array substrate before sequentially depositing the silicon nitride film on the substrate.

[0064] According to the grating sheet, the LCD device and the method for manufacturing the grating sheet and the liquid crystal display panel provided by embodiments of the disclosure, since the grating sheet comprise a plurality of parallel disposed primary color gratings comprising an R (red) sub-grating, a G (green) sub-grating and a B (blue) sub-grating, each of which comprises an opening area and a reflective region disposed around the opening area and corresponds to a pixel unit on the array substrate, thereby the grating sheet can display R, G, B colors. Since each sub-grating further comprises a reflective region so that the light emitted from the backlight module and not passing through the grating sheet is reflected from the reflective region onto the backlight module and further reflected to the grating sheet by the backlight module, thereby the light which does not pass through the grating sheet initially can be utilized again, which can solve the problem that part of the light emitted from the backlight module may be absorbed by the black matrix region and thus wasted and causes a low utilization ratio.

[0065] A method for manufacturing the liquid crystal display panel according to an embodiment of the disclosure comprises the following steps.

[0066] Step 1001, forming an opposing substrate on which only a transparent conductive film is formed.

[0067] Step 1002, forming an array substrate, wherein data lines and gate lines are crosses with each other and thus define pixel units on the array substrate.

[0068] Step 1003, forming an above-mentioned grating sheet, wherein the grating sheet is formed on a transparent substrate, the array substrate or the opposing substrate.

[0069] Step 1004, when the grating sheet is formed on the transparent substrate, attaching together the array substrate and the grating sheet or attaching together the opposing substrate and the grating sheet.

[0070] Step 1005, when the grating sheet is formed on the array substrate or the opposing substrate, attaching together the array substrate and the opposing substrate.

[0071] According to the method for manufacturing the liquid crystal display panel according to the embodiment of the disclosure, since the grating sheet comprise a plurality of parallel disposed primary color gratings comprising an R (red) sub-grating, a G (green) sub-grating and a B (blue) sub-grating, each of which comprises an opening area and a reflective region disposed around the opening area and corresponds to a pixel unit on the array substrate, thereby the grating sheet can display R, G, B colors. Since each sub-grating further comprises a reflective region, so that the light emitted from the backlight module and not passing through the grating sheet initially is reflected from the reflective region onto the backlight module and further reflected to the grating sheet by the backlight module again, thereby the light which does not pass through the grating sheet initially can be utilized again, which can solve the problem that part of the light emitted from the backlight module may be absorbed by the black matrix region and wasted and causes a relatively low utilization ratio.

[0072] The grating sheet, the LCD device and methods for manufacturing the grating sheet, liquid crystal display panel according to embodiments of the disclosure may be applied to a system having a liquid crystal display.

[0073] It should be appreciated that the embodiments described above are intended to illustrate but not limit the present disclosure. Although the present disclosure has been described in detail herein with reference to the preferred embodiments, it should be understood by those skilled in the art that the present disclosure can be realized with different material and equipment as necessary, and that various modification and equivalents thereof can be made herein without departing from the spirit and scope of the present disclosure.

What is claimed is:

1. A grating sheet comprising a plurality of primary color gratings disposed parallel with one another, wherein each primary color grating comprises a red (R) sub-grating, a green (G) sub-grating, and a blue (B) sub-grating parallel with one another, and wherein each sub-grating comprises an opening area with a metal layer for diffraction therein and with a reflective region disposed around and corresponds to a pixel unit.
2. The grating sheet according to claim 1, wherein the reflective region is a mirror surface type reflective region.
3. The grating sheet according to claim 1, wherein the reflective region is a prism reflective region.
4. The grating sheet according to claim 1, wherein the metal layer for diffraction is an aluminum metal layer.
5. The grating sheet according to claim 1, wherein, R sub-grating comprises: $l=0.813 \text{ } \mu\text{m}$, $\Phi=20\%$, $t=80 \text{ nm}$, $d=20 \text{ nm}$;

G sub-grating comprises: $l=0.813 \text{ } \mu\text{m}$, $\Phi=36\%$, $t=60 \text{ nm}$, $d=40 \text{ nm}$; and

B sub-grating comprises: $l=0.813 \text{ } \mu\text{m}$, $\Phi=47\%$, $t=40 \text{ nm}$, $d=60 \text{ nm}$;

wherein " l " is a period length of each sub-grating, Φ is a duty cycle and $\Phi=w/l$, " w " is an opening width of each sub-grating opening area, " t " is a thickness of the metal layer for diffraction on the sub-grating, and " d " is an interval between the opening area and the reflective region.

6. The grating sheet according to claim 1, wherein, a thickness of the metal layer of the R sub-gratings is in the range of 75-85 nm;

a thickness of the metal layer of the G sub-gratings is in the range of 55-65 nm; and

a thickness of the metal layer of the B sub-gratings is in the range of 35-45 nm.

7. A liquid crystal display (LCD) device, comprising:

a liquid crystal cell, comprising an upper polarizing film, a liquid crystal display panel, and a bottom polarizing film from top to bottom, wherein the liquid crystal display panel comprises an array substrate, an opposing substrate and a liquid crystal layer interposed between the array substrate and the opposing substrate;

a backlight module, disposed behind the liquid crystal cell; and

the grating sheet according to claim 1, wherein the grating sheet is provided at a light exiting side of the backlight module.

8. The LCD device of claim 7, wherein the grating sheet is provided between the backlight module and the lower polarizing film; or

the grating sheet is provided between the lower polarizing film and the liquid crystal display panel; or

the grating sheet is provided between the array substrate and the liquid crystal layer of the liquid crystal display panel; or

the grating sheet is provided between the opposing substrate and the liquid crystal layer of the liquid crystal display panel; or

the grating sheet is provided between the liquid crystal display panel and the upper polarizing film; or

the grating sheet is provided at a light exiting side of the upper polarizing film.

9. The LCD device of claim 8, wherein a reflective film is disposed between a protection film and a prism film of the backlight module, or

a light exiting side surface of the protection film of the backlight module is of a mirror surface.

10. The LCD device according to claim 8, wherein a transparent conductive layer is formed on the opposing substrate of the liquid crystal display panel.

11. The LCD device according to claim 9, wherein a transparent conductive layer is formed on the opposing substrate of the liquid crystal display panel.

12. A method for manufacturing a grating sheet, comprising:

sequentially depositing a silicon nitride film on a base substrate, forming a red (R) sub-wire grating, a green (G) sub-wire grating and a blue (B) sub-wire grating by a patterning process and then coating a metal film on the base substrate to form a red (R) sub-grating, a green (G) sub-grating and a blue (B) sub-grating parallel with one another; and

forming a reflective film on the base substrate, and forming a reflective region around the opening area of each sub-grating by a patterning process.

13. The method according to claim **12**, wherein depositing the reflective film on the base substrate and forming the reflective region around the opening area of each sub-grating by a patterning process comprises:

depositing a reflective film on the substrate;
 spinning coating a photoresist film on the reflective film;
 and

exposing the opening area of each sub-grating by performing an exposure, developing and etching processes to the base substrate and then removing the remaining photoresist on the base substrate.

14. The method according to claim **13**, wherein before spinning coating the photoresist film on the reflective film, the method further comprises:

stamping the reflective film by a mold with prism patterns to form a prism type reflective film.

15. The method according to claim **12**, wherein the substrate is a transparent substrate, an opposing substrate or an array substrate during the sequentially depositing a silicon nitride film on the base substrate.

16. The method according to claim **15**, wherein a transparent conductive film is formed on the opposing substrate.

17. The method according to claim **15**, wherein if the base substrate is an array substrate, the method further comprises depositing a transparent conductive film on the array substrate before sequentially depositing the silicon nitride film on the base substrate.

18. The grating sheet according to claim **12**, wherein

R sub-grating comprises: $l=0.813\text{ }\mu\text{m}$, $\Phi=20\%$, $t=80\text{ nm}$, $d=20\text{ nm}$;

G sub-grating comprises: $l=0.813\text{ }\mu\text{m}$, $\Phi=36\%$, $t=60\text{ nm}$, $d=40\text{ nm}$; and

B sub-grating comprises: $l=0.813\text{ }\mu\text{m}$, $\Phi=47\%$, $t=40\text{ nm}$, $d=60\text{ nm}$;

wherein " l " is a period length of each sub-grating, Φ is a duty cycle and $\Phi=w/l$, " w " is an opening width of each sub-grating opening area, " t " is a thickness of the metal layer for diffraction on the sub-grating, and " d " is an interval between the opening area and the reflective region.

19. The grating sheet according to claim **12**, wherein, a thickness of the metal layer of the R sub-gratings is in the range of 75-85 nm;

a thickness of the metal layer of the G sub-gratings is in the range of 55-65 nm; and

a thickness of the metal layer of the B sub-gratings is in the range of 35-45 nm.

* * * * *

专利名称(译)	光栅板，LCD装置和制造光栅板和LCD板的方法		
公开(公告)号	US20120169966A1	公开(公告)日	2012-07-05
申请号	US13/334889	申请日	2011-12-22
[标]申请(专利权)人(译)	北京京东方光电科技有限公司		
申请(专利权)人(译)	北京京东方光电科技有限公司.		
当前申请(专利权)人(译)	北京京东方光电科技有限公司.		
[标]发明人	LU LINLIN		
发明人	LU, LINLIN		
IPC分类号	G02F1/13357 G02B1/10 G02B27/44		
CPC分类号	G02B27/44 G02F1/133514 G02F1/133553 G02F2001/133521 G02F2201/305 G02B5/1857 H01L27/1259 G02B5/203 G02B5/1847 G02B5/1852 G02F1/1333 G02F1/133504 H01L27/124 G02B5/201		
优先权	201010620524.2 2010-12-31 CN		
其他公开文献	US8902380		
外部链接	Espacenet USPTO		

摘要(译)

提供了一种光栅板，一种LCD装置以及制造该光栅板的方法和一种液晶显示板。光栅板包括多个平行的原色光栅，每个原色光栅包括一个红色R子光栅，一个绿色G子光栅和一个蓝色B子光栅，每个子光栅包括一个开口区域和一个开口区域。反射区域设置在开口区域周围并且对应于子阵列基板上的像素单元。光栅板，液晶显示板以及制造光栅板的方法和液晶显示板可适用于具有液晶显示器的系统。

