



US 20130088673A1

(19) **United States**(12) **Patent Application Publication**
Shiau(10) **Pub. No.: US 2013/0088673 A1**(43) **Pub. Date: Apr. 11, 2013**(54) **LIQUID CRYSTAL DISPLAY PANEL****Publication Classification**(71) Applicant: **Au Optronics Corporation**, Hsinchu (TW)(72) Inventor: **Yi-Hau Shiau**, Taichung County (TW)(73) Assignee: **AU OPTRONICS CORPORATION**, Hsinchu (TW)(21) Appl. No.: **13/688,189**(22) Filed: **Nov. 28, 2012****Related U.S. Application Data**

(62) Division of application No. 12/838,496, filed on Jul. 19, 2010, now Pat. No. 8,355,100.

(30) **Foreign Application Priority Data**


Apr. 29, 2010 (TW) 99113703

(51) **Int. Cl.****G02F 1/1335** (2006.01)(52) **U.S. Cl.**CPC **G02F 1/133512** (2013.01)USPC **349/110**

(57)

ABSTRACT

An LCD panel includes an active device array substrate having a pixel array and fan-out lines electrically connected to the pixel array, an opposite substrate disposed above the active device array substrate, a sealant disposed between the active device array substrate and the opposite substrate, and a liquid crystal layer. The sealant surrounds the pixel array. The fan-out lines extend from the pixel array. The opposite substrate has light shielding patterns connecting the sealant that covers at least a portion of each fan-out line. In a region where the sealant is distributed, a slit between any two of the adjacent light shielding patterns exclusively overlaps one of the fan-out lines, and the number of the slits is less than the number of the fan-out lines. The liquid crystal layer is disposed between the active device array substrate and the opposite substrate.

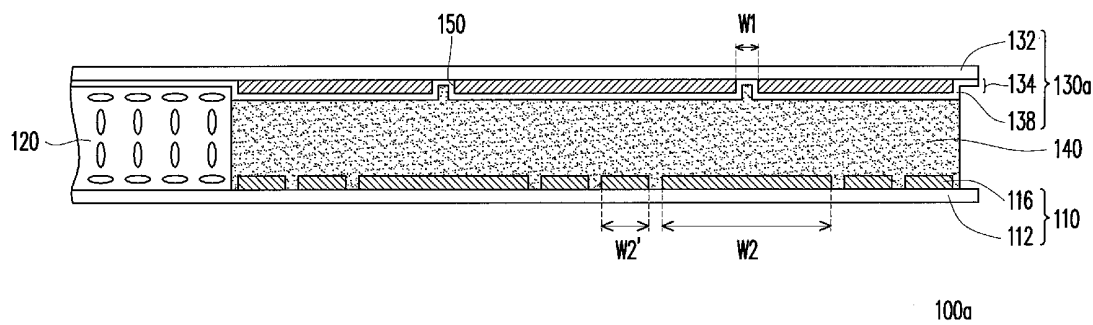

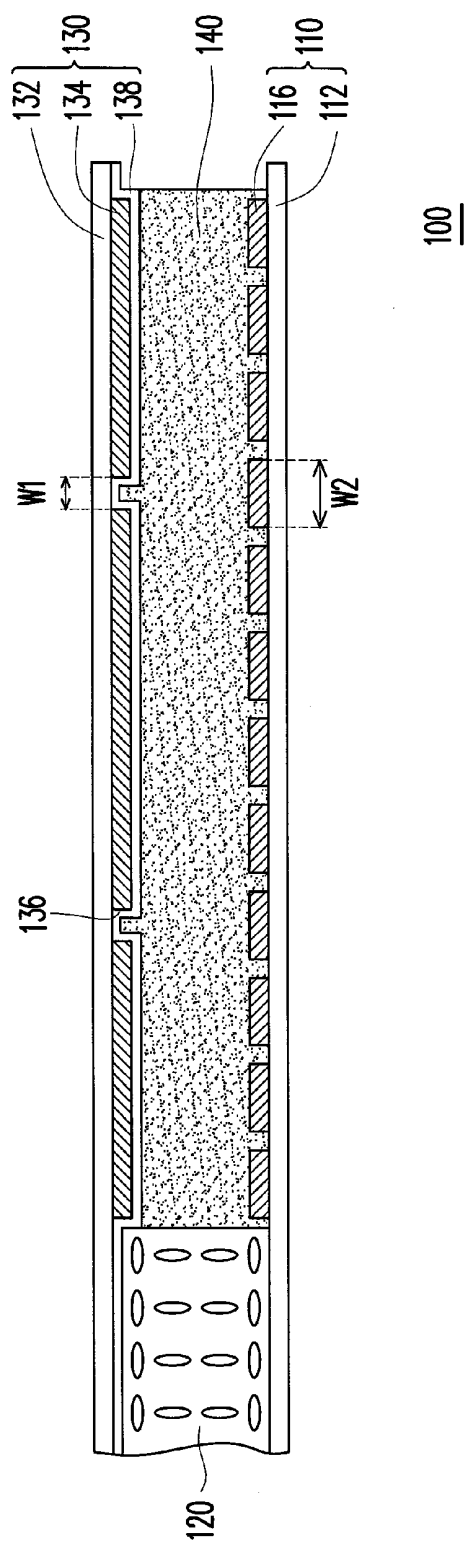


FIG. 1A


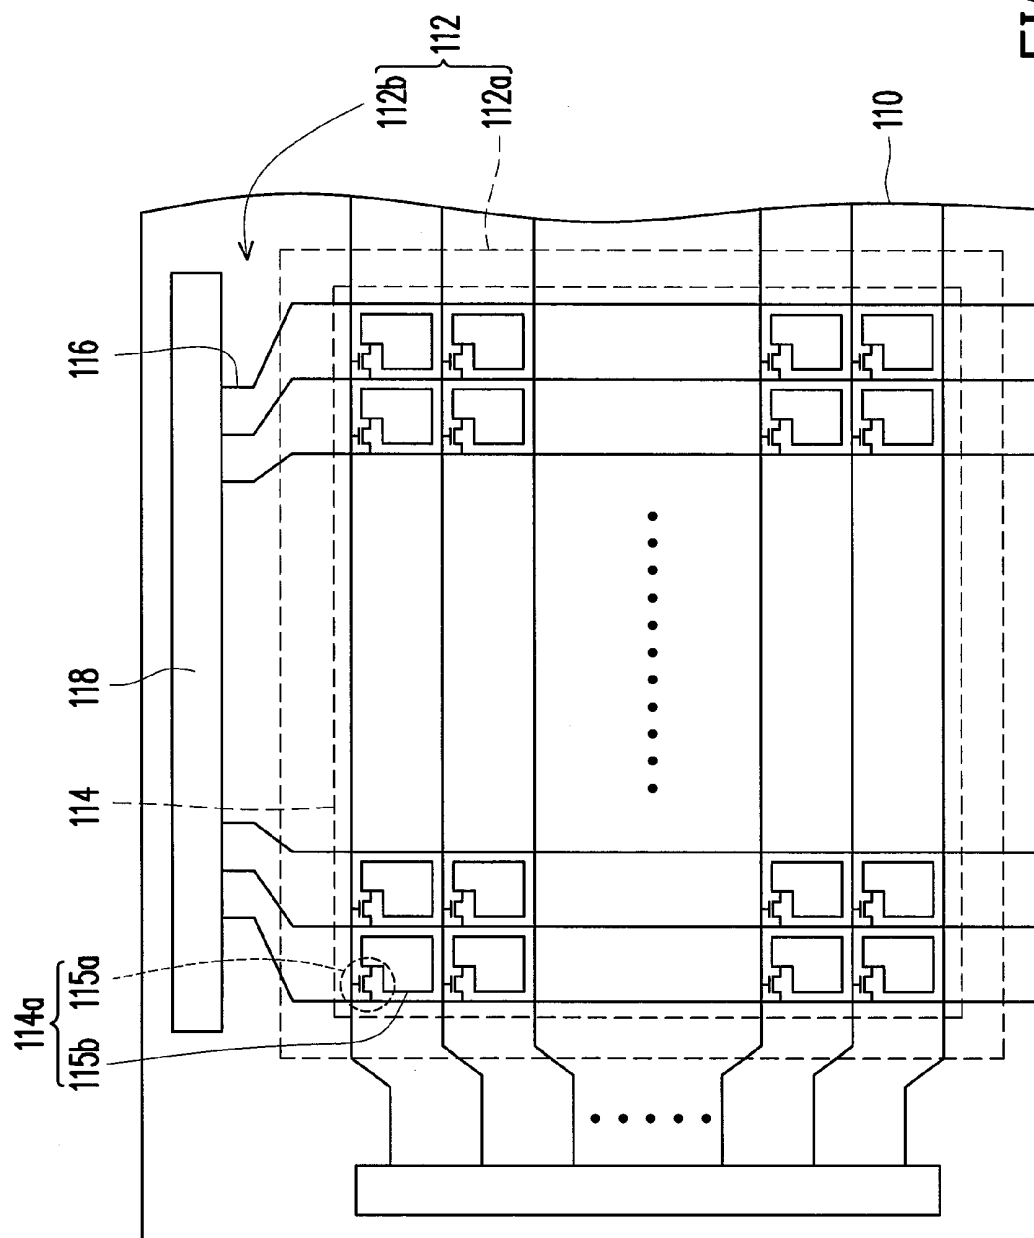


FIG. 1B

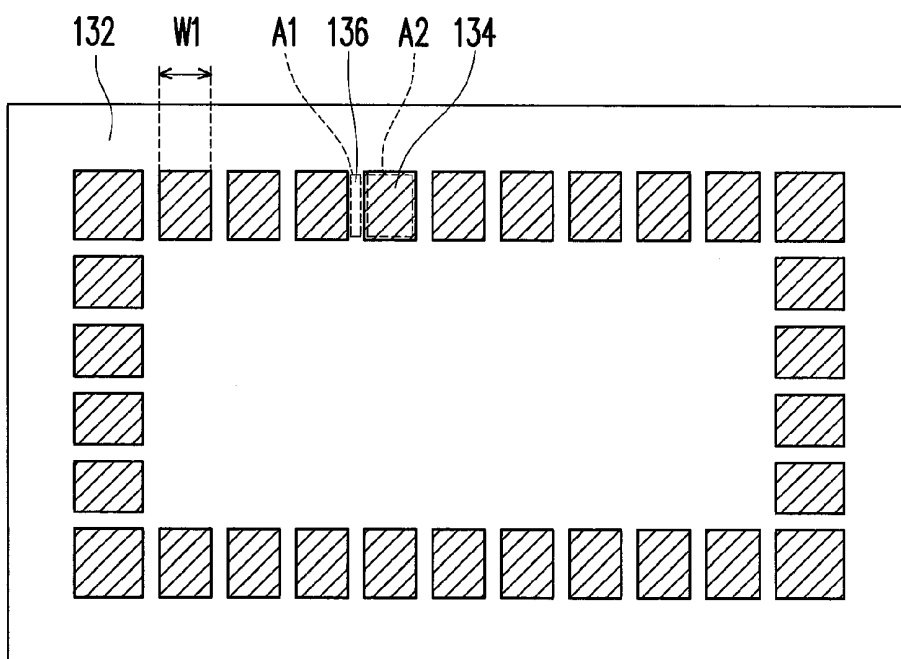

130

FIG. 1C

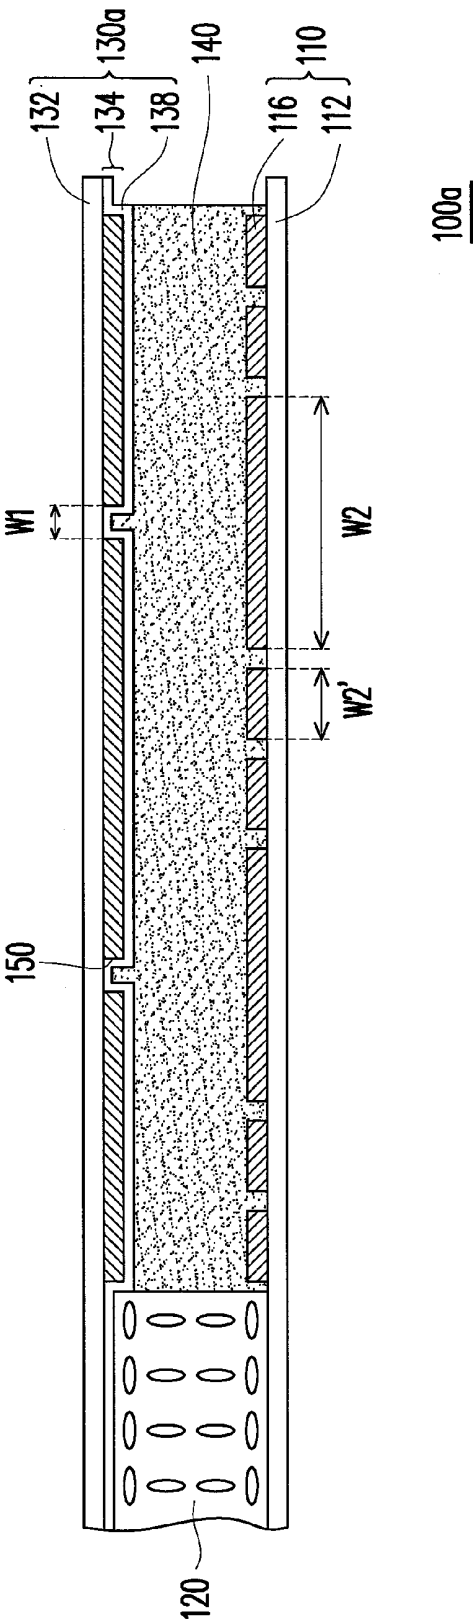


FIG. 2A

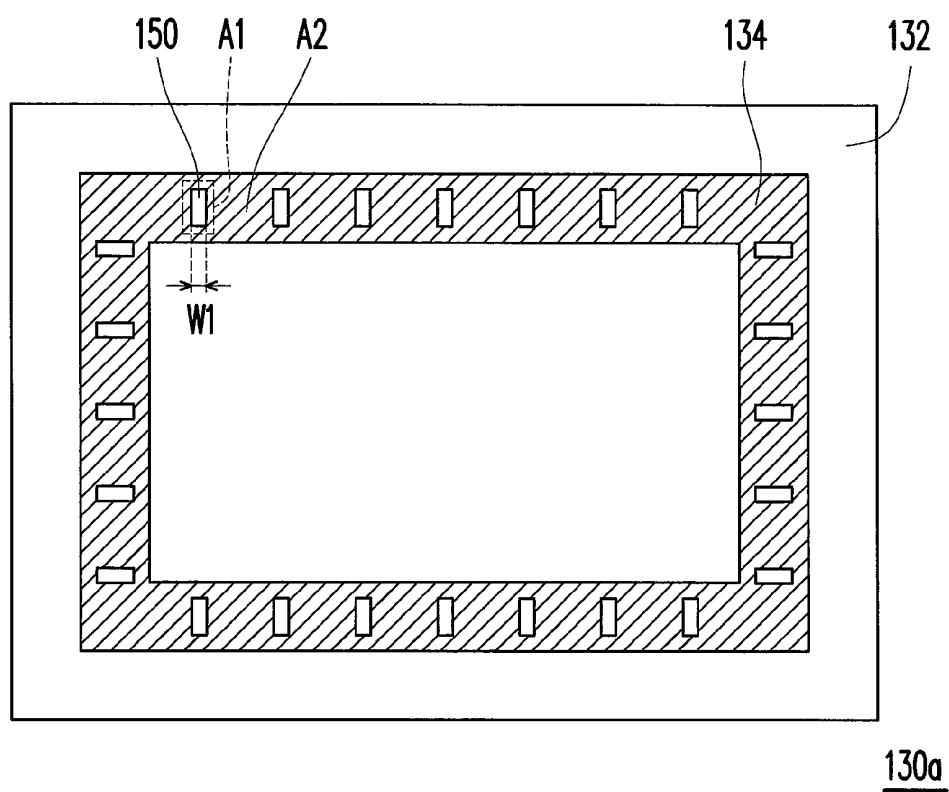


FIG. 2B

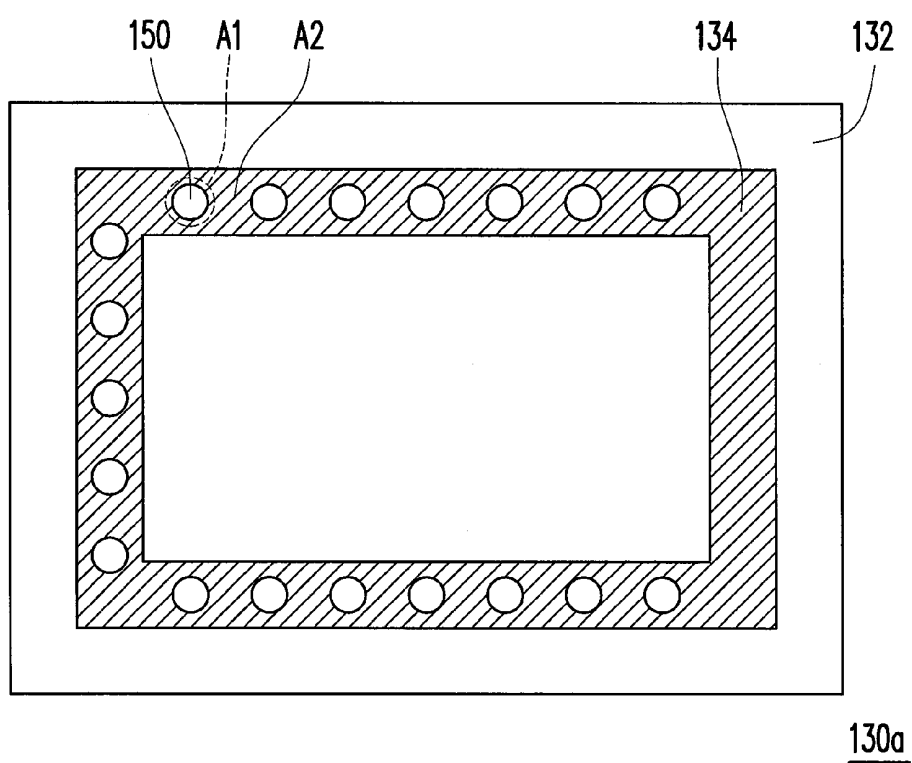


FIG. 3

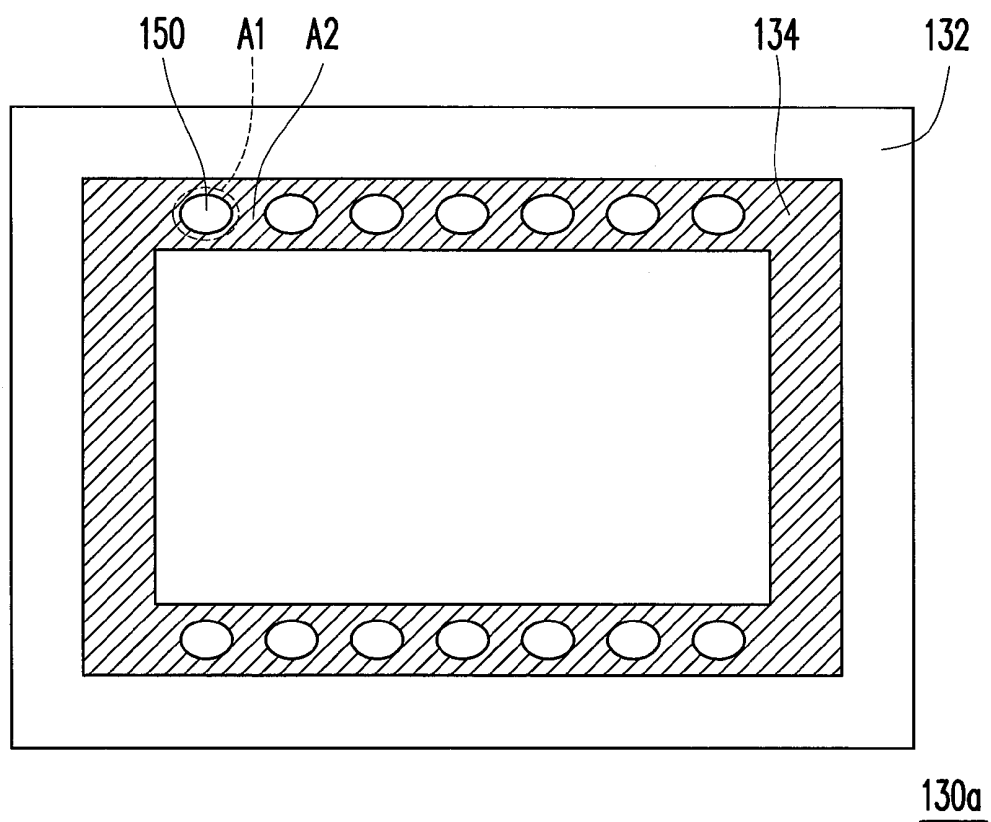


FIG. 4

LIQUID CRYSTAL DISPLAY PANEL

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is a divisional of and claims the priority benefit of U.S. application Ser. No. 12/838,496 filed on Jul. 19, 2010, now pending, which claims the priority benefit of Taiwan application serial no. 99113703, filed on Apr. 29, 2010. The entirety of each of the above-mentioned patent applications is hereby incorporated by reference herein and made a part of specification.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The invention relates to a panel. More particularly, the invention relates to a liquid crystal display (LCD) panel.

[0004] 2. Description of Related Art

[0005] In general, an LCD panel is mainly comprised of an active device array substrate, an opposite substrate, and a liquid crystal layer sandwiched between the active device array substrate and the opposite substrate. The active device array substrate has a plurality of pixels arranged in an array, and each of the pixels includes an active device and a pixel electrode electrically connected to the active device. A plurality of scan lines and a plurality of data lines are disposed on the active device array substrate, and the active device in each of the pixels is electrically connected to the corresponding scan line and the corresponding data line.

[0006] The opposite substrate is a color filter substrate in most cases and is disposed above the active device array substrate. Besides, the opposite substrate includes a substrate, a light shielding pattern layer, a plurality of color filter patterns, and a transparent electrode layer. The color filter patterns are disposed within the light shielding pattern layer, and the transparent electrode layer covers the light shielding pattern layer and the color filter patterns. To connect the active device array substrate and the opposite substrate, a sealant surrounding the pixel array is often formed between the active device array substrate and the opposite substrate, and the liquid crystal layer is disposed within a closed space defined by the active device array substrate, the color filter substrate, and the sealant.

[0007] When the aforesaid LCD panel is completely formed, a pulling force testing process is frequently performed on the LCD panel, so as to ensure that the active device array substrate and the opposite substrate are securely bonded by the sealant and to prevent the liquid crystal layer from leaking. Nonetheless, since there exists significant difference between material properties of the transparent electrode layer and those of the light shielding pattern layer, it is found during the testing process that peeling phenomenon of the transparent electrode layer and the light shielding pattern layer often occurs due to lack of adhesion. Thus, light leakage arises in the LCD panel.

SUMMARY OF THE INVENTION

[0008] The invention is directed to an LCD panel having no light leakage and characterized by favorable display quality.

[0009] In the invention, an LCD panel including an active device array substrate, an opposite substrate, a sealant, and a liquid crystal layer is provided. The active device array substrate has a pixel array and a plurality of fan-out lines electrically connected to the pixel array. The opposite substrate is

disposed above the active device array substrate. The sealant is disposed and/or connected between the active device array substrate and the opposite substrate, and the sealant substantially surrounds the pixel array. The fan-out lines extend from the pixel array to the sealant and substantially passing there-through. The opposite substrate has a plurality of light shielding patterns connected to the sealant, and the sealant covers at least a portion of each of the fan-out lines. In a region where the sealant is distributed, a slit between any two of the adjacent light shielding patterns exclusively overlaps one of the fan-out lines, and the number of the slits is less than the number of the fan-out lines. The liquid crystal layer is disposed between the active device array substrate and the opposite substrate.

[0010] According to an embodiment of the invention, a width of each of the slits ranges from about 5 micrometers to about 200 micrometers, a width of each of the slits is less than a width of one of the fan-out lines underlying the corresponding slit, a ratio of an area of each of the slits in total to an area of each of the light shielding patterns in total is less than about 35/65, and parts of the light shielding patterns overlap two or more of the fan-out lines.

[0011] According to an embodiment of the invention, an extension direction of the each of the fan-out lines located in the region where the sealant is distributed is substantially parallel to an extension direction of each of the slits.

[0012] In the invention, an LCD panel including an active device array substrate, an opposite substrate, a sealant, and a liquid crystal layer is provided. The active device array substrate has a pixel array and a plurality of fan-out lines electrically connected to the pixel array. The opposite substrate is disposed above the active device array substrate and has a light shielding pattern. The light shielding pattern has a plurality of openings. A ratio of an area of each of the openings in total to an area of the light shielding pattern is less than about 35/65. The sealant is located between the fan-out lines and the light shielding pattern. The liquid crystal layer is disposed between the active device array substrate and the opposite substrate.

[0013] According to an embodiment of the invention, the sealant is black so that the light leakage can be prevented more efficiently.

[0014] According to an embodiment of the invention, the openings are not located above one side of the active device array substrate but exclusively located above the other three sides of the active device array substrate.

[0015] According to an embodiment of the invention, the openings are not located above two sides of the active device array substrate but exclusively located above the other two sides of the active device array substrate.

[0016] According to an embodiment of the invention, the openings are slits, and the slits divide the light shielding pattern into a plurality of separated patterns.

[0017] According to an embodiment of the invention, the openings are closed patterns.

[0018] According to an embodiment of the invention, the closed patterns are circular, elliptical or rectangular.

[0019] In the invention, an LCD panel including an active device array substrate, an opposite substrate, a sealant, and a liquid crystal layer is provided. The active device array substrate has a pixel array and a plurality of fan-out lines electrically connected to the pixel array. The opposite substrate is disposed above the active device array substrate. The sealant is disposed and/or connected between the active device array

substrate and the opposite substrate, and the sealant substantially surrounds the pixel array. The fan-out lines extend from the pixel array to the sealant and passing therethrough. The opposite substrate has a plurality of light shielding patterns connected to the sealant, and the sealant covers at least a portion of each of the fan-out lines. In a region where the sealant is distributed, a slit between any two of the adjacent light shielding patterns is exclusively located right above one of the fan-out lines but not located right above another one of the fan-out lines, and the number of the slits is less than the number of the fan-out lines. The liquid crystal layer is disposed between the active device array substrate and the opposite substrate.

[0020] Based on the above, the opposite substrate in the LCD panel of the invention has the slits among the light shielding patterns. Alternatively, the opposite substrate has the light shielding pattern with the openings. The slits among the light shielding patterns or the openings of the light shielding pattern are disposed corresponding to the fan-out lines of the active device array substrate. As such, the light leakage in the LCD panel can be effectively prevented, and the adhesion between the active device array substrate and the opposite substrate can be enhanced, so as to improve the display quality of the LCD panel.

[0021] In order to make the aforementioned and other features and advantages of the invention more comprehensible, embodiments accompanying figures are described in detail below.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] The accompanying drawings are included to provide a further understanding of the invention, and are incorporated in and constitute a part of this specification. The drawings illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention.

[0023] FIG. 1A is a schematic cross-sectional view illustrating an LCD panel according to an embodiment of the invention.

[0024] FIG. 1B is a schematic top view illustrating an active device array substrate depicted in FIG. 1A.

[0025] FIG. 1C is a schematic top view illustrating an opposite substrate depicted in FIG. 1A.

[0026] FIG. 2A is a schematic cross-sectional view illustrating an LCD panel according to another embodiment of the invention.

[0027] FIG. 2B is a schematic top view illustrating an opposite substrate depicted in FIG. 2A.

[0028] FIG. 3 is a schematic top view illustrating another opposite substrate depicted in FIG. 2A.

[0029] FIG. 4 is a schematic top view illustrating still another opposite substrate depicted in FIG. 2A.

DESCRIPTION OF EMBODIMENTS

[0030] FIG. 1A is a schematic cross-sectional view illustrating an LCD panel according to an embodiment of the invention. FIG. 1B is a schematic top view illustrating an active device array substrate depicted in FIG. 1A. FIG. 1C is a schematic top view illustrating an opposite substrate depicted in FIG. 1A. A transparent electrode layer 138 is omitted in FIG. 1C. As shown in FIG. 1A, an LCD panel 100 has an active device array substrate 110, an opposite substrate 130, a sealant 140, and a liquid crystal layer 120. The opposite

substrate 130 is disposed above the active device array substrate 110. The sealant 140 is disposed or connected between the active device array substrate 110 and the opposite substrate 130. The liquid crystal layer 120 is disposed between the active device array substrate 110 and the opposite substrate 130.

[0031] With reference to FIG. 1B, in this embodiment, the active device array substrate 110 includes a substrate 112, a pixel array 114, and fan-out lines 116. The substrate 112, for example, has an active area 112a and a peripheral circuit area 112b connected to the active area 112a. The pixel array 114, for example, is disposed on the active area 112a of the substrate 112, and the pixel array 114 includes a plurality of pixels 114a disposed on the active area 112a. The fan-out lines 116, for example, extend to the peripheral circuit area 112b from the active area 112a and are electrically connected to the pixels 114a. In this embodiment, the pixel 114a includes active devices 115a of thin film transistors (TFTs) and pixel electrodes 115b electrically connected to the active devices 115a. The fan-out lines 116 disposed around the pixels 114a, for example, are horizontally extended scan lines and vertically extended data lines. In this embodiment, the fan-out lines 116, for instance, are connected to a driving circuit 118 located in the peripheral circuit area 112b, such that the driving circuit 118 can connect the active devices 115a of the corresponding pixels 114a to drive the pixels 114a. Here, a material of the fan-out lines 116 is, for example, chromium, molybdenum, or any other non-transparent metallic material.

[0032] As indicated in FIG. 1A and FIG. 1B, the sealant 140 is connected between the active device array substrate 110 and the opposite substrate 130. Besides, the sealant 140 surrounds the pixel array 114. The fan-out lines 116 extend from the pixel array 114 to the sealant 140 and pass therethrough. Furthermore, the sealant 140 may cover a portion of the areas between the fan-out lines 116. The sealant 140 covers at least a portion of each of the fan-out lines 116. In this embodiment, the sealant 140, for example, covers a portion of each of the fan-out lines 116 and the areas between the fan-out lines 116 located in the peripheral circuit area 112b. The sealant 140 can be formed on the active device array substrate 110 or on the opposite substrate 130, and the sealant 140 can be transparent or non-transparent.

[0033] With reference to FIG. 1A, the opposite substrate 130 of this embodiment is a color filter substrate, for instance. The opposite substrate 130 includes a substrate 132, a plurality of light shielding patterns 134 connected to the sealant 140, and the transparent electrode 138. The light shielding patterns 134 are disposed on the substrate 132, and a slit 136 is formed between any two adjacent light shielding patterns 134. The transparent electrode layer 138, for example, covers the light shielding patterns 134 and is in contact with the substrate 132 through the slits 136 among the light shielding patterns 134. Here, a material of the light shielding patterns 134 is resin or metal, for example, and a material of the transparent electrode layer 138 is indium tin oxide (ITO), for example. According to this embodiment, in the region where the sealant 140 is distributed, the slit 136 between any two of the adjacent light shielding patterns 134, for example, exclusively overlaps one of the fan-out lines 116, and the number of the slits 136 is less than the number of the fan-out lines 116. Particularly, the slit 136 between any two of the adjacent light shielding patterns 134, for example, completely overlaps one of the fan-out lines 116. The slit 136 between any two of the

adjacent light shielding patterns **134**, for example, is exclusively located right above one of the fan-out lines **116** but not located above another one of the fan-out lines **116**. That is to say, each of the slits **136** of this embodiment corresponds to one of the fan-out lines **116**, for instance. Since the slits **136** overlap the fan-out lines **116** according to this embodiment, the fan-out lines **116** or the light shielding patterns **134** are capable of blocking light from the active device array substrate **110** (e.g. light from a backlight module) or blocking light from the opposite substrate **130** (e.g. ambient light). Herein, parts of the light shielding patterns **134**, for example, covers two or more of the fan-out lines **116**. For instance, one of the light shielding patterns **134** covers two, three, four, five, or more of the fan-out lines **116**. Namely, a ratio of one of the light shielding patterns **134** to the number of the fan-out lines **116** underlying the one of the light shielding patterns **134** can be $\frac{1}{2}$, $\frac{1}{3}$, $\frac{1}{4}$, $\frac{1}{5}$, or the like. A width **W1** of each of the slits **136** exemplarily ranges from about 5 micrometers to about 200 micrometers, and the width **W1** of each of the slits **136** is exemplarily less than a width **W2** of one of the fan-out lines **116** underlying the corresponding slit **136**. Hence, the light shielding patterns **134** around the slits **136** overlap the fan-out lines **116** underlying the light shielding patterns **134**. In the region where the sealant **140** is distributed, an extension direction of each of the fan-out lines **116** is substantially parallel to an extension direction of each of the slits **136**, for example.

[0034] The width **W1** of each of the slits **136** can be the same or different. In other words, the light shielding patterns **134** can be arranged in an equidistant manner or in a non-equidistant manner. The fan-out lines **116** can also be arranged in an equidistant manner or in a non-equidistant manner. The width **W2** of each of the fan-out lines **116** can be the same or different, which results in different ratios of the width **W1** of each of the slits **136** to the width **W2** of each of the fan-out lines **116**. Here, the ratio of the width **W1** of each of the slits **136** to the width **W2** of each of the fan-out lines **116** can be about 0.5/2.5, 0.5/5, 0.5/10, or the like.

[0035] As shown in FIG. 1C, a ratio of an area **A1** of each of the slits **136** in total to an area **A2** of each of the light shielding patterns **134** in total is less than about 35/65, for instance. That is to say, a ratio of the area **A1** of each of the slits **136** in total to the area **A1** of each of the slits **136** and the area **A2** of each of the light shielding patterns **134** in total is less than about 35/100, for instance, i.e. an aperture ratio of the light shielding patterns **134** is less than about 35%, for instance. The arrangement of the slits **136** among the light shielding patterns **134** and the fan-out lines **116**, as indicated in FIG. 1A and FIG. 1C, allows the light from the active device array substrate **110** (e.g. the light from the backlight module) or the light from the opposite substrate **130** (e.g. the ambient light) to be blocked, and the light shielding patterns **134** can have an appropriate aperture ratio. Thereby, the LCD panel **100** can have favorable display quality.

[0036] In the LCD panel **100** of this embodiment, the slits **136** among the light shielding patterns **134** in the opposite substrate **130** and the fan-out lines **116** in the active device array substrate **110** are correspondingly arranged. Therefore, the fan-out lines **116** or the light shielding patterns **134** are capable of blocking the light from the active device array substrate **110** (e.g. the light from the backlight module) or blocking the light from the opposite substrate **130** (e.g. the ambient light), such that the light is not apt to enter the LCD panel **100** from the slits **136** among the light shielding pat-

terns **134** or from spaces among the fan-out lines **116**. Accordingly, the light leakage in the LCD panel **100** can be effectively prevented, and the light shielding patterns **134** can have an appropriate aperture ratio, so as to improve the display quality of the LCD panel **100**. Moreover, the arrangement of the light shielding patterns **134** and the fan-out lines **116** ensures favorable light shielding capacity. Thus, the LCD panel **100** of this embodiment is applicable to the LCD panel with the narrow border design, and the transparent sealant that is unable to block light can be used in the LCD panel **100**. Further, in this embodiment, owing to the slits **136** among the light shielding patterns **134**, the transparent electrode layer **138** formed on the light shielding patterns **134** can also be formed in the slits **136** among the light shielding patterns **134** and thus can be in contact with the substrate **132**. Thereby, both the adhesion between the transparent electrode layer **138** and the light shielding patterns **134** and the adhesion between the active device array substrate **110** and the opposite substrate **130** can be enhanced, such that the light leakage caused by the peeling of the transparent electrode layer **138** and the light shielding patterns **134** does not occur. As a result, the LCD panel **100** can have favorable yield and satisfactory display quality.

[0037] According to the previous embodiment, the opposite substrate **130** exemplarily has a plurality of light shielding patterns **134**, while the opposite substrate **130** in another embodiment can have one light shielding pattern **134**.

[0038] FIG. 2A is a schematic cross-sectional view illustrating an LCD panel according to another embodiment of the invention. FIG. 2B is a schematic top view illustrating an opposite substrate depicted in FIG. 2A. The transparent electrode layer **138** is omitted in FIG. 2B. As shown in FIG. 2A, an LCD panel **100a** includes an active device array substrate **110**, an opposite substrate **130a**, a sealant **140**, and a liquid crystal layer **120**. The liquid crystal layer **120** is disposed between the active device array substrate **110** and the opposite substrate **130a**. The active device array substrate **110** has the pixel array **114** and the fan-out lines **116** electrically connected to the pixel array **114**. The structure of the active device array substrate **110** depicted in FIG. 2A is similar to the structure of the active device array substrate **110** depicted in FIG. 1B; therefore, relevant descriptions that have been provided before with reference to FIG. 1B are not provided hereinafter.

[0039] With reference to FIG. 2A and FIG. 2B, the opposite substrate **130a** is disposed above the active device array substrate **110** and includes a substrate **132**, a light shielding pattern **134**, and a transparent electrode layer **138**. The light shielding pattern **134** is disposed on the substrate **132** and has a plurality of openings **150**. A ratio of an area **A1** of each of the openings **150** in total to an area **A2** of the light shielding pattern **134** is less than about 35/65. The transparent electrode layer **138**, for example, covers the light shielding pattern **134** and is in contact with the substrate **132** through the openings **150** of the light shielding pattern **134**. Here, a material of the light shielding pattern **134** is resin or metal, for example, and a material of the transparent electrode layer **138** is ITO, for example. The sealant **140** is located between the fan-out lines **116** and the light shielding pattern **134**. In this embodiment, the sealant **140**, for example, is disposed between the light shielding pattern **134** and the fan-out lines **116** that are located in the peripheral circuit area **112b**. In addition, the sealant **140** can be formed on the active device array substrate **110** or on the opposite substrate **130**, and the sealant **140** can be trans-

parent or non-transparent. The sealant **140** may be black, colored or transparent. Selectively, the sealant **140** is black so that the light leakage can be prevented more efficiently.

[0040] With reference to FIG. 2A, in this embodiment, each of the openings **150** of the light shielding pattern **134**, for example, exclusively overlaps one of the fan-out lines **116**, and the number of the openings **150** is less than the number of the fan-out lines **116**. Particularly, each of the openings **150** of the light shielding pattern **134**, for example, completely overlaps one of the fan-out lines **116**. Since the openings **150** overlap the fan-out lines **116**, the fan-out lines **116** or the light shielding pattern **134** is capable of blocking the light from the active device array substrate **110** (e.g. the light from the backlight module) or blocking the light from the opposite substrate **130** (e.g. the ambient light). A width **W1** of each of the openings **150** exemplarily ranges from about 5 micrometers to about 200 micrometers, and the width **W1** of each of the openings **150** is exemplarily less than a width **W2** of one of the fan-out lines **116** underlying the corresponding opening **150**. In the region where the sealant **140** is distributed, an extension direction of each of the fan-out lines **116** is substantially parallel to an extension direction of each of the openings **150**, for example. According to this embodiment, the fan-out lines **116**, for example, have different widths **W2** and **W2'**. The width **W1** of each of the openings **150** is exemplarily less than the width **W2** of one of the fan-out lines **116** underlying the corresponding opening **150**, and the width **W2** of some of the fan-out lines **116** corresponding to the openings **150**, for example, is greater than the width **W2'** of the other fan-out lines **116** not corresponding to the openings **150**. As such, even though the light from the active device array substrate **110** enters the sealant **140** through the spaces among the fan-out lines **116**, or the light from the opposite substrate **130** enters the sealant **140** through the openings **150**, the light is not apt to be emitted out through the openings **150** of the light shielding pattern **134** or emitted out through the spaces among the fan-out lines **116** because the openings **150** of the light shielding pattern **134** and the spaces among the fan-out lines **116** are interlaced and separated from one another. Namely, the width **W1** of each of the openings **150** is designed to be less than the width **W2** of the fan-out lines **116** underlying the openings **150**, so as to ensure that the light is not apt to be emitted out through the openings **150** of the light shielding pattern **134**. Note that the width **W1** of each of the openings **150**, the width **W2** of each of the fan-out lines **116**, and the spaces among the fan-out lines **116** are not limited in this invention. People having ordinary skill in the art can modify said parameters at will based on actual requirements for products.

[0041] As shown in FIG. 2B, in this embodiment, the openings **150** of the light shielding pattern **134** are distributed at each side of the substrate **132**, for instance. In other words, when the opposite substrate **130a** and the active device array substrate **110** are assembled to form the LCD panel **100a** depicted in FIG. 2A, the openings **150** of the light shielding pattern **134**, for example, are located above each side of the active device array substrate **110**. Nonetheless, in another embodiment depicted in FIG. 3, the openings **150** of the light shielding pattern **134**, for example, are exclusively distributed at three sides of the substrate **132** but not at the remaining side of the substrate **132**. In other words, when the opposite

substrate **130a** and the active device array substrate **110** are assembled to form the LCD panel **100a** depicted in FIG. 2A, the openings **150** of the light shielding pattern **134**, for example, are located exclusively above three sides of the active device array substrate **110** but not above the remaining side of the active device array substrate **110**. Undoubtedly, in still another embodiment depicted in FIG. 4, the openings **150** of the light shielding pattern **134** in the opposite substrate **130a**, for example, can be exclusively distributed at two sides of the substrate **132** but not at the other two sides of the substrate **132**. Hence, when the opposite substrate **130a** and the active device array substrate **110** are assembled to form the LCD panel **100a** depicted in FIG. 2A, the openings **150** of the light shielding pattern **134**, for example, are located exclusively above two sides of the active device array substrate **110** but not above the other two sides of the active device array substrate **110**. Here, the openings **150** are closed patterns, for example, and the close patterns can be rectangular (shown in FIG. 2B), circular (shown in FIG. 3), elliptical (shown in FIG. 4), or in any other shape.

[0042] According to this embodiment, a ratio of an area **A1** of each of the openings **150** in total to an area **A2** of the light shielding pattern **134** is less than about 35/65. That is to say, a ratio of the area **A1** of each of the openings **150** in total to the area **A1** of each of the openings **150** and the area **A2** of the light shielding pattern **134** in total is less than about 35/100, for instance, i.e. an aperture ratio of the light shielding pattern **134** is less than about 35%, for instance. The arrangement of the openings **150** of the light shielding pattern **134** and the fan-out lines **116**, as indicated in FIG. 2A, FIG. 2B, FIG. 3, and FIG. 4, allows the light from the active device array substrate **110** (e.g. the light from the backlight module) or the light from the opposite substrate **130** (e.g. the ambient light) to be blocked, and the light shielding pattern **134** can have an appropriate aperture ratio. Thereby, the LCD panel **100a** can have favorable display quality.

[0043] In the LCD panel **100a** of this embodiment, the openings **150** of the light shielding pattern **134** in the opposite substrate **130** and the fan-out lines **116** in the active device array substrate **110** are correspondingly arranged, and the ratio of the area **A1** of each of the openings **150** in total to the area **A2** of the light shielding pattern **134** is less than about 35/65. Accordingly, the light leakage in the LCD panel **100a** can be effectively prevented, and the light shielding pattern **134** can have an appropriate aperture ratio, so as to improve the display quality of the LCD panel **100a**. Furthermore, in this embodiment, owing to the openings **150** of the light shielding pattern **134**, the transparent electrode layer **138** formed on the light shielding pattern **134** can also be formed in the openings **150** of the light shielding pattern **134** and thus can be in contact with the substrate **132**. Thereby, both the adhesion between the transparent electrode layer **138** and the light shielding pattern **134** and the adhesion between the active device array substrate **110** and the opposite substrate **130** can be enhanced, such that the light leakage caused by the peeling phenomenon of the transparent electrode layer **138** and the light shielding pattern **134** does not occur. As a result, the LCD panel **100a** can have favorable yield and satisfactory display quality.

[0044] In light of the foregoing, the opposite substrate in the LCD panel of the invention has the slits among the light shielding patterns. Alternatively, the opposite substrate has

the light shielding pattern with the openings. The slits among the light shielding patterns or the openings of the light shielding pattern are disposed corresponding to the fan-out lines of the active device array substrate. Thereby, the fan-out lines or the light shielding patterns are capable of blocking the light from the active device array substrate or blocking the light from the opposite substrate (e.g. the light from the backlight module or the ambient light), such that the light is not apt to be emitted out through the slits among the light shielding patterns in the opposite substrate, emitted out through the openings of the light shielding pattern, or emitted out through the spaces among the fan-out lines. As such, the light leakage in the LCD panel can be prevented, and the LCD panel can have favorable display quality. Additionally, the transparent electrode layer formed on the light shielding pattern(s) can be formed in the slits among the light shielding patterns or in the openings of the light shielding pattern, and the transparent electrode layer can then be in contact with the substrate, so as to enhance the adhesion between the substrate and the transparent electrode layer as well as the light shielding pattern(s). Thus, the light leakage caused by peeling off the light shielding pattern(s) from the substrate does not occur. As such, the light leakage in the LCD panel can be prevented in an effective manner, and the LCD panel can have favorable display quality. As a result, the LCD panel of the invention can have favorable yield and satisfactory display quality.

[0045] Although the invention has been described with reference to the above embodiments, it will be apparent to one of the ordinary skill in the art that modifications to the described embodiment may be made without departing from the spirit of the invention. Accordingly, the scope of the invention will be defined by the attached claims not by the above detailed descriptions.

What is claimed is:

1. A liquid crystal display panel comprising:
 - an active device array substrate having a pixel array and a plurality of fan-out lines electrically connected to the pixel array;
 - an opposite substrate disposed above the active device array substrate, the opposite substrate having a light shielding pattern, the light shielding pattern having a plurality of openings, a ratio of an area of each of the openings in total to an area of the light shielding pattern is less than about 35/65;
 - a sealant located between the fan-out lines and the light shielding pattern; and
 - a liquid crystal layer disposed between the active device array substrate and the opposite substrate.
2. The liquid crystal display panel as claimed in claim 1, wherein the openings are not located above one side of the active device array substrate but exclusively located above the other three sides of the active device array substrate.
3. The liquid crystal display panel as claimed in claim 1, wherein the openings are not located above two sides of the active device array substrate but exclusively located above the other two sides of the active device array substrate.
4. The liquid crystal display panel as claimed in claim 1, wherein the openings are slits, and the slits divide the light shielding pattern into a plurality of separated patterns.
5. The liquid crystal display panel as claimed in claim 1, wherein the openings are closed patterns.
6. The liquid crystal display panel as claimed in claim 5, wherein the closed patterns are circular, elliptical or rectangular.
7. The liquid crystal display panel as claimed in claim 1, wherein the sealant is black.

* * * * *

专利名称(译)	液晶显示面板		
公开(公告)号	US20130088673A1	公开(公告)日	2013-04-11
申请号	US13/688189	申请日	2012-11-28
[标]申请(专利权)人(译)	友达光电股份有限公司		
当前申请(专利权)人(译)	友达光电股份有限公司		
[标]发明人	SHIAU YI HAU		
发明人	SHIAU, YI-HAU		
IPC分类号	G02F1/1335		
CPC分类号	G02F1/133512 G02F1/1345 G02F1/1339		
优先权	099113703 2010-04-29 TW		
外部链接	Espacenet USPTO		

摘要(译)

一种LCD面板，包括：有源器件阵列基板，具有像素阵列和电连接到像素阵列的扇出线；相对基板，设置在有源器件阵列基板上方；密封剂，设置在有源器件阵列基板和相对基板之间，和液晶层。密封剂围绕像素阵列。扇出线从像素阵列延伸。相对基板具有连接密封剂的光屏蔽图案，所述密封剂覆盖每个扇出线的至少一部分。在分布有密封剂的区域中，任意两个相邻的遮光图案之间的狭缝仅与扇出线中的一个重叠，并且狭缝的数量小于扇出线的数量。液晶层设置在有源器件阵列基板和相对基板之间。

