



US 20170192272A1

(19) **United States**(12) **Patent Application Publication**
KONDO et al.(10) **Pub. No.: US 2017/0192272 A1**(43) **Pub. Date: Jul. 6, 2017**(54) **DISPLAY DEVICE HAVING AN OXIDE
SEMICONDUCTOR TRANSISTOR****Publication Classification**(71) Applicant: **Semiconductor Energy Laboratory
Co., Ltd., Atsugi-shi (JP)**(72) Inventors: **Toshikazu KONDO, Atsugi (JP); Jun
KOYAMA, Sagamihara (JP); Shunpei
YAMAZAKI, Setagaya (JP)**(51) **Int. Cl.****G02F 1/1368** (2006.01)**G02F 1/1333** (2006.01)**G09G 3/36** (2006.01)**G02F 1/1362** (2006.01)(52) **U.S. Cl.****CPC G02F 1/1368** (2013.01); **G02F 1/136286****(2013.01); G02F 1/136227** (2013.01); **G02F****1/133345** (2013.01); **G09G 3/3622** (2013.01);**G02F 2001/13606** (2013.01)(21) Appl. No.: **15/464,572**(22) Filed: **Mar. 21, 2017****Related U.S. Application Data**(63) Continuation of application No. 14/703,379, filed on
May 4, 2015, now Pat. No. 9,658,506, which is a
continuation of application No. 13/944,996, filed on
Jul. 18, 2013, now Pat. No. 9,048,325, which is a
continuation of application No. 13/029,151, filed on
Feb. 17, 2011, now Pat. No. 8,502,226.**Foreign Application Priority Data**

Feb. 26, 2010 (JP) 2010-042584

(57)

ABSTRACT

An object is to reduce parasitic capacitance of a signal line included in a liquid crystal display device. A transistor including an oxide semiconductor layer is used as a transistor provided in each pixel. Note that the oxide semiconductor layer is an oxide semiconductor layer which is highly purified by thoroughly removing impurities (hydrogen, water, or the like) which become electron suppliers (donors). Thus, the amount of leakage current (off-state current) can be reduced when the transistor is off. Therefore, a voltage applied to a liquid crystal element can be held without providing a capacitor in each pixel. In addition, a capacitor wiring extending to a pixel portion of the liquid crystal display device can be eliminated. Therefore, parasitic capacitance in a region where the signal line and the capacitor wiring intersect with each other can be eliminated.

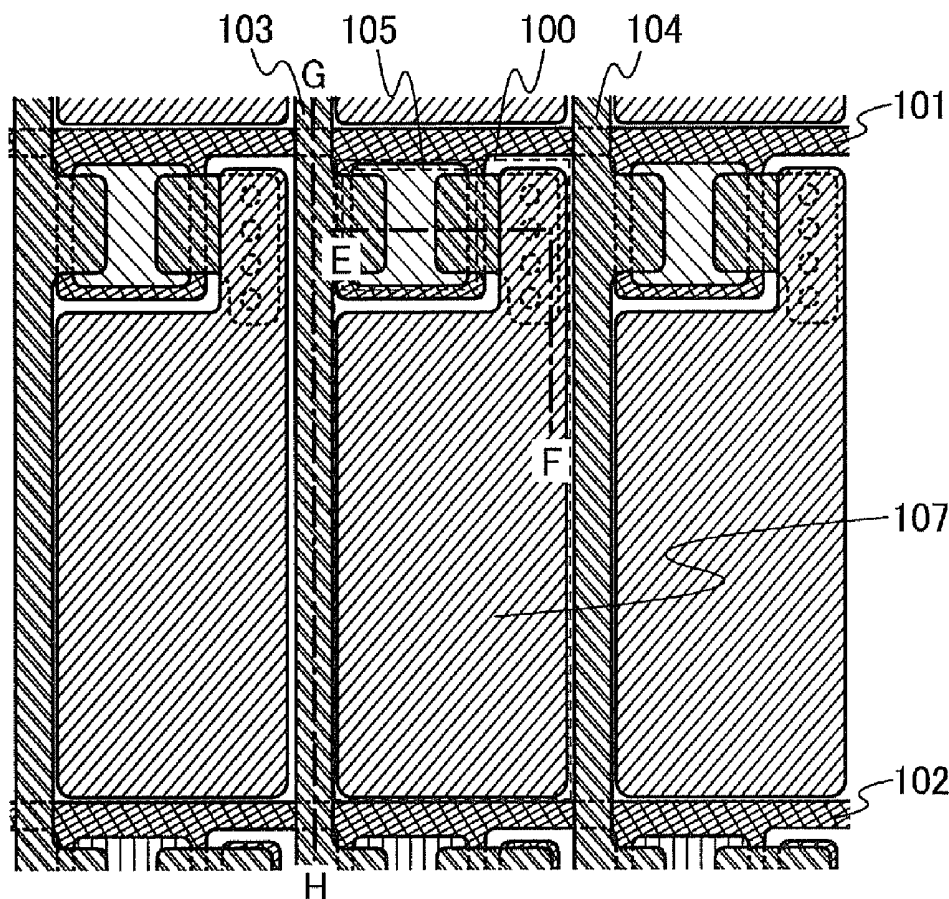


FIG. 1A

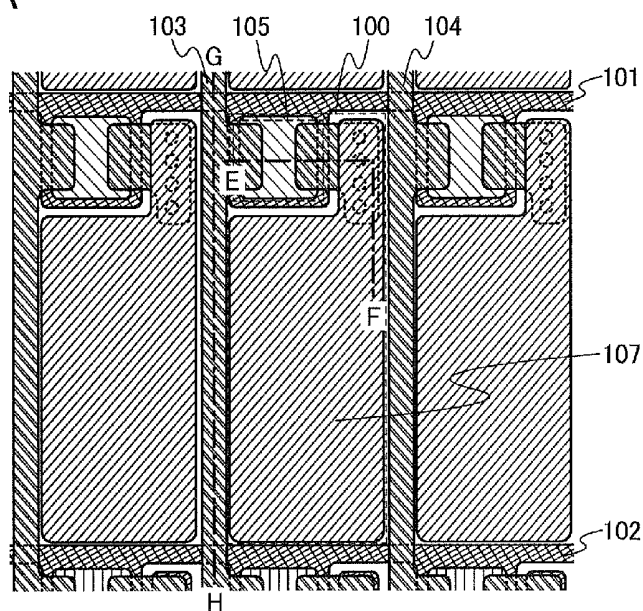


FIG. 1B

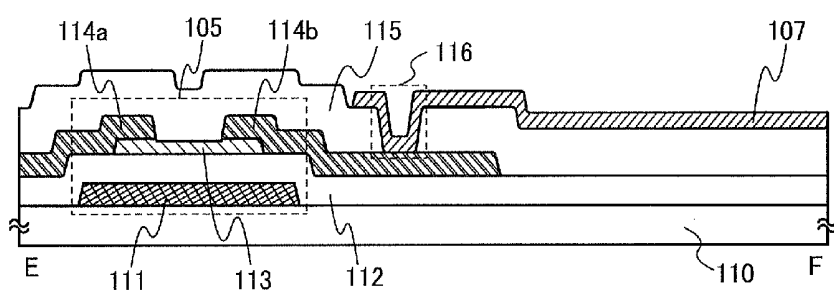


FIG. 1C

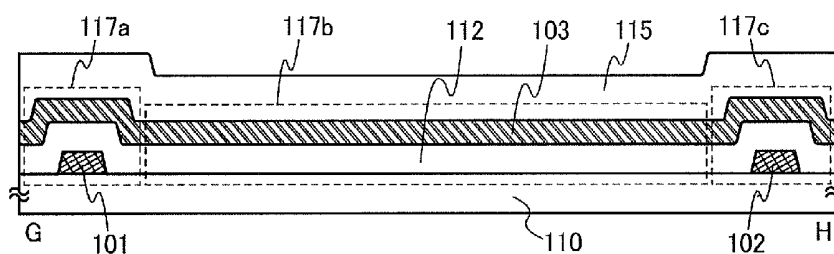


FIG. 2

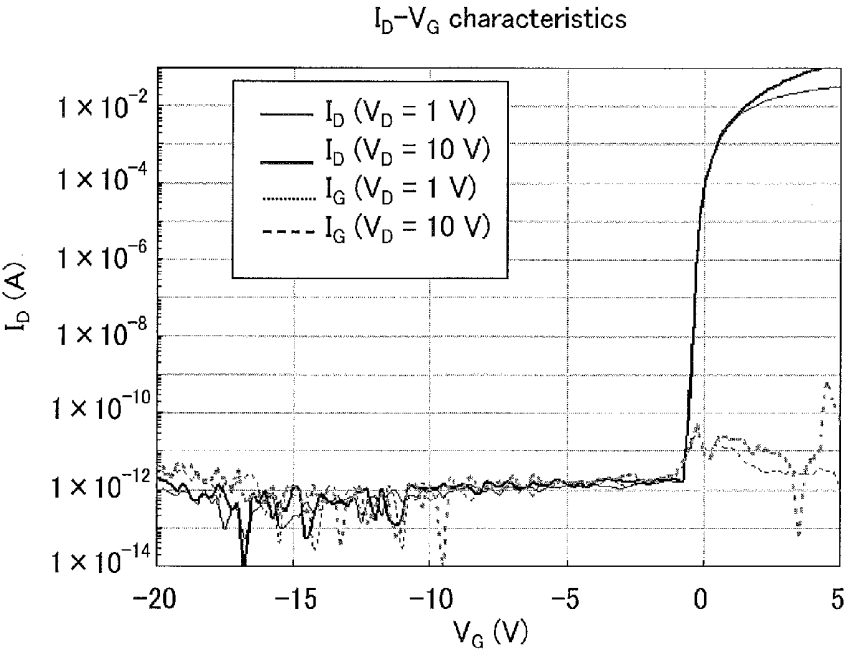


FIG. 3

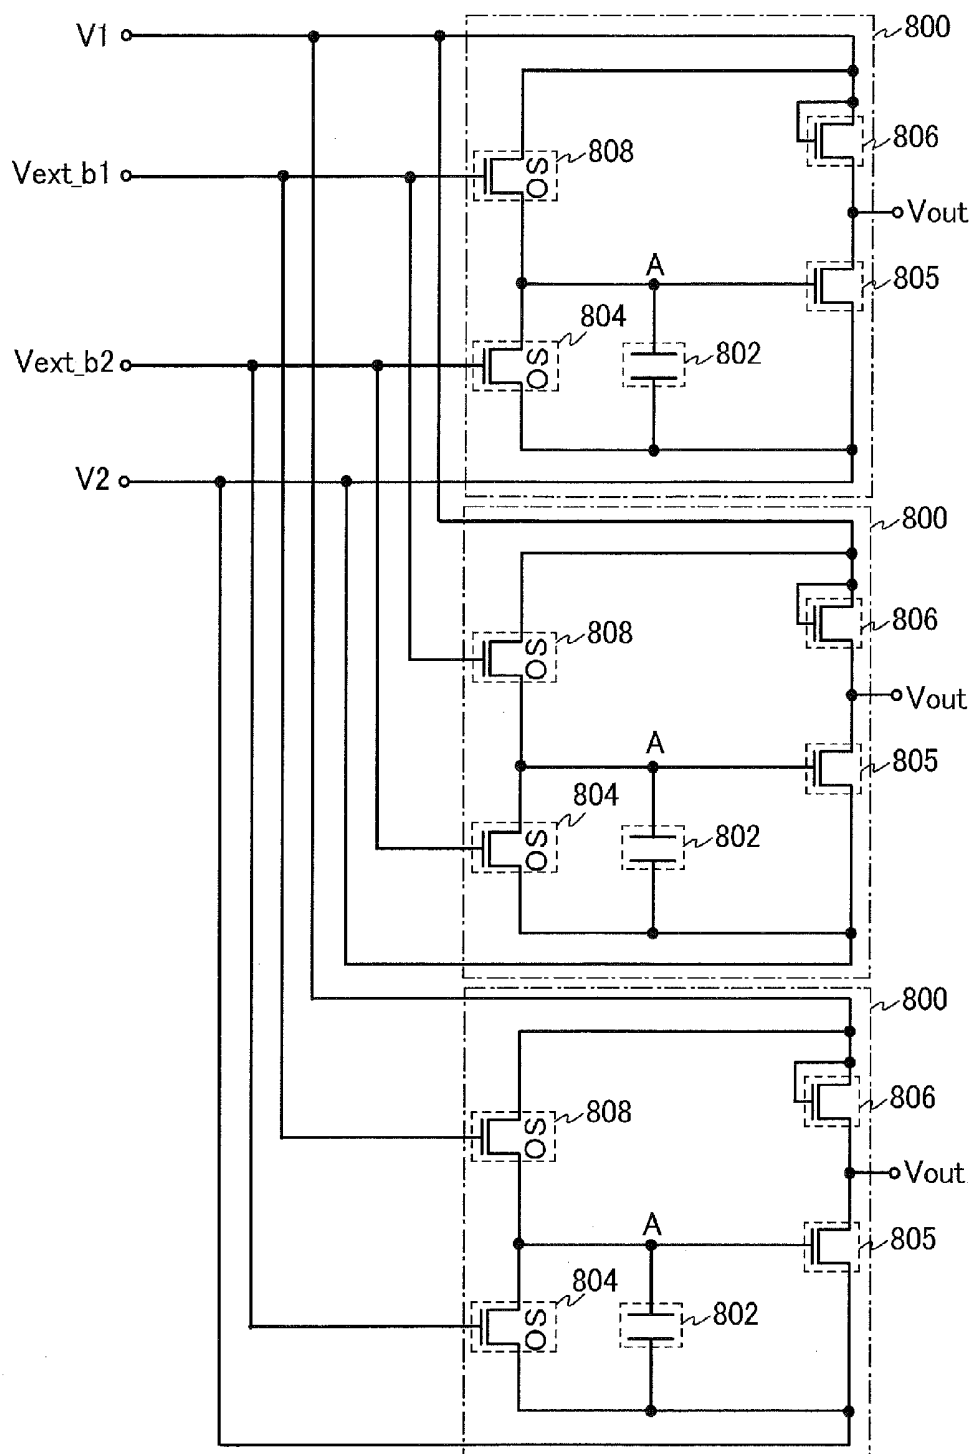


FIG. 4

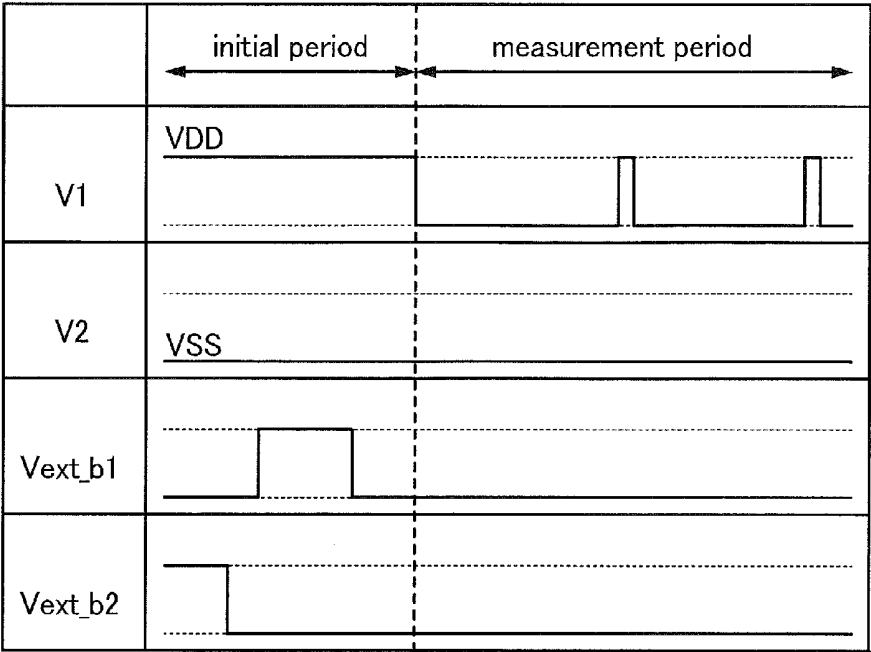


FIG. 5

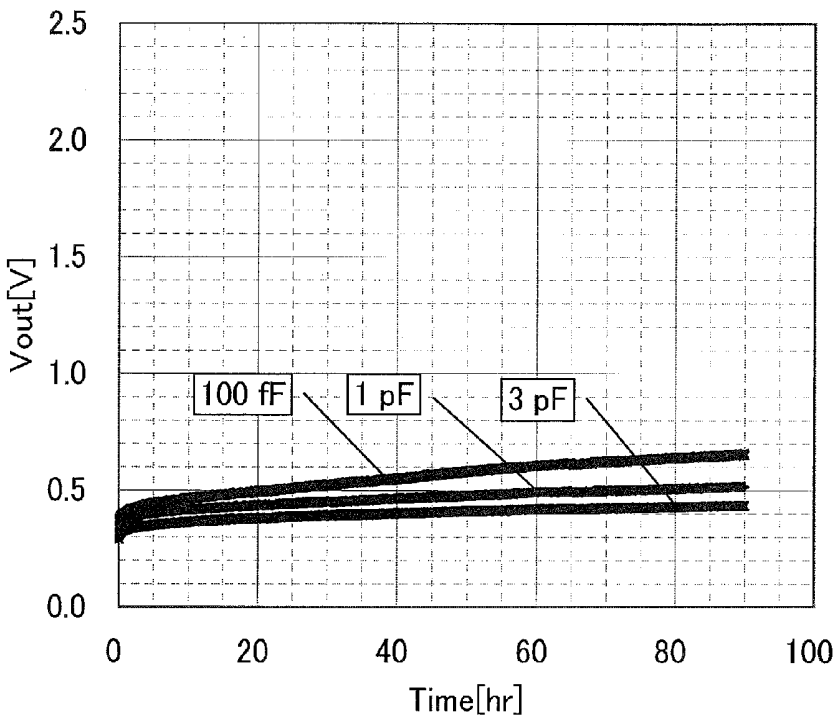


FIG. 6

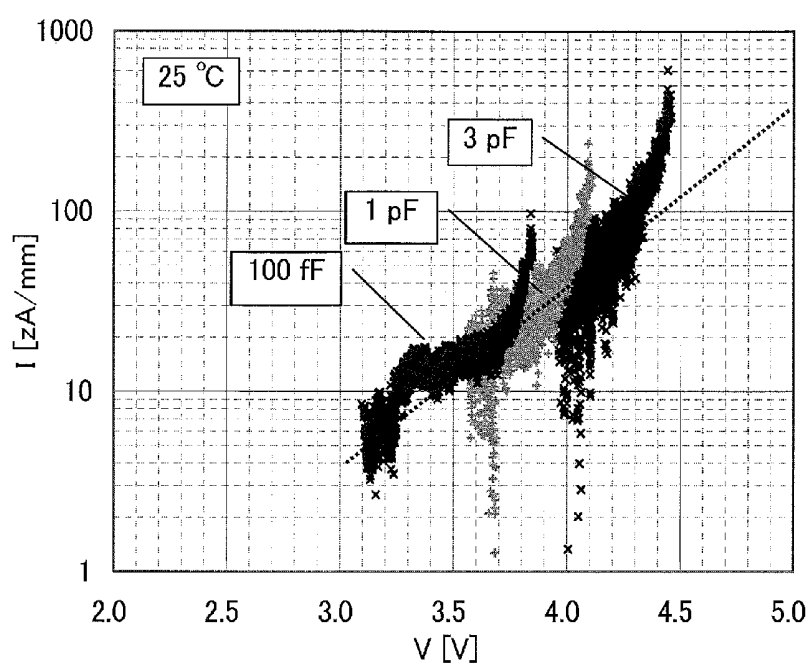


FIG. 7

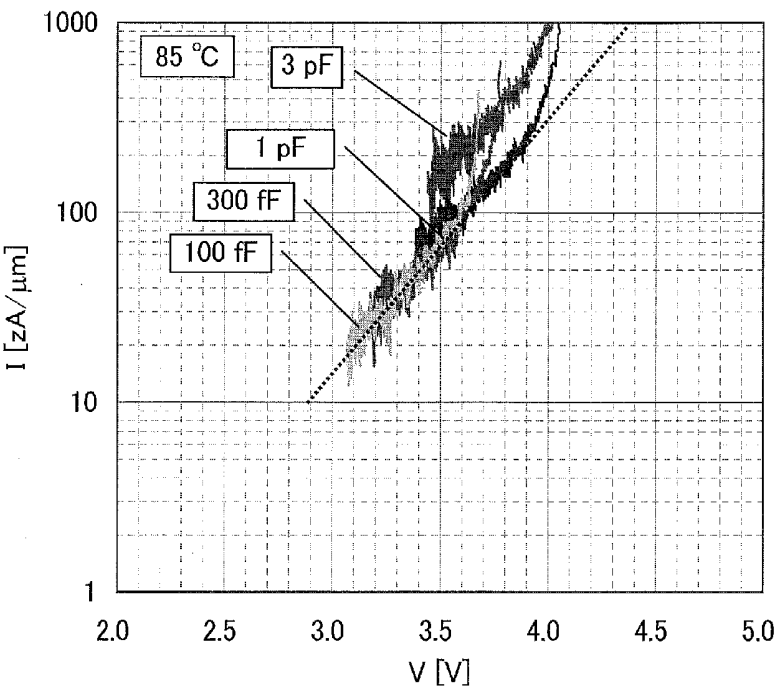


FIG. 8A

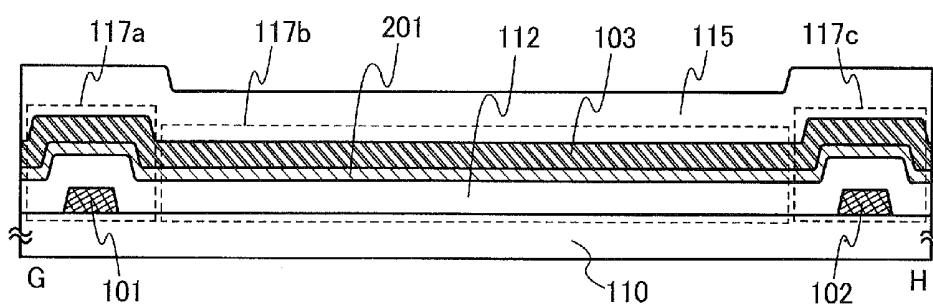


FIG. 8B

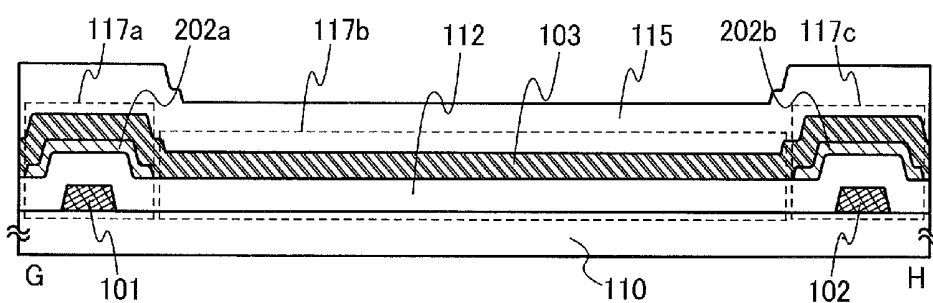


FIG. 8C

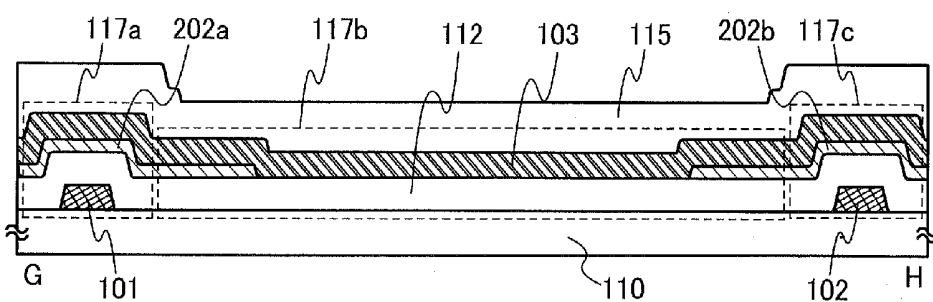


FIG. 9A

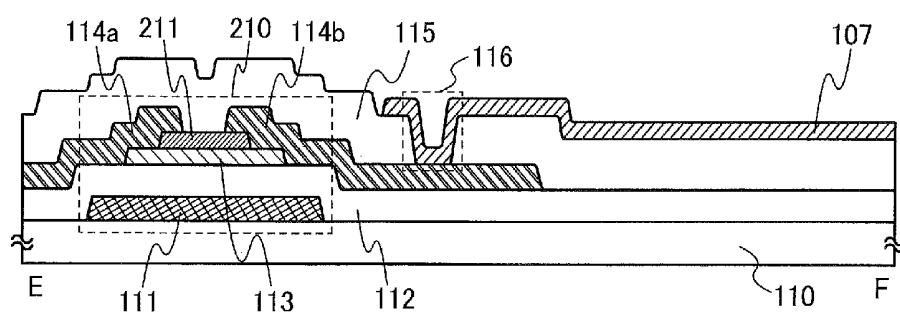


FIG. 9B

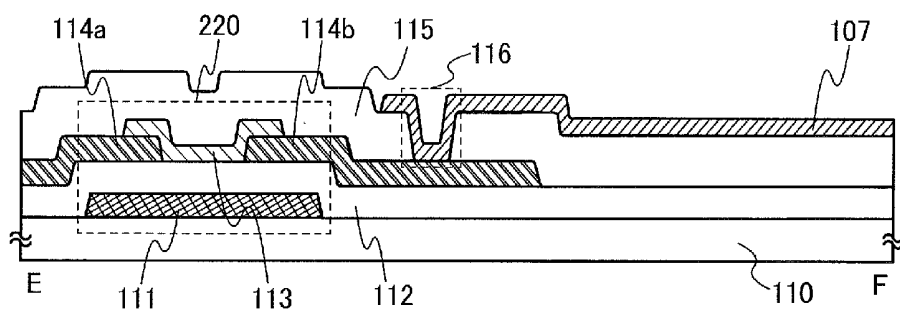


FIG. 9C

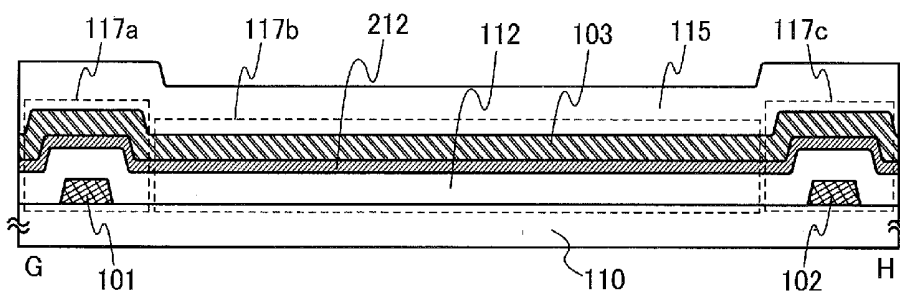


FIG. 10A

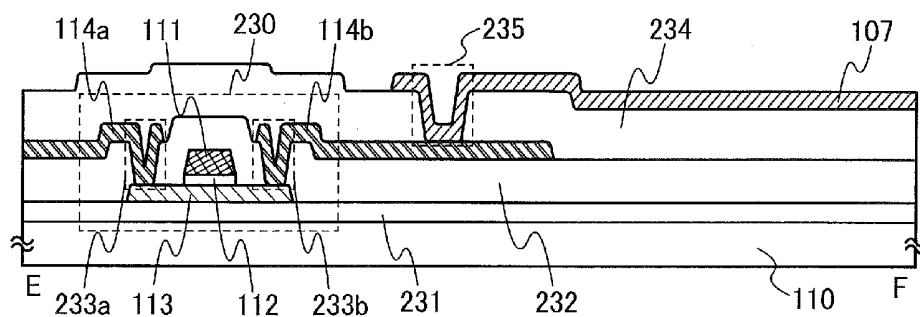


FIG. 10B

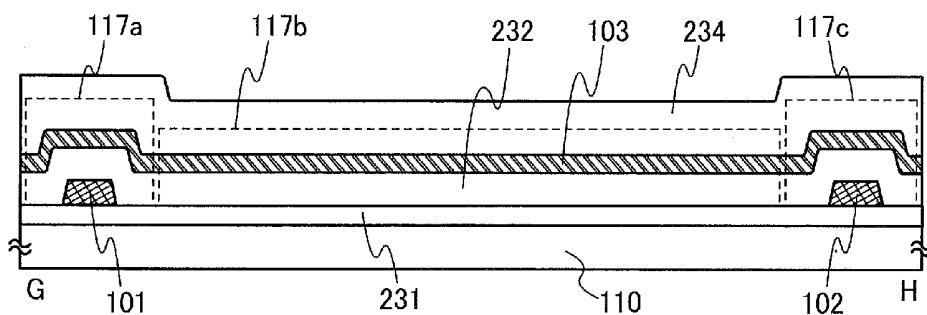


FIG. 11A

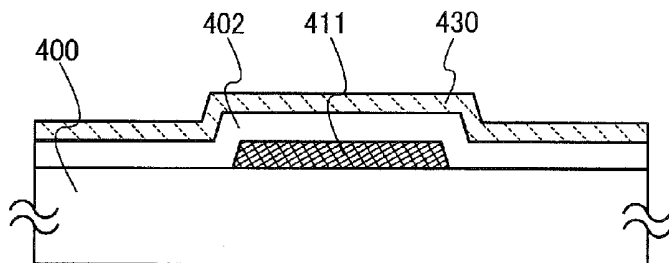


FIG. 11B

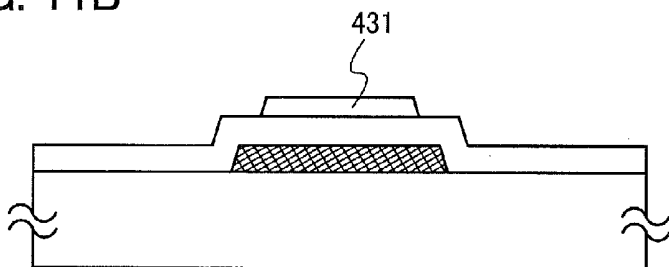


FIG. 11C

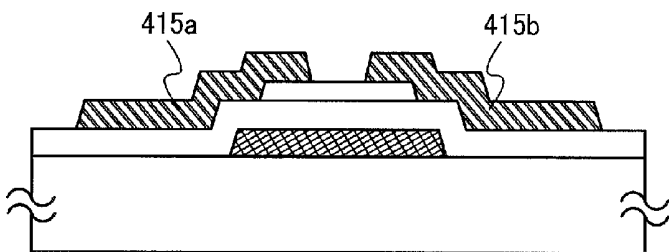


FIG. 11D

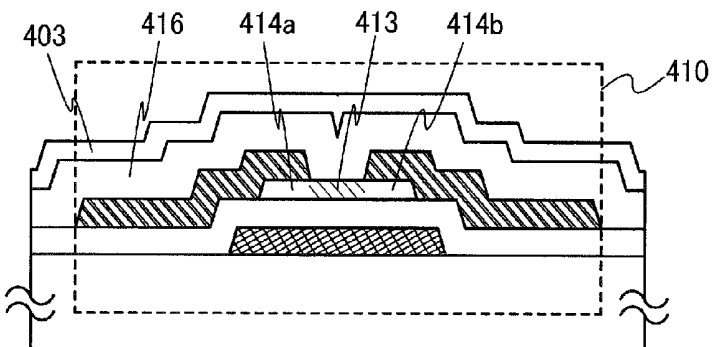


FIG. 12A




FIG. 12B

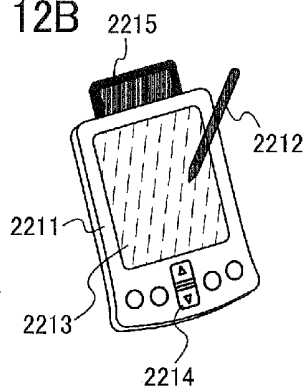


FIG. 12C

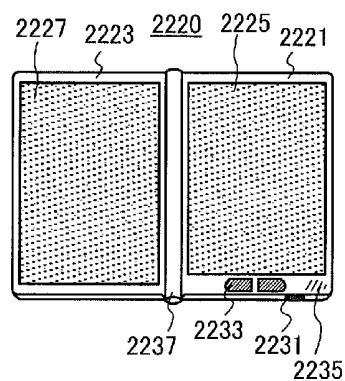


FIG. 12D

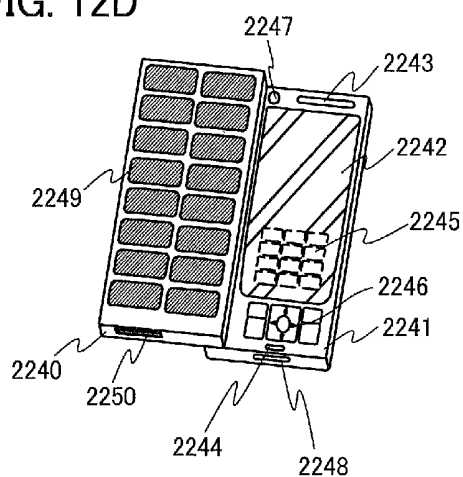


FIG. 12E





FIG. 12F

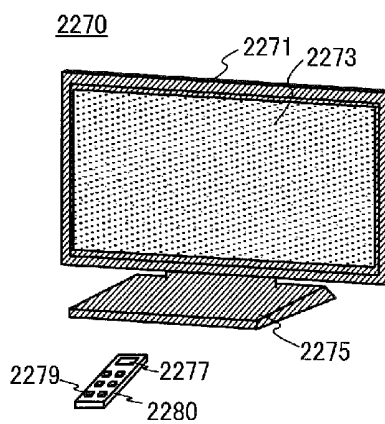

EXPLANATION OF REFERENCE

100: pixel, 101: scan line, 102: scan line, 103: signal line, 104: signal line, 105: transistor, 107: pixel electrode layer, 110: substrate, 111: gate layer, 112: gate insulating layer, 113: oxide semiconductor layer, 114a: one of a source layer and a drain layer, 114b: the other of a source layer and a drain layer, 115: insulating layer, 116: contact hole, 117a: region, 117b: region, 117c: region, 201: oxide semiconductor layer, 202a: oxide semiconductor layer, 202b: oxide semiconductor layer, 210: transistor, 211: insulating layer, 212: insulating layer, 220: transistor, 230: transistor, 231: base insulating layer, 232: insulating layer, 233a: contact hole, 233b: contact hole, 234: insulating layer, 235: contact hole, 400: substrate, 402: gate insulating layer, 403: protective insulating layer, 410: transistor, 411: gate layer, 413: channel formation region, 414a: source region, 414b: drain region, 415a: source layer, 415b: drain layer, 416: oxide insulating layer, 430: oxide semiconductor film, 431: oxide semiconductor layer, 800: measurement system, 802: capacitor, 804: transistor, 805: transistor, 806: transistor, 808: transistor, 1000: pixel, 1001: scan line, 1002: scan line, 1003: signal line, 1004: signal line, 1005: transistor, 1006: capacitor, 1007: pixel electrode layer, 1008: capacitor wiring, 1010: substrate, 1011: gate layer, 1012: gate insulating layer, 1013: semiconductor layer, 1014a: one of a source layer and a drain layer, 1014b: the other of a source layer and a drain layer, 1015: insulating layer, 1016: contact hole, 1017a: region, 1017b: region, 1017c: region, 2201: main body, 2202: housing, 2203: display portion, 2204: keyboard, 2211: main body, 2212: stylus, 2213: display portion, 2214: operation button, 2215: external interface, 2220: e-book reader, 2221: housing, 2223: housing, 2225: display portion, 2227: display portion, 2231: power supply, 2233: operation key, 2235: speaker, 2237: axis portion, 2240: housing, 2241: housing, 2242: display panel, 2243: speaker, 2244: microphone, 2245: operation key, 2246: pointing device, 2247: camera lens, 2248: external connection terminal, 2249: solar cell, 2250: external memory slot, 2261: main body, 2263: eyepiece, 2264: operation switch, 2265: display portion (B), 2266: battery, 2267: display portion (A), 2270: television set, 2271: housing, 2273: display portion, 2275: stand, 2277: display portion, 2279: operation key, and 2280: remote controller.

DISPLAY DEVICE HAVING AN OXIDE SEMICONDUCTOR TRANSISTOR

TECHNICAL FIELD

[0001] The present invention relates to a liquid crystal display device.

BACKGROUND ART

[0002] Active matrix liquid crystal display devices including a plurality of pixels arranged in matrix have been widespread. In general, the pixel includes a transistor having a gate electrically connected to a scan line and a source and a drain one of which is electrically connected to a signal line, a capacitor having terminals one of which is electrically connected to the other of the source and drain of the transistor and the other of which is electrically connected to a wiring supplying a common potential (hereinafter, also referred to as a capacitor wiring), and a liquid crystal element having terminals one of which (a pixel electrode) is electrically connected to the other of the source and the drain of the transistor and the one of the terminals of the capacitor and the other of which (a counter electrode) is electrically connected to a wiring supplying a counter potential.

[0003] An example of a structure of the above-described pixel is illustrated in FIGS. 13A to 13C. FIG. 13A is a top view of the pixel. Note that FIGS. 13A to 13C are diagrams in which parts (a liquid crystal layer, the counter electrode, and the like) of the liquid crystal element are omitted (a so-called active matrix substrate is illustrated). A pixel 1000 illustrated in FIG. 13A is provided in a region surrounded by a scan line 1001 and a scan line 1002 which are arranged in parallel or substantially parallel to each other and a signal line 1003 and a signal line 1004 which are arranged perpendicularly or substantially perpendicularly to the scan lines 1001 and 1002. Further, the pixel 1000 includes a transistor 1005, a capacitor 1006, and a pixel electrode layer 1007. Note that a conductive layer (a capacitor wiring 1008) which is to be one of electrode layers of the capacitor 1006 is arranged in parallel or substantially parallel to the scan lines 1001 and 1002 and is provided so as to be across the plurality of pixels.

[0004] FIG. 13B is a cross-sectional view taken along line A-B in FIG. 13A. The transistor 1005 includes a gate layer 1011 provided over a substrate 1010, a gate insulating layer 1012 provided over the gate layer 1011, a semiconductor layer 1013 provided over the gate insulating layer 1012, one of a source layer and a drain layer 1014a provided over one end of the semiconductor layer 1013, and the other of the source and drain layers 1014b provided over the other end of the semiconductor layer 1013. The capacitor 1006 includes part of the capacitor wiring 1008, an insulating layer (the gate insulating layer 1012) provided over the capacitor wiring 1008, and the other of the source and drain layers 1014b provided over the insulating layer. In addition, the other of the source and drain layers 1014b is electrically connected to the pixel electrode layer 1007 in a contact hole 1016 formed in an insulating layer 1015 provided over the transistor 1005 and the capacitor 1006.

[0005] FIG. 13C is a cross-sectional view taken along line C-D in FIG. 13A. The signal line 1003 intersects with the scan line 1001, the capacitor wiring 1008, and the scan line 1002 in a region 1017a, a region 1017b, and a region 1017c respectively with the gate insulating layer 1012 interposed

therebetween. Therefore, an upper surface of the signal line 1003 has a convex shape in the regions 1017a, 1017b, and 1017c. Note that it is apparent that the signal line 1004 also has the same upper surface shape as the signal line 1003.

[0006] Note that in a liquid crystal display device including the pixel 1000 illustrated in FIGS. 13A to 13C, the scan lines 1001 and 1002 and the capacitor wiring 1008 are formed using the same conductive film, and the gate insulating layer 1012 in the transistor 1005 is also used as a dielectric in the capacitor 1006. That is, it can be said that the liquid crystal display device is a liquid crystal display device whose manufacturing process steps are reduced.

[0007] In the pixel 1000 illustrated in FIGS. 13A to 13C, the transistor 1005 has a function of controlling input of a data signal which determines a voltage applied to the liquid crystal element (a potential applied to the pixel electrode layer 1007), and the capacitor 1006 has a function of holding the voltage applied to the liquid crystal element (the potential applied to the pixel electrode layer 1007).

[0008] For example, in the case where the dielectric of the capacitor 1006 is formed with a silicon oxide film with a thickness of 0.1 μm , the area of the capacitor 1006 having a capacitance of 0.4 pF is approximately 1160 μm^2 . Here, when the size of the pixel is 42 μm $\times$ 126 μm (a 4-inch VGA pixel), the proportion of the area of the capacitor 1006 to the pixel is approximately 22%, which causes a reduction in the aperture ratio. Note that the capacitor 1006 can be eliminated in the above pixel structure. A certain amount of charge can be held without intentionally providing the capacitor 1006 because the liquid crystal element itself has storage capacitance. However, the relative permittivity of liquid crystal is about 3 at the lowest, and the cell gap is 3 μm to 4 μm . Consequently, electrostatic capacitance is approximately 1/50 of that of the device using the capacitor 1006 having a 0.1- μm -thick silicon oxide film as a dielectric, and therefore, the area of the liquid crystal element is required to be approximately 58000 μm^2 . Since this size is comparable to that of the pixel with a size of 140 μm $\times$ 420 μm , the resolution is reduced to approximately 60 ppi and charge can be held only when the liquid crystal display devices have a resolution of 60 ppi or lower. In other words, when pixels are formed with a resolution of 60 ppi or more, the capacitor 1006 is required.

[0009] In the liquid crystal display device, by controlling a potential of the scan line 1001, the transistor 1005 is turned on and a potential of the signal line 1003 is controlled as a data signal for the pixel 1000. Thus, a desired voltage can be applied to the liquid crystal element included in the pixel 1000. The voltage is held by the capacitor 1006 for a certain period, so that desired display can be performed in each pixel for a certain period. The liquid crystal display device successively performs such operation for each pixel, whereby images (still images) are formed in a pixel portion. Further, the liquid crystal display device displays a moving image by changing the images successively (e.g., 60 times per second (at a frame frequency of 60 Hz)).

[0010] As described above, the moving image is formed of many still images. That is, strictly speaking, the moving image is not a continuous image. Accordingly, when fast moving images are displayed, residual images are readily generated in display. In particular, in a liquid crystal display device, each pixel maintains display from when a data signal is input to the pixel to when the next data signal is input to the pixel; therefore, residual images tend to be apparent. In

Patent Document 1, a technique to reduce residual images (referred to as “double-frame rate driving” in general) is disclosed. Specifically, in Patent Document 1, the following technique is disclosed: an image for interpolation is formed between two images displayed sequentially, and the image is inserted between two images displayed sequentially, so that residual images are reduced.

REFERENCE

[0011] [Patent Document] Japanese Published Patent Application No. H04-302289

DISCLOSURE OF INVENTION

[0012] It can be said that the above technique is a technique for increasing the number of data signals input to each pixel per unit time. Therefore, in order to apply this technique to a liquid crystal display device, a signal line supplying data signals to each pixel needs to operate at high speed. However, there is a possibility that parasitic capacitance is generated between the signal line extending to the pixel portion and another wiring extending to the pixel portion, and the parasitic capacitance prevents high speed operation of the signal line.

[0013] Thus, an object of one embodiment of the present invention is to reduce parasitic capacitance of a signal line included in a liquid crystal display device.

[0014] In a liquid crystal display device of one embodiment of the present invention, a transistor including an oxide semiconductor layer is used as a transistor provided in each pixel. Note that the oxide semiconductor layer is an oxide semiconductor layer which is highly purified by thoroughly removing impurities (hydrogen, water, or the like) which become electron suppliers (donors). The high-purified oxide semiconductor layer has extremely few (close to zero) carriers due to hydrogen, oxygen deficiency, or the like, and the carrier density is lower than $1 \times 10^{12}/\text{cm}^3$ or lower than $1 \times 10^{11}/\text{cm}^3$. In other words, the carrier density of the oxide semiconductor layer resulting from hydrogen, oxygen deficiency, or the like is reduced to close to zero as possible. Since the number of the carriers due to hydrogen, oxygen deficiency, or the like in the oxide semiconductor layer is extremely small, the leakage current (off-state current) of the transistor can be reduced when the transistor is off.

[0015] Thus, a voltage applied to the liquid crystal element can be held without providing a capacitor in each pixel. Further, a capacitor wiring extending to the pixel portion of the liquid crystal display device can be eliminated. Therefore, in the liquid crystal display device of one embodiment of the present invention, parasitic capacitance generated in a region where a signal line and the capacitor wiring intersect with each other does not exist. In contrast, in a conventional liquid crystal display device, parasitic capacitance is generated in a region where a signal line and a scan line intersect with each other and a region where the signal line and a capacitor wiring intersect with each other. That is, parasitic capacitance of the signal line can be reduced.

[0016] Specifically, one embodiment of the present invention is a liquid crystal display device. The liquid crystal display device includes: a first scan line and a second scan line arranged in parallel or substantially parallel to each other; a first signal line and a second signal line arranged perpendicularly or a substantially perpendicularly to the first scan line and the second scan line; and a transistor including

an oxide semiconductor layer, in which a gate is electrically connected to the first scan line, one of a source and a drain is electrically connected to the first signal line, and the other of the source and the drain is electrically connected to a pixel electrode layer. The pixel electrode layer is provided in a region surrounded by the first scan line, the second scan line, the first signal line, and the second signal line. The first signal line and the second signal line intersect with the first scan line and the second scan line with an insulating layer provided over the first scan line and the second scan line interposed therebetween. An upper surface of the first signal line has a convex shape in a first region where the first signal line intersects with the first scan line and in a second region where the first signal line intersects with the second scan line, and has a planar shape or a substantially planar shape in a region between the first region and the second region. In other words, the whole of the upper surface of the first signal line exists coplanarly or substantially coplanarly in the whole region between the first region and the second region.

[0017] In the liquid crystal display device of one embodiment of the present invention, a transistor including an oxide semiconductor layer is used as the transistor provided in each pixel. Thus, a capacitor provided in each pixel can be eliminated. Specifically, even when the liquid crystal display device has a resolution of 60 ppi or more, a voltage applied to the liquid crystal element can be held without providing a capacitor in each pixel. Accordingly, the aperture ratio of each pixel can be improved. Further, a capacitor wiring extending to the pixel portion of the liquid crystal display device can be eliminated. That is, the liquid crystal display device is a liquid crystal display device in which parasitic capacitance of the signal line is reduced. Accordingly, in a liquid crystal display device of one embodiment of the present invention, a driving frequency of a signal line can be increased as compared to that of a signal line in a conventional liquid crystal display device. In other words, a liquid crystal display device of one embodiment of the present invention is preferable as a liquid crystal display device which is driven at a double-frame rate or a higher rate than the double-frame rate.

BRIEF DESCRIPTION OF DRAWINGS

[0018] In the accompanying drawings:

[0019] FIGS. 1A to 1C are a top view and cross-sectional views illustrating an example of a structure of a pixel of a liquid crystal display device;

[0020] FIG. 2 is a graph showing characteristics of transistors;

[0021] FIG. 3 is a circuit diagram for evaluating characteristics of a transistor;

[0022] FIG. 4 is a timing chart for evaluating characteristics of a transistor;

[0023] FIG. 5 is a graph showing characteristics of transistors;

[0024] FIG. 6 is a graph showing characteristics of transistors;

[0025] FIG. 7 is a graph showing characteristics of transistors;

[0026] FIGS. 8A to 8C are cross-sectional views each illustrating an example of a structure of a pixel of a liquid crystal display device;

[0027] FIGS. 9A to 9C are cross-sectional views each illustrating an example of a structure of a pixel of a liquid crystal display device;

[0028] FIGS. 10A and 10B are cross-sectional views each illustrating an example of a structure of a pixel of a liquid crystal display device;

[0029] FIGS. 11A to 11D are cross-sectional views illustrating an example of a manufacturing process of a transistor;

[0030] FIGS. 12A to 12F are diagrams illustrating examples of electronic devices; and

[0031] FIGS. 13A to 13C are a top view and cross-sectional views illustrating an example of a structure of a pixel of a liquid crystal display device.

BEST MODE FOR CARRYING OUT THE INVENTION

[0032] Hereinafter, embodiments of the present invention will be described in detail with reference to the accompanying drawings. Note that the present invention is not limited to the description below, and it is easily understood by those skilled in the art that a variety of changes and modifications can be made without departing from the spirit and scope of the present invention. Therefore, the present invention should not be limited to the description of the embodiment below.

(Structure Example of Pixel)

[0033] First, an example of a structure of a pixel included in a liquid crystal display device of one embodiment of the present invention is described with reference to FIGS. 1A to 1C. Specifically, an example of a structure of a pixel in a liquid crystal display device having a structure in which a liquid crystal material is interposed between one substrate provided with a pixel electrode and the other substrate provided with a counter electrode (a liquid crystal display device in which a vertical electric field is applied to a liquid crystal material) is described with reference to FIGS. 1A to 1C.

[0034] FIG. 1A is a top view of the pixel. Note that FIG. 1A is a diagram in which parts (a liquid crystal layer, the counter electrode, and the like) of the liquid crystal element are omitted (a so-called active matrix substrate is illustrated). A pixel 100 illustrated in FIG. 1A is provided in a region surrounded by a scan line 101 and a scan line 102 which are arranged in parallel or substantially parallel to each other and a signal line 103 and a signal line 104 which are arranged perpendicularly or substantially perpendicularly to the scan lines 101 and 102. Further, a transistor 105 and a pixel electrode layer 107 are provided in the pixel 100. In other words, the pixel 100 illustrated in FIG. 1A has a structure in which a component relating to the capacitor 1006 is omitted from the pixel 1000 illustrated in FIG. 13A.

[0035] FIG. 1B is a cross-sectional view taken along line E-F in FIG. 1A. The transistor 105 includes: a gate layer 111 provided over a substrate 110; a gate insulating layer 112 provided over the gate layer 111; an oxide semiconductor layer 113 provided over the gate insulating layer 112; one of a source layer and a drain layer 114a provided over one end of the oxide semiconductor layer 113; and the other of the source layer and the drain layer 114b over the other end of the oxide semiconductor layer 113. Note that in the transistor 105 illustrated in FIGS. 1A and 1B, a projection of the scan

line 101 is used as a gate and a projection of the signal line 103 is used as one of a source and a drain. Thus, in the transistor 105 illustrated in FIGS. 1A and 1B, the gate can be expressed as part of the scan line 101 and the one of the source and the drain can be expressed as part of the signal line 103. The other of the source layer and the drain layer 114b is electrically connected to the pixel electrode layer 107 in a contact hole 116 formed in an insulating layer 115 provided over the transistor 105.

[0036] FIG. 1C is a cross-sectional view taken along line G-H in FIG. 1A. The signal line 103 intersects with the scan line 101 and the scan line 102 in a region 117a and a region 117c respectively with an insulating layer (the gate insulating layer 112) interposed therebetween. Therefore, an upper surface of the signal line 103 has a convex shape in the regions 117a and 117c. In addition, an upper surface of the signal line 103 has a planar shape or a substantially planar shape in a region 117b between the region 117a and the region 117c. In other words, the upper surface of the signal line 103 exists coplanarly or substantially coplanarly in the whole region 117b between the region 117a and the region 117c. This is because a capacitor wiring is not provided in the liquid crystal display device including the pixel 100. Note that it is apparent that the signal line 104 also has the same upper surface shape as the signal line 103.

[0037] As described above, the transistor 105 illustrated in FIGS. 1A to 1C includes the oxide semiconductor layer 113 as a semiconductor layer. As an oxide semiconductor used for the oxide semiconductor layer 113, an In—Sn—Ga—Zn—O-based oxide semiconductor which is a four-component metal oxide; an In—Ga—Zn—O-based oxide semiconductor, an In—Sn—Zn—O-based oxide semiconductor, an In—Al—Zn—O-based oxide semiconductor, a Sn—Ga—Zn—O-based oxide semiconductor, an Al—Ga—Zn—O-based oxide semiconductor, or a Sn—Al—Zn—O-based oxide semiconductor which is a three-component metal oxide; an In—Zn—O-based oxide semiconductor, a Sn—Zn—O-based oxide semiconductor, an Al—Zn—O-based oxide semiconductor, a Zn—Mg—O-based oxide semiconductor, a Sn—Mg—O-based oxide semiconductor, or an In—Mg—O-based oxide semiconductor which is a two-component metal oxide; or an In—O-based oxide semiconductor, a Sn—O-based oxide semiconductor, or a Zn—O-based oxide semiconductor which is a one-component metal oxide can be used. Further, SiO₂ may be contained in the above oxide semiconductors. Here, for example, an In—Ga—Zn—O-based oxide semiconductor is an oxide including at least In, Ga, and Zn, and there is no particular limitation on the composition ratio thereof. Further, the In—Ga—Zn—O-based oxide semiconductor may contain an element other than In, Ga, and Zn.

[0038] For the oxide semiconductor layer 113, a thin film, represented by the chemical formula, InMO₃(ZnO)_m (m>0) can be used. Here, M represents one or more metal elements selected from Ga, Al, Mn, and Co. For example, M can be Ga, Ga and Al, Ga and Mn, Ga and Co, or the like.

[0039] In order to suppress variation in electrical characteristics, the above-described oxide semiconductor is highly purified to exist in electrically i-type (intrinsic) by intentionally removing impurities such as hydrogen, moisture, a hydroxyl group, or a hydride (also referred to as a hydrogen compound) which is a factor of the variation.

[0040] Therefore, it is preferable that the oxide semiconductor contain as little hydrogen as possible. Further, the

highly purified oxide semiconductor has very few (close to zero) carriers which are derived from hydrogen, oxygen deficiency, and the like and the carrier density is less than $1 \times 10^{12}/\text{cm}^3$ or than $1 \times 10^{11}/\text{cm}^3$. In other words, the density of carriers derived from hydrogen, oxygen deficiency, and the like in the oxide semiconductor layer is made as close to zero as possible. Since the oxide semiconductor layer has very few carriers derived from hydrogen, oxygen deficiency, and the like, the amount of leakage current (off-state current) can be small when the transistor is off. It is preferred that the amount of off-state current is small as possible. In the transistor including the above oxide semiconductor for a semiconductor layer, the current per micrometer of the channel width (W) has a value of 100 zA/ μm (zeptoampere) or less, 10 zA/ μm or less, or 1 zA/ μm or less. Furthermore, because there is no pn junction and no hot carrier degradation, electrical characteristics of the transistor are not adversely affected thereby.

[0041] The oxide semiconductor which is highly purified by throughout removing hydrogen contained in the oxide semiconductor layer as described above is used in a channel formation region of a transistor, whereby the transistor with an extremely small amount of off-state current can be obtained. In other words, the circuit can be designed with the oxide semiconductor layer that can be regarded as an insulator when the transistor is off. On the other hand, when the transistor is on, the current supply capability of the oxide semiconductor layer is expected to be higher than the current supply capability of a semiconductor layer formed of amorphous silicon.

[0042] As the substrate 110, a glass substrate made of barium borosilicate glass, aluminoborosilicate glass, or the like can be used.

[0043] In the transistor 105, an insulating film serving as a base film may be provided between the substrate 110 and the gate layer 111. The base film has a function of preventing diffusion of an impurity element from the substrate 110, and can be formed to have a single-layer structure or a stacked structure using one or more of a silicon nitride film, a silicon oxide film, a silicon nitride oxide film, and a silicon oxynitride film.

[0044] As the gate layer 111, an element selected from aluminum (Al), copper (Cu), titanium (Ti), tantalum (Ta), tungsten (W), molybdenum (Mo), chromium (Cr), neodymium (Nd), and scandium (Sc), an alloy containing any of these elements, or a nitride containing any of these elements can be used. A stacked structure of these materials can also be used.

[0045] As the gate insulating layer 112, an insulator such as a silicon oxide layer, a silicon nitride layer, a silicon oxynitride layer, a silicon nitride oxide layer, an aluminum oxide layer, an aluminum nitride layer, an aluminum oxynitride layer, an aluminum nitride oxide layer, and a hafnium oxide layer formed by a plasma CVD method, a sputtering method, or the like can be used. Alternatively, a stacked structure of these insulators may be used. For example, by a plasma CVD method, a silicon nitride layer (SiN_y ($y > 0$)) with a thickness greater than or equal to 50 nm and less than or equal to 200 nm is formed as a first gate insulating layer, and a silicon oxide layer (SiO_x ($x > 0$)) with a thickness greater than or equal to 5 nm and less than or equal to 300 nm can be stacked over the first gate insulating layer, as a second gate insulating layer.

[0046] As a material of the one of the source and drain layers 114a and the other of the source and drain layers 114b, an element selected from aluminum (Al), chromium (Cr), copper (Cu), tantalum (Ta), titanium (Ti), molybdenum (Mo), and tungsten (W), an alloy containing any of these elements, a nitride containing any of these elements can be used. A stacked structure of these materials can also be used. Alternatively, a structure may be employed in which a high-melting-point metal layer of titanium (Ti), molybdenum (Mo), tungsten (W), or the like is stacked over and/or below a metal layer of aluminum (Al), copper (Cu), or the like. In addition, heat resistance can be improved by using an aluminum alloy to which an element (Si, Nd, Sc, or the like) which prevents generation of a hillock or a whisker in an aluminum (Al) film is added.

[0047] Note that the one of the source and drain layers 114a is part of the signal line 103 in the above-described liquid crystal display device. Therefore, in terms of high-speed driving of the signal line 103, the source layer and the drain layer are preferably formed using a low-resistance conductive material so that a signal delay is suppressed. For example, the source layer and the drain layer are preferably formed of a low-resistance conductive material such as copper (Cu) or an alloy including copper (Cu) as a main structural element. Alternatively, the source layer and the drain layer have a stacked structure which includes a layer including copper (Cu) or an alloy including copper (Cu) as a main structural element.

[0048] A capacitor is not provided in the pixel 100 in the above liquid crystal display device. Therefore, in terms of holding of a data signal in the pixel 100, a metal nitride is preferably used as the source layer and the drain layer in order to suppress the flow of carriers to the oxide semiconductor layer. For example, a nitride such as titanium nitride or tungsten nitride is preferably used. Alternatively, a stacked structure can be employed in which a layer in contact with the oxide semiconductor layer is formed using a nitride such as titanium nitride or tungsten nitride, and another conductive layer is formed thereover. For example, a stacked structure of tungsten nitride and copper (Cu), or the like can be employed.

[0049] Alternatively, a conductive film to be the source and drain layers 114a and 114b (including a wiring layer formed using the same layer as these layers 114a and 114b) may be formed using a conductive metal oxide. As the conductive metal oxide, indium oxide (In_2O_3), tin oxide (SnO_2), zinc oxide (ZnO), indium oxide-tin oxide ($\text{In}_2\text{O}_3\text{—SnO}_2$, which is abbreviated to ITO), indium oxide-zinc oxide ($\text{In}_2\text{O}_3\text{—ZnO}$), or any of these metal oxide in which silicon oxide is contained can be used.

[0050] As the insulating layer 115, typically, an inorganic insulating film such as a silicon oxide film, a silicon oxynitride film, an aluminum oxide film, or an aluminum oxynitride film can be used.

[0051] As the insulating layer 115, an inorganic insulating film such as a silicon nitride film, an aluminum nitride film, a silicon nitride oxide film, or an aluminum nitride oxide film can be used.

[0052] A planarization insulating film may be formed over the insulating layer 115 in order to reduce surface roughness caused by the transistor 105. As the planarization insulating film, an organic material such as a polyimide, an acrylic resin, or a benzocyclobutene-based resin can be used. Other than such organic materials, it is also possible to use a

low-dielectric constant material (a low-k material) or the like. Note that the planarization insulating film may be formed by stacking a plurality of insulating films formed from these materials.

(Off-State Current of Transistor 105)

[0053] Next, results obtained by measurement of the off-state current of a transistor including a highly purified oxide semiconductor layer will be described.

[0054] First, a transistor with a sufficiently large channel width W of 1 m was prepared in consideration of the fact that the off-state current of a transistor including a highly purified oxide semiconductor layer is extremely small, and then the off-state current was measured. FIG. 2 shows the results obtained by measurement of the off-state current of a transistor with a channel width W of 1 m. In FIG. 2, the horizontal axis shows a gate voltage V_G and the vertical axis shows a drain current I_D . In the case where the drain voltage V_D is +1 V or +10 V and the gate voltage V_G is within the range of -5 V to -20 V, the off-state current of the transistor was found to be smaller than or equal to 1×10^{-12} A which is the detection limit. Moreover, it was found that the off-state current density of the transistor (per unit channel width (1 μm)) is lower than or equal to 1 aA/ μm (1×10^{-18} A/ μm).

[0055] Next will be described the results obtained by measurement of the off-state current of the transistor including a highly purified oxide semiconductor layer more accurately. As described above, the off-state current of the transistor including a highly purified oxide semiconductor layer was found to be smaller than or equal to 1×10^{-12} A, which is the detection limit of the measurement equipment. Here, the results obtained by more accurate measurement of the off-state current (the value smaller than or equal to the detection limit of measurement equipment in the above measurement), with the use of an element for characteristic evaluation, will be described.

[0056] First, the element for characteristic evaluation used in a method for measuring current will be described with reference to FIG. 3.

[0057] In the element for characteristic evaluation in FIG. 3, three measurement systems 800 are connected in parallel. The measurement system 800 includes a capacitor 802, a transistor 804, a transistor 805, a transistor 806, and a transistor 808. The transistor including a highly purified oxide semiconductor layer is used as the transistors 804 and 808.

[0058] In the measurement system 800, one of a source and a drain of the transistor 804, one of terminals of the capacitor 802, and one of a source and a drain of the transistor 805 are connected to a power source (a power source for supplying V_2). The other of the source and the drain of the transistor 804, one of a source and a drain of the transistor 808, the other of the terminals of the capacitor 802, and a gate of the transistor 805 are electrically connected to one another. The other of the source and the drain of the transistor 808, one of a source and a drain of the transistor 806, and a gate of the transistor 806 are electrically connected to a power source (a power source for supplying V_1). The other of the source and the drain of the transistor 805, the other of the source and the drain of the transistor 806 are electrically connected to an output terminal.

[0059] A potential V_{ext_b2} for controlling an on state and an off state of the transistor 804 is supplied to a gate of the transistor 804. A potential V_{ext_b1} for controlling an on state

and an off state of the transistor 808 is supplied to a gate of the transistor 808. A potential V_{out} is output from the output terminal.

[0060] Next, a method for measuring current with the use of the element for characteristic evaluation will be described.

[0061] First, an initial period in which a potential difference is applied to measure the off-state current will be described briefly. In the initial period, the potential V_{ext_b1} for turning on the transistor 808 is input to the gate of the transistor 808, and a potential V_1 is supplied to a node A that is a node electrically connected to the other of the source and the drain of the transistor 804 (i.e., the node electrically connected to the one of the source and the drain of the transistor 808, the other terminal of the capacitor 802, and the gate of the transistor 805). Here, the potential V_1 is, for example, a high potential. The transistor 804 is turned off.

[0062] After that, the potential V_{ext_b1} for turning off the transistor 808 is input to the gate of the transistor 808 so that the transistor 808 is turned off. After the transistor 808 is turned off, the potential V_1 is set to low. Still, the transistor 804 is off. The potential V_2 is the same potential as the potential V_1 . Thus, the initial period is completed. In a state where the initial period is completed, a potential difference is generated between the node A and the one of the source and the drain of the transistor 804, and also, a potential difference is generated between the node A and the other of the source and the drain of the transistor 808. Therefore, charge flows slightly through the transistor 804 and the transistor 808. That is, the off-state current flows.

[0063] Next, a measurement period of the off-state current is briefly described. In the measurement period, the potential (V_2) of the one of the source and the drain of the transistor 804 and the potential (V_1) of the other of the source and the drain of the transistor 808 are set to low and fixed. On the other hand, the potential of the node A is not fixed (the node A is in a floating state) in the measurement period. Accordingly, charge flows through the transistors 804 and 808 and the amount of charge held in the node A varies over time. Further, as the amount of charge held in the node A varies, the potential of the node A varies. That is to say, the output potential V_{out} of the output terminal also varies.

[0064] FIG. 4 shows details of the relation (timing chart) between potentials in the initial period in which the potential difference is applied and in the following measurement period.

[0065] In the initial period, first, the potential V_{ext_b2} is set to a potential (high potential) at which the transistor 804 is turned on. Thus, the potential of the node A comes to be V_2 , that is, a low potential (V_{SS}). Note that a low potential (V_{SS}) is not necessarily supplied to the node A. After that, the potential V_{ext_b2} is set to a potential (low potential) at which the transistor 804 is turned off, whereby the transistor 804 is turned off. Next, the potential V_{ext_b1} is set to a potential (a high potential) at which the transistor 808 is turned on. Thus, the potential of the node A comes to be V_1 , that is, a high potential (V_{DD}). After that, the potential V_{ext_b1} is set to a potential at which the transistor 808 is turned off. Accordingly, the node A is brought into a floating state and the initial period is completed.

[0066] In the following measurement period, the potential V_1 and the potential V_2 are individually set to potentials at which charge flows to or from the node A. Here, the potential V_1 and the potential V_2 are low potentials (V_{SS}). Note that

at the timing of measuring the output potential V_{out} , it is necessary to operate an output circuit; thus, V1 is set to a high potential (V_{DD}) temporarily in some cases. The period in which V1 is a high potential (V_{DD}) is set to be short so that the measurement is not influenced.

[0067] When the potential difference is generated and the measurement period is started as described above, the amount of charge hold in the node A varies over time, which varies the potential of the node A. This means that the potential of the gate of the transistor 805 varies and thus, the output potential V_{out} of the output terminal also varies over time.

[0068] A method for calculating the off-state current on the basis of the obtained output potential V_{out} is described below.

[0069] The relation between the potential V_A of the node A and the output potential V_{out} is obtained in advance before the off-state current is calculated. With this, the potential V_A of the node A can be obtained using the output potential V_{out} . In accordance with the above relation, the potential V_A of the node A can be expressed as a function of the output potential V_{out} by the following equation.

$$V_A = F(V_{out}) \quad [\text{FORMULA 1}]$$

[0070] Charge Q_A of the node A can be expressed by the following equation with the use of the potential V_A of the node A, capacitance C_A connected to the node A, and a constant (const). Here, the capacitance C_A connected to the node A is the sum of the capacitance of the capacitor 802 and other capacitance.

$$Q_A = C_A V_A + \text{const} \quad [\text{FORMULA 2}]$$

[0071] Since a current I_A of the node A is obtained by differentiating charge flowing to the node A (or charge flowing from the node A) with respect to time, the current I_A of the node A is expressed by the following equation.

$$I_A = \frac{\Delta Q_A}{\Delta t} = \frac{C_A \cdot \Delta F(V_{out})}{\Delta t} \quad [\text{FORMULA 3}]$$

[0072] In this manner, the current I_A of the node A can be obtained from the capacitance C_A connected to the node A and the output potential V_{out} of the output terminal.

[0073] In accordance with the above method, it is possible to measure a leakage current (off-state current) which flows between a source and a drain of a transistor in an off state.

[0074] Here, the transistor 804 and the transistor 808 were formed using a highly purified oxide semiconductor with a channel length L of 10 μm and a channel width W of 50 μm . In addition, in the measurement systems 800 which are arranged in parallel, values of the capacitance of the capacitors 802 were 100 fF, 1 pF, and 3 pF, respectively.

[0075] Note that in the above-described measurement, V_{DD} was 5 V and V_{SS} was 0 V. In the measurement period, the potential V1 was basically set to V_{SS} and set to V_{DD} only in a period of 100 milliseconds every 10 seconds to 300 seconds, and V_{out} was measured. Further, Δt which was used in calculation of a current I which flows through the element was about 30000 sec.

[0076] FIG. 5 shows the relation between elapsed time Time in measuring the current and the output potential V_{out} . According to FIG. 5, the potential varies over time.

[0077] FIG. 6 shows the off-state current at room temperature (25° C.) calculated based on the above current measurement. Note that FIG. 6 shows the relation between a source-drain voltage V of the transistor 804 or the transistor 808 and an off-state current I. According to FIG. 6, the off-state current was about 40 zA/ μm under the condition that the source-drain voltage was 4 V. In addition, the off-state current was less than or equal to 10 zA/ μm under the condition where the source-drain voltage was 3.1 V. Note that 1 zA represents 10^{-21} A.

[0078] FIG. 7 shows the off-state current in an environment at a temperature of 85° C., which was calculated based on the above current measurement. FIG. 7 shows the relation between a source-drain voltage V of the transistor 804 or the transistor 808 and an off-state current I in an environment at 85° C. According to FIG. 7, the off-state current was less than or equal to 100 zA/ μm under the condition where the source-drain voltage was 3.1 V.

[0079] From the above results, it was confirmed that the off-state current can be sufficiently small in a transistor including a highly purified oxide semiconductor layer.

(Liquid Crystal Display Device Including Pixel 100)

[0080] In the liquid crystal display device disclosed in this specification, the transistor 105 including an oxide semiconductor layer is used as a transistor provided in each pixel. Since the off-state current of the transistor 105 including the oxide semiconductor layer is small, in the liquid crystal display device, a voltage applied to a liquid crystal element can be held without providing a capacitor in each pixel. Accordingly, the aperture ratio of each pixel can be improved. In addition, a capacitor wiring extending to a pixel portion of the liquid crystal display device can be eliminated. Therefore, parasitic capacitance due to the capacitor wiring does not exist in the liquid crystal display device disclosed in this specification. Specifically, there is no parasitic capacitance such as capacitance provided in a region where a signal line and a capacitor wiring intersect with each other with an insulating layer interposed therebetween. As a result, the driving frequency of the signal line can be improved in the liquid crystal display device disclosed in this specification. In other words, the liquid crystal display device disclosed in this specification is preferable as a liquid crystal display device which is driven at a double-frame rate or a higher rate than the double-frame rate.

[0081] In the case of performing driving at a double-frame rate or a higher rate than that the double-frame rate, the frequency of rewriting a data signal in each pixel is increased. That is, a period in which a voltage applied to a liquid crystal element in each pixel becomes shorter. Accordingly, variations in the voltage applied to the liquid crystal element (deterioration (change) in display in each pixel) can be further reduced. In addition, similar effects can be obtained in the case where the liquid crystal display device disclosed in this specification is driven by a field sequential system. In other words, it is preferable to employ field sequential driving for the liquid crystal display device disclosed in this specification.

[0082] In particular, the liquid crystal display device disclosed in this specification is highly effective when used as a large-sized liquid crystal display device (e.g., having 40 inches or more in size). As the size of a liquid crystal display device is increased, data signal delay or the like due to wiring resistance or the like easily occurs. In contrast, in the

liquid crystal display device disclosed in this specification, parasitic capacitance generated in a signal line is reduced, so that data signal delay or the like can be reduced. Further, in the case where a small-sized liquid crystal display device and a large-sized one have the same number of pixels, each pixel included in the large-sized one is larger in size. This means that the capacitance of the liquid crystal element itself becomes large. Therefore, in addition to the use of the transistor **105** including an oxide semiconductor layer in each pixel, the large capacitance of the liquid crystal element itself contributes to reduction in the variation of the voltage applied to the liquid crystal element.

[0083] Moreover, the liquid crystal display device disclosed in this specification is highly effective when used as a liquid crystal display device having high definition (a large number of pixels) (e.g., a full high-definition (FHD) one and a one having a resolution of 2K4K or more). The number of wirings provided in a pixel portion is increased in accordance with higher definition (an increase in the number of pixels) of a liquid crystal display device, so that parasitic capacitance generated in the signal line is readily increased. In contrast, since a capacitor wiring is not provided in the liquid crystal display device disclosed in this specification, an increase in parasitic capacitance can be reduced. In addition, in the case where a liquid crystal display device which has a large number of pixels and a liquid crystal display device which has a small number of pixels have the same size, the wiring density in a pixel portion of the former device is increased. This means that the aperture ratio of each pixel is decreased. Moreover, in the liquid crystal display device disclosed in this specification, a capacitor is not provided in each pixel; therefore, a decrease in the aperture ratio can be suppressed.

[0084] In a conventional liquid crystal display device, holding characteristics of a data signal of each pixel have mainly determined by characteristics (the value of the off-state current) of a transistor provided therein. However, by applying the transistor **105** including a highly purified oxide semiconductor layer as a transistor provided in each pixel, the holding characteristics of the data signal of each pixel is mainly determined by characteristics of a liquid crystal element (a current flowing in a liquid crystal element). That is, in the liquid crystal display device disclosed in this specification, leakage of charge through the liquid crystal element has larger influence than leakage of charge through the transistor **105**. Therefore, it is preferable that a substance having a high specific resistivity be used as the liquid crystal material included in the liquid crystal element. Specifically, in the liquid crystal display device disclosed in this specification, the specific resistivity of the liquid crystal material is preferably $1 \times 10^{12} \Omega \cdot \text{cm}$ or more, still preferably over $1 \times 10^{13} \Omega \cdot \text{cm}$, still further preferably over $1 \times 10^{14} \Omega \cdot \text{cm}$. In the case where a liquid crystal element is formed using the liquid crystal material, since there is a possibility of entry of impurities from an alignment film or a sealant, the resistivity of the liquid crystal element is preferably $1 \times 10^{11} \Omega \cdot \text{cm}$ or more, more preferably over $1 \times 10^{12} \Omega \cdot \text{cm}$. Note that the value of the specific resistivity in this specification is defined as that measured at 20° C.

(Modified Example of Structure of Pixel)

[0085] A liquid crystal display device having the above-described structure is one embodiment of the present invention, and a liquid crystal display device different from the

liquid crystal display device having the above-described structure in some points is included in the present invention.

[0086] Although only the gate insulating layer **112** is provided between the signal line **103** and the scan line **101** and between the signal line **103** and the scan line **102** (see FIG. 1C) in the aforementioned liquid crystal display device, an oxide semiconductor layer **201** can be provided between the signal line **103** and the gate insulating layer **112** (see FIG. 8A). In other words, in a step for forming the oxide semiconductor layer **113** included in the transistor **105** (a photolithography step and an etching step), an oxide semiconductor layer can be left without being etched also in a region where the signal line **103** is to be formed later. Thus, by providing the oxide semiconductor layer **201** between the signal line **103** and the gate insulating layer **112**, parasitic capacitance between the signal line **103** and the scan line **101** and between the signal line **103** and the scan line **102** can be further reduced.

[0087] Further, an oxide semiconductor layer can be selectively provided between the signal line **103** and the gate insulating layer **112**. For example, an oxide semiconductor layer **202a** and an oxide semiconductor layer **202b** can be selectively provided in the region **117a** where the signal line **103** and the scan line **101** intersect with each other and in the region **117c** where the signal line **103** and the scan line **102** intersect with each other, respectively (see FIG. 8B). The oxide semiconductor layers **202a** and **202b** can be selectively provided in part of the region **117b** in addition to the regions **117a** and **117c** (see FIG. 8C). Note that a step occurs on the upper surface of the signal line **103** in the region **117b** in this case due to the oxide semiconductor layer between the signal line **103** and the gate insulating layer **112**; however, in this specification, the upper surface shape is regarded as a shape included in a substantially planar shape. In other words, the signal line **103** and the gate insulating layer **112** directly contact with each other in the whole region interposed between the steps caused by the scan line **101**, the scan line **102**, and the part of the oxide semiconductor layers **202a** and **202b**, and the whole of the upper surface of the signal line **103** exists coplanarly or substantially coplanarly in this region.

[0088] In the above-described liquid crystal display device, the channel-etched transistor **105** which is one kind of transistors having a bottom-gate structure (see FIG. 1B) is used as a transistor provided in each pixel; however, a transistor having another structure can be used. For example, a channel-stop transistor **210** which is one kind of transistors having a bottom-gate structure (see FIG. 9A) or a bottom-contact transistor **220** which is one kind of transistors having a bottom-gate structure (see FIG. 9B) can be used.

[0089] Specifically, the channel-stop transistor **210** illustrated in FIG. 9A includes: the gate layer **111** provided over the substrate **110**; the gate insulating layer **112** provided over the gate layer **111**; the oxide semiconductor layer **113** provided over the gate insulating layer **112**; an insulating layer **211** which functions as a channel protective layer and is provided over a central portion of the oxide semiconductor layer **113**; the one of the source and drain layers **114a** provided over the one end of the oxide semiconductor layer **113** and one end of the insulating layer **211**; and the other of the source and drain layers **114b** provided over the other end of the oxide semiconductor layer **113** and the other end of the insulating layer **211**. Note that the insulating layer **211** can be formed using an inorganic insulating film such as a

silicon oxide film, a silicon oxynitride film, an aluminum oxide film, or an aluminum oxynitride film.

[0090] The bottom-contact transistor **220** illustrated in FIG. 9B includes: the gate layer **111** provided over the substrate **110**; the gate insulating layer **112** provided over the gate layer **111**; one of the source and drain layers **114a** and the other of the source and drain layers **114b** provided over the gate insulating layer **112**; and the oxide semiconductor layer **113** provided over one end of the one of the source and drain layers **114a**, one end of the other of the source and drain layers **114b**, and the gate insulating layer **112**.

[0091] Further, in the case where a transistor provided in each pixel is the channel-stop transistor **210**, an insulating layer **212** can be provided between the signal line **103** and the gate insulating layer **112** (see FIG. 9C). Note that the insulating layer **212** is an insulating layer formed using the same material as the insulating layer **211** which functions as a channel protective layer included in the transistor **210**. Further, an oxide semiconductor layer can be provided between the gate insulating layer **112** and the insulating layer **212** (not illustrated). Note that the oxide semiconductor layer is an oxide semiconductor layer formed using the same material as the oxide semiconductor layer **113** included in the transistor **210**. Furthermore, the oxide semiconductor layer and the insulating layer can be selectively provided only over the scan line **101** and the scan line **102** (not illustrated).

[0092] Alternatively, a top-gate transistor **230** (see FIG. 10A) can be used as the transistor **105**. Specifically, the top-gate transistor **230** illustrated in FIG. 10A includes: a base insulating layer **231** provided over the substrate **110**; the oxide semiconductor layer **113** provided over the base insulating layer **231**; the gate insulating layer **112** provided over the oxide semiconductor layer **113**; the gate layer **111** provided over the gate insulating layer **112**; the one of the source and drain layers **114a** which is in contact with the oxide semiconductor layer **113** in a contact hole **233a** formed in an insulating layer **232** provided over the oxide semiconductor layer **113** and the gate layer **111**; and the other of the source and drain layers **114b** which is in contact with the oxide semiconductor layer **113** in a contact hole **233b** formed in the insulating layer **232** provided over the oxide semiconductor layer **113** and the gate layer **111**. The other of the source and drain layers **114b** is electrically connected to the pixel electrode layer **107** in a contact hole **235** formed in an insulating layer **234** provided over the transistor **230**. In this case, the signal line **103** intersects with the scan lines **101** and **102** with the insulating layer **232** interposed therebetween in the regions **117a** and **117c** (see FIG. 10B). Note that the base insulating layer **231** can be formed with a single-layer structure or a stacked structure using one or more of a silicon nitride film, a silicon oxide film, a silicon nitride oxide film, and a silicon oxynitride film. The insulating layer **232** can be formed with a single-layer structure or a stacked structure using one or more of inorganic insulators such as a silicon oxide film, a silicon nitride film, a silicon oxynitride film, a silicon nitride oxide film, an aluminum oxide film, an aluminum nitride film, an aluminum oxynitride film, an aluminum nitride oxide film, and a hafnium oxide film. Note that the insulating layer **234** can be formed using an inorganic insulating film similar to that of the insulating layer **232** or using an organic material such as a polyimide, an acrylic resin, or a benzocyclobutene-based resin.

[0093] Although one transistor is provided in each pixel in the above-described liquid crystal display device, two or more transistors can be provided in each pixel. For example, in the case where two transistors are provided in each pixel to solve a problem relating to the viewing angle of a vertical alignment (VA) mode liquid crystal display device, a transistor including an oxide semiconductor layer can be used as the two transistors. Here, the liquid crystal display device is regarded as a liquid crystal display device including two leak paths through the transistors in each pixel. Therefore, in a conventional liquid crystal display device, a voltage applied to a liquid crystal element is held by increasing the area of capacitors, for example, providing two capacitors in each pixel. That is, the voltage applied to the liquid crystal element is held with the aperture ratio sacrificed. In contrast, in a liquid crystal display device disclosed in this specification, leakage of charge through a transistor including an oxide semiconductor layer is significantly reduced, so that a capacitor itself can be eliminated. That is, the liquid crystal display device disclosed in this specification can maintain high aperture ratio even when a plurality of transistors is provided in each pixel.

(Specific Example of Method for Manufacturing Transistor)

[0094] As an example of a transistor which is provided in each pixel of the liquid crystal display device disclosed in this specification, a process for manufacturing a channel-etched transistor **410** which is one kind of transistors having a bottom-gate structure is described below with reference to FIGS. 11A to 11D. Although a single-gate transistor is illustrated here, a multi-gate transistor including a plurality of channel formation regions can be formed as needed.

[0095] A process for manufacturing the transistor **410** over a substrate **400** is described below with reference to FIGS. 11A to 11D.

[0096] First, a conductive film is formed over the substrate **400** having an insulating surface, and a first photolithography step is performed thereon, so that a gate layer **411** is formed. Note that a resist mask used in the process may be formed by an inkjet method. In the case of forming a resist mask by an inkjet method, the manufacturing cost can be reduced because a photomask is not used.

[0097] Although there is no particular limitation on a substrate which can be used as the substrate **400** having an insulating surface, it is necessary that the substrate have at least enough heat resistance to heat treatment to be performed later. For example, a glass substrate made of barium borosilicate glass, aluminoborosilicate glass, or the like can be used. In the case where a glass substrate is used and the temperature at which the heat treatment performed later is high, a glass substrate whose strain point is higher than or equal to 730° C. is preferably used.

[0098] An insulating layer serving as a base layer may be provided between the substrate **400** and the gate layer **411**. The base layer has a function of preventing diffusion of an impurity element from the substrate **400**, and can be formed with a single-layer structure or a stacked structure using one or more of a silicon nitride film, a silicon oxide film, a silicon nitride oxide film, and a silicon oxynitride film.

[0099] The gate layer **411** can be formed to have a single-layer structure or a stacked structure using a metal such as molybdenum, titanium, chromium, tantalum, tung-

sten, aluminum, copper, neodymium, or scandium or an alloy which contains any of these metals as its main component.

[0100] As a two-layer structure of the gate layer 411, for example, the following structure is preferable: a structure in which a molybdenum layer is stacked over an aluminum layer, a structure in which a molybdenum layer is stacked over a copper layer, a structure in which a titanium nitride layer or a tantalum nitride layer is stacked over a copper layer, or a structure in which a titanium nitride layer and a molybdenum layer are stacked. As a three-layer structure, a three-layer structure of a tungsten layer or a tungsten nitride layer, a layer of an alloy of aluminum and silicon or an alloy of aluminum and titanium, and a titanium nitride layer or a titanium layer is preferable.

[0101] Then, a gate insulating layer 402 is formed over the gate layer 411.

[0102] The gate insulating layer 402 can be formed to have a single-layer or stacked structure using one or more of a silicon oxide layer, a silicon nitride layer, a silicon oxynitride layer, a silicon nitride oxide layer, and an aluminum oxide layer by a plasma CVD method, a sputtering method, or the like. For example, a silicon oxynitride layer may be formed by a plasma CVD method using silane (SiH_4), oxygen, and nitrogen as a deposition gas. Furthermore, a high-k material such as hafnium oxide (HfO_x) or tantalum oxide (TaO_x) can be used as the gate insulating layer 402. The gate insulating layer 402 is formed to a thickness of 100 nm to 500 nm inclusive; in the case where the gate insulating layer 402 is formed with a stacked structure, for example, a first gate insulating layer with a thickness of 50 nm to 200 nm inclusive and a second gate insulating layer with a thickness of 5 nm to 300 nm inclusive are stacked.

[0103] Here, a silicon oxynitride layer is formed as the gate insulating layer 402 by a plasma CVD method.

[0104] As the gate insulating layer 402, a silicon oxynitride layer may be formed with a high density plasma apparatus. Here, the high-density plasma apparatus refers to an apparatus which can realize a plasma density higher than or equal to $1 \times 10^{11}/\text{cm}^3$. For example, plasma is generated by application of a microwave power of 3 kW to 6 kW so that an insulating layer is formed.

[0105] As a source gas, silane (SiH_4), nitrous oxide (N_2O), and a rare gas are introduced into a chamber. Then, high-density plasma is generated at a pressure of 10 Pa to 30 Pa, and the insulating layer is formed over the substrate having an insulating surface, such as a glass substrate. After that, the supply of silane (SiH_4) is stopped, and plasma treatment may be performed on a surface of the insulating layer by introducing nitrous oxide (N_2O) and a rare gas without exposure of the insulating layer to the air. The insulating layer formed through the above process procedure contributes to high reliability of the transistor even it has a small thickness.

[0106] In forming the gate insulating layer 402, the flow ratio of silane (SiH_4) to nitrous oxide (N_2O) which are introduced into the chamber is in the range of 1:10 to 1:200. As a rare gas which is introduced into the chamber, helium, argon, krypton, xenon, or the like can be used. In particular, argon, which is inexpensive, is preferably used.

[0107] Since the insulating layer formed using the high-density plasma apparatus can have a uniform thickness, the insulating layer has excellent ability to cover a step. Further,

with the high-density plasma apparatus, the thickness of a thin insulating film can be controlled precisely.

[0108] The insulating layer formed through the above process procedure is greatly different from the insulating layer formed using a conventional parallel plate plasma CVD apparatus. The etching rate of the insulating film formed through the above process procedure is lower than that of the insulating film formed using the conventional parallel plate plasma CVD apparatus by 10% or more or 20% or more in the case where the etching rates with the same etchant are compared to each other. Thus, it can be said that the insulating layer formed using the high-density plasma apparatus is a dense film.

[0109] The oxide semiconductor which becomes i-type or becomes substantially i-type (an oxide semiconductor which is highly purified) in a later step is extremely sensitive to an interface state or an interface charge; therefore, an interface with the gate insulating layer plays an important role. For that reason, the gate insulating layer that is to be in contact with a highly purified oxide semiconductor needs to have high quality. Therefore, a high-density plasma CVD apparatus with use of microwaves (2.45 GHz) is preferably employed since a dense and high-quality insulating film having high withstand voltage can be formed. When the highly purified oxide semiconductor and the high-quality gate insulating layer are in contact with each other, the interface state density can be reduced and favorable interface characteristics can be obtained. It is important that the gate insulating layer have lower interface state density with an oxide semiconductor and a favorable interface as well as having favorable film quality as a gate insulating layer.

[0110] Then, an oxide semiconductor film 430 is formed to a thickness of 2 nm to 200 nm inclusive over the gate insulating layer 402. Note that before the oxide semiconductor film 430 is formed by a sputtering method, powdery substances (also referred to as particles or dust) which are attached on a surface of the gate insulating layer 402 are preferably removed by reverse sputtering in which an argon gas is introduced and plasma is generated. The reverse sputtering refers to a method in which, without application of a voltage to a target side, an RF power source is used for application of a voltage to the substrate side in an argon atmosphere so that plasma is generated in the vicinity of the substrate to modify a surface of the substrate. Note that instead of an argon atmosphere, a nitrogen atmosphere, a helium atmosphere, an oxygen atmosphere, or the like may be used.

[0111] As the oxide semiconductor film 430, an In—Ga—Zn—O-based oxide semiconductor film, an In—Sn—O-based oxide semiconductor film, an In—Sn—Zn—O-based oxide semiconductor film, an In—Al—Zn—O-based oxide semiconductor film, a Sn—Ga—Zn—O-based oxide semiconductor film, an Al—Ga—Zn—O-based oxide semiconductor film, a Sn—Al—Zn—O-based oxide semiconductor film, an In—Zn—O-based oxide semiconductor film, a Sn—Zn—O-based oxide semiconductor film, an Al—Zn—O-based oxide semiconductor film, an In—O-based oxide semiconductor film, a Sn—O-based oxide semiconductor film, or a Zn—O-based oxide semiconductor film is used. Here, the oxide semiconductor film 430 is formed by a sputtering method with the use of an In—Ga—Zn—O-based metal oxide target. A cross-sectional view at this stage is illustrated in FIG. 11A. Alternatively, the oxide semiconductor film 430 can be formed by a sputtering method in a

rare gas (typically argon) atmosphere, an oxygen atmosphere, or a mixed atmosphere of a rare gas (typically argon) and oxygen. When a sputtering method is employed, deposition may be performed using a target containing SiO_2 at 2 wt % to 10 wt % inclusive to allow SiO_x ($x>0$) which inhibits crystallization to be contained in the oxide semiconductor film 430, so that crystallization can be suppressed in the heat treatment for dehydration or dehydrogenation in a later step.

[0112] Here, film deposition is performed using a metal oxide target containing In, Ga, and Zn ($\text{In}_2\text{O}_3\text{:Ga}_2\text{O}_3\text{:ZnO}=1:1:1$ [mol], and $\text{In:Ga:Zn}=1:1:0.5$ [atom]). The deposition condition is set as follows: the distance between the substrate and the target is 100 mm; the pressure is 0.2 Pa; the direct current (DC) power is 0.5 kW; and the atmosphere is a mixed atmosphere of argon and oxygen (argon:oxygen=30 sccm:20 sccm and the oxygen flow rate is 40%). Note that a pulse direct current (DC) power source is preferable because powder substances generated in deposition can be reduced and the film thickness can be made uniform. The In—Ga—Zn—O-based film is formed to a thickness of 2 nm to 200 nm inclusive. Here, as the oxide semiconductor film, a 20-nm-thick In—Ga—Zn—O-based film is formed by a sputtering method with the use of an In—Ga—Zn—O-based metal oxide target. As the metal oxide target containing In, Ga, and Zn, a metal oxide target having a composition ratio of $\text{In:Ga:Zn}=1:1:1$ [atom] or a target having a composition ratio of $\text{In:Ga:Zn}=1:1:2$ [atom] can also be used.

[0113] Examples of a sputtering method include an RF sputtering method in which a high-frequency power source is used as a sputtering power source, a DC sputtering method, and a pulsed DC sputtering method in which a bias is applied in a pulsed manner. An RF sputtering method is mainly used in the case where an insulating film is formed, and a DC sputtering method is mainly used in the case where a metal film is formed.

[0114] There is also a multi-source sputtering apparatus in which a plurality of targets of different materials can be set. With the multi-source sputtering apparatus, films of different materials can be formed to be stacked in the same chamber, or a film of plural kinds of materials can be formed by electric discharge at the same time in the same chamber.

[0115] In addition, there are a sputtering apparatus provided with a magnet system inside the chamber and used for a magnetron sputtering method, and a sputtering apparatus for an ECR sputtering in which plasma generated in the presence of microwaves is applied instead of glow discharge.

[0116] Furthermore, as a deposition method by sputtering, there are also a reactive sputtering method in which a target substance and a sputtering gas are chemically reacted with each other during deposition to form a thin film of a compound thereof, and a bias sputtering in which a voltage is also applied to a substrate during deposition.

[0117] Then, the oxide semiconductor film 430 is processed into an island-shaped oxide semiconductor layer in a second photolithography step. Note that a resist mask used in the process may be formed by an inkjet method. Formation of the resist mask by an inkjet method needs no photomask; thus, manufacturing cost can be reduced.

[0118] Next, dehydration or dehydrogenation of the oxide semiconductor layer is performed. The temperature of first heat treatment for dehydration or dehydrogenation is higher than or equal to 400° C. and lower than or equal to 750° C.,

preferably higher than or equal to 400° C. and lower than the strain point of the substrate. Here, the substrate is introduced into an electric furnace which is one of heat treatment apparatuses, heat treatment is performed on the oxide semiconductor layer in a nitrogen atmosphere at 450° C. for one hour, and then, the oxide semiconductor layer is cooled without exposure to the air in order to avoid entry of water and hydrogen thereto; thus, an oxide semiconductor layer 431 is obtained (see FIG. 11B).

[0119] Note that a heat treatment apparatus is not limited to an electrical furnace, and may include a device for heating an object to be processed by heat conduction or heat radiation from a heating element such as a resistance heating element. For example, a rapid thermal anneal (RTA) apparatus such as a gas rapid thermal anneal (GRTA) apparatus or a lamp rapid thermal anneal (LRTA) apparatus can be used. An LRTA apparatus is an apparatus for heating an object to be processed by radiation of light (an electromagnetic wave) emitted from a lamp such as a halogen lamp, a metal halide lamp, a xenon arc lamp, a carbon arc lamp, a high pressure sodium lamp, or a high pressure mercury lamp. A GRTA apparatus is an apparatus for heat treatment using a high-temperature gas. As the gas, an inert gas which does not react with an object to be processed by heat treatment, such as nitrogen or a rare gas such as argon is used.

[0120] For example, as the first heat treatment, GRTA by which the substrate is moved into an inert gas heated to a high temperature as high as 650° C. to 700° C., heated for several minutes, and moved out of the inert gas heated to the high temperature may be performed. With GRTA, high-temperature heat treatment for a short period can be achieved.

[0121] Note that in the first heat treatment, it is preferable that water, hydrogen, and the like be not contained in the atmosphere of nitrogen or a rare gas such as helium, neon, or argon. It is preferable that the purity of nitrogen or the rare gas such as helium, neon, or argon which is introduced into a heat treatment apparatus be set to be 6N (99.9999%) or higher, preferably 7N (99.99999%) or higher (that is, the impurity concentration is 1 ppm or lower, preferably 0.1 ppm or lower).

[0122] The first heat treatment of the oxide semiconductor layer can be performed on the oxide semiconductor film 430 before being processed into the island-shaped oxide semiconductor layer. In that case, after the first heat treatment, the substrate is extracted from the heat treatment apparatus, and then the second photolithography step is performed.

[0123] The heat treatment for dehydration or dehydrogenation of the oxide semiconductor layer may be performed at any of the following timings: after the oxide semiconductor layer is formed; after a source electrode layer and a drain electrode layer are formed over the oxide semiconductor layer; and after a protective insulating film is formed over the source electrode layer and the drain electrode layer.

[0124] In the case where an opening portion is formed in the gate insulating layer 402, the step of forming the opening portion may be performed either before or after the oxide semiconductor film 430 is subjected to dehydration or dehydrogenation treatment.

[0125] Note that the etching of the oxide semiconductor film 430 is not limited to wet etching, and dry etching may also be used.

[0126] As the etching gas for dry etching, a gas including chlorine (chlorine-based gas such as chlorine (Cl_2), boron trichloride (BCl_3), silicon tetrachloride (SiCl_4), or carbon tetrachloride (CCl_4)) is preferably used.

[0127] Alternatively, a gas containing fluorine (fluorine-based gas such as carbon tetrafluoride (CF_4), sulfur hexafluoride (SF_6), nitrogen trifluoride (NF_3), or trifluoromethane (CHF_3)); hydrogen bromide (HBr); oxygen (O_2); any of these gases to which a rare gas such as helium (He) or argon (Ar) is added; or the like can be used.

[0128] As the dry etching method, a parallel plate reactive ion etching (RIE) method or an inductively coupled plasma (ICP) etching method can be used. In order to etch the films into desired shapes, the etching conditions (the amount of electric power applied to a coil-shaped electrode, the amount of electric power applied to an electrode on a substrate side, the temperature of the electrode on the substrate side, and the like) are adjusted as appropriate.

[0129] As an etchant used for wet etching, a mixed solution of phosphoric acid, acetic acid, and nitric acid, or the like can be used. In addition, ITO07N (produced by KANTO CHEMICAL CO., INC.) may also be used.

[0130] The etchant after the wet etching is removed together with the etched materials by cleaning. The waste liquid including the etchant and the material etched off may be purified and the material may be reused. When a material such as indium included in the oxide semiconductor layer is collected from the waste liquid after the etching and reused, the resources can be efficiently used and the cost can be reduced.

[0131] The etching conditions (such as an etchant, etching time, and temperature) are appropriately adjusted depending on the material so that the material can be etched into a desired shape.

[0132] Next, a metal conductive film is formed over the gate insulating layer **402** and the oxide semiconductor layer **431**. The metal conductive film may be formed by a sputtering method or a vacuum evaporation method. As a material of the metal conductive film, an element selected from aluminum (Al), chromium (Cr), copper (Cu), tantalum (Ta), titanium (Ti), molybdenum (Mo), and tungsten (W), an alloy containing any of these elements as a component, an alloy containing any of these elements in combination, or the like can be given. Alternatively, one or more materials selected from manganese (Mn), magnesium (Mg), zirconium (Zr), beryllium (Be), and yttrium (Y) may be used. Further, the metal conductive film may have a single-layer structure or a stacked structure of two or more layers. For example, the following structures can be given: a single-layer structure of an aluminum film including silicon, a single-layer structure of a copper film, or a film including copper as a main component, a two-layer structure in which a titanium film is stacked over an aluminum film, a two-layer structure in which a copper film is stacked over a tantalum nitride film or a copper nitride film, and a three-layer structure in which an aluminum film is stacked over a titanium film and another titanium film is stacked over the aluminum film. Alternatively, a film, an alloy film, or a nitride film which contains aluminum (Al) and one or more elements selected from titanium (Ti), tantalum (Ta), tungsten (W), molybdenum (Mo), chromium (Cr), neodymium (Nd), and scandium (Sc) may be used.

[0133] When heat treatment is performed after the formation of the metal conductive film, it is preferable that the metal conductive film have heat resistance high enough to withstand the heat treatment.

[0134] A resist mask is formed over the metal conductive film by a third photolithography step and etching is selectively performed, so that a source layer **415a** and a drain layer **415b** are formed. Then, the resist mask is removed (see FIG. **11C**). Alternatively, the resist mask used in the process may be formed by an inkjet method. Formation of the resist mask by an inkjet method needs no photomask; thus, manufacturing cost can be reduced.

[0135] Note that materials and etching conditions are adjusted as appropriate so that the oxide semiconductor layer **431** is not removed by etching of the metal conductive film.

[0136] Here, a titanium film is used as the metal conductive film, an In—Ga—Zn—O based oxide is used for the oxide semiconductor layer **431**, and an ammonia hydrogen peroxide mixture (a mixed solution of ammonia, water, and a hydrogen peroxide solution) is used.

[0137] Note that, in the third photolithography step, part of the oxide semiconductor layer **431** may be etched, whereby an oxide semiconductor layer having a groove (a depressed portion) is formed in some cases.

[0138] In order to reduce the number of photomasks used in a photolithography step and reduce the number of photolithography steps, an etching step may be performed with the use of a multi-tone mask which is a light-exposure mask through which light is transmitted to have a plurality of intensities. Since a resist mask formed using a multi-tone mask has a plurality of thicknesses and can be further changed in shape by performing ashing, the resist mask can be used in a plurality of etching steps to provide different patterns. Therefore, a resist mask corresponding to at least two kinds or more of different patterns can be formed by one multi-tone mask. Thus, the number of light-exposure masks can be reduced and the number of corresponding photolithography steps can be also reduced, whereby simplification of a process can be realized.

[0139] Next, plasma treatment using a gas such as nitrous oxide (N_2O), nitrogen (N_2), or argon (Ar) is performed. By this plasma treatment, absorbed water and the like attached to an exposed surface of the oxide semiconductor layer are removed. Plasma treatment may be performed using a mixed gas of oxygen and argon as well.

[0140] After the plasma treatment, an oxide insulating layer **416** which serves as a protective insulating film and is in contact with part of the oxide semiconductor layer is formed without exposure of the oxide semiconductor layer to the air.

[0141] The oxide insulating layer **416**, which has a thickness of at least 1 nm, can be formed as appropriate using a sputtering method or the like, that is a method with which impurities such as water and hydrogen are not mixed into the oxide insulating layer **416**. When hydrogen is contained in the oxide insulating layer **416**, entry of the hydrogen to the oxide semiconductor layer is caused, whereby a back channel of the oxide semiconductor layer **431** comes to have a lower resistance (to be n-type) and thus a parasitic channel might be formed. Therefore, it is important that a deposition method in which hydrogen is not used is employed in order to form the oxide insulating layer **416** containing as little hydrogen as possible.

[0142] Here, a 200-nm-thick silicon oxide film is deposited as the oxide insulating layer **416** by a sputtering method. The substrate temperature in deposition may be from room temperature to 300° C. inclusive and here, is 100° C. Formation of a silicon oxide film by a sputtering method can be performed in a rare gas (typically argon) atmosphere, an oxygen atmosphere, or an atmosphere of a rare gas (typically argon) and oxygen. As a target, a silicon oxide target or a silicon target can be used. For example, the silicon oxide film can be formed using a silicon target by a sputtering method in an atmosphere of oxygen and nitrogen.

[0143] Next, second heat treatment is performed in an inert gas atmosphere or an oxygen gas atmosphere (preferably at higher than or equal to 200° C. and lower than or equal to 400° C., e.g., higher than or equal to 250° C. and lower than or equal to 350° C.). For example, the second heat treatment is performed in a nitrogen atmosphere at 250° C. for one hour. Through the second heat treatment, part of the oxide semiconductor layer (a channel formation region) is heated while being in contact with the oxide insulating layer **416**. Thus, oxygen is supplied to the part of the oxide semiconductor layer (the channel formation region). Furthermore, hydrogen is transported from the oxide semiconductor layer to the oxide insulating layer **416** by this heat treatment.

[0144] Through the above steps, the oxide semiconductor layer is subjected to the heat treatment for dehydration or dehydrogenation, and then, the part of the oxide semiconductor layer (the channel formation region) is selectively made to be in an oxygen excess state. As a result, a channel formation region **413** overlapping with the gate layer **411** becomes i-type, and a source region **414a** overlapping with the source layer **415a** and a drain region **414b** overlapping with the drain layer **415b** are formed in a self-aligned manner. Through the above-described process, the transistor **410** is formed.

[0145] Under severe conditions (e.g., at 85° C. and 2×10^6 V/cm for 12 hours) such as those in a gate-bias thermal stress test (BT test), if an impurity (such as hydrogen) exists in an oxide semiconductor, the bond between the impurity and the main component of the oxide semiconductor is cleaved by a high electric field (B: bias) and high temperature (T: temperature), so that a generated dangling bond induces a drift in the threshold voltage (V_{th}). On the other hand, by removing impurities, especially hydrogen and water, in an oxide semiconductor as much as possible and using the high-density plasma CVD apparatus to form a dense and high-quality insulating film with high withstand voltage and good interface characteristics between the insulating film and an oxide semiconductor as described above, a transistor which is stable even under severe external environments can be obtained.

[0146] An additional heat treatment may be performed at higher than or equal to 100° C. lower than or equal to 200° C. for one hour to 30 hours in the air. Here, the heat treatment is performed at 150° C. for 10 hours. This heat treatment may be performed at a fixed heating temperature. Alternatively, the following change in the heating temperature may be conducted plural times repeatedly: the heating temperature is increased from room temperature to a temperature of 100° C. to 200° C. inclusive and then decreased to room temperature. Further, this heat treatment may be performed before formation of the oxide insulating layer **416**

under a reduced pressure. Under the reduced pressure, the heat treatment time can be shortened.

[0147] By the formation of the drain region **414b** in part of the oxide semiconductor layer, which overlaps with the drain layer **415b**, reliability of the transistor can be improved. Specifically, by the formation of the drain region **414b**, a structure in which conductivity can be varied from the drain layer **415b** to the channel formation region **413** through the drain region **414b** can be obtained.

[0148] Further the source region or the drain region in the oxide semiconductor layer is formed in the entire thickness direction in the case where the thickness of the oxide semiconductor layer is 15 nm or less. In the case where the thickness of the oxide semiconductor layer is 30 nm to 50 nm inclusive, in part of the oxide semiconductor layer, that is, in a region in the oxide semiconductor layer, which is in contact with the source layer or the drain layer, and the vicinity thereof, resistance is reduced and the source region or the drain region is formed, while a region in the oxide semiconductor layer, which is close to the gate insulating layer, can be made to be i-type.

[0149] A protective insulating layer may be further formed over the oxide insulating layer **416**. For example, a silicon nitride film is formed by an RF sputtering method. Since an RF sputtering method has high productivity, it is preferably used as a deposition method of the protective insulating layer. As the protective insulating layer, an inorganic insulating film which does not include impurities such as moisture, a hydrogen ion, and OH^- and blocks entry of these species from the outside is used; for example, a silicon nitride film, an aluminum nitride film, a silicon nitride oxide film, an aluminum oxynitride film, or the like is used. Here, as the protective insulating layer, a protective insulating layer **403** is formed using a silicon nitride film (see FIG. 11D).

(Variety of Electronic Device on which Liquid Crystal Display Device is Mounted)

[0150] Examples of an electronic device on which the liquid crystal display device disclosed in this specification is mounted are described with reference to FIGS. 12A to 12F.

[0151] FIG. 12A illustrates a laptop personal computer, which includes a main body **2201**, a housing **2202**, a display portion **2203**, a keyboard **2204**, and the like.

[0152] FIG. 12B illustrates a personal digital assistant (PDA), which includes a main body **2211** provided with a display portion **2213**, an external interface **2215**, operation buttons **2214**, and the like. A stylus **2212** for operation is included as an accessory.

[0153] FIG. 12C illustrates an e-book reader **2220** as an example of an electronic paper. The e-book reader **2220** includes two housings, a housing **2221** and a housing **2223**. The housings **2221** and **2223** are bound with each other by an axis portion **2237**, along which the e-book reader **2220** can be opened and closed. With such a structure, the e-book reader **2220** can be used as a paper book.

[0154] A display portion **2225** is incorporated in the housing **2221**, and a display portion **2227** is incorporated in the housing **2223**. The display portion **2225** and the display portion **2227** may display one image or different images. In the structure where the display portions display different images from each other, for example, the right display portion (the display portion **2225** in FIG. 12C) can display text and the left display portion (the display portion **2227** in FIG. 12C) can display images.

[0155] Further, in FIG. 12C, the housing 2221 is provided with an operation portion and the like. For example, the housing 2221 is provided with a power supply switch 2231, operation keys 2233, a speaker 2235, and the like. With the operation keys 2233, pages can be turned. Note that a keyboard, a pointing device, or the like may also be provided on the surface of the housing, on which the display portion is provided. Furthermore, an external connection terminal (an earphone terminal, a USB terminal, a terminal that can be connected to various cables such as an AC adapter and a USB cable, or the like), a recording medium insertion portion, and the like may be provided on the back surface or the side surface of the housing. Further, the e-book reader 2220 may have a function of an electronic dictionary.

[0156] The e-book reader 2220 may be configured to transmit and receive data wirelessly. Through wireless communication, desired book data or the like can be purchased and downloaded from an electronic book server.

[0157] Note that electronic paper can be applied to devices in a variety of fields as long as they display information. For example, electronic paper can be used for posters, advertisement in vehicles such as trains, display in a variety of cards such as credit cards, and the like in addition to e-book readers.

[0158] FIG. 12D illustrates a mobile phone. The mobile phone includes two housings, a housing 2240 and a housing 2241. The housing 2241 is provided with a display panel 2242, a speaker 2243, a microphone 2244, a pointing device 2246, a camera lens 2247, an external connection terminal 2248, and the like. The housing 2240 is provided with a solar cell 2249 which charges the mobile phone, an external memory slot 2250, and the like. An antenna is incorporated in the housing 2241.

[0159] The display panel 2242 has a touch panel function. A plurality of operation keys 2245 which is displayed as images is illustrated by dashed lines in FIG. 12D. Note that the mobile phone includes a booster circuit for increasing a voltage output from the solar cell 2249 to a voltage needed for each circuit. Moreover, the mobile phone can include a contactless IC chip, a small recording device, or the like in addition to the above structure.

[0160] The display orientation of the display panel 2242 changes as appropriate in accordance with the application mode. Further, the camera lens 2247 is provided on the same surface as the display panel 2242, and thus it can be used as a video phone. The speaker 2243 and the microphone 2244 can be used for videophone calls, recording, and playing sound, etc. as well as voice calls. Moreover, the housings 2240 and 2241 in a state where they are developed as illustrated in FIG. 12D can be slid so that one is lapped over the other; therefore, the size of the mobile phone can be reduced, which makes the mobile phone suitable for being carried.

[0161] The external connection terminal 2248 can be connected to a variety of cables such as an AC adapter or a USB cable, which enables charging of the mobile phone and data communication. Moreover, a larger amount of data can be saved and moved by inserting a recording medium to the external memory slot 2250. Further, in addition to the above functions, an infrared communication function, a television reception function, or the like may be provided.

[0162] FIG. 12E illustrates a digital camera, which includes a main body 2261, a display portion (A) 2267, an

eyepiece 2263, an operation switch 2264, a display portion (B) 2265, a battery 2266, and the like.

[0163] FIG. 12F illustrates a television set 2270, which includes a display portion 2273 incorporated in a housing 2271. The display portion 2273 can display images. Here, the housing 2271 is supported by a stand 2275.

[0164] The television set 2270 can be operated by an operation switch of the housing 2271 or a separate remote controller 2280. Channels and volume can be controlled with operation keys 2279 of the remote controller 2280 so that an image displayed on the display portion 2273 can be controlled. Moreover, the remote controller 2280 may have a display portion 2277 in which the information outgoing from the remote controller 2280 is displayed.

[0165] Note that the television set 2270 is preferably provided with a receiver, a modem, and the like. A general television broadcast can be received with the receiver. Moreover, when the television set is connected to a communication network with or without wires via the modem, one-way (from a sender to a receiver) or two-way (between a sender and a receiver or between receivers) data communication can be performed.

[0166] This application is based on Japanese Patent Application serial no. 2010-042584 filed with Japan Patent Office on Feb. 26, 2010, the entire contents of which are hereby incorporated by reference.

1. A display device comprising:

a first scan line over a substrate;

a second scan line adjacent to the first scan line;

a first insulating layer over the first scan line and the second scan line;

an oxide semiconductor layer over the first insulating layer, wherein the oxide semiconductor layer comprises a channel formation region overlapping with the first scan line;

a signal line over and electrically connected to the oxide semiconductor layer;

an inorganic insulating layer over the signal line; and

a pixel electrode electrically connected to the oxide semiconductor layer,

wherein the signal line intersects the first scan line and the second scan line,

wherein no conductive layer is provided between the signal line and the substrate in a region between the first scan line and the second scan line,

wherein the display device has a resolution of 60 ppi or more,

wherein the display device is a liquid crystal display device, and

wherein frequency of rewriting a data signal in a pixel is changeable, the pixel comprising the pixel electrode.

2. The display device according to claim 1, wherein the oxide semiconductor layer comprises indium, gallium, and zinc.

3. The display device according to claim 2, wherein the frequency of rewriting the data signal is able to be higher than 60 Hz.

4. The display device according to claim 1, wherein a size of the display device is 40 inches or more.

5. The display device according to claim 1, wherein off-state current of a transistor comprising the oxide semiconductor layer is smaller than or equal to 1×10^{-12} A.

6. The display device according to claim 1, wherein the pixel comprises no capacitor.

7. The display device according to claim 1, wherein the display device is driven at a double-frame rate or a higher rate than the double-frame rate.

8. The display device according to claim 1, wherein a vertical electric field is applied to a liquid crystal material of the display device.

9. The display device according to claim 1, wherein a gap between the signal line and the pixel electrode in a top view is smaller than a gap between the first scan line and the pixel electrode in a top view.

10. The display device according to claim 9, wherein the first scan line and the second scan line each comprise no metal layer of aluminum.

11. The display device according to claim 10, wherein the first scan line and the second scan line each comprise copper.

12. A display device comprising:

a first scan line over a substrate;

a second scan line adjacent to the first scan line;

a first insulating layer over the first scan line and the second scan line;

an oxide semiconductor layer over the first insulating layer, wherein the oxide semiconductor layer comprises a channel formation region overlapping with the first scan line;

a signal line over and electrically connected to the oxide semiconductor layer;

a metal layer over the oxide semiconductor layer;

an inorganic insulating layer over the signal line and the metal layer, wherein the inorganic insulating layer is in contact with a top surface of the oxide semiconductor layer and comprises silicon and oxygen;

an organic insulating layer over the inorganic insulating layer; and

a pixel electrode over the inorganic insulating layer, the pixel electrode being electrically connected to the oxide semiconductor layer through the metal layer,

wherein the signal line intersects the first scan line and the second scan line,

wherein no conductive layer is provided between the signal line and the substrate in a region between the first scan line and the second scan line,

wherein the display device has a resolution of 60 ppi or more,

wherein the display device is a liquid crystal display device,

wherein frequency of rewriting a data signal in a pixel is able to be higher than 60 Hz, the pixel comprising the pixel electrode,

wherein the first scan line has a stacked structure comprising a first layer comprising titanium, tantalum or molybdenum and a second layer comprising copper or tungsten,

wherein the first insulating layer has a stacked structure comprising a third layer comprising silicon and nitrogen, and a fourth layer comprising silicon and oxygen over the third layer,

wherein the metal layer has a stacked structure comprising a fifth layer comprising aluminum or copper and a sixth layer comprising titanium or molybdenum, and wherein the oxide semiconductor layer comprises indium, gallium, and zinc.

13. The display device according to claim 12, wherein a size of the display device is 40 inches or more.

14. The display device according to claim 12, wherein off-state current of a transistor comprising the oxide semiconductor layer is smaller than or equal to 1×10^{-12} A.

15. The display device according to claim 12, wherein the pixel comprises no capacitor.

16. The display device according to claim 12, wherein the display device is driven at a double-frame rate or a higher rate than the double-frame rate.

17. The display device according to claim 12, wherein a vertical electric field is applied to a liquid crystal material of the display device.

18. The display device according to claim 12, wherein a gap between the signal line and the pixel electrode in a top view is smaller than a gap between the first scan line and the pixel electrode in a top view.

19. The display device according to claim 18, wherein the first scan line and the second scan line each comprise no metal layer of aluminum.

20. The display device according to claim 19, wherein the first scan line and the second scan line each comprise copper.

21. A display device comprising:

a scan line;

an oxide semiconductor layer over the scan line, the oxide semiconductor layer overlapping with the scan line;

a signal line over and electrically connected to the oxide semiconductor layer;

an inorganic insulating layer over the signal line; and

a pixel electrode electrically connected to the oxide semiconductor layer,

wherein the display device has a resolution of 60 ppi or more,

wherein the display device is a liquid crystal display device,

wherein frequency of rewriting a data signal in a pixel is changeable and is able to be higher than 60 Hz, the pixel comprising the pixel electrode,

wherein the oxide semiconductor layer comprises indium, gallium, and zinc, and

wherein off-state current of a transistor comprising the oxide semiconductor layer is smaller than or equal to 1×10^{-12} A.

22. The display device according to claim 21, wherein the pixel electrode does not overlap with the signal line.

* * * * *

