



US 20190004367A1

(19) **United States**(12) **Patent Application Publication**  
**KOIKE et al.**(10) **Pub. No.: US 2019/0004367 A1**(43) **Pub. Date: Jan. 3, 2019**(54) **METHOD FOR IMPROVING VISIBILITY OF LIQUID CRYSTAL DISPLAY DEVICE, AND LIQUID CRYSTAL DISPLAY DEVICE USING THE SAME**(71) Applicants: **KEIO UNIVERSITY**, Tokyo (JP);  
**TOYOBO CO., LTD.**, Osaka (JP)(72) Inventors: **Yasuhiro KOIKE**, Yokohama (JP);  
**Akihiro TAGAYA**, Yokohama (JP)(73) Assignees: **KEIO UNIVERSITY**, Tokyo (JP);  
**TOYOBO CO., LTD.**, Osaka (JP)(21) Appl. No.: **16/102,345**(22) Filed: **Aug. 13, 2018****Related U.S. Application Data**

(63) Continuation of application No. 13/509,211, filed on May 10, 2012, now Pat. No. 10,054,816, filed as application No. PCT/JP2010/057956 on May 11, 2010.

(30) **Foreign Application Priority Data**

Nov. 12, 2009 (JP) ..... 2009-259054

**Publication Classification**(51) **Int. Cl.****G02F 1/1335** (2006.01)**G02F 1/13363** (2006.01)**G02B 5/30** (2006.01)(52) **U.S. Cl.**CPC .... **G02F 1/133528** (2013.01); **G02F 1/13363** (2013.01); **G02F 2202/40** (2013.01); **G02F 1/133603** (2013.01); **G02B 5/3083** (2013.01)

(57)

**ABSTRACT**

The present invention provides a liquid crystal display method capable of, when a screen thereof is observed through a polarizer such as sunglasses, ensuring an excellent visibility regardless of the angle of observation. In a liquid crystal display device at least having a backlight light source, a liquid crystal cell, and a polarizer disposed on a viewing side of the liquid crystal cell, a white light-emitting diode is used as the backlight light source; and a polymer film having a retardation of from 3,000 nm to 30,000 nm is used so as to be disposed on the viewing side of the polarizer so that an angle between an absorption axis of the polarizer and a slow axis of the polymer film becomes about 45 degrees.

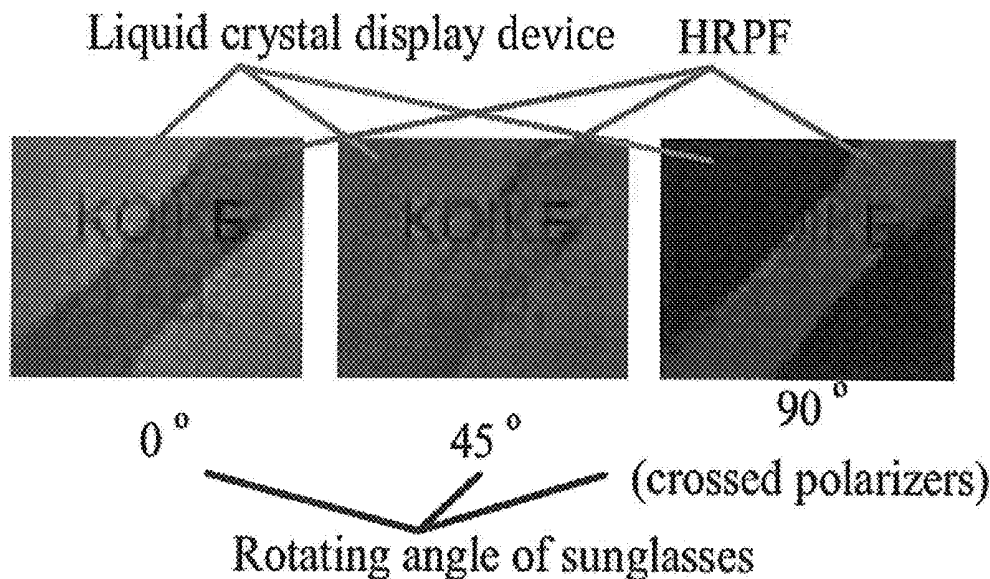


FIG.1



FIG.2

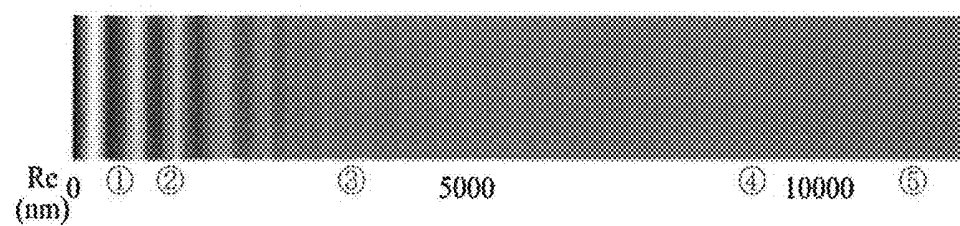


FIG.3

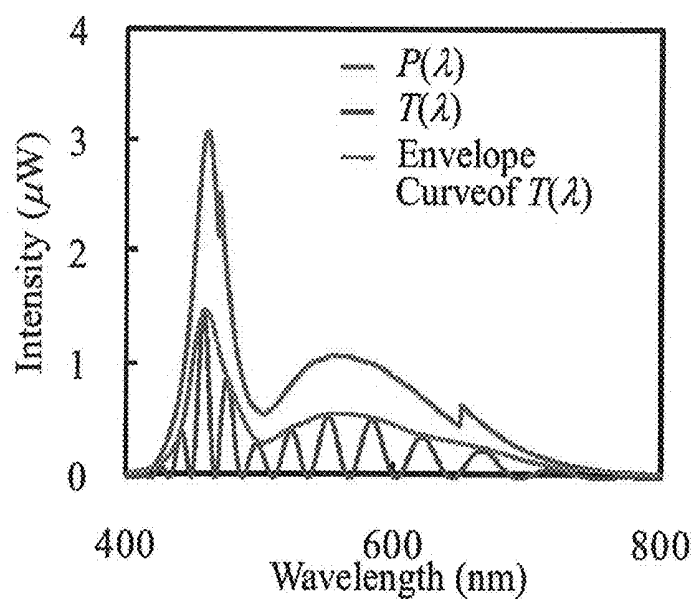


FIG.4

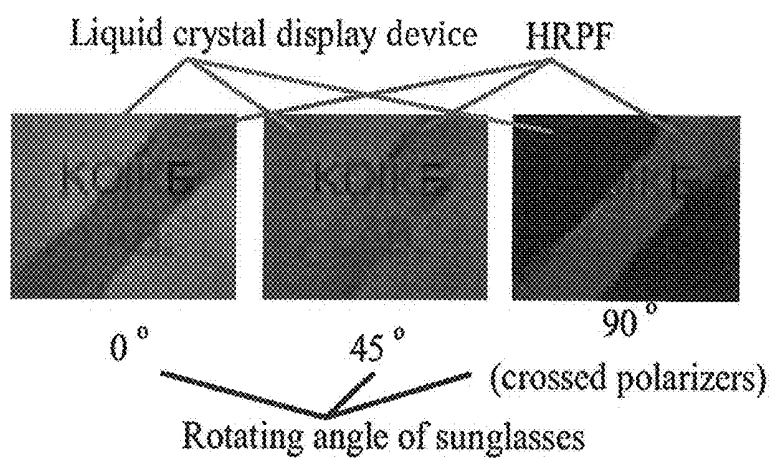


FIG. 5

prior art


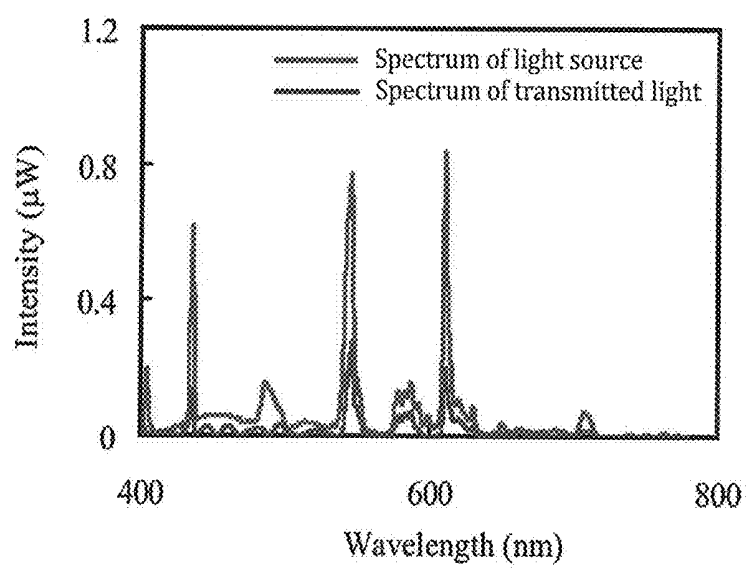


FIG.6  
prior art

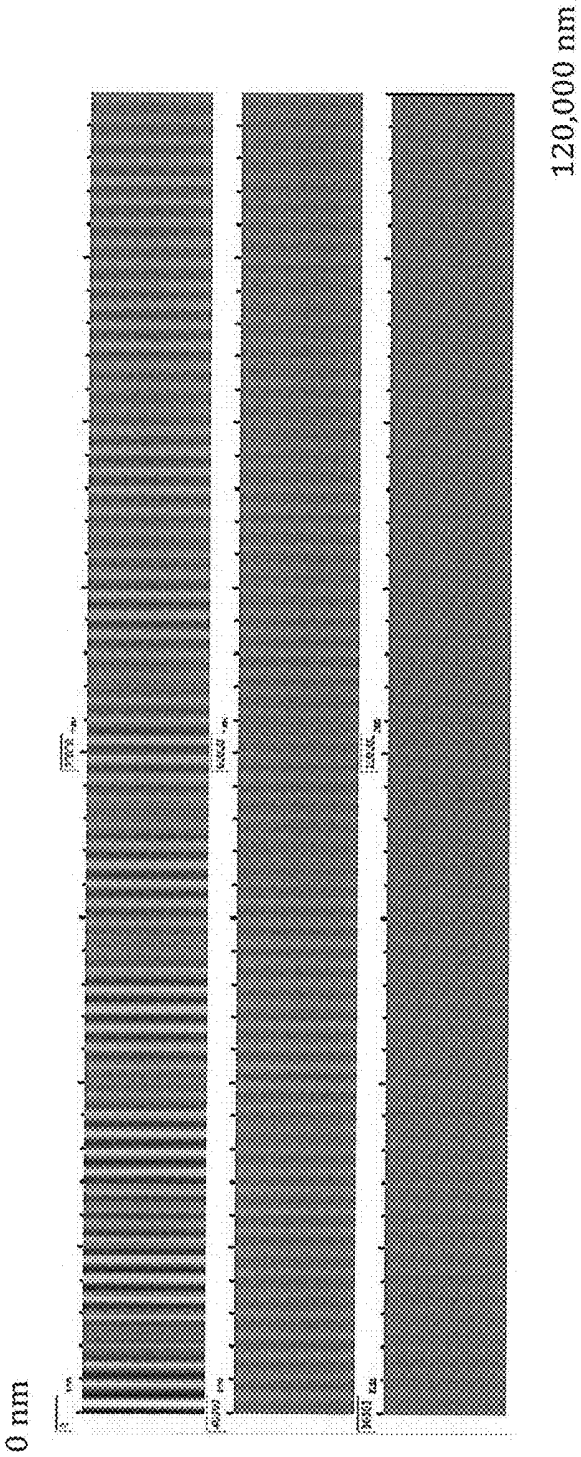

Interference color chart calculated using emission spectrum of  
cold-cathode tubes (retardation = 0 to 120,000 nm)

**METHOD FOR IMPROVING VISIBILITY OF  
LIQUID CRYSTAL DISPLAY DEVICE, AND  
LIQUID CRYSTAL DISPLAY DEVICE USING  
THE SAME**

**CROSS-REFERENCE TO RELATED  
APPLICATIONS**

[0001] This patent application is a continuation of co-pending U.S. patent application Ser. No. 13/509,211, filed on May 10, 2012, which is the U.S. national phase of International Patent Application No. PCT/JP2010/057956, filed May 11, 2010, which claims the benefit of Japanese Patent Application No. 2009-259054, filed Nov. 12, 2009, which are incorporated by reference in their entireties.

**TECHNICAL FIELD**

[0002] The present invention relates to a method of improving the visibility of a liquid crystal display device, the method capable of, when the screen of the liquid crystal display device is observed through a polarizer such as sunglasses, ensuring excellent visibility regardless of the angle of observation, and the present invention also relates to a liquid crystal display device using the same.

**BACKGROUND ART**

[0003] In recent years, liquid crystal display devices (LCDs) have expanded applications, and LCDs are applied even to various displays used outdoors. The applications of LCDs have been expanded, for example, to instrument panels of automobiles, ships, and airplanes; mobile devices such as automobile-mounted navigation systems, digital cameras, mobile phones, and personal computers; and digital signages used in buildings, supermarkets, and other facilities.

[0004] An LCD performs display by causing a liquid crystal panel, in which a liquid crystal cell is sandwiched between two polarizers, to transmit or block the light from outside or the light generated by a light source such as frontlight or backlight. As the backlight light source, it is ordinary to use fluorescent tubes such as cold-cathode tubes or hot-cathode tubes. The spectral distribution of fluorescent tubes such as cold-cathode tubes or hot-cathode tubes shows an emission spectrum having two or more peaks. The combination of colors in such a discontinuous emission spectrum provides a white light source. Meanwhile, the applications of light-emitting diodes, which consume low power, have been studied in view of energy conservation. In particular, white light-emitting diodes (white LEDs) have a more continuous and wider emission spectrum than that of fluorescent tubes, and also have an excellent luminous efficiency.

[0005] Incidentally, there is a case where, in an environment such as outdoors in the strong sunlight, an observer views an LCD while wearing sunglasses having polarization properties to eliminate the glare. In this case, the observer views, through polarizers, linearly polarized light emitted from the LCD. Therefore, the screen cannot be viewed depending on the angle between the absorption axis of a polarizer included in the LCD and the absorption axis of a polarizer such as sunglasses.

[0006] To solve the above problem, for example, Patent Document 1 proposes a method for performing depolarization by layering a retardation (one-quarter wavelength) film

obliquely on the surface of an LCD to convert linearly polarized light into circularly polarized light.

[0007] In addition, Patent Document 2 proposes the use of a highly birefringent material, such as calcite or synthetic quartz, as a depolarizing device to solve the above problem. This solution makes use of the following properties: If a highly birefringent material such as calcite or synthetic quartz is inserted between crossed polarizers (i.e., crossed-nicols), the light transmitted through the highly birefringent material having a great retardation (e.g., a retardation of higher than 100,000 nm) becomes light having various wavelengths. Thus, the resulting light interferes with itself due to the various wavelengths and presents white light.

**PRIOR ART DOCUMENTS**

[0008] Patent Document 1: Japanese Patent Laid-open Publication No. 2005-352068

[0009] Patent Document 2: Japanese Patent Laid-open Publication No. Hei 10-10522

**DISCLOSURE OF THE INVENTION**

**Problems to be Solved by the Invention**

[0010] However, even the retardation (one-quarter wavelength) film merely achieves a phase difference of one-quarter wavelength of light only in a specific wavelength region, and there cannot have been obtained a material for achieving a phase difference of one-quarter wavelength uniformly over the wide visible-light region. Thus, the method of Patent Document 1 cannot provide the effect of sufficiently improving a visibility.

[0011] In addition, the method of Patent Document 2 requires the use of a highly birefringent material formed of a special material such as calcite or synthetic quartz. This complicates the structure of a liquid crystal display device, and therefore, this makes it difficult to employ a structure with a high degree of freedom for increasing the screen size or reducing the weight. Thus, this method has little practicality.

[0012] The present invention has been completed to solve the above problem, and it is an object of the present invention to provide a liquid crystal display device capable of, when the screen thereof is observed through a polarizer such as sunglasses, ensuring an excellent visibility to a high degree regardless of the angle of observation.

**Means for Solving the Problems**

[0013] The present inventors have intensively studied to attain the above object, and as a result, they have found that the combined use of a specific backlight light source and a polymer film having a specific retardation makes it possible to solve the above problems, thereby leading to the completion of the present invention.

[0014] That is, the present invention includes the following inventions set forth in (i) to (vi) below:

[0015] (i) A method for improving a visibility of a liquid crystal display device at least comprising a backlight light source, a liquid crystal cell, and a polarizer disposed on a viewing side of the liquid crystal cell, which method comprises:

[0016] using a white light-emitting diode as the backlight light source; and

[0017] using a polymer film having a retardation of from 3,000 to 30,000 nm, which polymer film is disposed on the viewing side of the polarizer so that an angle between an absorption axis of the polarizer and a slow axis of the polymer film becomes about 45 degrees.

[0018] (ii) The method for improving a visibility of a liquid crystal display device as described above, wherein the white light-emitting diode is a light-emitting device comprising a combination of an yttrium-aluminum-garnet yellow phosphor with a blue light-emitting diode using a compound semiconductor.

[0019] (iii) The method for improving a visibility of a liquid crystal display device as described above, wherein the polymer film is an oriented polycarbonate film.

[0020] (iv) The method for improving a visibility of a liquid crystal display device as described above, wherein the polymer film is an oriented polyester film.

[0021] (v) A liquid crystal display device using the method for improving a visibility as described above.

[0022] (vi) A polymer film to be used in the method for improving a visibility as described above.

#### Effects of the Invention

[0023] The method of the present invention efficiently depolarizes linearly polarized light in a white light-emitting diode light source having a continuous and wide emission spectrum, and provides a spectrum approximated to that of the light source. This makes it possible that even when the screen of a liquid crystal display is observed through a polarizer such as sunglasses, an excellent visibility is ensured regardless of the angle of observation.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0024] The patent or application file contains at least one drawing executed in color. Copies of this patent or patent application publication with color drawing(s) will be provided by the Office upon request and payment of the necessary fee.

[0025] FIG. 1 shows the interference colors of a polycarbonate film, which were observed using a white LED light source.

[0026] FIG. 2 shows the interference color chart for the polycarbonate film, which was calculated using the emission spectrum of the white LED light source.

[0027] FIG. 3 shows the calculation results of the emission spectrum of the white LED light source, and the spectrum of the light transmitted through crossed nicols when  $\text{Re}=8,000$  nm.

[0028] FIG. 4 shows the images obtained when the screen of a liquid crystal display obtained by the method of the present invention was observed through sunglasses.

[0029] FIG. 5 shows the calculation results of the emission spectrum of cold-cathode tubes of the prior art, and the spectrum of the light transmitted through the crossed nicols when  $\text{Re}=8,000$  nm.

[0030] FIG. 6 shows the interference color chart for the polycarbonate film, which was calculated using the emission spectrum of the cold-cathode tubes of the prior art.

#### BEST MODE FOR CARRYING OUT THE INVENTION

[0031] In general, a liquid crystal panel comprises a back module, a liquid crystal cell, and a front module in order,

starting from the side opposing a backlight source to the side on which an image is displayed (i.e., to the viewing side). The back module and the front module each ordinarily include a transparent substrate, a transparent conductive film formed on the surface of the transparent substrate on the liquid crystal cell side, and a polarizer disposed on the opposite side. In this regard, the polarizer in the back module is disposed on the side opposing the backlight source, and the polarizer in the front module is disposed on the side on which an image is displayed (i.e., on the viewing side).

[0032] The liquid crystal display device (LCD) of the present invention comprises, as components, at least a backlight source, a liquid crystal cell, and a polarizer disposed on the viewing side of the liquid crystal cell. As described above, it is ordinary that a liquid crystal cell is disposed between two polarizers, i.e., one on the backlight source side and the other on the viewing side. Therefore, another polarizer may also be disposed on the liquid crystal cell on the side opposite to the viewing side. Furthermore, the liquid crystal display device (LCD) may appropriately comprise other components, in addition to the above components, such as a color filter, a lens film, an optical diffusion sheet, and an antireflection film.

[0033] In the present invention, it is necessary to use white light-emitting diodes (white LEDs) as the backlight source of the liquid crystal display device (LCD). The white LEDs refer to phosphor-based devices, that is, devices that emit white light by the combined use of phosphors with light-emitting diodes using compound semiconductors to emit blue light or ultraviolet light. Among these devices, in particular, white light-emitting diodes comprising light-emitting devices obtained by the combined use of yttrium-aluminum-garnet yellow phosphors with blue light-emitting diodes using compound semiconductors are suitable as the backlight source of the present invention. This is because the white light-emitting diodes have a continuous and wide emission spectrum and also have an excellent luminous efficiency. Furthermore, the method of the present invention enables a wide range of the applications of white LEDs, which consume low power, and therefore, it can also attain the effect of energy conservation.

[0034] In this connection, a method including the combined use of red-emitting, green-emitting, and blue-emitting LEDs as a white light source has also been put to practical use. This method, however, is not preferred, because it provides a narrow and discontinuous emission spectrum, and therefore, it is expected to become difficult to obtain a desired effect of the present invention.

[0035] In addition, the present invention cannot use fluorescent tubes such as cold-cathode tubes or hot-cathode tubes either, which have hitherto been widely used as backlight sources. This is because the emission spectrum of each of these light sources is a discontinuous emission spectrum having peaks at specific wavelengths. Therefore, to produce white light by interference colors from such an emission spectrum, it is necessary to use a special inorganic material having a retardation of higher than 100,000 nm. This significantly restricts the design of liquid crystal display devices.

[0036] In the present invention, it is characterized that a polymer film having a specific range of retardation is disposed on the viewing side of the polarizer. The present inventors have obtained the idea of the present invention by focusing on the envelope curve shape of the interference

color spectrum of the light transmitted through a birefringent material. That is, the present inventors have found that a visibility is significantly improved when the shape of the emission spectrum of a light source becomes similar to the envelope curve shape of the interference color spectrum of the light transmitted through a birefringent material, thereby leading to the completion of the present invention. More specifically, the effect of improving a visibility with the constituent features of the present invention is based on the following technical idea.

**[0037]** If a polymer film having birefringent properties is disposed between two mutually orthogonal polarizers, light is transmitted in such a manner that linearly polarized light emitted from the polarizers is disturbed when passing through the polymer film. The transmitted light shows an interference color specific to the retardation of the polymer film, which is the product of the birefringence and the thickness thereof. The present invention employs white LEDs having a continuous emission spectrum as the light source. This makes it possible to approximate the envelope curve shape of the spectrum of transmitted light, showing an interference color, to the emission spectrum of the light source by controlling the retardation in a specific range achievable also with a polymer film. The present invention has thus led to an improvement in visibility (see FIG. 3).

**[0038]** To attain the above effect, the polymer film used in the present invention needs to have a retardation of from 3,000 to 30,000 nm. If the retardation is lower than 3,000 nm, a strong interference color is presented when the screen is observed through a polarizer such as sunglasses. This makes the envelope curve shape dissimilar to the emission spectrum of the light source, and therefore, it is not possible to ensure an excellent visibility. The lower limit of the retardation may preferably be 4,500 nm, more preferably 6,000 nm, still more preferably 8,000 nm, and further still more preferably 10,000 nm.

**[0039]** On the other hand, the upper limit of the retardation is 30,000 nm. A polymer film having a retardation of higher than 30,000 nm is not preferred. This is because the use of such a polymer film cannot substantially attain the effect of further improving a visibility, but also leads to a considerable increase in the thickness of the film. This reduces the handling ability of the film as an industrial material.

**[0040]** In this connection, the retardation of the present invention can be determined by measuring refractive indices in two mutually orthogonal directions and thickness, or can also be determined using a commercially available automatic birefringence analyzer such as KOBRA-21ADH (Oji Scientific Instruments).

**[0041]** In the present invention, white LEDs having a wide emission spectrum are used as the light source. Therefore, the adjustment of the retardation of a polymer film to the above range makes it possible to approximate the envelope curve shape of the spectrum of transmitted light to the emission spectrum of the light source only with a relatively simple structure. That is, in the case of a conventional technique, the use of a light source having a discontinuous emission spectrum requires the use of a birefringent material having a very high retardation (e.g., higher than 100,000 nm) for an improvement in visibility. In contrast, the present invention can attain a unique effect of improving a visibility with a relatively simple structure as described above, making use of the property of a white LED light source having a continuous emission spectrum.

**[0042]** The polymer film used in the present invention is disposed on the viewing side of the polarizer, which is disposed on the viewing side of the liquid crystal cell, so that an angle between the absorption axis of the polarizer and the slow axis of the polymer film becomes about 45 degrees. The method of disposing the polymer film on the viewing side of the polarizer may be performed by layering the polymer film directly on the outermost layer of the polarizer, or may be performed by disposing the polymer film on the polarizer via another transparent member. Alternatively, the polymer film may be provided on and attached to the top surface of the liquid crystal display device on the viewing side. When the polymer film is disposed directly or via another transparent member, the polymer film may preferably have a pressure-sensitive adhesive layer.

**[0043]** When the polymer film is disposed, it is desirable that the angle between the absorption axis of the polarizer and the slow axis of the polymer film should become about 45 degrees. This makes it possible to obtain highly transmitted light, even if a polarizer such as sunglasses is at any angle. In this connection, the above angle does not need to be exactly 45 degrees, and may appropriately be adjusted, if necessary, in the range where the effect of the present invention is not impaired. The range of the angle may preferably be from 30 to 60 degrees, and more preferably from 40 to 50 degrees.

**[0044]** The material of the polymer film used in the present invention is not particularly limited, but may be any material. Examples of the material of the polymer film may include polyesters such as polyethylene terephthalate and polyethylene naphthalate, polycarbonates, polystyrenes, polyether ether ketones, polyphenylene sulfides, and cycloolefin polymers. Among these, examples of the particularly preferred material may include polycarbonates and polyesters. The resins of these materials have excellent transparencies and also have excellent thermal and mechanical properties. This makes it possible to easily control the retardations of the resins by stretching. In particular, polyesters typified by polyethylene terephthalate are the most suitable materials, because they have high intrinsic birefringences, and therefore, they can relatively easily provide a great retardation, even if the thickness of the film is small.

**[0045]** Next, the polymer film of the present invention has specific birefringent properties, and therefore, it is desirable that the polymer film should be an oriented film. The method of producing the oriented film, however, is not particularly limited, so long as the film properties defined in the present invention are satisfied.

**[0046]** In the case of a polycarbonate film, an oriented polycarbonate film having a specific retardation can be obtained by stretching a non-oriented sheet in one direction (or in two directions, if necessary) at a temperature equal to or higher than the glass transition temperature thereof, which non-oriented sheet is obtained by melting polycarbonate and extruding the melted polycarbonate into a sheet. Suitable examples of the non-oriented polycarbonate sheet may also include commercially available ones and those which are produced by solution film formation.

**[0047]** Alternatively, in the case of a polyester film, as an example, a method is performed, in which a non-oriented polyester is stretched in the transverse direction by a tenter at a temperature equal to or higher than the glass transition temperature thereof, which non-oriented polyester is



obtained by melting a polyester and extruding the melted polyester into a sheet, followed by heat treatment.

**[0048]** More specifically, the temperature for stretching in the transverse direction may preferably be from 80° C. to 130° C., and particularly preferably from 90° C. to 120° C. Furthermore, the stretch ratio for stretching in the transverse direction may preferably be from 2.5 to 6.0, and particularly preferably from 3.0 to 5.5. If the stretch ratio is too high, the transparency of the film to be obtained is likely to decrease. On the other hand, it is not preferred that the stretch ratio should be too low. This is because the stretch tension also decreases, and therefore, the birefringence of the film to be obtained decreases, which reduces the retardation. In the subsequent heat treatment, the treatment temperature may preferably be from 100° C. to 250° C., and particularly preferably from 180° C. to 245° C.

**[0049]** It is possible to control the retardation of the polymer film in a specific range by appropriately setting the stretch ratio, the stretch temperature, and the thickness of the polymer film. For example, the higher the stretch ratio, or the lower the stretch temperature, or the greater the thickness of the film, the more likely a great retardation is obtained. In contrast, the lower the stretch ratio, or the higher the stretch temperature, or the smaller the thickness of the film, the more likely a small retardation is obtained.

**[0050]** The polymer film of the present invention may be subjected to surface treatments, i.e., corona discharge treatment (e.g., in air, nitrogen, or carbon dioxide gas) and adhesion facilitating treatment, by known methods, for the purpose of improving water resistance, chemical resistance, and adhesiveness between the film and a layer to be formed thereon, such as an adhesive layer, a release layer, and an antistatic layer. The adhesion facilitating treatment may be performed by various known methods. For example, a method may suitably be employed of applying one of various known adhesion facilitating agents to the film during the production process thereof, or to the film that has been uniaxially or biaxially stretched.

**[0051]** The polymer film used in the present invention may have any thickness, but may preferably have a thickness in the range of from 25 to 500  $\mu\text{m}$ . Even a film having a thickness of lower than 25  $\mu\text{m}$  can, in principle, provide a retardation of 3,000 nm or higher. In this case, however, the mechanical properties of the film become significantly anisotropic. This causes the film to, for example, tear or break, which significantly reduces the practicality of the film as an industrial material. The lower limit of the thickness may particularly preferably be 35  $\mu\text{m}$ . On the other hand, the film having a thickness of higher than 500  $\mu\text{m}$  is not preferred, because such a film is very rigid, which reduces flexibility inherent to a polymer film. This again reduces the practicality of the film as an industrial material. The upper limit of the film thickness may particularly preferably be 350  $\mu\text{m}$ .

#### EXAMPLES

**[0052]** The present invention will hereinafter be described more specifically by way of Examples, but the present invention is not limited to the Examples described below. The present invention can be put into practice after appropriate modifications or variations within a range meeting the gist of the present invention, all of which are included in the

technical scope of the present invention. In the following Examples, the methods for the evaluation of physical properties are as follows:

**[0053]** <Retardation>

**[0054]** A retardation is a parameter defined by the product ( $\Delta N \times d$ ) of the anisotropy ( $\Delta N = |N_x - N_y|$ ) of the refractive indices in two mutually orthogonal directions on a film and the film thickness  $d$  (nm), and is a scale indicating optical isotropy or anisotropy. The anisotropy ( $\Delta N$ ) of refractive indices in two directions is obtained by the following method. The directions of orientation axes of a film were determined using two polarizers, and the film was cut into a rectangle of 4 cm $\times$ 2 cm so that the directions of orientation axes are mutually orthogonal. The cut piece was used as a sample for measurement. The sample was measured for the refractive indices ( $N_x$  and  $N_y$ ) in two mutually orthogonal directions and the refractive index ( $N_z$ ) in the thickness direction by the use of an Abbe refractometer (NAR-4T available from ATAGO Co., Ltd.). Then, the absolute value ( $|N_x - N_y|$ ) of the difference between the refractive indices in two directions was defined as the anisotropy ( $\Delta N$ ) of the refractive indices. The film thickness  $d$  (nm) was measured using an electric micrometer (Millitron 1245D available from Feinpruf GmbH), and was converted to the unit of nm. The retardation ( $R_e$ ) was determined by the product ( $\Delta N \times d$ ) of the anisotropy ( $\Delta N$ ) of the refractive indices and the film thickness  $d$  (nm). In this connection, of the orientation axes, the axis indicating the greater refractive index is defined as a slow axis.

#### Experimental Example 1

**[0055]** The following shows an example in which a polycarbonate film was used as the polymer film.

**[0056]** A polymer solution was prepared by dissolving polycarbonate (available from Aldrich Chemical Co.) into methylene chloride four times by weight. The polymer solution was spread on a flat and smooth glass plate with a knife coater, and was left at room temperature, and the solvent was dried. Then, the polycarbonate sheet was peeled from the glass plate, and was dried at 90° C. in a low-pressure dryer for 24 hours. A sample was cut into a dumbbell shape from the polycarbonate sheet obtained. The cut sheet sample was heated to a temperature of about 160° C. and uniaxially stretched using a tensilon (available from Orientec Co., Ltd.). The stretch ratio and the stretch rate during the stretching were adjusted, thereby obtaining an oriented polycarbonate film having a desired retardation.

**[0057]** The interference color of the oriented polycarbonate film obtained was observed. As a light source, white light-emitting diodes (NSPW500CS available from Nichia Corporation) were used, which included light-emitting devices obtained by the combined use of yttrium-aluminum-garnet yellow phosphors with blue light-emitting diodes.

**[0058]** FIG. 1 shows the relationship between the retardation and the interference color of the oriented polycarbonate film, which relationship was actually measured as described above.

**[0059]** Next, the interference color chart for the oriented polycarbonate film was prepared by simulation.

**[0060]** In the case where a birefringent material is disposed in a diagonal position between crossed nicols and a white light source is used as a backlight, if the light transmitted through the crossed nicols is defined as an

interference color, the transmittance of the light is represented by the following formula (1):

$$I/I_0 = \frac{1}{2} \sin^2(\pi \cdot Re/\lambda) \quad (1)$$

where  $I_0$  indicates the intensity of the light incident on the crossed nicols;  $I$  indicates the intensity of the light transmitted through the crossed nicols; and  $Re$  indicates the retardation of the birefringent material. The transmittance ( $I/I_0$ ) thus changes depending on the retardation and the wavelength of the light, and therefore, an interference color specific to the value of the retardation is observed.

[0061] However, the refractive indices of a polymer material (particularly in the short-wavelength region of visible light) have great wavelength-dispersive properties. Such wavelength-dispersive properties may vary depending on the polymer material. If the birefringence has wavelength dependence, the birefringence changes depending on the wavelength. Thus, when the above formula (1) was applied to oriented polycarbonate, the following formula (2) was applied in the experimental example, taking into consideration wavelength-dispersive properties inherent to polycarbonate.

$$I/I_0 = \frac{1}{2} \sin^2(\pi \cdot f(\lambda) \cdot Re/\lambda) \quad (2)$$

where  $f(\lambda)$  is a function representing the wavelength-dispersive properties of the birefringence.

[0062] Based on the above formula (2), a program was prepared for calculating an interference color, taking into consideration the wavelength-dispersive properties of the birefringence of the oriented polycarbonate film, and an interference color chart was prepared, which represented the relationship between the retardation and the interference color. FIG. 2 shows the interference color chart for the oriented polycarbonate film, which was calculated using the emission spectrum of the white light-emitting diodes as shown in FIG. 1. From FIGS. 1 and 2, colors coincided with each other between the actual measurements and the simulation. Thus, it was understood that a change in the interference color decreased significantly when retardation ( $Re$ )  $\geq 3,000$  nm, and the interference color was almost constant when  $Re \geq$  about 8,000 nm.

[0063] In addition, FIG. 3 shows the spectrum of the light transmitted through the crossed nicols when  $Re=8,000$  nm. In FIG. 3,  $P(\lambda)$  is the emission spectrum of the light source (white LEDs), and  $T(\lambda)$  is the spectrum of the transmitted light. The envelope curve shape of the spectrum of the transmitted light was similar to, and preserved, the shape of the emission spectrum of the light source. Thus, it was revealed that the constant interference color of the oriented polycarbonate film was effectively formed from the emission spectrum of the light source. Furthermore, it was confirmed that the intensity of the transmitted light was a quarter of the intensity of the light source.

[0064] FIG. 4 shows the state where the oriented polycarbonate film ( $Re=9,087$  nm) obtained by the above method was placed on a liquid crystal display (having a structure in which a liquid crystal cell was sandwiched between two polarizers) that employed, as a backlight source, white LEDs (NSPW500CS available from Nichia Corporation) having

light-emitting devices obtained by the combined use of yttrium-aluminum-garnet yellow phosphors with blue light-emitting diodes, and the screen of the liquid crystal display was viewed through polarized sunglasses. It was possible to view displayed colors as unchanged regardless of the angle between the liquid crystal display and the polarizer, i.e., the polarized sunglasses. Thus, it was confirmed that the produced film was able to be used as a device for improving the visibility of a liquid crystal display that employed white LEDs as a backlight source.

[0065] In this connection, FIG. 5 shows the emission spectrum of ordinary, prior art cold-cathode tubes, and the spectrum of the light transmitted through the crossed nicols when  $Re=8,000$  nm. In FIG. 5,  $P(\lambda)$  is the emission spectrum of the light source, and  $T(\lambda)$  is the spectrum of the transmitted light. The spectrum of the transmitted light did not preserve the shape of the emission spectrum of the light source. Thus, it was implied that the transmitted light presented a color different from that of the light source.

[0066] In addition, FIG. 6 shows the interference color chart for the oriented polycarbonate film, which was calculated using the emission spectrum of the prior art cold-cathode tubes as shown in FIG. 5. From comparison between FIGS. 5 and 2, it was understood that a change in the interference color relative to the retardation greatly varied depending on the spectrum of the light source, and therefore, the effect of improving a visibility according to the present invention was not able to be obtained when cold-cathode tubes were used as a backlight source.

#### Experimental Example 2

[0067] The following will show an example in which an oriented polyethylene terephthalate (PET) film was used as the polymer film.

[0068] First, 1,000 parts of dimethyl terephthalate, 700 parts of ethylene glycol, and 0.16 parts of manganese acetate tetrahydrate were put in a transesterification reaction vessel, transesterification reaction was performed at a temperature of from 120° C. to 210° C., and the generated methanol was distilled off. When the transesterification reaction was completed, 0.13 parts of antimony trioxide and 0.017 parts of orthophosphoric acid were added, and the pressure in the system was gradually reduced to 133 Pa for 75 minutes. Simultaneously, the temperature was gradually increased to 280° C. Under these conditions, polycondensation reaction was performed for 70 minutes, and the melted polymer was extruded into water through a discharge nozzle, thereby obtaining a PET resin having an intrinsic viscosity of 0.62 dl/g.

[0069] An unstretched film was produced by extruding the PET resin having an intrinsic viscosity of 0.62 dl/g onto a water-cooled rotary quenching drum through a film-forming die. The unstretched film was stretched 4.0 times in the transverse direction at 100° C., and then thermally fixed at 150° C., and further relaxed by 3% in the width direction while being cooled from 130° C. to 100° C., thereby obtaining an oriented PET film having a thickness of 38  $\mu$ m (PET film 1).

**[0070]** In addition, an oriented PET film having a thickness of 200  $\mu\text{m}$  (PET film 2) was obtained using a method similar to that of PET film 1 and changing the thickness of the unstretched film.

**[0071]** An unstretched film produced using a method similar to that of PET film 1 was heated to 105° C. using heated rolls and an infrared heater, and then stretched 3.4 times in the machine direction (i.e., in the running direction) by rolls different from each other in peripheral speed, thereby obtaining an oriented PET film having a thickness of 700  $\mu\text{m}$  (PET film 3).

**[0072]** Table 1 shows the properties of the oriented PET films obtained by the above methods. Furthermore, Table 2 shows the state where each of the films was placed on a liquid crystal display device (having the structure where a

liquid crystal cell was sandwiched between two polarizers) that employed, as a light source, white LEDs (NSPW500CS available from Nichia Corporation) having light-emitting devices obtained by the combined use of yttrium-aluminum-garnet yellow phosphors with blue light-emitting diodes, and each of the films was also placed on a liquid crystal display device (having the structure where a liquid crystal cell was sandwiched between two polarizers) that employed cold-cathode tubes as a backlight source, and the screen of each liquid crystal display device was viewed through sunglasses.

**[0073]** From the above results, it was understood that each of the produced films was able to provide the effect of improving a visibility when white LEDs were used as the backlight source, but was not able to provide the effect of improving a visibility when cold-cathode tubes were used as the backlight source.

TABLE 1

	Thickness ( $\mu\text{m}$ )	Nx	Ny	Nz	$\Delta n$	Retardation (nm)
PET film 1	38	1.5874	1.6854	1.5209	0.0980	3,724
PET film 2	200	1.5902	1.6978	1.5147	0.1076	21,520
PET film 3	700	1.6463	1.5831	1.5574	0.0630	44,100

TABLE 2

Visibility of liquid crystal display devices				
	Thickness ( $\mu\text{m}$ )	Retardation (nm)	LCD using white LEDs as light source	LCD using cold-cathode tubes as light source
PET film 1	38	3,724	Interference color was slightly seen depending on direction of sunglasses, but display screen was uniform and visibility having no problems for practical use was obtained.	Different interference colors were seen depending on direction of sunglasses. Irregularities of color and brightness derived from irregularities of retardation of film were also observed in display screen.
PET film 1 (used as two-ply film)	76	7,448	Visibility was excellent.	Different interference colors were seen depending on direction of sunglasses. Irregularities of color and brightness in screen were slightly decreased, probably because irregularities were compensated by two films.
PET film 2	200	21,520	Visibility was very excellent.	Gentle Moire fringes derived from irregularities of retardation of film were observed in screen. Shading of Moire fringes was changed by direction of sunglasses.
PET film 3	700	44,100	Visibility was very excellent, but film was rigid and handling ability was poor.	Many wood-grain Moire fringes derived from irregularities of retardation of film were observed in screen, and visibility was very poor.

## INDUSTRIAL APPLICABILITY

[0074] The method for improving the visibility of a liquid crystal display according to the present invention can preferably be applied to liquid crystal display devices used outdoors, for example, instrument panels of automobiles, ships, and airplanes; mobile devices such as automobile-mounted navigation systems, digital cameras, mobile phones, and personal computers; and digital signages used in buildings, supermarkets, and other facilities.

1. A method for improving a visibility of a liquid crystal display device at least comprising a backlight light source, a liquid crystal cell, and a polarizer disposed on a viewing side of the liquid crystal cell, which method comprises:

using a white light-emitting diode as the backlight light source; and

using a polymer film having a retardation of from 3,000 nm to 30,000 nm, which polymer film is disposed on the viewing side of the polarizer so that an angle

between an absorption axis of the polarizer and a slow axis of the polymer film becomes about 45 degrees.

2. The method for improving a visibility of a liquid crystal display device according to claim 1, wherein the white light-emitting diode is a light-emitting device comprising a combination of an yttrium-aluminum-garnet yellow phosphor with a blue light-emitting diode using a compound semiconductor.

3. The method for improving a visibility of a liquid crystal display device according to claim 1, wherein the polymer film is an oriented polycarbonate film.

4. The method for improving a visibility of a liquid crystal display device according to claim 1, wherein the polymer film is an oriented polyester film.

5. A liquid crystal display device using a method for improving a visibility according to claim 1.

6. A polymer film to be used in a method for improving a visibility according to claim 1.

\* \* \* \* \*

专利名称(译)	提高液晶显示装置的可视性的方法和使用该方法的液晶显示装置		
公开(公告)号	<a href="#">US20190004367A1</a>	公开(公告)日	2019-01-03
申请号	US16/102345	申请日	2018-08-13
[标]申请(专利权)人(译)	学校法人庆应义塾 东洋纺绩株式会社		
申请(专利权)人(译)	庆应大学 TOYOBO CO. , LTD.		
当前申请(专利权)人(译)	庆应大学 TOYOBO CO. , LTD.		
[标]发明人	KOIKE YASUHIRO TAGAYA AKIHIRO		
发明人	KOIKE, YASUHIRO TAGAYA, AKIHIRO		
IPC分类号	G02F1/1335 G02F1/13363 G02B5/30		
CPC分类号	G02F1/133603 G02F1/13363 G02B5/3083 G02F2202/40 G02F1/133528		
优先权	2009259054 2009-11-12 JP 13/509211 2012-05-10 US PCT/JP2010/057956 2010-05-11 WO		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

#### 摘要(译)

本发明提供一种液晶显示方法，当通过诸如太阳镜的偏振器观察其屏幕时，无论观察角度如何，都能够确保良好的可视性。在至少具有背光光源，液晶单元和设置在液晶单元的观看侧的偏振器的液晶显示装置中，白色发光二极管用作背光光源；并且使用具有3,000nm至30,000nm的延迟的聚合物膜，以便设置在偏振器的观察侧上，使得偏振器的吸收轴与聚合物膜的慢轴之间的角度变为约45°。度。

