



US008174635B2

(12) **United States Patent**
Kim et al.

(10) **Patent No.:** **US 8,174,635 B2**
(45) **Date of Patent:** **May 8, 2012**

(54) **METHOD OF MANUFACTURING A LIQUID CRYSTAL DISPLAY HAVING TOP GATE THIN FILM TRANSISTORS WHEREIN EACH GATE ELECTRODE CONTACTS AN AUXILLIARY ELECTRODE**

(75) Inventors: **Min Joo Kim**, Seoul (KR); **Ho Cheol Kang**, Gyeonggi-do (KR); **Kyo Seop Choo**, Gyeonggi-do (KR)

(73) Assignee: **LG Display Co., Ltd.**, Seoul (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **13/166,455**

(22) Filed: **Jun. 22, 2011**

(65) **Prior Publication Data**

US 2011/0249208 A1 Oct. 13, 2011

Related U.S. Application Data

(62) Division of application No. 12/958,860, filed on Dec. 2, 2010, now Pat. No. 7,986,382, which is a division of application No. 11/823,200, filed on Jun. 26, 2007, now Pat. No. 7,864,254.

(30) **Foreign Application Priority Data**

Dec. 11, 2006 (KR) 0125351/2006

(51) **Int. Cl.**

G02F 1/136 (2006.01)
G02F 1/13 (2006.01)
H01L 51/40 (2006.01)

(52) **U.S. Cl.** **349/47**; 349/187; 438/99

(58) **Field of Classification Search** 349/40, 349/42, 43, 47, 46, 146

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,159,779 A 12/2000 Huang et al.
(Continued)

FOREIGN PATENT DOCUMENTS

CN 1396656 A 2/2003
(Continued)

OTHER PUBLICATIONS

Office Action issued in corresponding Chinese Patent Application No. 2007101269068; issued Mar. 12, 2009.

(Continued)

Primary Examiner — Mark Robinson


Assistant Examiner — Paul Lee

(74) *Attorney, Agent, or Firm* — Brinks Hofer Gilson & Lione

(57) **ABSTRACT**

An electrostatic discharge protection element, a liquid crystal display device having the same, and a manufacturing method. A first ESD organic TFT, a second ESD organic TFT, a third ESD organic TFT each have a gate electrode, a source electrode and a drain electrode in which the source electrode and drain electrode of the first and second ESD organic TFTs and the gate electrode of the third ESD organic TFT are electrically connected. The gate electrode and the source electrode of the first ESD organic TFT are electrically connected to a first array line and the gate electrode and the drain electrode of the second ESD organic TFT are electrically connected to a second array line. The source electrode of the third ESD organic TFT is electrically connected to a data line or a gate line and the drain of the third ESD organic TFT are electrically connected to a common voltage line.

6 Claims, 7 Drawing Sheets

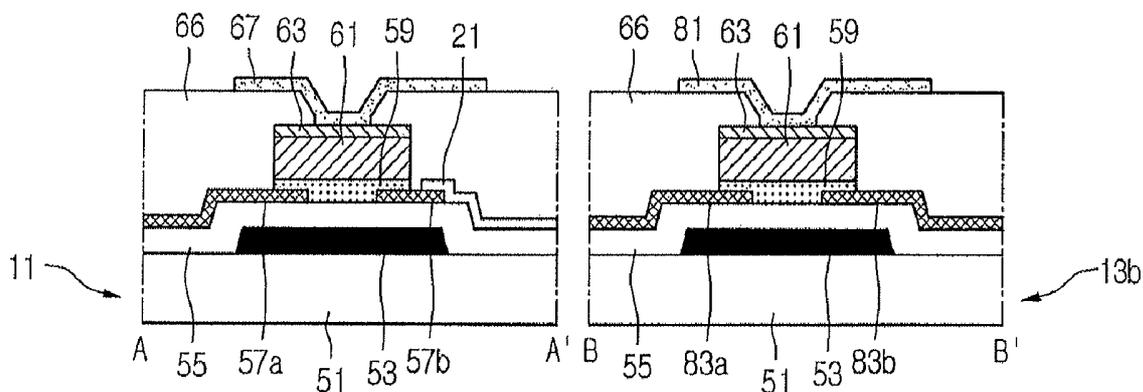

US 8,174,635 B2

Page 2

U.S. PATENT DOCUMENTS

6,674,502	B1	1/2004	Terakado et al.	
2002/0003586	A1	1/2002	Busson et al.	
2003/0020845	A1	1/2003	Lee et al.	
2004/0104461	A1*	6/2004	Ishihara et al.	257/679
2005/0104097	A1	5/2005	Hirose et al.	
2005/0140836	A1*	6/2005	Choi	349/40
2005/0140890	A1	6/2005	Kim et al.	
2006/0044500	A1	3/2006	Nakagawa et al.	
2006/0202199	A1	9/2006	Kim et al.	
2006/0223222	A1	10/2006	Choi et al.	

FOREIGN PATENT DOCUMENTS

CN	1761067	A	4/2006
EP	1 648 030	A2	4/2006

OTHER PUBLICATIONS

Dimitrakopoulos et al. (Organic Thin Film Transistors; a Review of Recent Advances; IBM Journal of Research and Development, vol. 45, No. 1, Jan. 2001, pp. 11-15).

* cited by examiner

FIG. 1

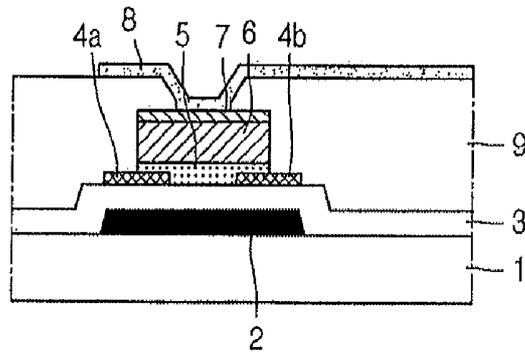


FIG. 2A

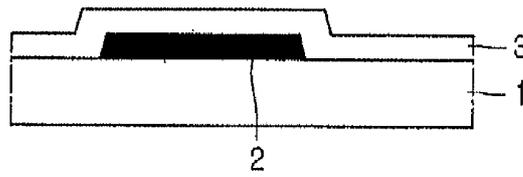


FIG. 2B

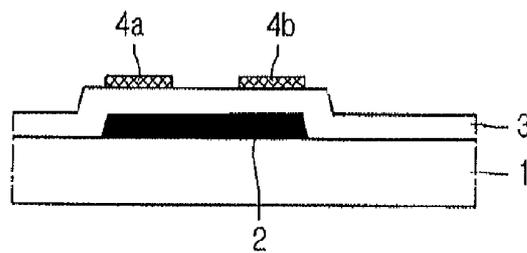


FIG. 2C

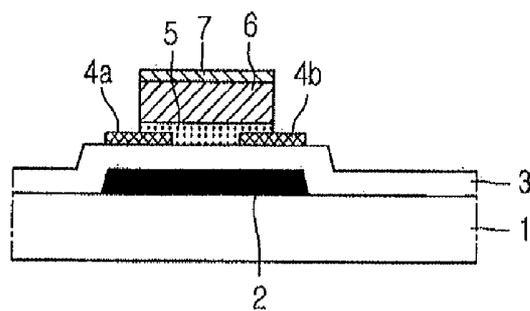


FIG. 2D

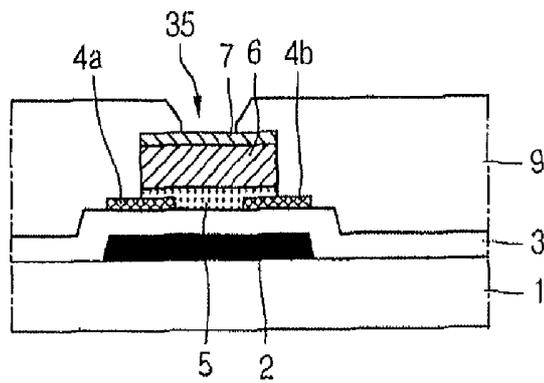


FIG. 2E

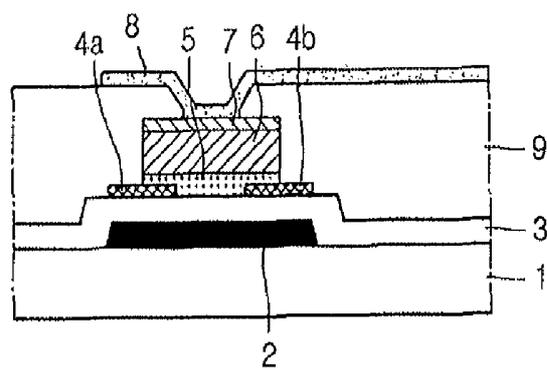


FIG. 3

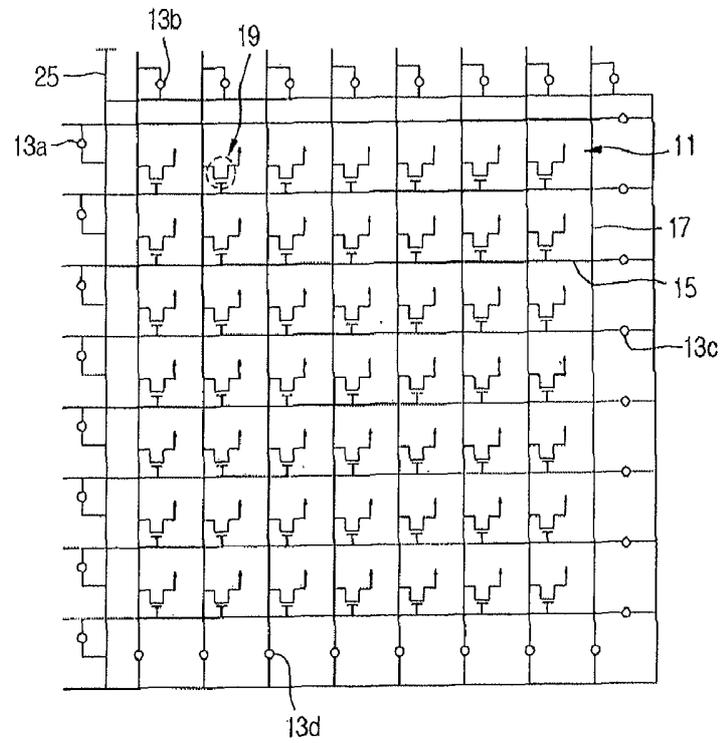


FIG. 4

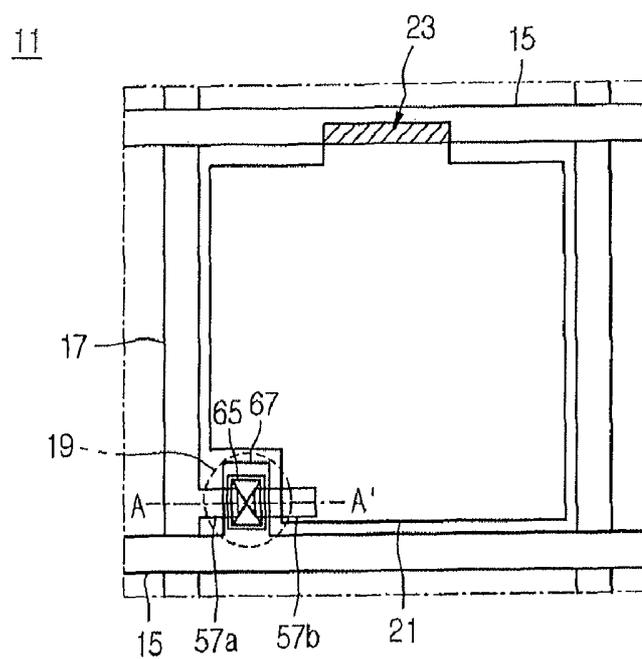


FIG. 5

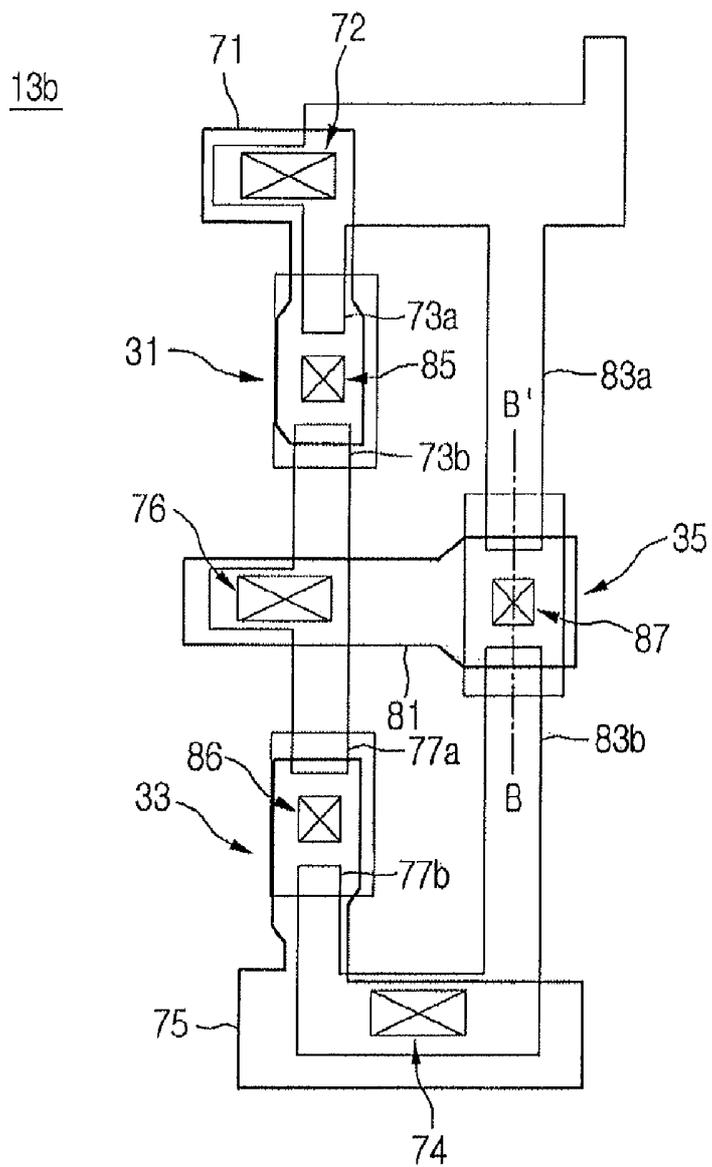


FIG. 6

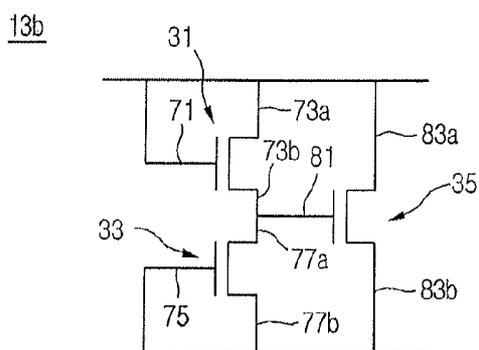


FIG. 7A

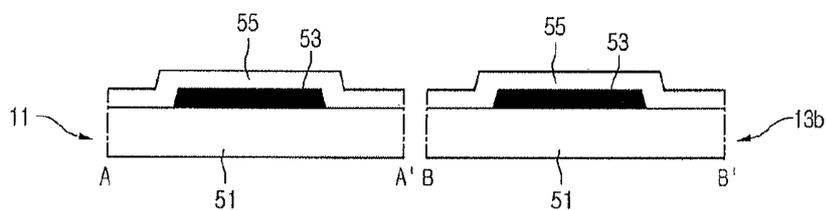


FIG. 7B

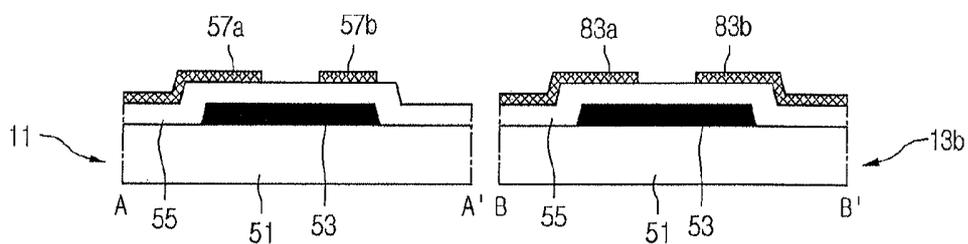


FIG. 7C

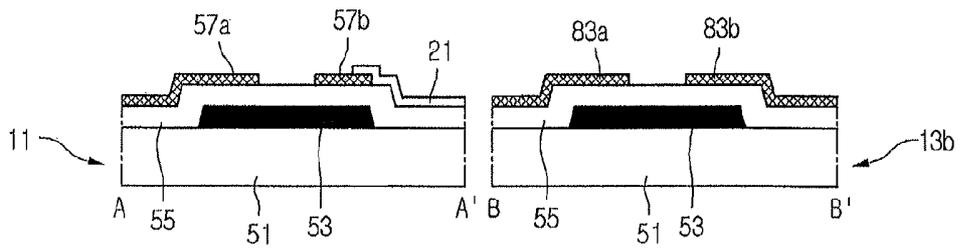


FIG. 7D

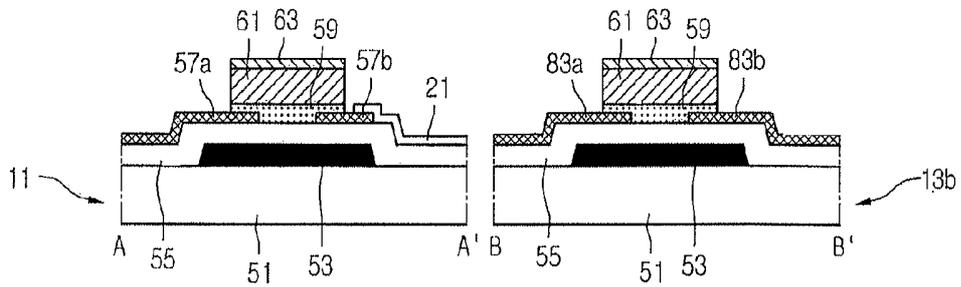


FIG. 7E


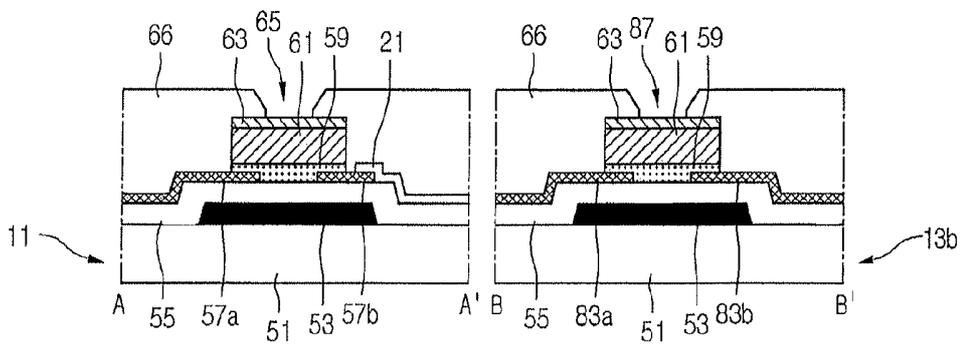


FIG. 7F

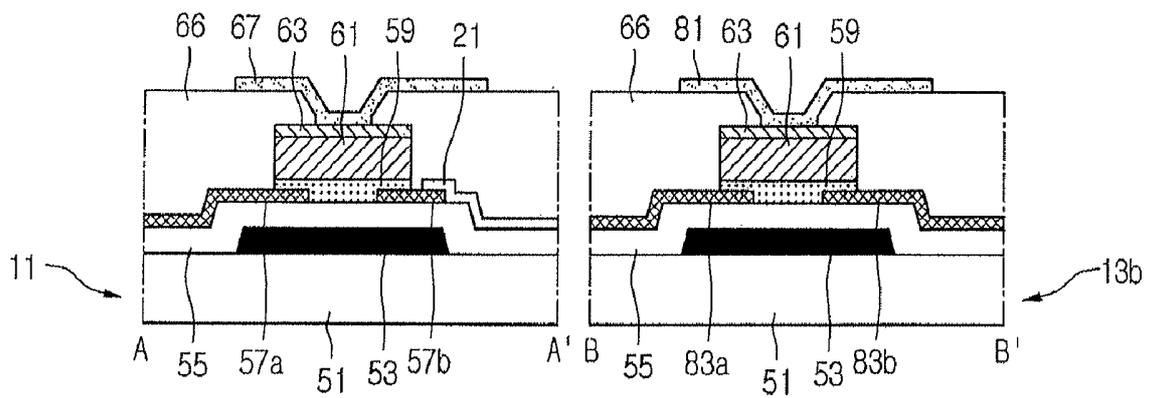

**METHOD OF MANUFACTURING A LIQUID
CRYSTAL DISPLAY HAVING TOP GATE
THIN FILM TRANSISTORS WHEREIN EACH
GATE ELECTRODE CONTACTS AN
AUXILLIARY ELECTRODE**

The present patent document is a divisional of U.S. patent application Ser. No. 12/958,860, filed Dec. 2, 2010, now U.S. Pat. No. 7,986,382 which is a divisional of U.S. patent application Ser. No. 11/823,200, filed Jun. 26, 2007, now U.S. Pat. No. 7,864,254, which claims the benefit of Korean Patent Application No. 0125351/2006 filed Dec. 11, 2006, which are incorporated by reference herein.

BACKGROUND

1. Field of the Invention

The present invention relates to an electrostatic discharge protection element, a liquid crystal display device having the same, and a manufacturing method thereof.

2. Discussion of the Related Art

A display device is implemented using a plurality of thin film transistors (TFTs). A TFT includes an amorphous silicon semiconductor or polycrystalline silicon semiconductor, an oxide silicon insulating layer, and a metal electrode.

With recent development of various conductive organic materials, extensive researches have been conducted on organic TFTs using organic semiconductors throughout the world.

The new organic semiconductors are widely applied to various types of display devices because they are prepared using various polymer synthesis methods, are easy to form in a fiber or film shape, are flexible, and are manufactured at a low cost.

Meanwhile, a liquid crystal display (LCD) device includes a plurality of pixels arranged in a matrix form. The pixels are implemented with TFTs. The LCD displays an image by controlling the respective pixels through the switching of the TFTs.

Since the LCD device is susceptible to electrostatic discharge (ESD), the LCD device includes an ESD protection element. The ESD protection element may be implemented with TFTs.

Studies have been conducted to apply organic TFTs to LCDs.

However, due to difficulties in fabrication of organic TFTs, favorable results have not been obtained.

In addition, the application of the organic TFTs to the ESD protection element has not been studied.

Therefore, the organic TFTs are applied only to the TFTs of the pixels of the LCD, and the ESD protection element is implemented with typical TFTs. Consequently, the manufacturing process of the LCD is complicated and the manufacturing cost of the LCD increases.

BRIEF SUMMARY

In one embodiment, an electrostatic discharge protection element includes a first thin film transistor (TFT), a second TFT, a third TFT each having a gate electrode, a source electrode and a drain electrode. The drain electrode of the first TFT and the gate electrode of the third TFT are electrically connected and the source electrode of the second TFT and the gate electrode of the third TFT are electrically connected. The gate electrode and the source electrode of the first TFT are electrically connected to a first array line and the gate electrode and the drain electrode of the second TFT are electrically

connected to a second array line. The source electrode of the third TFT is electrically connected to the first array line and the drain electrode of the third TFT is electrically connected to the second array line. Each TFT comprises an organic semiconductor layer disposed between the source electrode and drain electrode.

In another embodiment, a liquid crystal display device includes a plurality of gate lines and a plurality of data lines arranged on a substrate and unit pixels are defined by crossing points of the gate lines and the data lines. The unit pixels are located in a display region. Each unit pixel includes a pixel organic thin film transistor (TFT). A pixel electrode is connected to the pixel organic TFT. A common voltage line is disposed in a non-display region of the substrate. A plurality of electrostatic discharge (ESD) protection elements are provided in the non-display region. Each ESD protection element is electrically coupled to the data line or the gate line and the common voltage line and each ESD protection element includes three ESD organic TFTs. Each ESD protection element includes a first ESD organic TFT, a second ESD organic TFT, and a third ESD organic TFT, with each having a gate electrode, a source electrode and a drain electrode. The first ESD organic TFT and the second ESD organic TFT are connected in parallel and the third ESD organic TFT is connected between the first ESD organic TFT and the second ESD organic TFT.

In yet another embodiment, a method is disclosed for manufacturing an LCD device having organic electrostatic discharge protection devices. In the disclosed method, a light blocking pattern is formed on a substrate. The light blocking pattern is formed in a display region of the substrate and a non-display region of the substrate. A first metal material is deposited to overly the light blocking layer to thereby form source and drain electrodes for a pixel thin film transistor (TFT) and a plurality of electrostatic discharge (ESD) TFTs. A pixel electrode is formed such that it is connected to the drain electrode of the organic pixel TFT. An organic semiconductor layer, an organic insulating layer, and an auxiliary electrode layer overlying the source and drain regions are sequentially formed and patterned to form a gate stack. A passivation layer is formed to overly the gate stack and a contact hole is formed exposing a portion of the gate stack. A gate electrode and a gate line are formed to overly the passivation layer and to contact the auxiliary electrode through the contact hole.

It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention. In the drawings:

FIG. 1 is a cross-sectional view of an organic TFT according to an embodiment;

FIGS. 2A to 2E are cross-sectional views illustrating a method for manufacturing an organic TFT according to an embodiment;

FIG. 3 is a circuit diagram of an LCD having organic TFTs according to an embodiment of the present invention;

FIG. 4 is a plan view of a unit pixel of the LCD illustrated in FIG. 3;

FIG. 5 is a plan view of an ESD protection element in the LCD illustrated in FIG. 3;

FIG. 6 is an equivalent circuit diagram of the ESD protection element illustrated in FIG. 5; and

FIGS. 7A to 7F are cross-sectional views illustrating a method for manufacturing an LCD according to an embodiment.

DETAILED DESCRIPTION OF THE DRAWINGS AND THE PRESENTLY PREFERRED EMBODIMENTS

Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. In the drawings, the thicknesses of layers and regions are exaggerated for clarity. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

FIG. 1 is a cross-sectional view of an organic TFT according to an embodiment.

The organic TFT according to this embodiment is a top gate type TFT where a gate electrode 8 is disposed at the uppermost layer.

Referring to FIG. 1, a light blocking layer 2 is disposed in a predetermined portion of a substrate 1. The predetermined portion of the substrate 1 represents a region where the organic TFT will be formed. The light blocking layer 2 serves to prevent a channel characteristic from being affected by the deformation of an organic semiconductor layer, which is caused by light. The organic semiconductor layer, which will be described in more detail later, is formed of an organic semiconductor material. In general, the light blocking layer 2 is formed of light blocking material or light absorbing material. For example, the light blocking layer 2 may be formed of chrome oxide (CrO_x) having an optical density of 3.5 or above, metal such as chrome, or carbon based material.

A buffer layer 3 is disposed over the light blocking layer 2 and the substrate 1. The buffer layer 3 may be formed of an oxide material such as silicon oxide (SiO_2). The buffer layer 3 facilitates the formation of subsequent layers. If the light blocking layer is not made of a metal, the formation of the buffer layer 3 is not always necessary.

A source electrode 4a and a drain electrode 4b are disposed spaced apart from each other on the buffer layer 3.

An organic semiconductor layer 5 is disposed on the source electrode 4a and the drain electrode 4b. The organic semiconductor layer 5 is formed of an organic semiconductor material. The organic semiconductor layer 5 is disposed on portions of the source electrode 4a and the drain electrode 4b and the buffer layer 3 between the source electrode 4a and the drain electrode 4b. Examples of the organic semiconductor material may include, but are not limited to, pentacene, copper phthalocyanine, polythiophene, polyaniline, polyacetylene, polypyrrole, polyphenylene vinylene, or derivatives thereof.

An organic gate insulating layer 6 is disposed on the organic semiconductor layer 5. The organic gate insulating layer 6 is formed of an organic insulating material. Examples of the organic insulating material may include, but are not limited to, polyimide.

An auxiliary electrode 7 is disposed on the organic gate insulating layer 6. The auxiliary electrode 7 is electrically

connected to a gate electrode that will be formed later. The auxiliary electrode 7 can serve as an etch stop layer, which will be described later.

The organic semiconductor layer 5, the organic gate insulating layer 6, and the auxiliary electrode 7 may have the same width.

A passivation layer 9 is formed over the auxiliary electrode 7 and the substrate 1. The passivation layer 9 has a contact hole 35 exposing the auxiliary electrode 7 (see FIG. 2D). The passivation layer 9 protects the source electrode 4a, the drain electrode 4b, and the organic semiconductor layer 5.

A gate electrode 5 is disposed on the passivation layer 9 and is electrically connected to the auxiliary electrode 7 through the contact hole 35.

In order to prevent light irradiation onto the organic semiconductor layer 5, the light blocking layer 2 may have a width greater than that of the organic semiconductor layer 5. Hence, light transmitted through the rear surface of the substrate 1 is not irradiated onto the organic semiconductor layer 5 because the light blocking layer 2 has the width greater than the organic semiconductor layer 5.

Therefore, the organic TFT may be configured in a top gate type. That is, the organic semiconductor layer 5 and the organic gate insulating layer 6 are disposed on the source/drain electrodes 4a and 4b and the gate electrode 8 is disposed on the organic gate insulating layer 6.

FIGS. 2A to 2E are cross-sectional views illustrating a method for manufacturing an organic TFT according to an embodiment.

Referring to FIG. 2A, a light blocking material is deposited on a substrate 1 and is patterned to form a light blocking layer 2 in a predetermined region. Examples of the light blocking material may include, but are not limited to, chrome oxide (CrO_x) having an optical density of 3.5 or above, metal such as chrome, or carbon based material.

An oxide material such as silicon oxide is deposited over the light blocking layer 2 and the substrate 1 to form a buffer layer 3. The formation of the buffer layer 3 is not always necessary.

Referring to FIG. 2B, a first metal material is deposited on the buffer layer 3 and is patterned to form a source electrode 4a and a drain electrode 4b spaced apart from each other. Examples of the first metal material may include, but are not limited to, gold (Au), silver (Ag), aluminum (Al), nickel (Ni), chrome (Cr), and molybdenum (Mo).

Referring to FIG. 2C, an organic semiconductor material, an organic insulating material, and a second metal material are sequentially deposited on the source/drain electrodes 4a and 4b and the substrate 1 and are patterned to form an organic semiconductor layer 5, an organic gate insulating layer 6, and an auxiliary electrode 7. The organic semiconductor layer 5, the organic gate insulating layer 6, and the auxiliary electrode 7 are formed on portions of the source electrode 4a and the drain electrode 4b and the buffer layer 3 between the source electrode 4a and the drain electrode 4b. Portions of the source/drain electrodes 4a and 4b may be exposed by the patterning process. In the LCD, the exposed portions may be electrically connected to a pixel electrode.

The organic semiconductor layer 5 may have a width smaller than that of the light blocking layer 2. In this case, light transmitted through the rear surface of the substrate 1 can be prevented from being irradiated onto the organic semiconductor layer 5.

Examples of the organic semiconductor material may include, but are not limited to, pentacene, copper phthalocyanine, polythiophene, polyaniline, polyacetylene, polypyrrole, polyphenylene vinylene, or derivatives thereof.

Examples of the organic insulating material may include, but are not limited to, polyimide.

Examples of the second metal material may include, but are not limited to, gold (Au), silver (Ag), aluminum (Al), nickel (Ni), chrome (Cr), and molybdenum (Mo).

Referring to FIG. 2D, an organic insulating material or an inorganic insulating material is deposited on the auxiliary electrode 7 and the substrate 1 and is patterned to expose the auxiliary electrode 7, thereby forming a passivation layer 9 having a contact hole 35.

In this case, the auxiliary electrode 7 serves as an etch stop layer. Specifically, an organic gate insulating layer 6 is formed under the auxiliary electrode 7. If the organic insulating material or an inorganic insulating material is patterned in the absence of the auxiliary electrode 7, the organic gate insulating layer 6 may also be patterned. Therefore, the auxiliary electrode 7 can serve as an etch stop layer because it can prevent the organic gate insulating layer 6 from being patterned during the process of etching the organic insulating material or the inorganic insulating material.

Referring to FIG. 2E, a third metal material is deposited on the passivation layer 9 and is patterned to form a gate electrode 8. The gate electrode 8 is electrically connected to the auxiliary electrode 7 through the contact hole 35.

Examples of the third metal material may include, but are not limited to, gold (Au), silver (Ag), aluminum (Al), nickel (Ni), chrome (Cr), and molybdenum (Mo).

FIG. 3 is a circuit diagram of an LCD having the organic TFTs according to an embodiment of the present invention, FIG. 4 is a plan view of a unit pixel of the LCD illustrated in FIG. 3, FIG. 5 is a plan view of an ESD protection element in the LCD illustrated in FIG. 3, and FIG. 6 is an equivalent circuit diagram of the ESD protection element illustrated in FIG. 5.

Referring to FIGS. 3 and 4, a plurality of gate lines 15 and a plurality of data lines 17 are arranged to cross one another. Unit pixels 11 are defined by the crossing of the gate lines 15 and the data lines 17.

Therefore, the unit pixels 11 are arranged in a matrix form. A region where the pixels 11 are arranged in a matrix form is defined as a display region, and the other region is defined as a non-display region.

Organic TFTs 19 are connected to the gate lines 15 and the data lines 17. The organic TFT 19 has the same structure as that of the organic TFT illustrated in FIG. 1. Pixel electrodes 21 are connected to the organic TFTs 19. The organic TFT has a gate electrode 67 integrally formed with the gate line 15, a source electrode 57a integrally formed with a data line 17, and a drain electrode 57b spaced apart from the source electrode 57a and electrically connected to the pixel electrode 21.

Due to a contact hole 65, the gate electrode 67 is formed on an organic gate insulating layer (not shown) under a passivation layer (not shown).

The pixel electrode 21 is disposed to partially overlap the gate line 15. Therefore, a storage capacitor 23 is formed by the pixel electrode 21 and the gate line 15. The storage capacitor 23 serves to maintain a data voltage during one frame.

In addition, a common voltage line 25 is disposed in the non-display region, while surrounding the display region. That is, the common voltage line 25 is disposed along an edge of the LCD and supplies a common voltage. In the case of a twisted nematic (TN) mode, the common voltage line 25 may be electrically connected to a common electrode disposed in a top substrate facing a bottom substrate where the organic TFT 19 is disposed. In the case of an in-plane switching (IPS)

mode, the common voltage line 25 may be electrically connected to a common electrode disposed in the pixel 11 of the bottom substrate.

The common voltage line 25 may be disposed on the same layer as the data line 17 or on the same layer as the gate line 15. In the following description, it is assumed that the common voltage line 25 is disposed on the same layer as the data line 17.

In addition, a plurality of ESD protection elements 13a to 13d are disposed in the non-display region so as to protect the LCD against ESD. Specifically, a first ESD protection element 13a is disposed between the gate line 15 and the common voltage line 25, a second ESD protection element 13b is disposed between the data line 17 and the common voltage line 25, a third ESD protection element 13c is disposed between the gate line 15 and the common voltage line 25, and a fourth ESD protection element 13d is disposed between the data line 17 and the common voltage line 25.

As illustrated in FIGS. 5 and 6, each of the ESD protection elements 13a to 13d may include first to third organic TFTs 31, 33 and 35. For convenience, the second ESD protection element will be described below.

The first to third organic TFTs 31, 33 and 35 have the same structure as that of the organic TFT illustrated in FIG. 1. However, since the first to third organic TFTs 31, 33 and 35 must be turned on by a high voltage such as ESD, they may be relatively larger in size than the TFT 19 of the pixel 11.

The first organic TFT 31 has a first gate electrode 71 and a first source electrode 73a commonly connected to each other.

The second organic TFT 33 has a second gate electrode 75 and a second drain electrode 77b commonly connected to each other, and a second source electrode 77a connected to a first drain electrode 73b of the first organic TFT 31.

The third organic TFT 35 has a third gate electrode 81 connected to the first drain electrode 73b of the first organic TFT 31 and the second source electrode 77a of the second organic TFT 33, a third source electrode 83a connected to the first source electrode 73a of the first organic TFT 31, and a third drain electrode 83b connected to the second drain electrode 77b of the second organic TFT 33.

Therefore, the first organic TFT 31 and the second organic TFT 33 may be connected in parallel, and the third organic TFT 35 may be connected between the first organic TFT 31 and the second organic TFT 33.

More specifically, the first source electrode 73a of the first organic TFT 31 and the third source electrode 83a of the third organic TFT 35 may be integrally formed.

In the first organic TFT 31, the first gate electrode 71 is electrically connected to the first source electrode 73a through a first contact hole 72.

The second drain electrode 77b of the second organic TFT 33 and the third drain electrode 83b of the third organic TFT 35 may be integrally formed.

In the second organic TFT 33, the second gate electrode 75 is electrically connected to the second drain electrode 77b through a second contact hole 74.

The first drain electrode 73b of the first organic TFT 31 and the second source electrode 77a of the second organic TFT 33 may be integrally formed.

In the third organic TFT 35, the third gate electrode 81 is electrically connected to the first drain electrode 73b of the first organic TFT 31 and the second source electrode 77a of the second organic TFT 33 through a third contact hole 76.

Meanwhile, a fourth contact hole 85 may be formed between the first source electrode 73a and the first drain electrode 73b of the first organic TFT 31, a fifth contact hole 86 may be formed between the second source electrode 77a

and the second drain electrode **77b** of the second organic TFT **33**, and a sixth contact hole **87** may be formed between the third source electrode **83a** and the third drain electrode **83b** of the third organic TFT **35**. The fourth to sixth contact holes **85**, **86** and **87** are formed on a passivation layer (not shown). Due to the fourth to sixth contact holes **85**, **86** and **87**, the first to third gate electrodes **71**, **75** and **81** are formed in the organic gate insulating layer (not shown) under the passivation layer.

The common voltage line **25** is disposed on the same layer as the data line **17**. Therefore, in the second ESD protection element **13b**, the first source electrode **73a** of the first organic TFT **31** and the third source electrode **83a** of the third organic TFT **35** may be electrically connected to the data line **17**, and the second drain electrode **77b** of the second organic TFT **33** and the third drain electrode **83b** of the third organic TFT **35** may be electrically connected to the common voltage line **25**.

The first and second organic TFTs **31** and **33** are diode-connected transistors that allow a forward current flow, but block a reverse current flow.

When the first organic TFT **31** is turned on by a high voltage such as ESD flowing through the data line **17**, the high voltage passes through the first organic TFT **31** and turns on the third organic TFT **35**. Accordingly, the third organic TFT **35** between the data line **17** and the common voltage line **25** is turned on and thus a static electricity passes through the third organic TFT **35** and flows through the common voltage line **25**. Consequently, the TFT **19** or the pixel electrode **21** connected to the data line **17** in the display region is not damaged.

FIGS. **7A** to **7F** are cross-sectional views illustrating a method for manufacturing an LCD according to an embodiment. Specifically, FIGS. **7A** to **7F** are cross-sectional views taken along line A-A' of FIG. **4** and line B-B' of FIG. **5**.

A method for manufacturing an LCD according to an embodiment will be described below with reference to FIGS. **3** to **5** and **7A** to **7F**.

Referring to FIG. **7A**, a light blocking material is deposited on a substrate **51** and is patterned to form a light blocking layer **53** in a predetermined region. The predetermined region represents a region where an organic TFT will be formed, and may be a region where organic TFTs of pixels **11** of the display region are formed and a region where first to third organic TFTs of ESD protection elements **13a** to **13d** are formed.

Examples of the light blocking material may include, but are not limited to, chrome oxide (CrOx) having an optical density of 3.5 or above, metal such as chrome, or carbon based material.

The light blocking layer **53** prevents irradiation of external light onto the organic TFT.

An oxide material such as silicon oxide is deposited over the light blocking layer **53** and the substrate **51** to form a buffer layer **55**. The buffer layer **55** facilitates the formation of subsequent layers. It is preferable that the buffer layer **55** is formed as thin as possible. In some cases, the buffer layer **55** need not be formed.

Referring to FIG. **7B**, a first metal material is deposited on the buffer layer **55** and is patterned to form source electrodes **57a**, **73a**, **77a** and **83a**, drain electrodes **57b**, **73b**, **77b** and **83b**, a data line **17**, and a common voltage line **25**. The source electrode **57a** and the drain electrode **57b** may be formed in the organic TFT region of the pixel **11**, and the first to third source electrodes **73a**, **77a** and **83a** and the first to third drain electrodes **73b**, **77b** and **83b** may be formed in the first to third TFT regions of the ESD protection elements **13a** to **13d**, respectively.

The source electrode **57a** is integrally formed with the data line **17**. The drain electrode **57a** may be formed spaced apart from the source electrode **83a** by a predetermined distance.

The first source electrode **73a** and the third source electrode **83a** are integrally formed, the second drain electrode **77b** and the third drain electrode **83b** are integrally formed, and the first drain electrode **83b** and the second source electrode **77a** are integrally formed.

Examples of the first metal material may include, but are not limited to, gold (Au), silver (Ag), aluminum (Al), nickel (Ni), chrome (Cr), and molybdenum (Mo).

Referring to FIG. **7C**, a transparent conductive material is deposited on the data line **17** and the substrate **51** and is patterned to form a pixel electrode **21**. The pixel electrode **21** is formed in the pixel **11**, but not in the ESD protection elements **13a** to **13d**. Examples of the conductive material may include, but are not limited to, indium tin oxide (ITO) and indium zinc oxide (IZO).

The pixel electrode **21** may be formed to partially overlap the drain electrode **57b**. Therefore, the drain electrode **57b** and the pixel electrode **21** are electrically connected to each other.

Referring to FIG. **7D**, an organic semiconductor material, an organic insulating material, and a second metal material are sequentially deposited on the pixel electrode **21** and the substrate **51** and are patterned to form an organic semiconductor layer **59**, an organic gate insulating layer **61**, and an auxiliary electrode **63**. The organic semiconductor layer **59**, the organic gate insulating layer **61**, and the auxiliary electrode **63** are formed on portions of the source electrode **57a** and the drain electrode **57b** and the buffer layer **55** between the source electrode **57a** and the drain electrode **57b**. The formation of the buffer layer **55** is not always necessary.

Examples of the organic semiconductor material may include, but are not limited to, pentacene, copper phthalocyanine, polythiophene, polyaniline, polyacetylene, polypyrrole, polyphenylene vinylene, or derivatives thereof.

Examples of the organic insulating material may include, but are not limited to, polyimide.

Examples of the second metal material may include, but are not limited to, gold (Au), silver (Ag), aluminum (Al), nickel (Ni), chrome (Cr), and molybdenum (Mo).

Referring to FIG. **7E**, an organic insulating material or an inorganic insulating material is deposited on the auxiliary electrode **63** and the substrate **51** and is patterned to expose the first and second source electrodes **73a** and **77a** and the first and second drain electrodes **73b** and **77b** of the ESD protection elements **13a** to **13d** and the auxiliary electrode **63**, thereby forming a passivation layer **66** having contact holes **65**, **72**, **74**, **76**, **85**, **86** and **87**. In this case, the auxiliary electrode **63** serves as an etch stop layer. Specifically, an organic gate insulating layer **61** is formed under the auxiliary electrode **63**. If the organic insulating material or an inorganic insulating material is patterned in the absence of the auxiliary electrode **63**, the organic gate insulating layer **61** may also be patterned. Therefore, the auxiliary electrode **63** can serve as an etch stop layer because it can prevent the organic gate insulating layer **61** from being patterned during the process of etching the organic insulating material or the inorganic insulating material.

Referring to FIG. **7F**, a third metal material is deposited on the passivation layer **66** and is patterned to form a gate electrode **67** and a gate line **15**. The common voltage line **25** may be formed on the same layer as the gate line **15**.

The gate electrode **67** of the pixel **11** may be electrically connected to the auxiliary electrode **63** through the contact hole **65**.

In order to connect the first to third organic TFTs **31**, **33** and **35** in the ESD protection elements **13a** to **13d**, the first gate electrode **71** is electrically connected to the first source electrode **73a** through the first contact hole **72**, the second gate electrode **75** is electrically connected to the second drain electrode **77b** through the second contact hole **74**, and the third gate electrode **81** is electrically connected to the first drain electrode **73b** or the second source electrode **77a** through the third contact hole **76**.

In addition, the first gate electrode **71** is electrically connected to the auxiliary electrode **63** through the fourth contact hole **85**, the second gate electrode **75** is electrically connected to the auxiliary electrode **63** through the fifth contact hole **86**, and the third gate electrode **81** is electrically connected to the auxiliary electrode **63** through the sixth contact hole **87**.

Examples of the third metal material may include, but are not limited to, gold (Au), silver (Ag), aluminum (Al), nickel (Ni), chrome (Cr), and molybdenum (Mo).

Through these procedures, the LCD including the ESD protection elements **13a** to **13d** and the pixels **11** arranged in a matrix form can be manufactured.

As described above, the present invention facilitates the formation of the organic TFT and can increase the applicability of the organic TFT to the pixels or the ESD protection elements of the LCD.

In addition, the present invention can improve the structure of the organic TFT and simplify the manufacturing process of the organic TFT, thereby expanding the applicability to other fields.

Furthermore, the organic TFTs for the pixels of the display region and the ESD protection elements can be manufactured through the same manufacturing process, thereby simplifying the manufacturing process of the LCD and remarkably reducing the manufacturing cost of the LCD.

It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

The invention claimed is:

1. A liquid crystal display device comprising:

a plurality of gate lines and a plurality of data lines arranged on a substrate and unit pixels defined by crossing points of the gate lines and the data lines, the unit pixels located in a display region;

wherein each unit pixel includes a pixel organic thin film transistor (TFT);

a pixel electrode connected to the pixel organic TFT;

a common voltage line in a non-display region of the substrate;

a plurality of electrostatic discharge (ESD) protection elements in the non-display region, each ESD protection element being electrically coupled to the data line or the gate line and the common voltage line, wherein each ESD protection element comprises: a first ESD organic TFT, a second ESD organic TFT, a third ESD organic TFT each having a gate electrode, a source electrode and a drain electrode; and

wherein the first ESD organic TFT and the second ESD organic TFT are connected in parallel and the third ESD organic TFT is connected between the first ESD organic TFT and the second ESD organic TFT,

wherein each ESD organic TFT include an organic semiconductor and an auxiliary electrode on the organic semiconductor layer,

wherein the gate electrode is electrically connected to the auxiliary electrode through a contact hole.

2. The liquid crystal display device of claim **1**, wherein: the drain electrode of the first ESD organic TFT and the gate electrode of the third ESD organic TFT are electrically connected and the source electrode of the second ESD organic TFT and the gate electrode of the third ESD organic TFT are electrically connected;

the gate electrode and the source electrode of the first ESD organic TFT are electrically connected to one of the gate line or the data line and the gate electrode and the drain electrode of the second ESD organic TFT are electrically connected to the common voltage line;

the source electrode of the third ESD organic TFT is electrically connected to the data line or the gate line and the drain electrode of the third ESD organic TFT are electrically connected to the common voltage line; and each ESD organic TFT comprises an organic semiconductor layer disposed between the source electrode and drain electrode.

3. The liquid crystal display device of claim **1**, wherein the common voltage line is disposed on the substrate around a perimeter of the display region.

4. The liquid crystal display device of claim **1**, wherein each ESD protection element connected to the gate line is electrically connected between the gate line and the common voltage line and each ESD protection element connected to the data line is electrically connected between the data line and the common voltage line.

5. The liquid crystal display device of claim **1**, wherein one of the data line or the gate line is disposed in the same layer of the device as the common voltage line.

6. The liquid crystal display device of claim **1**, wherein the source electrode and the drain electrode are disposed under the organic semiconductor layer.

* * * * *

专利名称(译)	制造具有顶栅薄膜晶体管的液晶显示器的方法，其中每个栅电极接触辅助电极		
公开(公告)号	US8174635	公开(公告)日	2012-05-08
申请号	US13/166455	申请日	2011-06-22
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	KIM MIN JOO KANG HO CHEOL CHOO KYO SEOP		
发明人	KIM, MIN JOO KANG, HO CHEOL CHOO, KYO SEOP		
IPC分类号	G02F1/136 H01L51/40 G02F1/13		
CPC分类号	G02F1/136204 H01L27/0248 G02F2202/02 G02F2001/13685		
代理机构(译)	BRINKS霍费尔GILSON & LIONE		
审查员(译)	ROBINSON , MARK		
助理审查员(译)	LEE , PAUL		
优先权	1020060125351 2006-12-11 KR		
其他公开文献	US20110249208A1		
外部链接	Espacenet USPTO		

摘要(译)

静电放电保护元件，具有该静电放电保护元件的液晶显示装置和制造方法。第一ESD有机TFT，第二ESD有机TFT，第三ESD有机TFT各自具有栅电极，源电极和漏电极，其中第一和第二ESD有机TFT的源电极和漏电极以及栅电极第三ESD有机TFT的电连接。第一ESD有机TFT的栅电极和源电极电连接到第一阵列线，第二ESD有机TFT的栅电极和漏电极电连接到第二阵列线。第三ESD有机TFT的源极电连接到数据线或栅极线，第三ESD有机TFT的漏极电连接到公共电压线。

