



US 20160171948A1

(19) **United States**(12) **Patent Application Publication****Chen et al.**(10) **Pub. No.: US 2016/0171948 A1**(43) **Pub. Date: Jun. 16, 2016**(54) **LIQUID CRYSTAL DISPLAY PANEL AND DRIVING METHOD THEREOF**(52) **U.S. CL.**CPC *G09G 3/3696* (2013.01); *G09G 3/2003* (2013.01); *G09G 3/3614* (2013.01); *G09G 3/3648* (2013.01); *G09G 3/3674* (2013.01); *G09G 2310/0237* (2013.01); *G09G 2310/0202* (2013.01); *G09G 2300/0426* (2013.01); *G09G 2310/08* (2013.01)(71) Applicant: **SHENZHEN CHINA STAR OPTOELECTRONICS TECHNOLOGY CO., LTD.**, Shenzhen, Guangdong (CN)(72) Inventors: **Cheng Hung Chen**, Shenzhen, Guangdong (CN); **Jiali Jiang**, Shenzhen, Guangdong (CN)(21) Appl. No.: **14/416,401**(22) PCT Filed: **Dec. 30, 2014**(86) PCT No.: **PCT/CN2014/095579**


§ 371 (c)(1),

(2) Date: **Jul. 1, 2015**(30) **Foreign Application Priority Data**

Dec. 10, 2014 (CN) 201410752803.2

Publication Classification(51) **Int. Cl.***G09G 3/36* (2006.01)*G09G 3/20* (2006.01)(57) **ABSTRACT**

A LCD panel and a driving method thereof are disclosed. The LCD panel comprises a plurality of pixel units, each pixel unit comprising: a data line, a first scanning line, a second scanning line, a first switch, a second switch, and a pixel electrode. When the first switch is turned on, said pixel electrode receives data signal of said data line and has an electric potential. During the process of said second switch being critically turned on for a certain time period, the electric potential of said pixel electrode decreases gradually through said second switch. At the moment when said second switch is completely turned on, the electric potential of said pixel electrode is changed instantaneously to a reference electric potential of said common electrode through said second switch. According to the present disclosure, one pixel can present different voltages during different time of one frame, and thus the low color shift display effect can be realized. Moreover, the electric potential of the pixel electrode can be changed to the reference electric potential of the common electrode at the set moment, so that the black frame insertion can be realized.

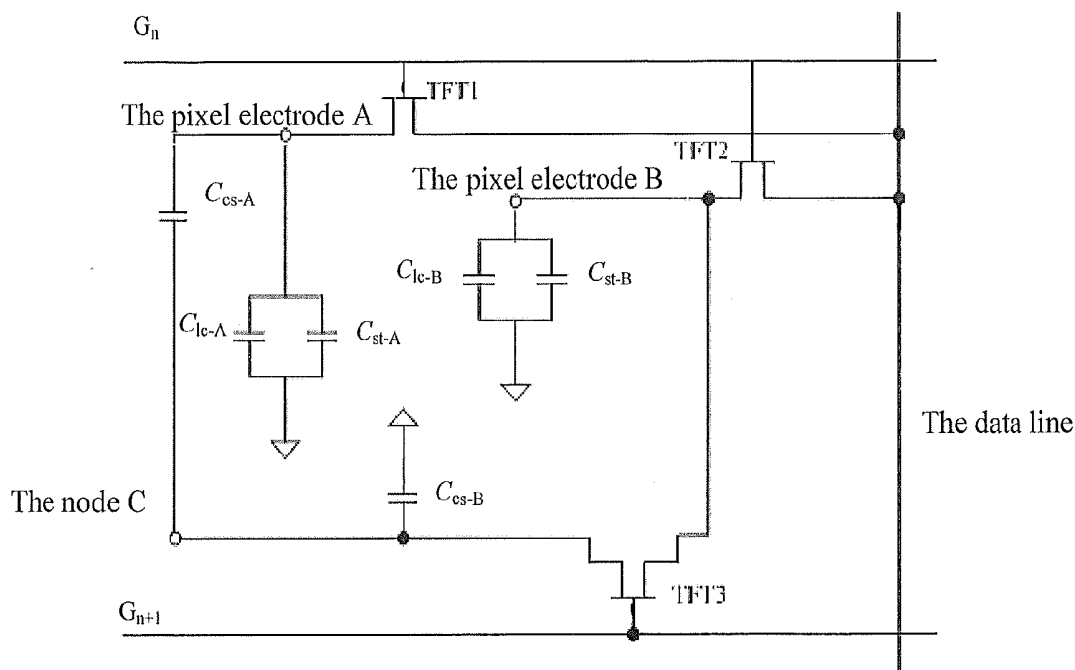

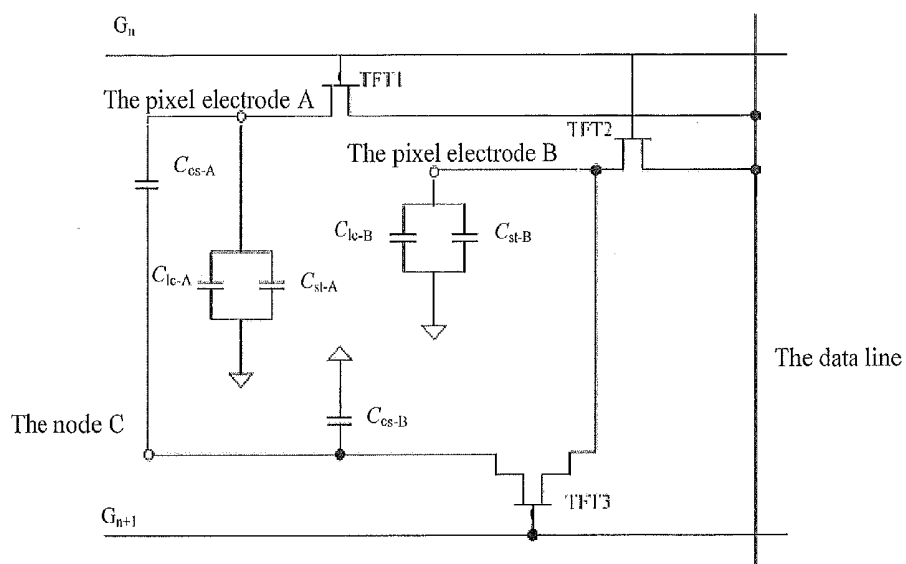


Fig. 1

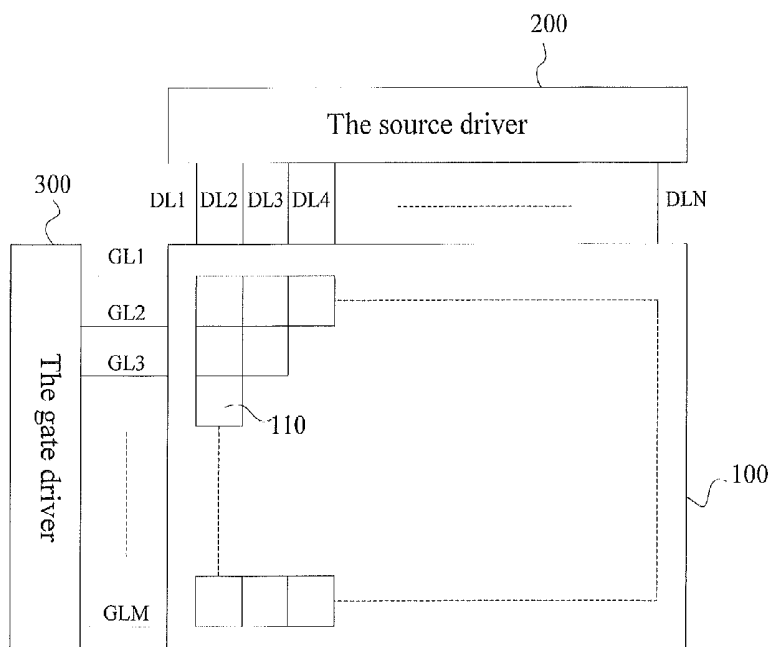


Fig. 2

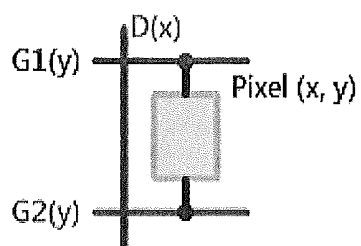


Fig. 3

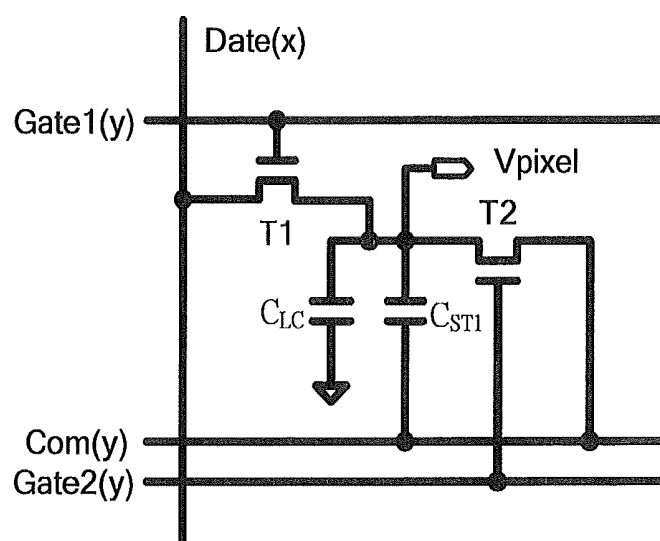


Fig. 4

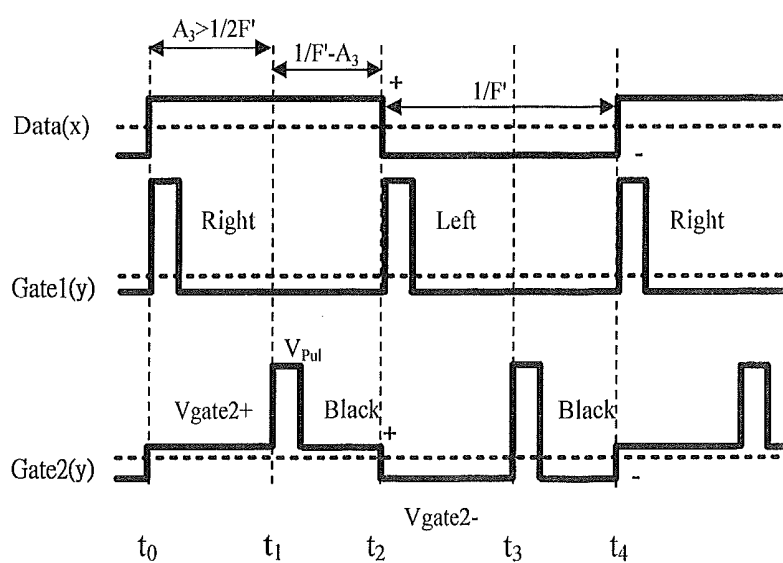


Fig. 5

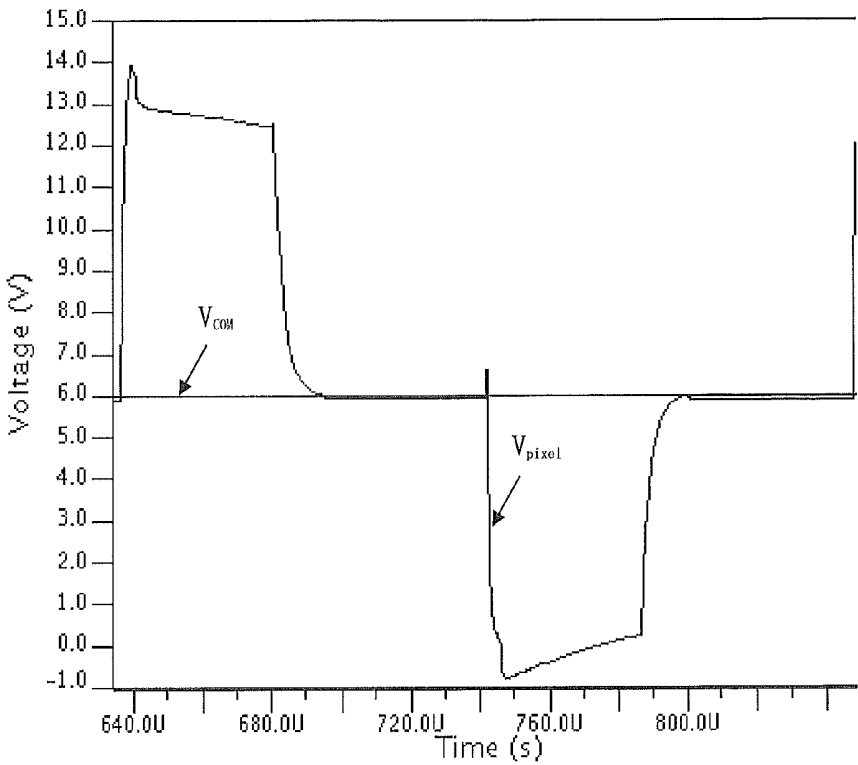


Fig. 6

LIQUID CRYSTAL DISPLAY PANEL AND DRIVING METHOD THEREOF

CROSS REFERENCE TO RELATED APPLICATION

[0001] The present application claims benefit of Chinese patent application CN 201410752803.2, entitled “Liquid Crystal Display Panel and Driving Method Thereof” and filed on Dec. 10, 2014, which is incorporated herein by reference.

FIELD OF THE INVENTION

[0002] The present disclosure relates to a liquid crystal display device, and particularly to a liquid crystal display panel and a method for driving the liquid crystal display panel.

BACKGROUND OF THE INVENTION

[0003] The Vertical Alignment Liquid Crystal Display (VA-LCD) has been commonly used in the field of large sized Thin Film Transistor Liquid Crystal Display (TFT-LCD) by virtue of its advantages of wide viewing angle, high picture contrast, and without friction alignment being necessary. A variety of vertical alignment display technologies have been developed based on different structures and techniques thereof. As the common feature of vertical alignment display technologies, the Color Shift phenomenon under different viewing angles is an important issue in the design of vertical alignment products.

[0004] In order to solve the problem of color shift under wide viewing angles, a plurality of pixel structures are proposed by technicians in the art to reduce the color shift thereof. In the charge sharing method usually used to solve the color shift problem under wide viewing angles, the Indium Tin Oxide (ITO) region of the pixel unit is divided into several domains, and the brightness of different domains are configured to be different from one another through providing a plurality of Thin Film Transistors therein. By means of which, a low color shift display effect under wide viewing angles can be achieved.

[0005] FIG. 1 schematically shows an equivalent circuit of a pixel unit with three Thin Film Transistors (TFTs) in the prior art. The scanning line G_m , when outputs a high-level voltage, charges and discharges a liquid crystal capacitor C_{lc-A} , a storage capacitor C_{st-A} , charge sharing capacitors C_{cs-A} and C_{cs-B} in area A through TFT1, and charges and discharges a liquid crystal capacitor C_{lc-B} and a storage capacitor C_{st-B} in area B through TFT2, so that a pixel voltage V_{pA} and a pixel voltage V_{pB} , which are basically equal to each other, are reached respectively. When the charging and discharging procedures come to an end, the TFT1 and TFT2 are turned off, the scanning line G_{m+1} outputs a high-level voltage, and a TFT3 is turned on. The voltage formed on the node C through the capacitive coupling voltage diverting effect of the charge sharing capacitors C_{cs-A} and C_{cs-B} is the final pixel voltage V_{pB} in area B. Because of the voltage difference between the pixel voltage V_{pA} and the pixel voltage V_{pB} , the brightness of different domains can be different from one another, and thus a low color shift display effect under wide viewing angles can be achieved.

[0006] However, the aperture ratio of the LCD panel manufactured by the above method would decrease greatly compared with the LCD panel with normal pixel design. In this case, the penetration of the Cell, i.e., the liquid crystal screen

equipped with Printed Circuit Board (PCB) and Chip On Film (COF), would decrease, and thus the cost of the backlight source would increase.

[0007] In addition, there is the problem of image spiking when motion pictures are displayed on the liquid crystal display panel, because the response rate of liquid crystal material is slow, and the response time thereof is relatively long. When an object in the picture moves fast, the liquid crystal material cannot track the trajectory of the object in real-time during the process of scanning the picture. In order to solve the above problem of image spiking brought about by the inherent property of the liquid crystal material, the method mainly adopted by a person skilled in the art is black frame insertion technology. That is, a totally black frame is inserted after each frame is displayed and before the next frame is displayed.

[0008] However, a desirable pixel unit design, which enables the liquid crystal display panel comprising the pixel unit to realize both the low color shift display effect and the black frame insertion, has not been proposed until now. Therefore, how to realize the low color shift display effect under wide viewing angles and the black frame insertion without the aperture ratio and the penetration thereof being reduced has become an effort demanding task in the industry.

SUMMARY OF THE INVENTION

[0009] One of the technical problems to be solved by the present disclosure is to provide a liquid crystal display panel, whereby both the low color shift display effect under wide viewing angles and the self black frame insertion can be realized without the aperture ratio and the penetration thereof being reduced. In addition, the present disclosure further provides a method for driving the liquid crystal display panel.

[0010] 1) In order to solve the aforesaid technical problem, the present disclosure provides a liquid crystal display panel, comprising: a plurality of pixel units, each pixel unit comprising: a data line; a first scanning line; a second scanning line, adjacent to said first scanning line, and configured to send a preset scanning signal; a first switch, connected between said data line and a pixel electrode, and configured to be turned on when receives a scanning signal of said first scanning line; a second switch, connected between said pixel electrode and a common electrode, and configured to reach different turn-on states when receives the preset scanning signal of said second scanning line, said turn-on states comprising the state that the second switch is completely turned on and the state that the second switch is critically turned on for a certain time period; a storage capacitor, connected between said pixel electrode and said common electrode; and a liquid crystal capacitor, one end of which is connected to said pixel electrode, wherein when the first switch is turned on, said pixel electrode receives a data signal from said data line to have an electric potential; wherein during the process of said second switch being critically turned on for a certain time period, the electric potential of said pixel electrode decreases gradually through said second switch; and wherein at the moment when said second switch is completely turned on, the electric potential of said pixel electrode is changed instantaneously to a reference electric potential of said common electrode through said second switch.

[0011] 2) In one preferred embodiment of item 1) of the present disclosure, said first switch and said second switch each comprise a gate, a first source/drain, and a second source/drain; the gate of said first switch is connected to said

first scanning line, and the first source/drain and the second source/drain of said first switch are connected to said data line and said pixel electrode respectively; and the gate of said second switch is connected to said second scanning line, and the first source/drain and the second source/drain of said second switch are connected to said pixel electrode and said common electrode respectively.

[0012] 3) In one preferred embodiment of item 1 or item 2) of the present disclosure, said preset scanning signal includes a group of signals with a low-level voltage changing with a variation of data signal of said data line, and a high-level voltage being consistent with the scanning signal of said first scanning line.

[0013] 4) In one preferred embodiment of any one of item 1) to item 3) of the present disclosure, a trigger time of said high-level voltage is set at a time being larger than or equal to half of one frame time.

[0014] 5) In one preferred embodiment of any one of item 1) to item 4) of the present disclosure, a first low-level voltage of said preset scanning signal is obtained based on the reference electric potential of said common electrode and a stipulated regulation voltage; and a second low-level voltage of said preset scanning signal is obtained based on a negative voltage of said data signal and said stipulated regulation voltage.

[0015] 6) According to another aspect of the present disclosure, the present disclosure further provides a method for driving the above liquid crystal display panel, said method comprising: transmitting, during a positive/negative half period, by the first scanning line of each pixel unit, a scanning signal to turn on said first switch, and a data signal of the data line of each pixel unit to said pixel electrode, so that said pixel electrode has an electric potential; transmitting, during said positive/negative half period, by the second scanning line which is adjacent to said first scanning line, the preset scanning signal to enable said second switch to reach different turn-on states; reducing/raising, by said second switch, the electric potential of said pixel electrode gradually during the process of said second switch being critically turned on for a certain time period; and reducing/raising, by said second switch, the electric potential of said pixel electrode instantaneously to a reference electric potential of said common electrode at the moment when said second switch is completely turned on.

[0016] 7) In one preferred embodiment of item 6) of the present disclosure, said preset scanning signal includes a group of signals with a low-level voltage changing with a variation of data signal of said data line, and a high-level voltage being consistent with the scanning signal of said first scanning line.

[0017] 8) In one preferred embodiment of item 6) or item 7) of the present disclosure, a trigger time of said high-level voltage is set at a time being larger than or equal to half of one frame time.

[0018] 9) In one preferred embodiment of any one of item 6) to item 8) of the present disclosure, a first low-level voltage of said preset scanning signal is obtained based on the reference electric potential of said common electrode and a stipulated regulation voltage; and wherein a second low-level voltage of said preset scanning signal is obtained based on a negative voltage of said data signal and said stipulated regulation voltage.

[0019] Compared with the prior art, one embodiment or a plurality of embodiments of the present disclosure may have the following advantages.

[0020] According to the present disclosure, one pixel can present different voltages during different time of one frame through regulation of the design of the pixel units and the electric potential of each scanning line, and thus the low color shift display effect can be realized. In addition, the electric potential of the pixel electrode can be changed to the reference electric potential of the common electrode at a set moment, so that the black frame insertion can be realized.

[0021] Other features and advantages of the present disclosure will be further explained in the following description, and partially become self-evident therefrom, or be understood through the embodiments of the present disclosure. The objectives and advantages of the present disclosure will be achieved through the structure specifically pointed out in the description, claims, and the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] The accompanying drawings are used to provide further understandings of the present disclosure and constitute one part of the description. The drawings are used for interpreting the present disclosure together with the embodiments, not for limiting the present disclosure. In the drawings:

[0023] FIG. 1 schematically shows an equivalent circuit of a pixel unit with three Thin Film Transistors in the prior art;

[0024] FIG. 2 is a structural diagram of a liquid crystal display panel according to one embodiment of the present disclosure;

[0025] FIG. 3 roughly shows a structure of a pixel unit of the liquid crystal display panel according to one embodiment of the present disclosure;

[0026] FIG. 4 schematically shows an equivalent circuit of a pixel unit of the liquid crystal display panel according to one embodiment of the present disclosure;

[0027] FIG. 5 schematically shows a time sequence graph of a method for driving the liquid crystal display panel according to one embodiment of the present disclosure; and

[0028] FIG. 6 schematically shows a simulation result of the method according to the embodiment of the present disclosure.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0029] The present disclosure will be illustrated in detail hereinafter in combination with the accompanying drawings to make the purpose, technical solutions, and advantages of the present disclosure more clear.

[0030] FIG. 2 is a structural diagram of a liquid crystal display panel according to one embodiment of the present disclosure. The display panel comprises an image display area **100**, a source driver **200**, and a gate driver **300**. The image display area **100** comprises an array that is configured by a plurality of data lines (which are also referred to as information lines, see the N data lines DL1-DLN as shown in FIG. 2) and a plurality of scanning lines (which are also referred to as gate lines, see the M scanning lines GL1-GLM as shown in FIG. 2) that are arranged in a staggered manner with respect to each other, and a plurality of pixel structures **110**. The source driver **200** transmits data signal provided therein to the image display area **100** through the plurality of data lines coupled therewith; and the gate driver **300** transmits scanning

signal provided therein to the image display area 100 through the plurality of scanning lines coupled therewith.

[0031] It should be noted that, the term “pixel structure” referred to herein comprises a plurality of pixel units, and each pixel unit is configured in a corresponding pixel area of the pixel areas that are formed by the plurality of data lines and the plurality of scanning lines arranged in a staggered manner with respect to each other. As shown in FIG. 3, a pixel area is formed by a data line $D(x)$ and two scanning lines $G1(y)$ and $G2(y)$, and a pixel unit is configured in said pixel area.

[0032] FIG. 4 schematically shows an equivalent circuit of a pixel unit according to one embodiment of the present disclosure. As shown in FIG. 4, the pixel unit comprises two switching elements T1 and T2, a storage capacitor C_{ST1} and a liquid crystal capacitor C_{LC} . The switching elements T1 and T2 are both preferably made of Thin Film Transistors.

[0033] As shown in FIG. 4, the switching element T1 is connected between a data line $Data(x)$ and a pixel electrode V_{pixel} , and a control end thereof (i.e., a gate) is connected to a scanning line $Gate1(y)$. The storage capacitor C_{ST1} is connected between the pixel electrode V_{pixel} and a common electrode $Com(y)$. One end of the liquid crystal capacitor C_{LC} is connected to the pixel electrode V_{pixel} and the other end thereof is connected to a common electrode. The switching element T1 is turned on or enabled when it receives a turn-on signal from the scanning line $Gate1(y)$, so that the data signal of the data line $Data(x)$ is transmitted to the storage capacitor C_{ST1} through the switching element T1, and the storage capacitor C_{ST1} is charged according to the data signal and then stored with a corresponding electric potential. Based on this, the pixel electrode V_{pixel} has the corresponding electric potential also, and thus the pixel unit displays image data accordingly.

[0034] However, the low color shift display effect cannot be realized through the above display method. In order to reduce the cost of the LCD panel without affecting the aperture ratio and the penetration thereof, the present embodiment provides an improvement of the pixel unit. As shown in FIG. 4, the pixel unit further comprises a switching element T2, which is connected between said common electrode $Com(y)$ and said pixel electrode V_{pixel} , and a control end of which is connected to a scanning line $Gate2(y)$.

[0035] It should be especially noted that, compared with traditional pixel unit design, the signal transmitted by the scanning line $Gate2(y)$ includes a group of alternating signals with a low-level voltage changing with a variation of data signal of said data line $Data(x)$, while a high-level voltage being consistent with the scanning signal of the scanning line $Gate1(y)$. The above configuration enables the pixel electrode to perform gradual electric leakage with T2 being turned on, so that one pixel unit can present different degrees of brightness during different time of one frame, and thus the low color shift display effect can be realized. Moreover, the self black frame insertion can be realized, and thus the image spiking phenomena can be eliminated.

[0036] As shown in FIG. 5, a first low-level voltage V_{gate2+} of a preset scanning signal is obtained based on the reference electric potential V_{com} of said common electrode and a stipulated regulation voltage X ; and a second low-level voltage V_{gate2-} of said preset scanning signal is obtained based on a negative voltage V_{data-} of said data signal and said stipulated regulation voltage X . That is to say, the first low-level voltage V_{gate2+} and the second low-level voltage

V_{gate2-} of said preset scanning signal can be obtained respectively through the following equations:

$$(V_{gate2+}) = V_{com} + X$$

$$(V_{gate2-}) = (V_{data-}) + X$$

[0037] Considering the brightness needed during actual display, the value of X preferably ranges from $-14V$ to $14V$. The brightness of the pixel can be regulated through adjustment of the value of X , and thus the desirable display effect under wide viewing angles can be finally achieved. Of course, the above manner is just a preferred example, and the stipulated regulation voltage X can be selected by a person skilled in the art according to actual needs.

[0038] The switching element T2 can reach different turn-on states during different stages when receives the preset scanning signal of the scanning line $Gate2(y)$. The turn-on states preferably comprise the state that the second switch is completely turned on, and the state that the second switch is critically turned on for a certain time period. The expression “completely turned on” means that the TFT works under its saturation voltage; and the expression “critically turned on”, which can be referred to as “slightly turned on” as well, means that the TFT does not work under its saturation voltage.

[0039] During the process of the switching element T2 being slightly turned on for a certain time period, the electric potential of the pixel electrode V_{pixel} gradually reduces.

[0040] In other words, the electric potential of the pixel electrode V_{pixel} decreases gradually through the switching element T2. In this case, during the whole electric leakage process, the pixel electrode V_{pixel} has different electric potentials at different time of one frame, and thus one pixel can present different degrees of brightness during different time of one frame, so that the low color shift display effect can be realized.

[0041] At the moment when the switching element T2 is completely turned on, the electric potential of the pixel electrode V_{pixel} is changed instantaneously to a reference electric potential of the common electrode $Com(y)$ through the switching element T2. In this case, the electric potential difference at the two ends of the liquid crystal capacitor C_{LC} is near to zero, and the deflection angle of liquid crystal is near to close. Hence, the pixel has the effect of a black frame being inserted, i.e., the black frame insertion function can be realized.

[0042] The specific driving time sequence during three dimensional (3D) display will be illustrated hereinafter with reference to FIG. 5. However, FIG. 5 is just an example, and is not used for limiting the present disclosure. That is, the variation of the electric potential of the pixel electrode V_{pixel} can be adjusted according to actual needs without departing from the spirit and scope of the present disclosure.

[0043] During 3D display, briefly speaking, on the one hand, the electric potential of the pixel electrode V_{pixel} can be reduced gradually through the additional switching element T2 and the scanning signal of the scanning line $Gate2(y)$ used for controlling T2. In this case, a certain electric potential difference ΔV of the pixel electrode V_{pixel} can be formed during different time of one frame, so that a better low color shift display effect can be realized. On the other hand, the electric potential of the pixel electrode V_{pixel} can be changed instantaneously to the reference electric potential of the common electrode $Com(y)$, and thus the black frame insertion function can be realized.

[0044] Specifically, reference can be made to FIG. 4 and FIG. 5. During a positive half period (i.e., a positive polarity reversion period of polarity reversion, wherein the electric potential of the data signal is higher than the electric potential of the common electrode), when the scanning line Gate1(y) transmits the scanning signal (i.e., outputs a high-level voltage), the switching element T1 is turned on according to the scanning signal. The data signal of the data line Data(x) is transmitted to the storage capacitor C_{ST1} through the switching element T1, the storage capacitor C_{ST1} is charged according to the data signal and then stored with the corresponding electric potential, and thus the pixel electrode V_{pixel} has the corresponding electric potential.

[0045] Then, since the scanning line Gate2(y) transmits the first low-level voltage V_{gate2+} during the first time period t0-t1, the switching element T2 is slightly turned on for a certain time period according to the first low-level voltage V_{gate2+} . The electric potential of the pixel electrode V_{pixel} can be reduced gradually (i.e., electric leakage) through the switching element T2, and thus one pixel having different voltages at different time of this period can be realized.

[0046] At the moment t1 when the first time period comes to an end, the scanning line Gate2(y) transmits high-level scanning signal instantaneously, so that the switching element T2 is completely turned on instantaneously, and the electric potential of the pixel electrode V_{pixel} can be reduced instantaneously to the reference electric potential of the common electrode Com(y) to realize the black frame insertion function. That is, a totally black frame is inserted between a right frame image and a left frame image.

[0047] During the second time period t1-t2, the scanning line Gate2(y) transmits the first low-level voltage V_{gate2+} again, the electric potential of the pixel electrode V_{pixel} can be reduced gradually (i.e., electric leakage) through the switching element T2. Thus one pixel having different voltages at different time of the positive half period can be realized.

[0048] It should be noted that, a trigger time (t1) of the high-level voltage of the scanning line Gate2(y) is set at a time larger than or equal to half of one frame time ($\frac{1}{2}F$), as shown in FIG. 5.

[0049] Similarly, during a negative half period (i.e., a negative polarity reversion period of polarity reversion, wherein the electric potential of the data signal is lower than the electric potential of the common electrode), when the scanning line Gate1(y) transmits the scanning signal, the switching element T1 is turned on according to the scanning signal. The data signal of the data line Data(x) is transmitted to the storage capacitor C_{ST1} through the switching element T1, the storage capacitor C_{ST1} is charged according to the data signal and then stored with the corresponding electric potential, and thus the pixel electrode V_{pixel} has the corresponding electric potential.

[0050] Then, since the scanning line Gate2(y) transmits the second low-level voltage V_{gate2-} during the third time period t2-t3, the switching element T2 is slightly turned on for a certain time period according to the second low-level voltage. The electric potential of the pixel electrode V_{pixel} can be raised gradually (i.e., electric leakage) through the switching element T2, and thus one pixel having different voltages at different time of this period can be realized.

[0051] At the moment t3 when the third time period comes to an end, the scanning line Gate2(y) transmits high-level scanning signal instantaneously, the switching element T2 is completely turned on instantaneously, and the electric poten-

tial of the pixel electrode V_{pixel} can be raised instantaneously to the reference electric potential of the common electrode Com(y) to realize the black frame insertion function. That is, a totally black frame is inserted between a left frame image and a right frame image.

[0052] During the fourth time period t3-t4, the scanning line Gate2(y) transmits the second low-level voltage V_{gate2-} again, the electric potential of the pixel electrode V_{pixel} can be reduced gradually (i.e., electric leakage) through the switching element T2. Thus one pixel having different voltages at different time of the negative half period can be realized.

[0053] In this manner, during both positive polarity reversion operation and negative polarity reversion operation, one pixel can have different electric potentials during different time of one frame, and can present different degrees of brightness during different time of one frame. Therefore, the low color shift display effect can be realized. Moreover, the electric potential of the pixel electrode can be changed to the reference electric potential of the common electrode Com(y), and thus the black frame insertion function can be realized.

[0054] In addition, compared with the prior art, no additional Thin Film Transistors or capacitors is added to the pixel unit according to the present embodiment. Therefore, the aperture ratio and the penetration of the Cell are not affected, and the cost of the backlight source is not increased.

[0055] Further, the result of the embodiment of the present disclosure is examined by the applicant through experiments. As shown in FIG. 6, the electric potential of the pixel electrode V_{pixel} changes gradually, and one pixel can present different voltages during different time of one frame. In addition, when the scanning line Gate2(y) transmits high-level scanning signal, the electric potential of the pixel electrode can be changed to the reference electric potential instantaneously, and thus the black frame insertion function can be realized.

[0056] The preferred embodiments of the present disclosure are stated hereinabove, but the protection scope of the present disclosure is not limited by this. Any changes or substitutes readily conceivable for any one skilled in the art within the technical scope disclosed by the present disclosure shall be covered by the protection scope of the present disclosure. Therefore, the protection scope of the present disclosure shall be determined by the scope as defined in the claims.

1. A liquid crystal display panel, comprising a plurality of pixel units, each pixel unit comprising:

- a data line;
- a first scanning line;
- a second scanning line, adjacent to said first scanning line, and configured to transmit a preset scanning signal;
- a first switch, connected between said data line and a pixel electrode, and configured to be turned on when receives a scanning signal of said first scanning line;
- a second switch, connected between said pixel electrode and a common electrode, and configured to reach different turn-on states when receives the preset scanning signal of said second scanning line, said turn-on states comprising the state that the second switch is completely turned on and the state that the second switch is critically turned on for a certain time period;
- a storage capacitor, connected between said pixel electrode and said common electrode; and
- a liquid crystal capacitor, one end of which is connected to said pixel electrode,

wherein when the first switch is turned on, said pixel electrode receives a data signal from said data line to have an electric potential;

wherein during the process of said second switch being critically turned on for a certain time period, the electric potential of said pixel electrode decreases gradually through said second switch; and

wherein at the moment when said second switch is completely turned on, the electric potential of said pixel electrode is changed instantaneously to a reference electric potential of said common electrode through said second switch.

2. The liquid crystal display panel according to claim 1, wherein

said first switch and said second switch each comprise a gate, a first source/drain, and a second source/drain;

the gate of said first switch is connected to said first scanning line, and the first source/drain and the second source/drain of said first switch are connected to said data line and said pixel electrode respectively; and

the gate of said second switch is connected to said second scanning line, and the first source/drain and the second source/drain of said second switch are connected to said pixel electrode and said common electrode respectively.

3. The liquid crystal display panel according to claim 2, wherein said preset scanning signal includes a group of signals having a low-level voltage changing with a variation of data signal of said data line, and a high-level voltage being consistent with the scanning signal of said first scanning line.

4. The liquid crystal display panel according to claim 3, wherein a trigger time of said high-level voltage is set at a time point larger than or equal to half of one frame time.

5. The liquid crystal display panel according to claim 3, wherein a first low-level voltage of said preset scanning signal is obtained based on the reference electric potential of said common electrode and a stipulated regulation voltage; and

wherein a second low-level voltage of said preset scanning signal is obtained based on a negative voltage of said data signal and said stipulated regulation voltage.

6. A method for driving a liquid crystal display panel, said liquid crystal display panel comprising a plurality of pixel units, each pixel unit comprising: a data line; a first scanning line; a second scanning line, adjacent to said first scanning line, and configured to transmit a preset scanning signal; a first switch, connected between said data line and a pixel electrode, and configured to be turned on when receives a

scanning signal of said first scanning line; a second switch, connected between said pixel electrode and a common electrode, and configured to realize different turn-on states when receives the preset scanning signal of said second scanning line, said turn-on states comprising the state that the second switch is completely turned on and the state that the second switch is critically turned on for a certain time period; a storage capacitor, connected between said pixel electrode and said common electrode; and a liquid crystal capacitor, one end of which is connected to said pixel electrode,

said method comprising:

transmitting, during a positive/negative half period, by the first scanning line of each pixel unit, a scanning signal to turn on said first switch, and a data signal of the data line of each pixel unit to said pixel electrode, so that said pixel electrode has an electric potential;

transmitting, during said positive/negative half period, by the second scanning line which is adjacent to said first scanning line, the preset scanning signal to enable said second switch to reach different turn-on states;

reducing/raising, by said second switch, the electric potential of said pixel electrode gradually during the process of said second switch being critically turned on for a certain time period; and

reducing/raising, by said second switch, the electric potential of said pixel electrode instantaneously to a reference electric potential of said common electrode at the moment when said second switch is completely turned on.

7. The method according to claim 6, wherein said preset scanning signal includes a group of signals having a low-level voltage changing with a variation of data signal of said data line, and a high-level voltage being consistent with the scanning signal of said first scanning line.

8. The method according to claim 7, wherein a trigger time of said high-level voltage is set at a time point larger than or equal to half of one frame time.

9. The method according to claim 7,

wherein a first low-level voltage of said preset scanning signal is obtained based on the reference electric potential of said common electrode and a stipulated regulation voltage; and

wherein a second low-level voltage of said preset scanning signal is obtained based on a negative voltage of said data signal and said stipulated regulation voltage.

* * * * *

专利名称(译)	液晶显示面板及其驱动方法		
公开(公告)号	US20160171948A1	公开(公告)日	2016-06-16
申请号	US14/416401	申请日	2014-12-30
[标]申请(专利权)人(译)	深圳市华星光电技术有限公司		
申请(专利权)人(译)	深圳市中国星光电科技有限公司.		
当前申请(专利权)人(译)	深圳市中国星光电科技有限公司.		
[标]发明人	CHEN CHENG HUNG JIANG JIALI		
发明人	CHEN, CHENG HUNG JIANG, JIALI		
IPC分类号	G09G3/36 G09G3/20		
CPC分类号	G09G3/3696 G09G3/2003 G09G3/3614 G09G3/3648 G09G2310/08 G09G2310/0237 G09G2310/0202 G09G2300/0426 G09G3/3674 G09G3/003 G09G3/3607 G09G3/3659 G09G3/3677 G09G2310/0248 G09G2320/028 G09G2320/0666		
优先权	201410752803.2 2014-12-10 CN		
其他公开文献	US9508304		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种LCD面板及其驱动方法。LCD面板包括多个像素单元，每个像素单元包括：数据线，第一扫描线，第二扫描线，第一开关，第二开关和像素电极。当第一开关导通时，所述像素电极接收所述数据线的数据信号并具有电位。在所述第二开关严重接通一段时间的过程中，所述像素电极的电位通过所述第二开关逐渐减小。在所述第二开关完全导通的时刻，所述像素电极的电位通过所述第二开关瞬间改变为所述公共电极的参考电位。根据本公开，一个像素可以在一帧的不同时间期间呈现不同的电压，因此可以实现低色移显示效果。而且，像素电极的电位可以在设定的时刻改变为公共电极的参考电位，从而可以实现黑框插入。

