



US 20170322462A1

(19) **United States**(12) **Patent Application Publication**
LEE et al.(10) **Pub. No.: US 2017/0322462 A1**(43) **Pub. Date: Nov. 9, 2017**(54) **LIQUID CRYSTAL DISPLAY DEVICE****G02F 1/1368** (2006.01)**G02F 1/1333** (2006.01)(71) Applicant: **SAMSUNG DISPLAY CO., LTD.**,
Yongin-si (KR)(52) **U.S. Cl.**CPC **G02F 1/134309** (2013.01); **H01L 27/124**
(2013.01); **G02F 1/136286** (2013.01); **G02F**
1/133512 (2013.01); **G02F 1/133514**
(2013.01); **G02F 1/1368** (2013.01); **G02F**
1/133345 (2013.01); **G02F 1/13439** (2013.01);
G02F 1/13394 (2013.01); **G02F 1/133707**
(2013.01); **G02F 2001/133357** (2013.01);
G02F 2201/121 (2013.01); **G02F 2201/123**
(2013.01)(72) Inventors: **Se Hyun LEE**, Seoul (KR); **Hak Sun**
CHANG, Yongin-si (KR); **Cheol**
SHIN, Hwaseong-si (KR)(21) Appl. No.: **15/351,694**(22) Filed: **Nov. 15, 2016**(30) **Foreign Application Priority Data**

May 3, 2016 (KR) 10-2016-0054473

Publication Classification(51) **Int. Cl.****G02F 1/1343** (2006.01)**G02F 1/1362** (2006.01)**G02F 1/1335** (2006.01)**G02F 1/1335** (2006.01)**G02F 1/1333** (2006.01)**G02F 1/1343** (2006.01)**G02F 1/1339** (2006.01)**G02F 1/1337** (2006.01)**H01L 27/12** (2006.01)(57) **ABSTRACT**

A liquid crystal display device includes a substrate, and a pixel electrode disposed on the substrate, the pixel electrode including a first stem electrode that extends in a first direction, a second stem electrode that extends in a second direction perpendicular to the first direction and intersects with the first stem electrode, a plurality of branch electrodes, the branch electrodes extending obliquely to the first direction and the second direction from the first stem electrode and the second stem electrode, a first connection electrode that connects distal ends of some of the branch electrodes to each other, extends in the first direction and intersects with the second stem electrode, and a first edge electrode that is connected to one distal end of the second stem electrode and extends in the first direction.

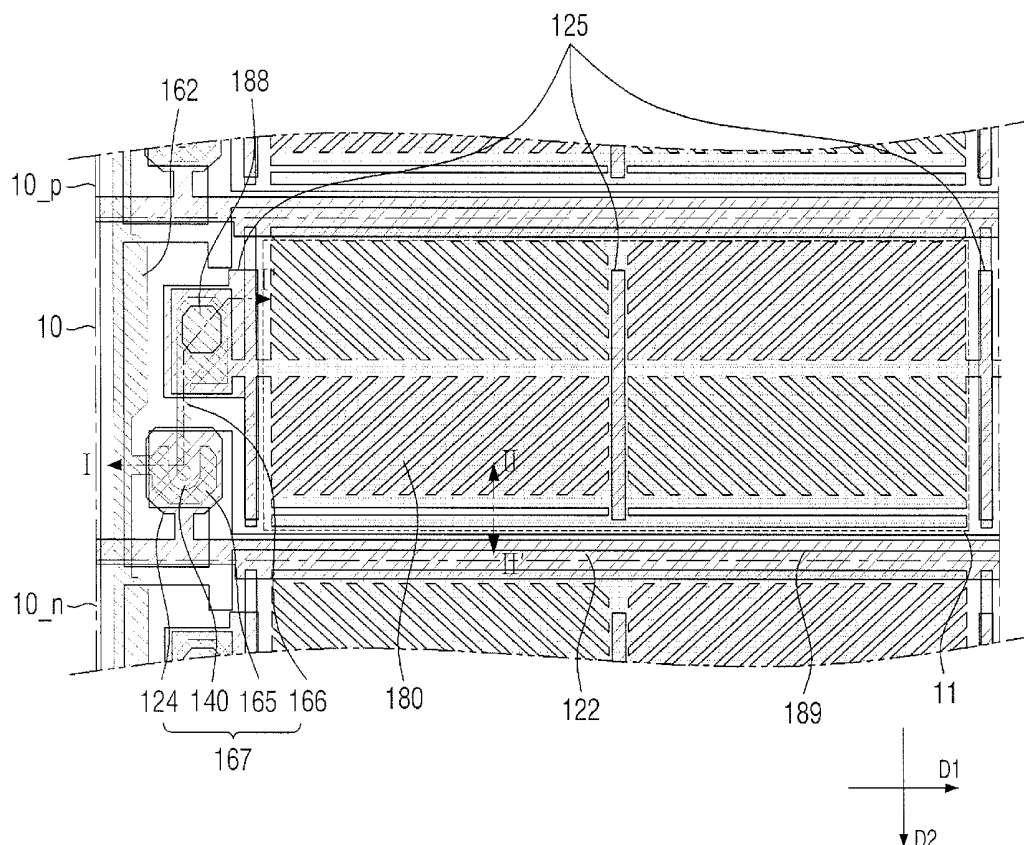


FIG. 2

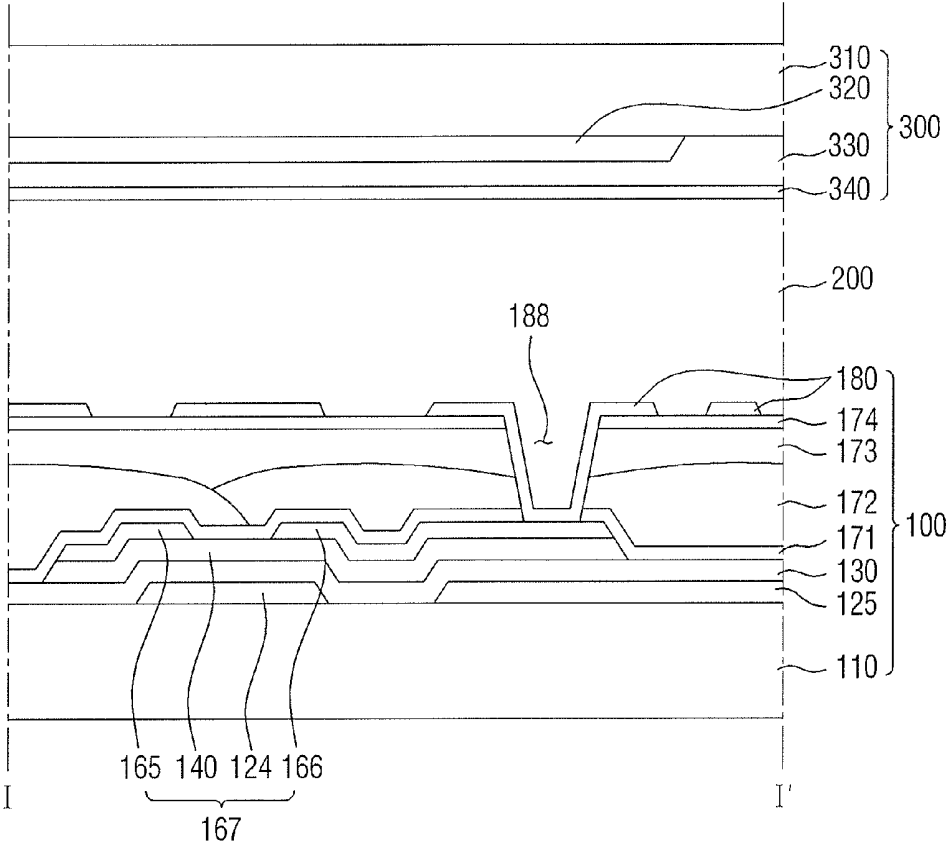


FIG. 3

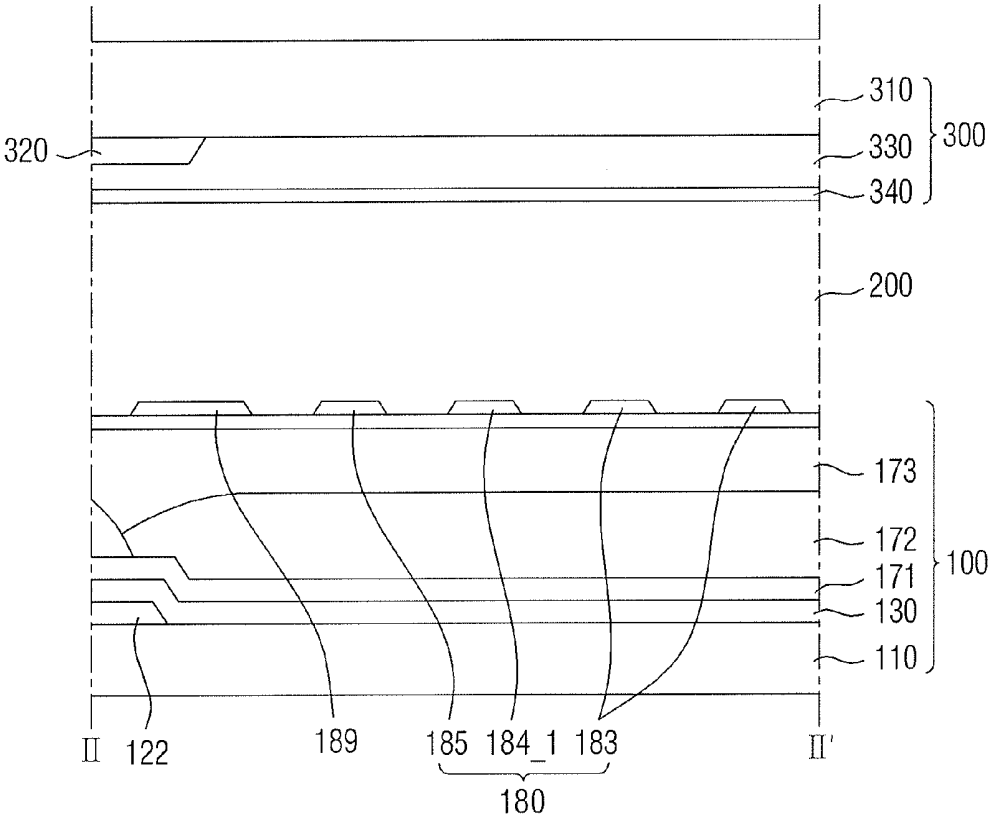


FIG. 4

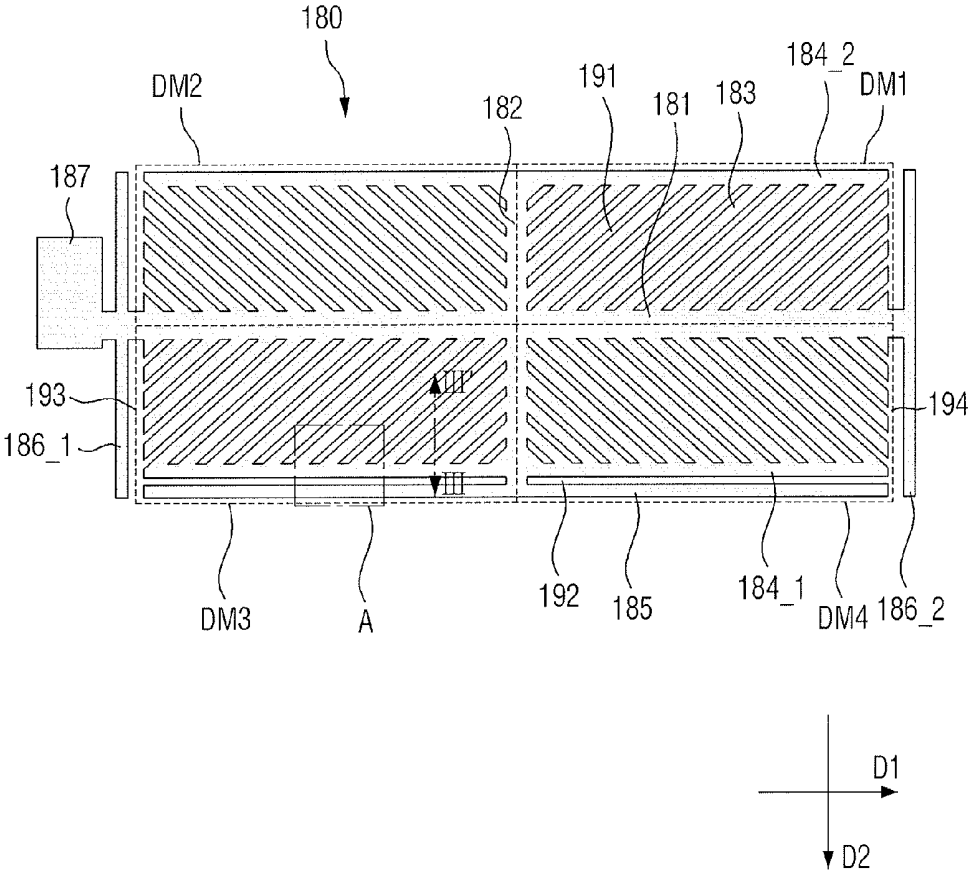


FIG. 5

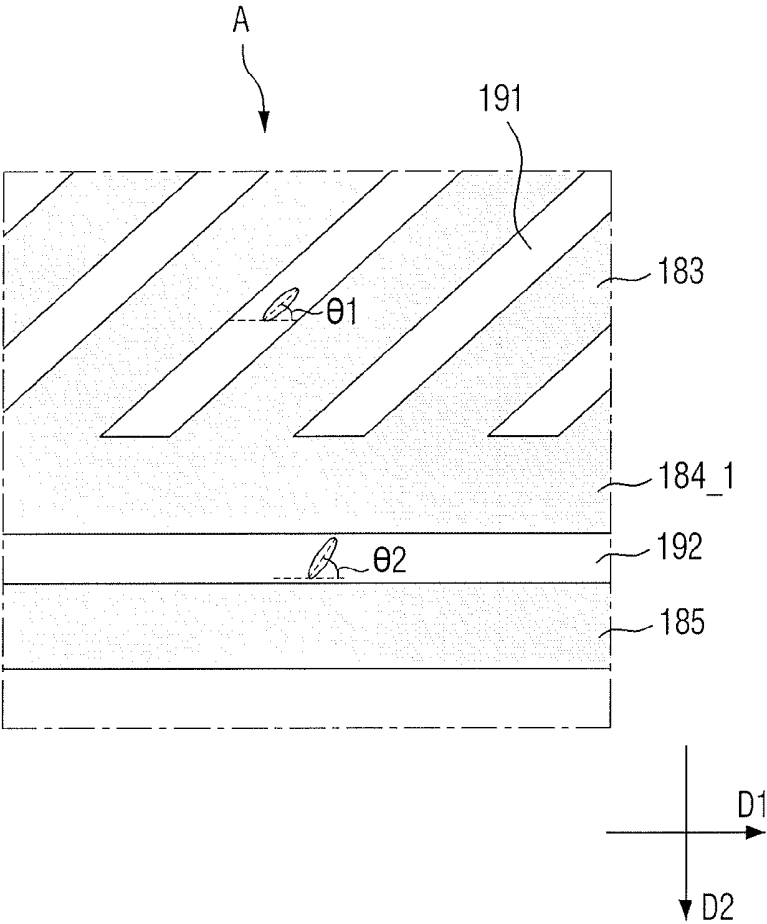


FIG. 6

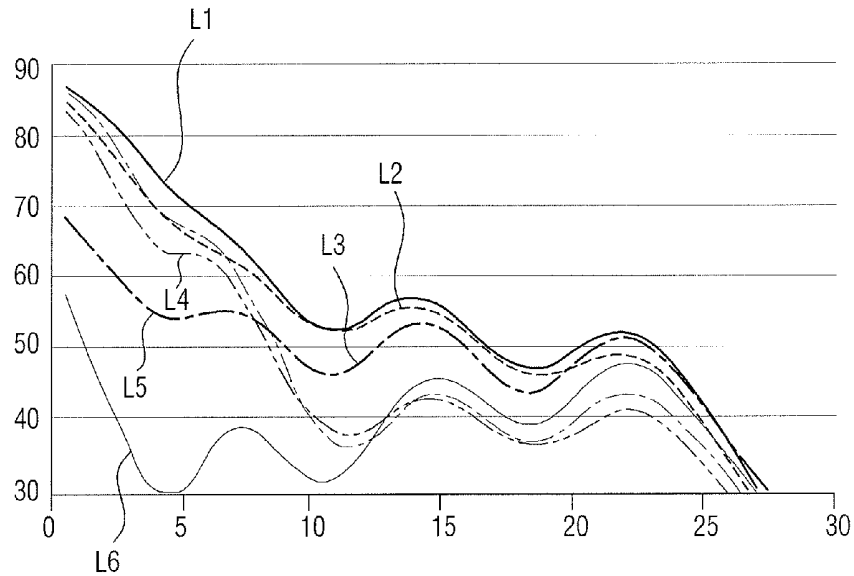


FIG. 7

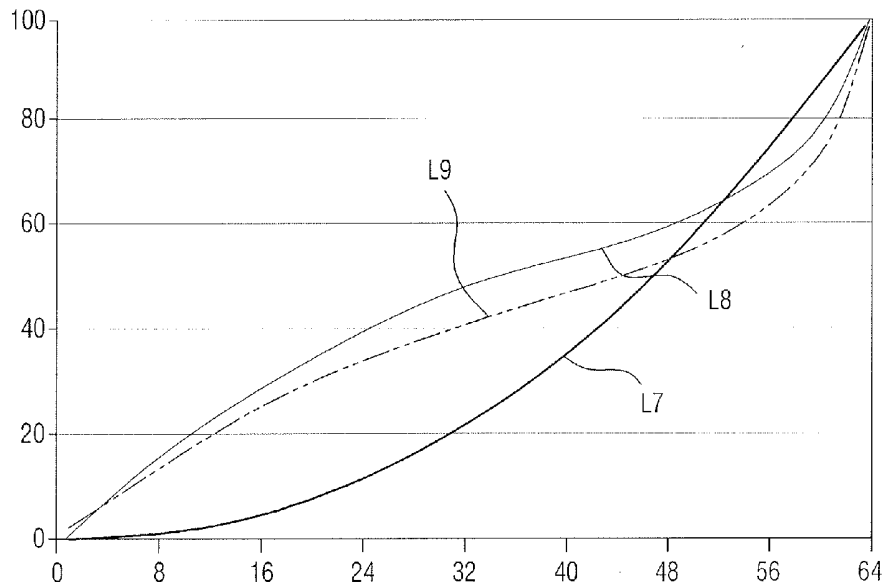


FIG. 8

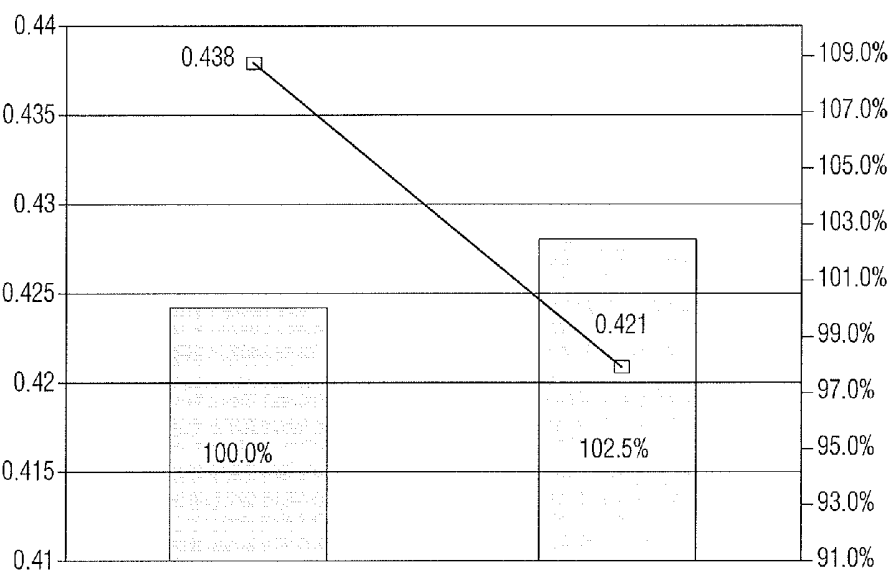


FIG. 9

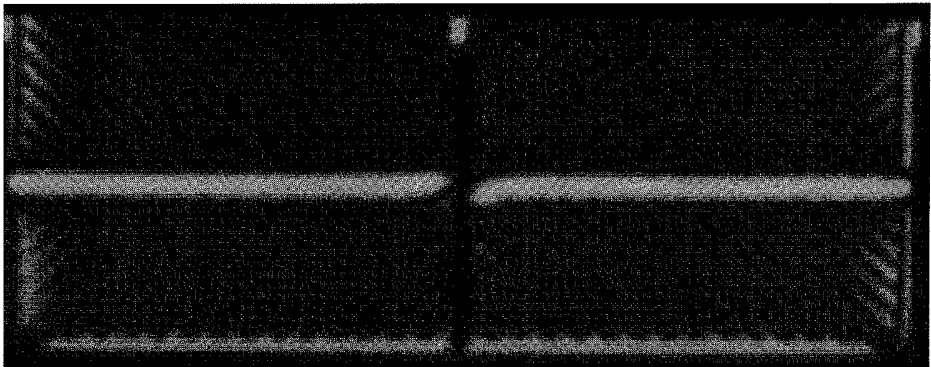


FIG. 10

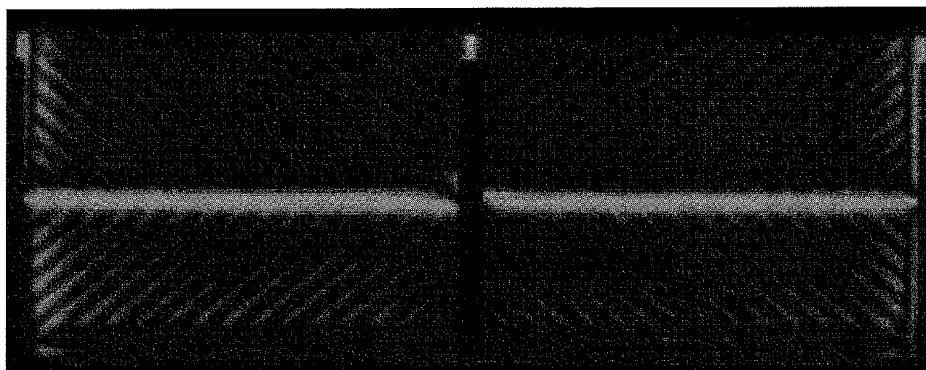


FIG. 11

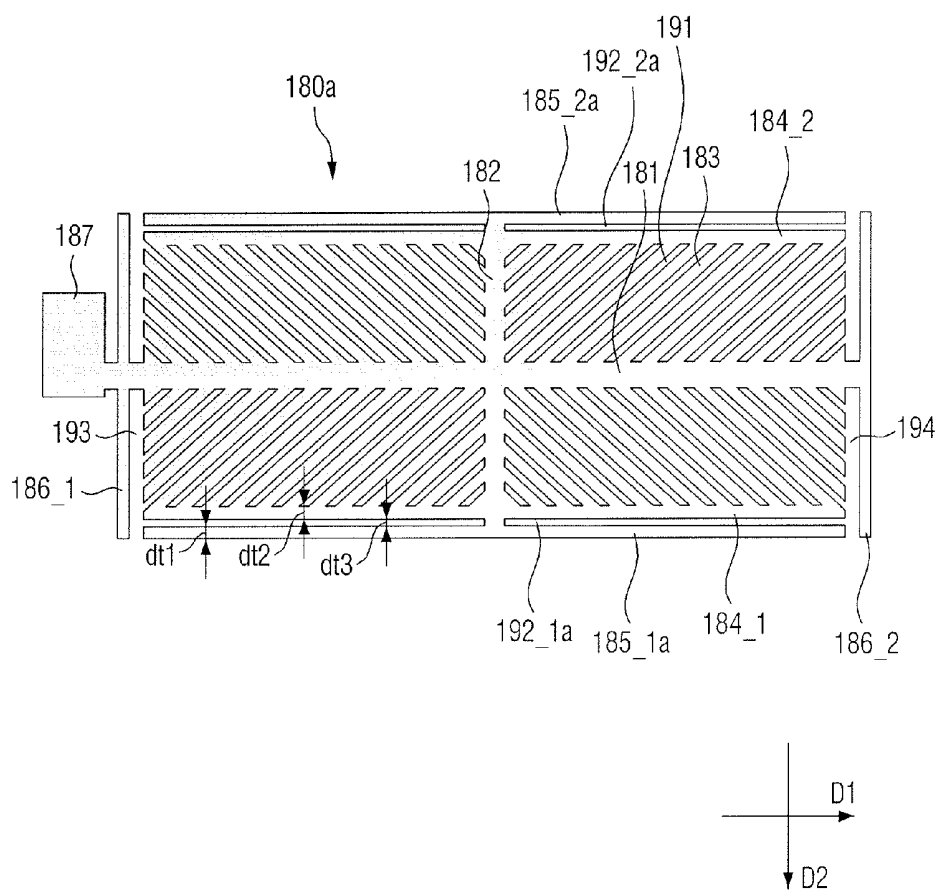


FIG. 12

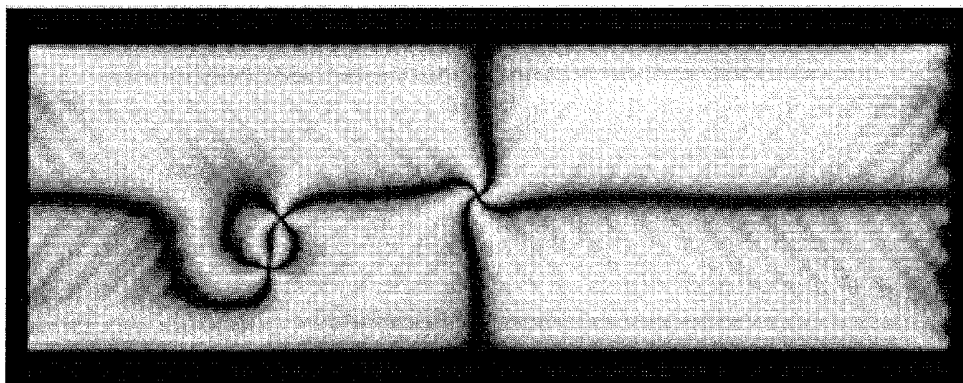


FIG. 13

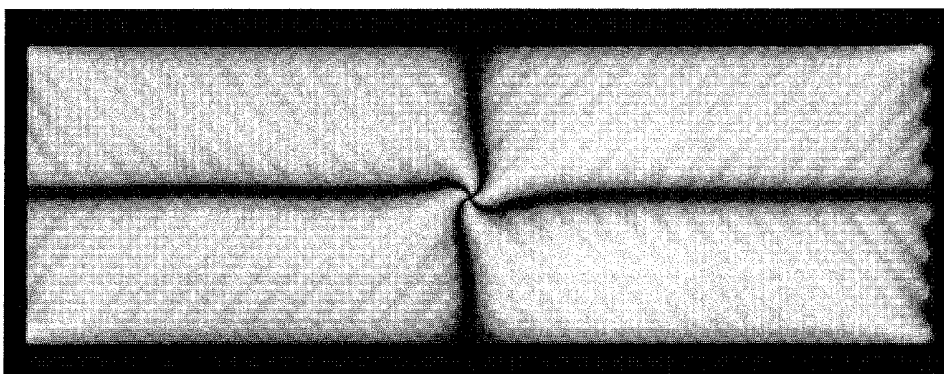


FIG. 14

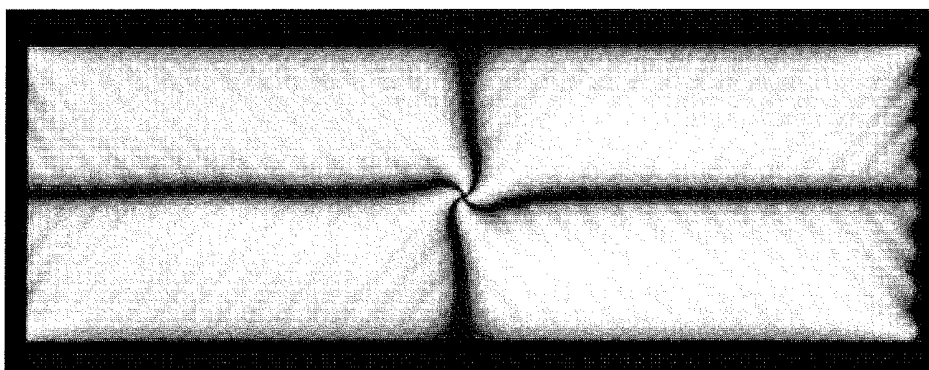


FIG. 15

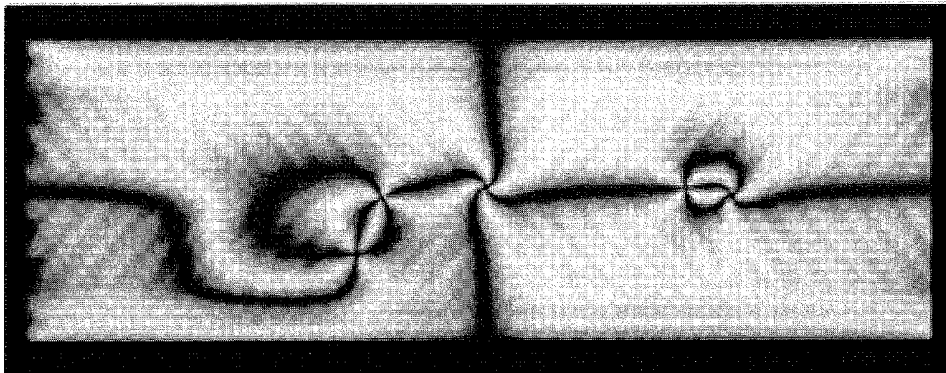


FIG. 16

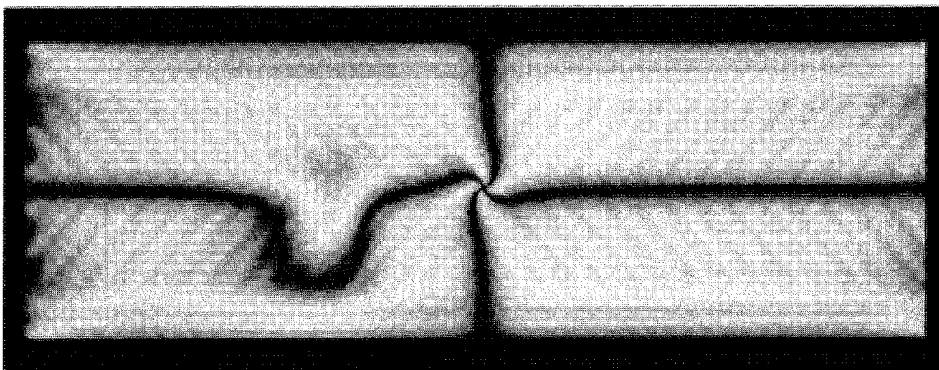


FIG. 17

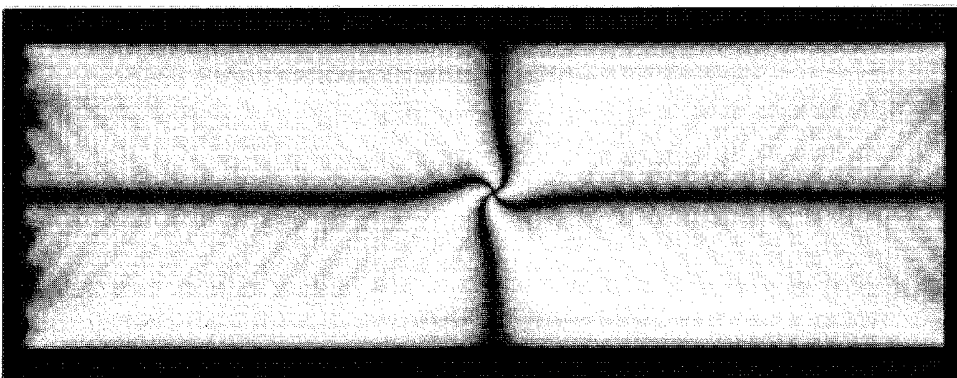


FIG. 19

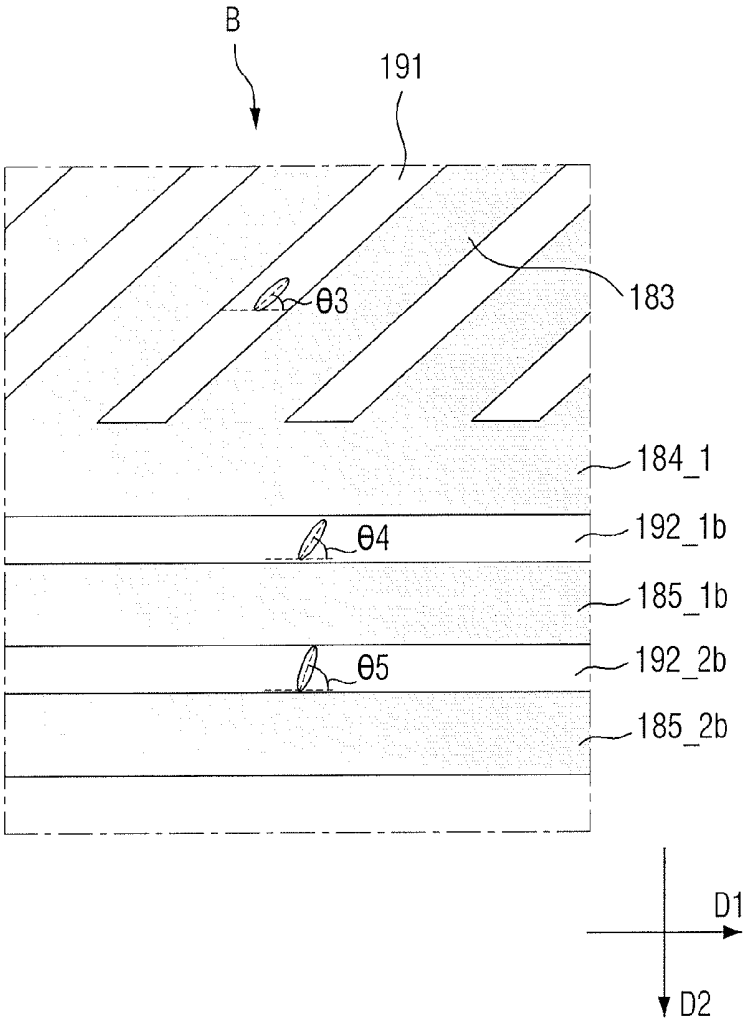


FIG. 20

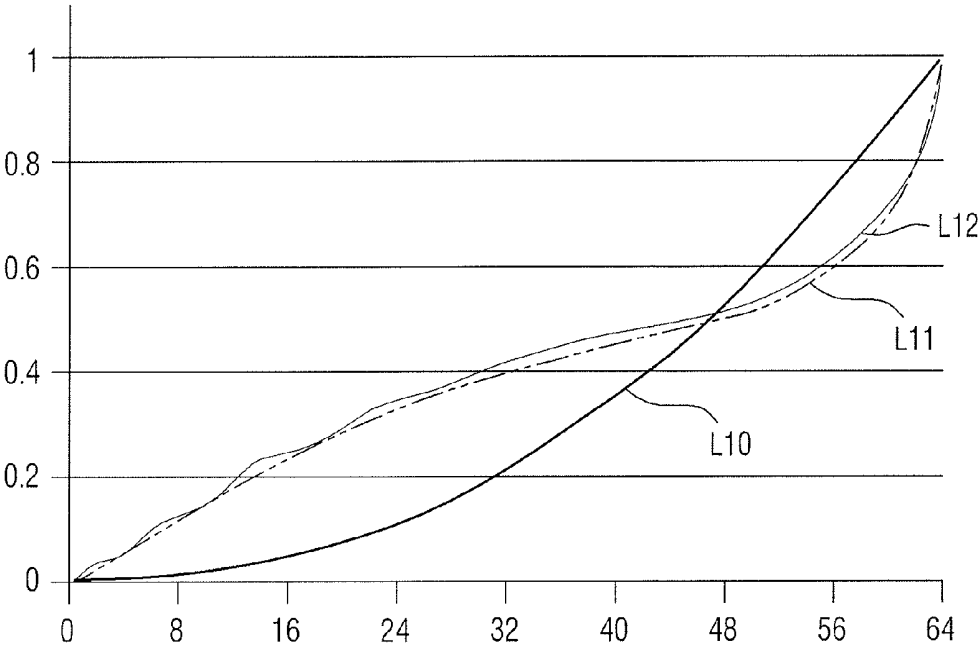


FIG. 21

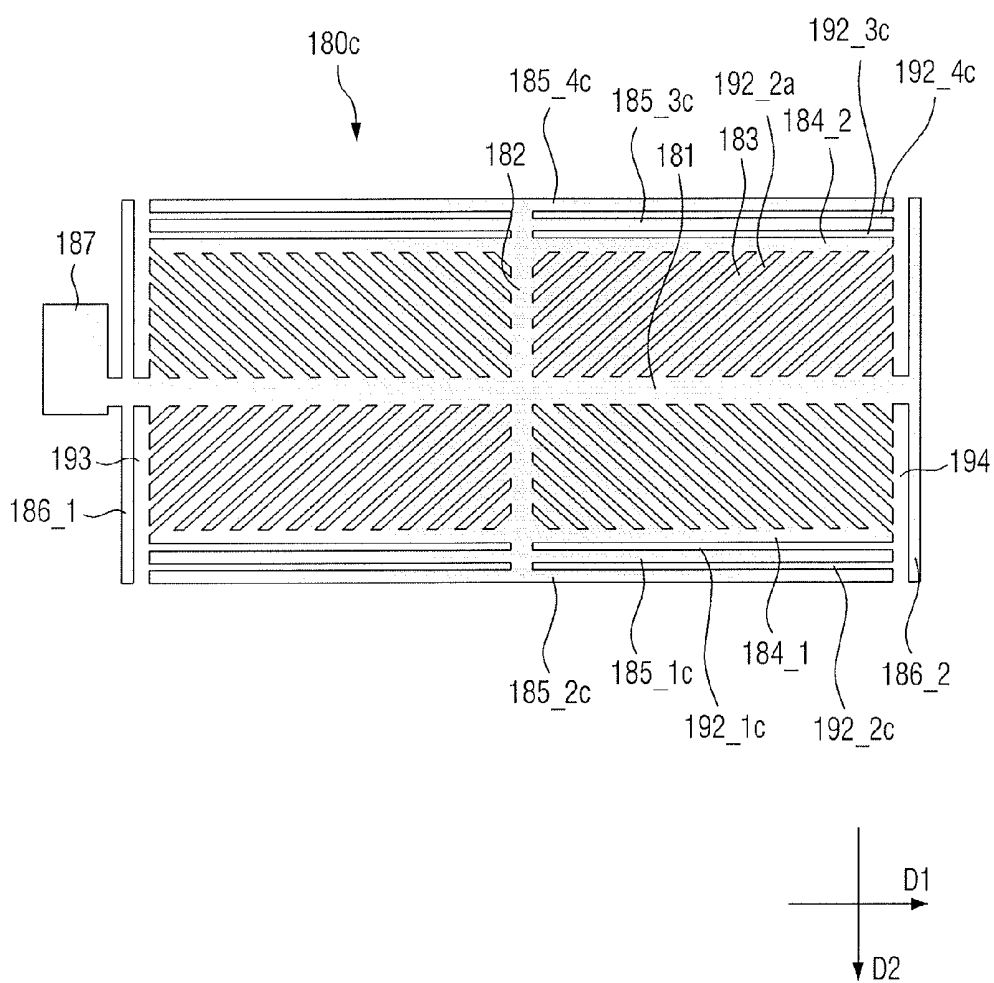


FIG. 22

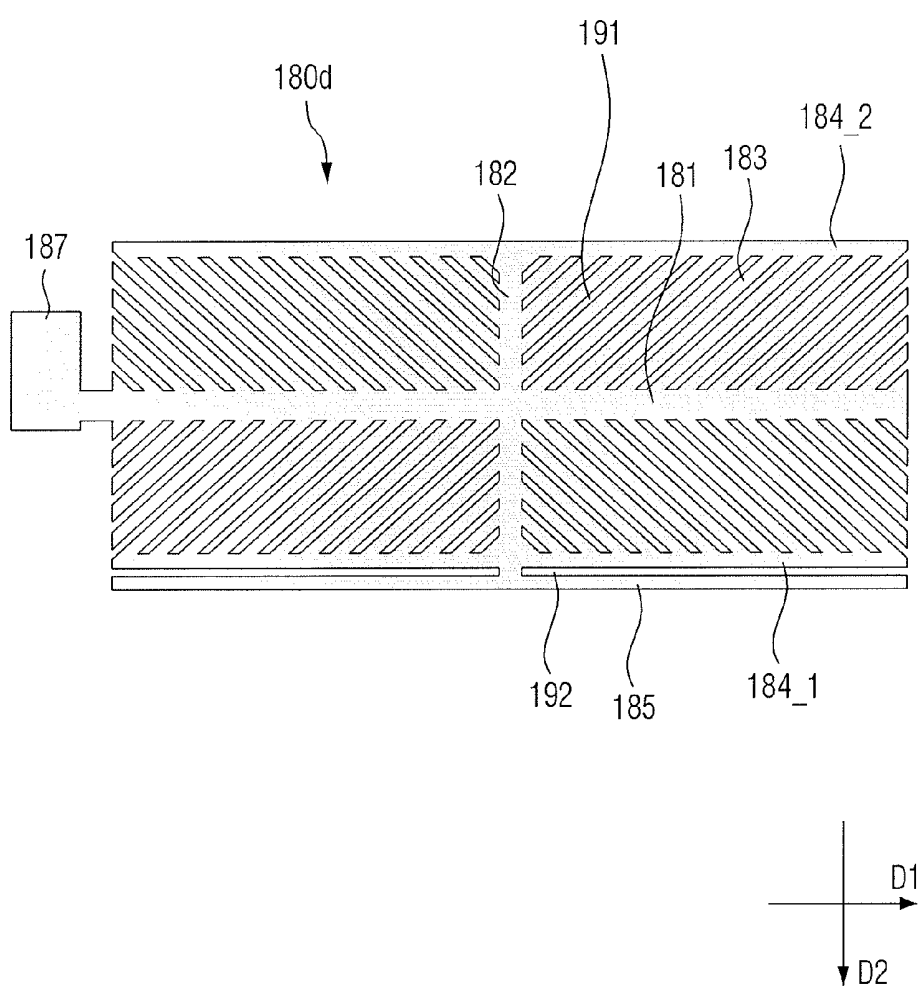


FIG. 23

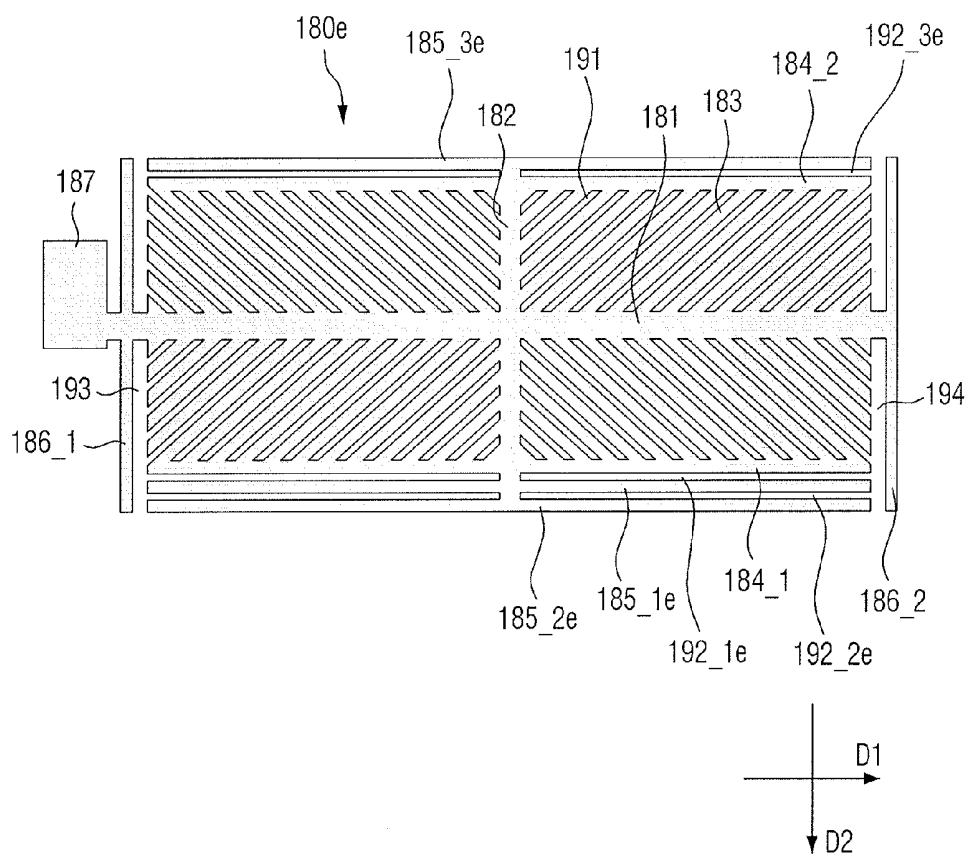


FIG. 24

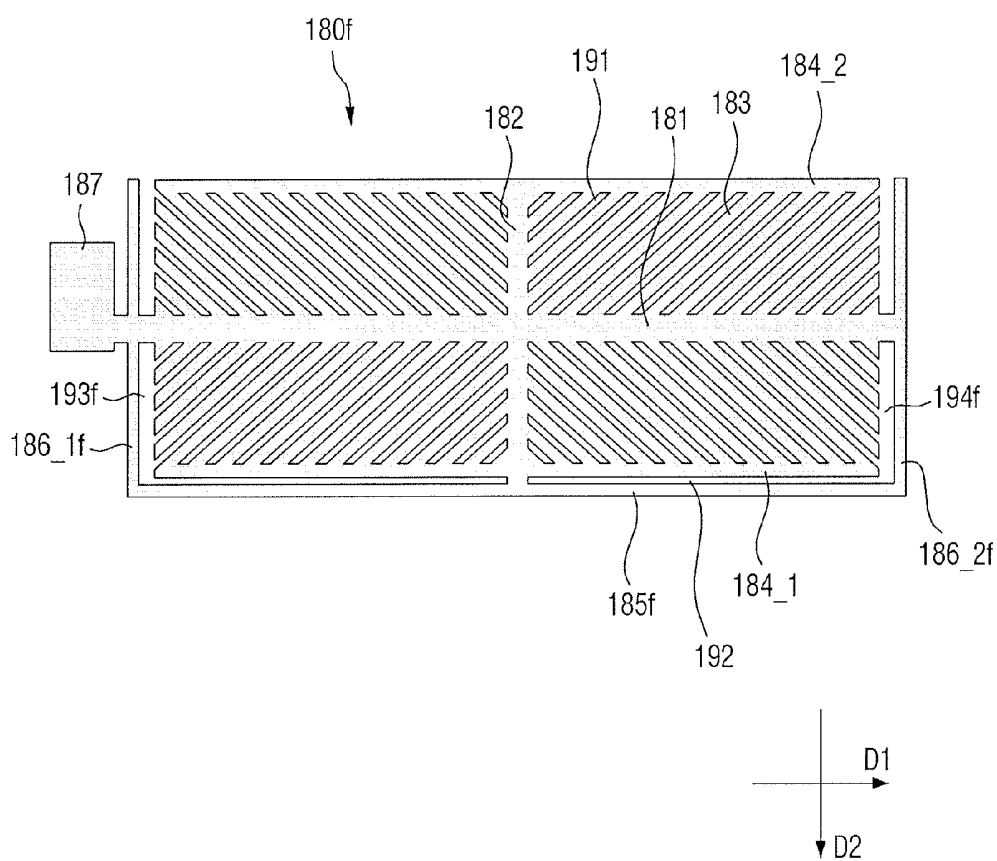


FIG. 25

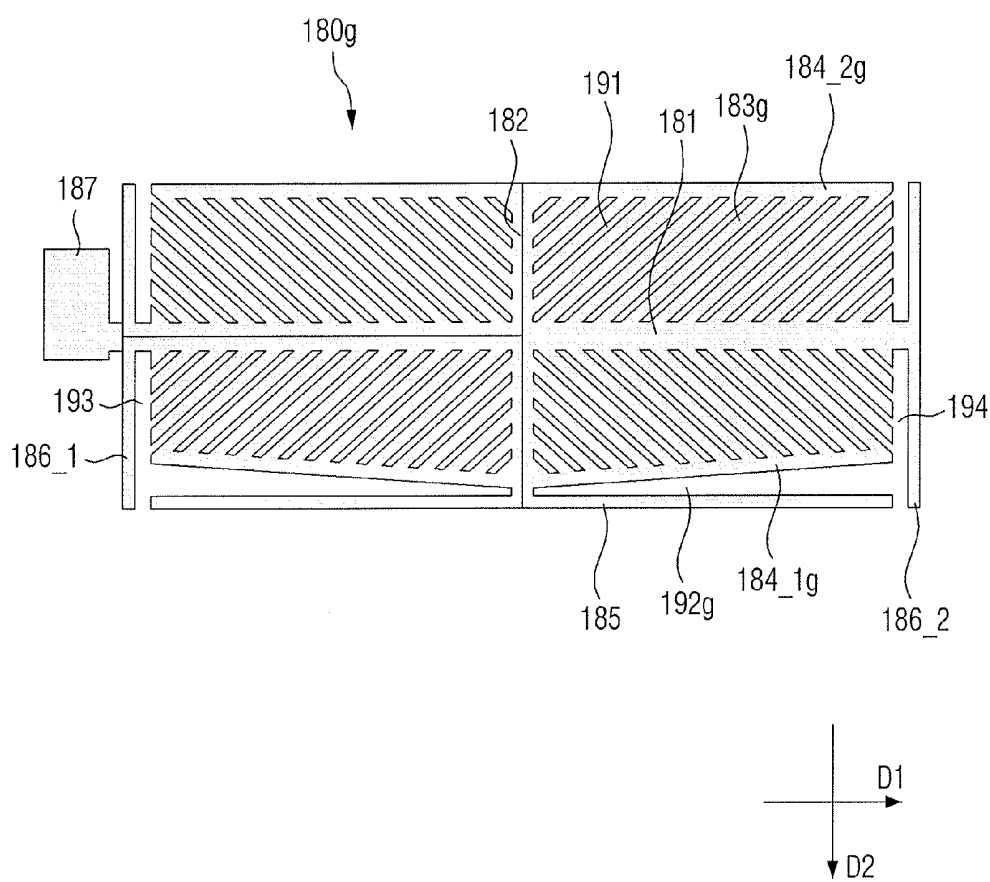


FIG. 27

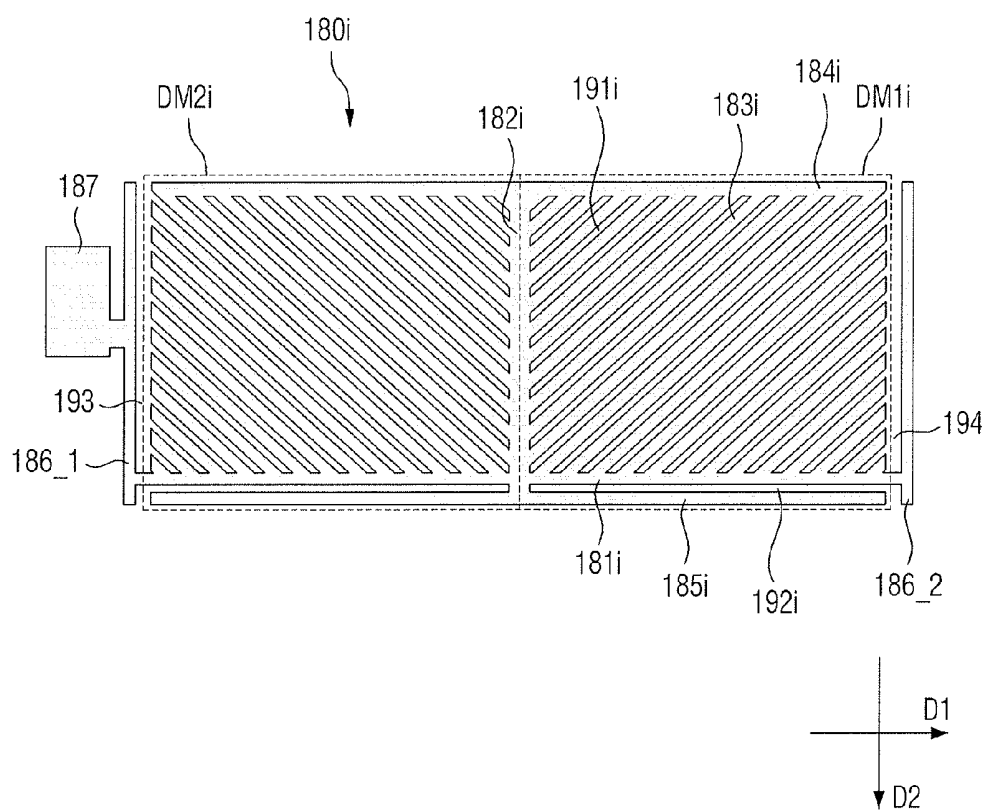


FIG. 28

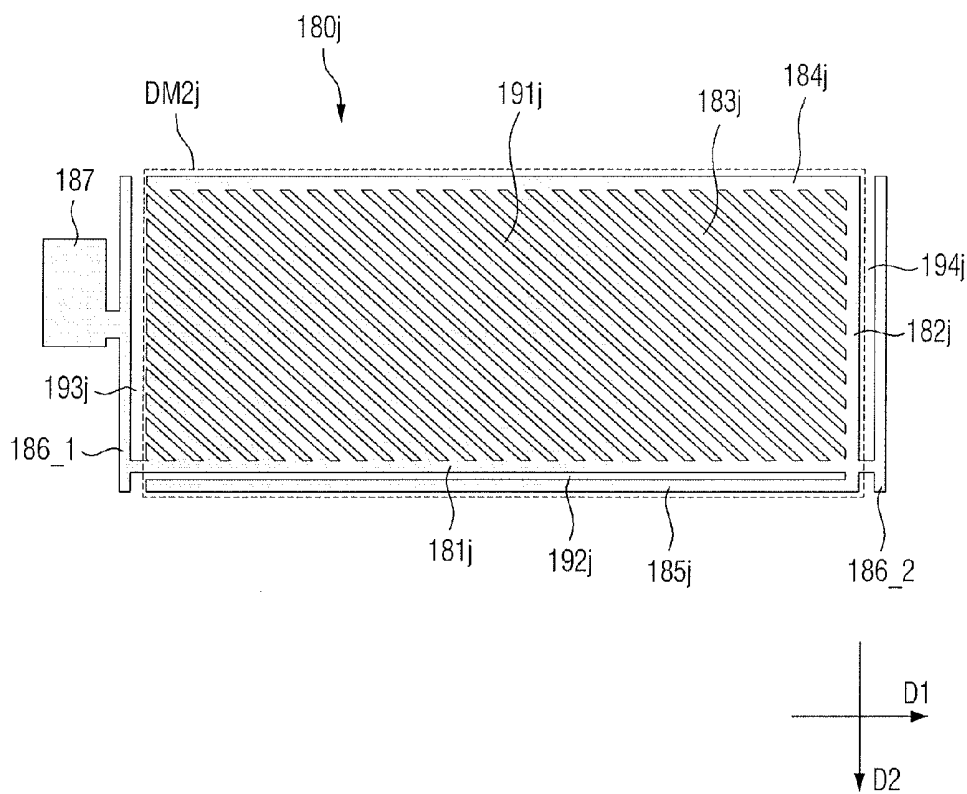


FIG. 29

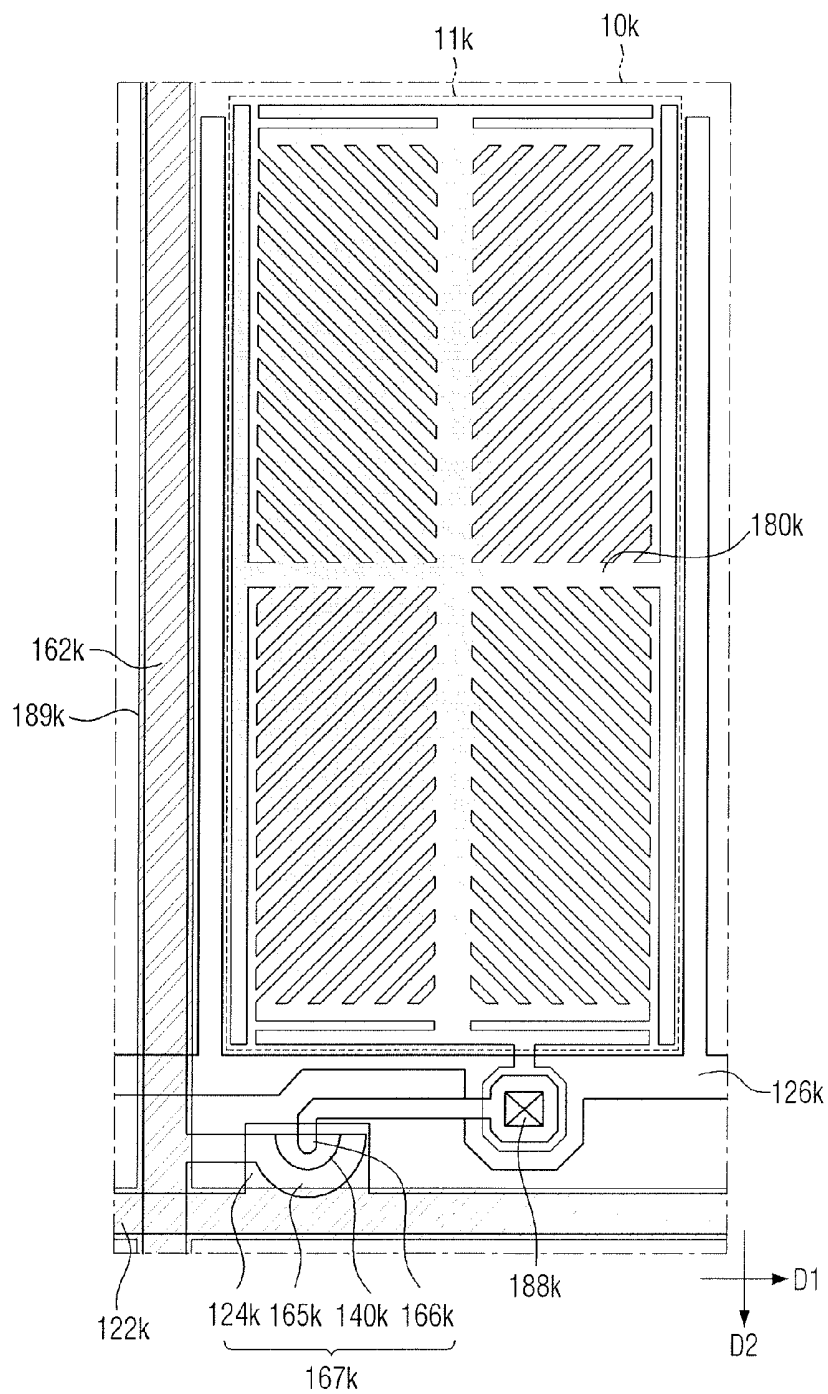


FIG. 30

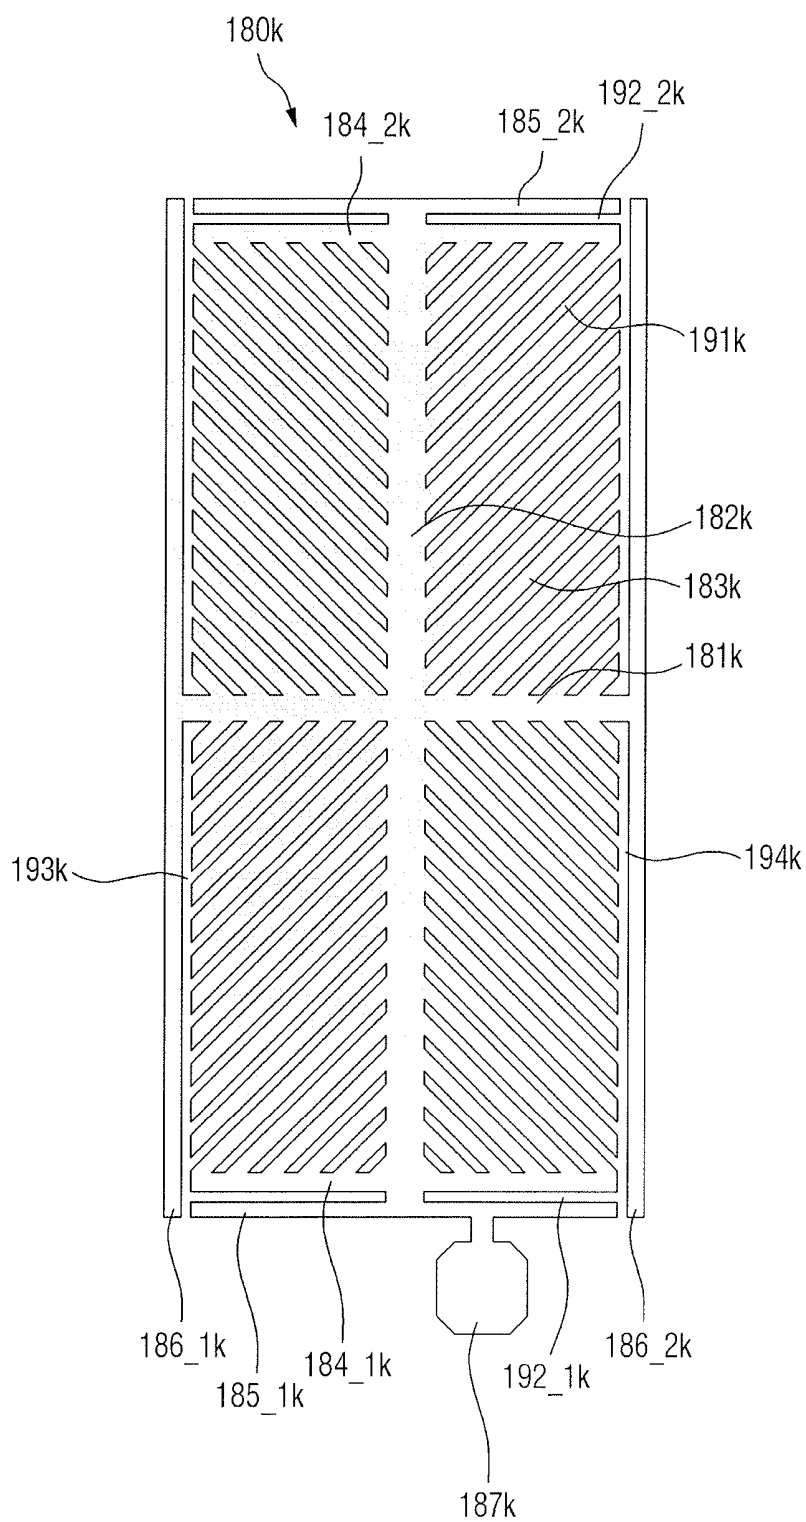


FIG. 31


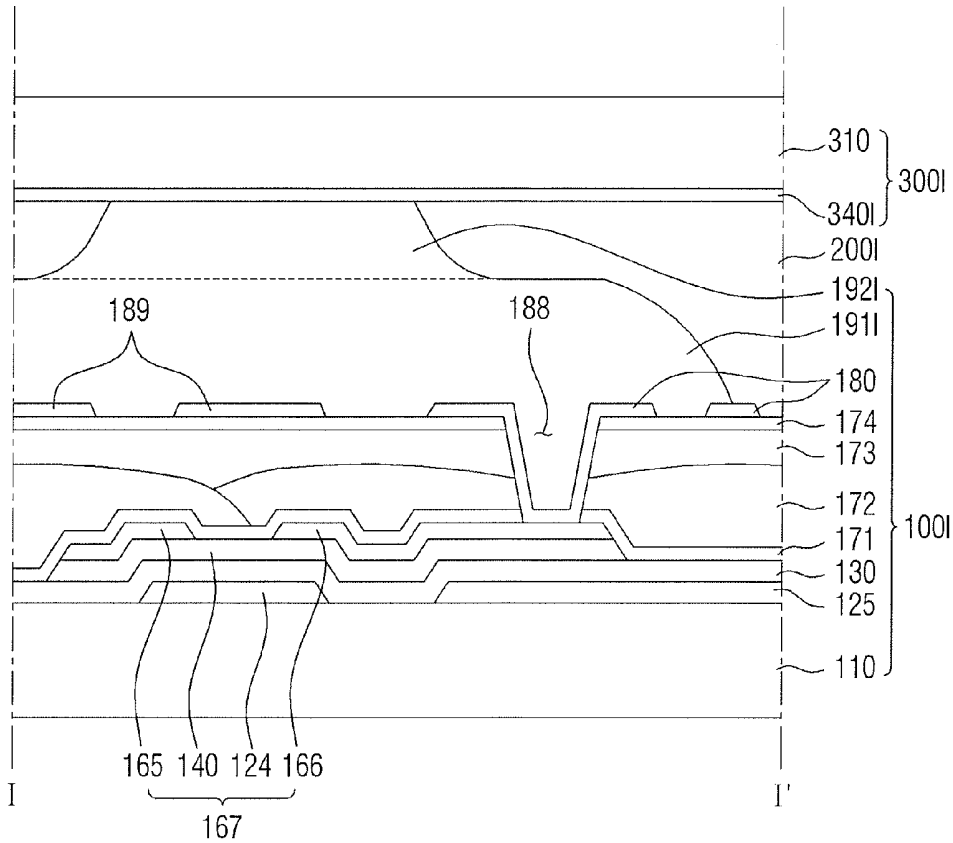


FIG. 32

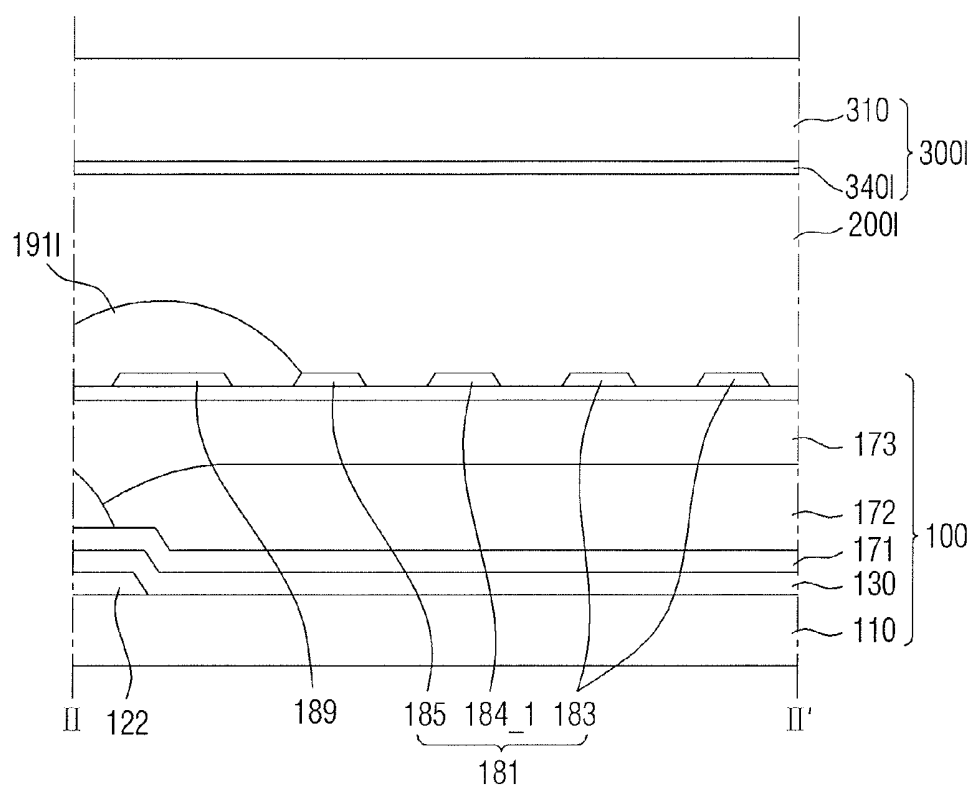

LIQUID CRYSTAL DISPLAY DEVICE

CROSS-REFERENCE TO RELATED APPLICATION

[0001] Korean Patent Application No. 10-2016-0054473, filed on May 3, 2016, in the Korean Intellectual Property Office, and entitled: "Liquid Crystal Display Device," is incorporated by reference herein in its entirety.

BACKGROUND

1. Field

[0002] Embodiments relate to a liquid crystal display device

2. Description of the Related Art

[0003] The liquid crystal display device is one of display devices that are most widely used at present. The liquid crystal display device includes two substrates formed with field-generating electrodes such as a pixel electrode and a common electrode, and a liquid crystal layer injected therebetween, and displays an image, by applying a voltage to the field-generating electrodes to form the electric field in the liquid crystal layer, and by determining the alignment of the liquid crystal of the liquid crystal layer and controlling the polarization of incident light.

SUMMARY

[0004] Embodiments are directed to a liquid crystal display device including a substrate, and a pixel electrode disposed on the substrate, the pixel electrode including a first stem electrode that extends in a first direction, a second stem electrode that extends in a second direction perpendicular to the first direction and intersects with the first stem electrode, a plurality of branch electrodes, the branch electrodes extending obliquely to the first direction and the second direction from the first stem electrode and the second stem electrode, a first connection electrode that connects distal ends of some of the branch electrodes to each other, extends in the first direction and intersects with the second stem electrode, and a first edge electrode that is connected to one distal end of the second stem electrode and extends in the first direction.

[0005] Embodiments are also directed to a liquid crystal display device including a substrate, a first gate line and a second gate line that are disposed on the substrate, extend in a first direction, and are insulated from each other, a data line that is disposed on the first gate line, is insulated from the first gate line and the second gate line, and extends in a second direction perpendicular to the first direction, and a pixel electrode that is disposed on the data line and is insulated from the first gate line, the second gate line, and the data line, the pixel electrode including a first stem electrode that extends in a first direction, a second stem electrode that extends in the second direction and intersects with the first stem electrode, a plurality of branch electrodes, the branch electrodes extending obliquely to the first direction and the second direction from the first stem electrode and the second stem electrode, a first connection electrode that connects distal ends of some of the branch electrodes to each other, extends in the first direction, and intersects with the second stem electrode, a second connection electrode that connects the distal ends of the remaining branch elec-

trodes to each other, extends in the first direction, and intersects with the second stem electrode on an opposite side of the first connection electrode, and a first edge electrode that is connected to one distal end of the second stem electrode and extends in the first direction. The first edge electrode may be disposed between the first connection electrode and the first gate line, and the second connection electrode may be disposed to overlap the second gate line.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] Features will become apparent to those of skill in the art by describing in detail example embodiments with reference to the attached drawings in which:

[0007] FIG. 1 illustrates a layout diagram of a first display substrate that is included in a liquid crystal display device according to an example embodiment, more specifically, illustrating a partial structure of a single pixel and two pixels adjacent thereto;

[0008] FIG. 2 illustrates a cross-sectional view of the liquid crystal display device including the first display substrate of FIG. 1 taken along line I-I' of FIG. 1;

[0009] FIG. 3 illustrates a cross-sectional view of the liquid crystal display device including the first display substrate of FIG. 1 taken along the line II-II' of FIG. 1;

[0010] FIG. 4 illustrates a plan view of a pixel electrode of a single pixel of the liquid crystal display device including the first display substrate of FIG. 1;

[0011] FIG. 5 illustrates an enlarged plan view illustrating a region A of FIG. 4;

[0012] FIG. 6 illustrates a graph of the direction in which the liquid crystal is tilted along III-III' of FIG. 4 through measurement;

[0013] FIG. 7 illustrates a graph of the degree of improvement in visibility of the liquid crystal display device according to the embodiment illustrated in FIG. 1;

[0014] FIG. 8 illustrates a graph of the degrees of improvement in transmittance and visibility of the liquid crystal display device according to the embodiment illustrated in FIG. 1;

[0015] FIG. 9 illustrates a photograph obtained in the case of viewing a region corresponding to an active region of the liquid crystal display device according to the embodiment illustrated in FIG. 1 from the front, in a liquid crystal display device according to a comparative example;

[0016] FIG. 10 illustrates a photograph obtained in the case of viewing the active region of the liquid crystal display device according to the embodiment illustrated in FIG. 1 from the front;

[0017] FIG. 11 illustrates a plan view of a pixel electrode of a liquid crystal display device according to another example embodiment;

[0018] FIGS. 12 to 14 illustrate photographs of an active region for each time period in a case where a width of a first connection electrode is 2.6 μm ;

[0019] FIGS. 15 to 17 illustrate photographs of an active region for each time period in a case where the width of the first connection electrode is 3 μm ;

[0020] FIG. 18 illustrates a plan view of a pixel electrode of a liquid crystal display device according to another example embodiment;

[0021] FIG. 19 illustrates an enlarged plan view illustrating a region B of FIG. 18;

[0022] FIG. 20 illustrates a graph of the degree of improvement in visibility of the liquid crystal display device according to the embodiment illustrated in FIG. 18;

[0023] FIG. 21 illustrates a plan view of a pixel electrode of a liquid crystal display device according to still another example embodiment;

[0024] FIG. 22 illustrates a plan view of the pixel electrode of the liquid crystal display device according to still another example embodiment;

[0025] FIG. 23 illustrates a plan view of the pixel electrode of the liquid crystal display device according to still another example embodiment;

[0026] FIG. 24 illustrates a plan view of the pixel electrode of the liquid crystal display device according to still another example embodiment;

[0027] FIG. 25 illustrates a plan view of the pixel electrode of the liquid crystal display device according to still another example embodiment;

[0028] FIG. 26 illustrates a plan view of the pixel electrode of the liquid crystal display device according to still another example embodiment;

[0029] FIG. 27 illustrates a plan view of the pixel electrode of the liquid crystal display device according to still another example embodiment;

[0030] FIG. 28 illustrates a plan view of the pixel electrode of the liquid crystal display device according to still another example embodiment;

[0031] FIG. 29 illustrates a layout diagram of a single pixel of the liquid crystal display device according to still another example embodiment;

[0032] FIG. 30 illustrates an enlarged plan view illustrating the pixel electrode of FIG. 29;

[0033] FIG. 31 illustrates a cross-sectional view taken along a line corresponding to the line I-I' illustrated in FIG. 1 in a liquid crystal display device according to still another example embodiment; and

[0034] FIG. 32 illustrates a cross-sectional view taken along a line corresponding to the line I-I' illustrated in FIG. 1 in the liquid crystal display device according to the embodiment illustrated in FIG. 31.

DETAILED DESCRIPTION

[0035] Example embodiments will now be described more fully hereinafter with reference to the accompanying drawings; however, they may be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey example implementations to those skilled in the art.

[0036] In the drawing figures, the dimensions of layers and regions may be exaggerated for clarity of illustration. Like reference numerals refer to like elements throughout.

[0037] It will be understood that, although the terms first, second, third, etc., may be used herein to describe various elements, these elements should not be limited by these terms. These terms are only used to distinguish one element from another element. Thus, a first element discussed below could be termed a second element without departing from the teachings of the invention.

[0038] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting. As used herein, the singular forms “a,” “an,” and “the” are intended to include the plural forms, including “at least one,” unless the content clearly indicates otherwise.

“Or” means “and/or.” As used herein, the term “and/or” includes any and all combinations of one or more of the associated listed items. It will be further understood that the terms “comprises” and/or “comprising,” or “includes” and/or “including” when used in this specification, specify the presence of stated features, regions, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, regions, integers, steps, operations, elements, components, and/or groups thereof.

[0039] Spatially relative terms, such as “beneath,” “below,” “lower,” “above,” “upper” and the like, may be used herein for ease of description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, elements described as “below” or “beneath” other elements or features would then be oriented “above” the other elements or features. Thus, the example term “below” can encompass both an orientation of above and below. The device may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein interpreted accordingly.

[0040] FIG. 1 is a layout diagram of a first display substrate that is included in a liquid crystal display device according to an example embodiment, more specifically, illustrating a partial structure of a single pixel and two pixels adjacent thereto. FIG. 2 is a cross-sectional view of the liquid crystal display device including the first display substrate of FIG. 1 taken along line I-I' of FIG. 1. FIG. 3 is a cross-sectional view of the liquid crystal display device including the first display substrate of FIG. 1 taken along the line II-II' of FIG. 1. FIG. 4 is a plan view illustrating a pixel electrode of a single pixel of the liquid crystal display device including the first display substrate of FIG. 1. FIG. 5 is an enlarged plan view illustrating a region A of FIG. 4.

[0041] Referring to FIGS. 1 through 5, a liquid crystal display device according to an example embodiment includes a first display substrate 100, a second display substrate 300, and a liquid crystal layer 200. Furthermore, the liquid crystal display device may further include a pair of polarizers attached to the outside surfaces of the first display substrate 100 and the second display substrate 300.

[0042] A switching element for driving the liquid crystal 210 of the liquid crystal layer 200, for example, a thin film transistor 167, is disposed on the first display substrate 100. The second display substrate 300 is a substrate which is disposed to face the first display substrate 100.

[0043] The liquid crystal layer 200 is interposed between the first display substrate 100 and the second display substrate 300, and may include a plurality of liquid crystals 210 having dielectric constant anisotropy. When the electric field is applied between the first display substrate 100 and the second display substrate 300, the liquid crystal 210 may transmit or cut off light by rotating in a particular direction between the first display substrate 100 and the second display substrate 300. Here, the term “rotation” may include the meaning that the alignment of the liquid crystal 210 changes by the electric field, as well as the actual rotation of the liquid crystal 210.

[0044] The liquid crystal display device includes a plurality of pixels 10 arranged in the form of a matrix. The

gradations of each pixel 10 can be independently controlled, and each pixel may be a basic unit for displaying a particular color. As shown in FIG. 2, each pixel 10 includes an active region 11, which is a region in which colors are actually displayed by transmitting the light incident on the bottom of the first display substrate 100 to the top of the second display substrate 300. A total of three pixels 10_p, 10, and 10_n are illustrated in FIG. 1 as an example. For convenience, on the basis of FIG. 1, the pixel 10 arranged at the top is referred to as a previous pixel 10_p and a pixel 10 arranged at the bottom is referred to as a next pixel 10_n. Further, a pixel 10 referred to without a special and additional description will be referred to as a pixel 10 disposed at the center of FIG. 1.

[0045] Hereinafter, the first display substrate 100 will be described.

[0046] Referring to FIG. 2, the first display substrate 100 includes a first base substrate 110. The first base substrate 110 may be a transparent insulating substrate. For example, the first base substrate 110 may be made of a glass substrate, a quartz substrate, a transparent resin substrate, or the like.

[0047] In some embodiments, the first base substrate 110 may also be curved along one direction. In some other embodiments, the first base substrate 110 may also have flexibility. For example, the first base substrate 110 may be deformed by rolling, folding, bending, or the like.

[0048] A gate line 122, a gate electrode 124, and a light-shielding pattern 125 are disposed on the first base substrate 110.

[0049] The gate line 122 transmits a gate signal that controls the thin film transistor 167, as described further below. The gate line 122 may have a shape extending in a first direction D1.

[0050] Here, the first direction D1 corresponds to a direction extending in parallel with one side of the first base substrate 110 on the plane in which the first base substrate 110 is disposed, and may be defined as a direction indicated by an arbitrary straight line that extends from left to right as illustrated in FIG. 1. However, the first direction does not need to be parallel to the one side of the first base substrate 110 and may also be a direction indicated by an arbitrary straight line extending in a specific direction on the first base substrate 110.

[0051] The gate signal may be a signal having a varying voltage value provided from the outside, and turning on/off of the thin film transistor 167 may be controlled to correspond to the voltage value of the gate signal.

[0052] The gate line 122 may extend along the first direction D1 for each pixel 10, and may be disposed over a boundary between the previous pixel 10_p and the pixel 10 or over a boundary the pixel 10 and the next pixel 10_n.

[0053] The gate electrode 124 may be formed as a protrusion from the gate line 122, and may be physically connected to the gate line 122. The gate electrode 124 may be a single component that makes up the thin film transistor 167, as described further below.

[0054] The light-shielding pattern 125 may cut off the transmission of the light through the first display substrate 100 and the second display substrate 300 in the region in which the light-shielding pattern 125 is disposed, and may help minimize a deterioration of display quality caused by scattering and reflection of light due to each constituent element, as described further below. The light shielding pattern 125 may be disposed on the first base substrate 110. The light-shielding pattern 125 may be disposed to be

physically spaced apart from the gate line 122 and the gate electrode 124, and may be a conductor that is maintained in a floating state, i.e., a state in which a voltage is not directly applied.

[0055] The light-shielding pattern 125 may be disposed to overlap a contact hole 188, as described further below, or a second stem electrode 182, as described further below, and the arrangement thereof will be described below.

[0056] The gate line 122, the gate electrode 124, and the light-shielding pattern 125 may be made of the same material. As an example, the gate line 122, the gate electrode 124 and the light-shielding pattern 125 may contain an aluminum-based metal such as aluminum (Al) and aluminum alloy, a silver-based metal such as silver (Ag) and silver alloy, a copper-based metal such as copper (Cu) or copper alloy, a molybdenum-based metal such as molybdenum (Mo) and molybdenum alloy, chromium (Cr), tantalum (Ta) and titanium (Ti). The gate line 122, the gate electrode 124, and the light-shielding pattern 125 may have a single layer structure or may also have a multilayer structure that includes at least two conductive films with physical properties different from each other.

[0057] The gate insulating film 130 is disposed on the gate line 122, the gate electrode 124, and the light-shielding pattern 125. The gate insulating film 130 may be made of an insulating material, and as an example, it may be made of silicon nitride or silicon oxide. The gate insulating film 130 may be made of a single layer structure, or may have a multilayer structure including two insulating layers with physical properties different from each other.

[0058] A semiconductor layer 140 may be disposed on the gate insulating film 130. The semiconductor layer 140 may at least partially overlap the gate electrode 124. The semiconductor layer 140 may be formed of amorphous silicon, polycrystalline silicon, or an oxide semiconductor, etc.

[0059] The semiconductor layer 140 may overlap the gate electrode 124 and may also be disposed to overlap at least a part or all of a data line 162, a source electrode 165, and a drain electrode 166, as described further below, depending on the process procedure.

[0060] In some embodiments, an ohmic contact member may be additionally disposed on the semiconductor layer 140. The ohmic contact member may be formed of, for example, n⁺ hydrogenated amorphous silicon doped with n-type impurities at high concentration or may be formed of silicide. The ohmic contact members may be disposed in pairs on the semiconductor layer 140. The ohmic contact member may be disposed among the source electrode 165, the drain electrode 166, and the semiconductor layer 140 to allow them to have ohmic contact characteristics. In an implementation, the semiconductor layer 140 includes an oxide semiconductor and the ohmic contact member is omitted.

[0061] The data line 162, the source electrode 165, and the drain electrode 166 may be disposed on the semiconductor layer 140 and the gate insulating film 130.

[0062] The data line 162 may extend in the second direction D2 and may intersect with the gate line 122.

[0063] Here, the second direction D2 may be a direction intersecting with the first direction D1 on the plane in which the first base substrate 110 is disposed, and as illustrated in FIG. 1, the second direction may be a direction indicated by an arbitrary straight line extending from the lower side to the

upper side. In some embodiments, the first direction D1 and the second direction D2 may perpendicularly intersect with each other.

[0064] The data line 162 may be insulated from the gate line 122, the gate electrode 124, and a sustain line by the gate insulating film 130.

[0065] The data line 162 may provide a data signal to the source electrode 165. Here, the data signal may be a signal having a varying voltage value provided from the outside, and the gradation of each pixel 10 may be controlled to correspond to the data signal.

[0066] The source electrode 165 may branch from the data line 162 and may at least partially overlap the gate electrode 124.

[0067] The drain electrode 166 may be disposed to be spaced apart from the source electrode 165 with the semiconductor layer 140 interposed therebetween on the basis of the viewing point of FIG. 1, and may at least partially overlap the gate electrode 124.

[0068] As illustrated in FIG. 1, the source electrode 165 may be formed in the form of surrounding the drain electrode 166 in a "U" shape at fixed intervals. However, the source electrode 165 may extend in a rod shape, and may also be disposed to be spaced apart from the drain electrode 166 in parallel at regular intervals, etc.

[0069] The semiconductor layer 140 may also be disposed in a region between the source electrode 165 and the drain electrode 166 formed by the source electrode 165 and the drain electrode 166 being spaced apart from each other. For example, the source electrode 165 and the drain electrode 166 partially overlap the semiconductor layer 140 or are in contact with the semiconductor layer 140, and may be disposed to face each other with the semiconductor layer 140 interposed therebetween.

[0070] The data line 162, the source electrode 165, and the drain electrode 166 may be made of the same material. As an example, the data line 162, the source electrode 165, and the drain electrode 166 may be made of aluminum, copper, silver, molybdenum, chromium, titanium, tantalum, or an alloy thereof. Further, the data line 162, the source electrode 165, and the drain electrode 166 may also have, for example, a multilayer structure having a lower film such as a refractory metal and a low-resistance upper film formed thereon.

[0071] The gate electrode 124, the semiconductor layer 140, the source electrode 165, and the drain electrode 166 may constitute the thin film transistor 167. The thin film transistor 167 may be disposed in a region other than the active region 11.

[0072] A first passivation film 171 may be disposed on the gate insulating film 130 and the thin film transistor 167. The first passivation film 171 may be made of an inorganic insulating material and may be disposed to cover the thin film transistor 167. The first passivation film 171 may protect the thin film transistor 167, and may prevent a substance contained in a color filter layer 172 and a planarization film 173 (to be described below) from flowing into the semiconductor layer 140.

[0073] A color filter layer 172 may be disposed on the first passivation film 171. The color filter layer 172 may be a photosensitive organic composition that contains a pigment for providing a color, and may include, for example, any one of red, green, and blue pigments. As an example, the color filter layer 172 may include a plurality of color filters. As an example, any one of the plurality of color filters may display

one of primary colors such as three primary colors of red, green, and blue. In an implementation, the plurality of color filters may display any one of cyan, magenta, yellow, and white colors.

[0074] The planarization film 173 may be disposed on the color filter layer 172. The planarization film 173 may flatten a local step generated by components located between the planarization film 173 and the first base substrate 110. Thus, the upper surface of the planarization film 173 may be substantially flat.

[0075] A second passivation film 174 may be disposed on the planarization film 173. The second passivation film 174 may be made of an inorganic insulating material such as silicon oxide, silicon nitride, or silicon oxynitride, etc. The second passivation film 174 may help prevent the liquid crystal layer 200 from being contaminated by organic matter, such as solvent introduced from the planarization film 173 and the color filter layer 172. Thus, it may be possible to prevent a defect such as a residual image that may be generated at the time of driving the liquid crystal display device. In some embodiments, the second passivation film 174 may be omitted.

[0076] A contact hole 188 may be formed in the first passivation film 171, the color filter layer 172, the planarization film 173, and the second passivation film 174. The contact hole 188 may expose some of the thin film transistor 167 and, for example, some of the drain electrode 166 to the top along the direction perpendicular to the first base substrate 110. Some of the drain electrode 166 and the pixel electrode 180, as described further below, disposed at the top of the second passivation film 174 may be physically and electrically connected to each other through the contact hole 188.

[0077] The pixel electrode 180 and the shielding electrode 189 may be disposed on the second passivation film 174.

[0078] The pixel electrode 180 may receive the data signal from the drain electrode 166 by being physically and electrically connected to the drain electrode 166 through the contact hole 188.

[0079] The pixel electrode 180 may be made of a transparent conductive material such as indium tin oxide (ITO), indium zinc oxide (IZO), indium tin zinc oxide (ITZO), or Al-doped zinc oxide (AZO), etc.

[0080] The pixel electrodes 180, 180 may include an opening portion on which an electrically conductive material is not disposed. A pattern is formed on the pixel electrode 180 by the opening portion, and a tilted direction of the liquid crystal 210 disposed to overlap the pixel electrode 180 may be controlled depending on the shape and pattern of the pixel electrode 180.

[0081] The pixel electrode 180 includes a first stem electrode 181, a second stem electrode 182, a plurality of branch electrodes 183, a first connection electrode 184_1, a second connection electrode 184_2, a first edge electrode 185, a first auxiliary electrode 186_1, a second auxiliary electrode 186_2, and a protrusion 187.

[0082] Most of the components constituting the pixel electrode 180 are disposed in the active region 11, but some components, for example, the second connection electrode 184_2, the first auxiliary electrode 186_1, the second auxiliary electrode 186_2, and the protrusion 187, may be located outside the active region 11.

[0083] The first stem electrode 181 may extend along the first direction D1, and the second stem electrode 182 may

extend along the second direction D2. The first stem electrode 181 and the second stem electrode 182 may intersect with each other in a cross shape, and may be physically connected to each other at the point of intersection.

[0084] The first stem electrode 181 and the second stem electrode 182 may be disposed in the active region 11 to form a cross shape. Thus, the active region 11 may be divided into four regions. Here, a region disposed at the right top from the intersection between the first stem electrode 181 and the second stem electrode 182 will be defined as a first domain region DM1, a region disposed at the left top will be defined as a second domain region DM2, a region disposed at the left bottom will be defined as a third domain region DM3, and a region disposed at the right bottom will be defined as a fourth domain region DM4.

[0085] A plurality of branch electrodes 183 may be provided. The branch electrodes 183 may extend in an oblique direction that is not parallel to the first direction D1 or the second direction D2 from the first stem electrode 181 and the second stem electrode 182. The branch electrodes 183 may extend in the same direction within each domain region. For example, the branch electrodes 183 may extend to face the right top in the first domain region DM1, may extend to face the left top in the second domain region DM2, may extend to face the left bottom in the third domain region DM3, and may extend to face the right bottom in the fourth domain region DM4.

[0086] An absolute value of an included angle formed between the branch electrode 183 and the first direction D1 may be, for example, 30° to 60° in each of the first to fourth domain regions DM1, DM2, DM3, and DM4. For example, the absolute value of the included angle formed between each first branch electrode 183 and the first direction D1 may be about 45°.

[0087] First fine slits 191 are disposed between the branch electrodes 183 disposed in parallel with each other. The first fine slits 191 may be opening portions in which a transparent conductive material is not disposed. Because the first fine slits 191 are disposed between the two branch electrodes 183 disposed in parallel with each other, the first fine slits 191 may extend along the same direction as the extending direction of the branch electrodes 183 adjacent to each other in each domain region.

[0088] The first connection electrode 184_1 and the second connection electrode 184_2 connect the distal ends of the branch electrodes 183 to each other, extend along the first direction D1, and are disposed to intersect with the second stem electrode 182. For example, the first connection electrode 184_1 may connect the distal ends of the branch electrodes 183 disposed in the third domain region DM3 and the fourth domain region DM4 to each other. The second connection electrode 184_2 may connect the distal ends of the branch electrodes 183 disposed in the first domain region DM1 and the second domain region DM2 to each other. Consequentially, the first connection electrode 184_1 extends in parallel with the first stem electrode 181 and is disposed at the bottom of the first stem electrode 181, and the second connection electrode 184_2 extends in parallel with the first stem electrode 181 and may be disposed at the top of the first stem electrode 181.

[0089] Because the first connection electrode 184_1 and the second connection electrode 184_2 connect the distal ends of the branch electrodes 183 in which the electric field formed in the liquid crystal layer 200 is likely to be

irregularly formed, it is possible to prevent the misalignment of the liquid crystal 210 and a decrease in transmittance at the distal ends of the branch electrodes 183.

[0090] The first edge electrode 185 extends along the first direction D1 and is disposed to be connected to one distal end of the second stem electrode 182. The first edge electrode 185 may be connected to the distal end close to the gate line 122 connected to the control terminal of the thin film transistor 167, of the two distal ends of the second stem electrode 182. Thus, the first edge electrode 185 is disposed adjacent to the first connection electrode 184_1 and in parallel with the first connection electrode 184_1 at intervals, and the first edge electrode 185 may be disposed to form a 180° rotation shape of a “T” shape with the second stem electrode 182. Further, as illustrated in FIG. 1, from the viewing point of viewing the first base substrate 110, the first edge electrode 185 is disposed adjacent to the gate line 122 and in parallel with the gate line 122 at intervals, and may be disposed in parallel with the gate line 122 at intervals. Consequentially, the first connection electrode 184_1, the first edge electrode 185, and the gate line 122 extend in parallel with one another along the first direction D1, and the first edge electrode 185 may be disposed between the first connection electrode 184_1 and the gate line 122.

[0091] A second fine slit 192 is disposed between the first connection electrode 184_1 and the first edge electrode 185. The second fine slit 192 may be an opening portion in which a transparent conductive material is not disposed. Because the second fine slit 192 is disposed between the first connection electrode 184_1 and the first edge electrode 185 extending in the first direction D1 and disposed in parallel with each other, the second fine slit 192 may extend along the first direction D1 similarly to the first connection electrode 184_1 and the first edge electrode 185.

[0092] With the arrangement of the aforementioned first edge electrode 185, the effect of improving the visibility and improving the transmittance can be maximized in the region in which the first edge electrode 185 and the second fine slit 192 are disposed.

[0093] For example, the display qualities of the pixel electrode 180 and the gate line 122 for controlling the same may be degraded due to a kick-back phenomenon when overlapping. Here, when the kick-back phenomenon is a phenomenon in which, when the gate signal provided to the gate line 122 changes from an on-level voltage value to an off-level voltage value, the voltage charged to the pixel electrode 180 drops under its influence. Because this reduces the charging rate of the pixel electrode 180 and causes a user to recognize blinking, or the like, there is a risk of a degradation of display quality. Accordingly, the pixel electrode 180 and the gate line 122 for controlling the same are disposed at a fixed interval to minimize the kickback phenomenon. Thus, the control of the liquid crystal 210 may be incomplete in the region between the pixel electrode 180 and the gate lines 122, and the first edge electrode 185 may be disposed adjacent to the gate line 122 and in parallel with the gate line 122 and may suppress the degradation of the visibility and the decrease in transmittance due to the gate line 122. The specific description of the principles of improvement in the visibility and improvement in the transmittance of the first edge electrode 185 will be described later with reference to FIG. 5.

[0094] The second connection electrode 184_2 may be disposed to overlap the gate line 122 of the previous pixel

10_p. The reason is that the gate line **122** of the previous pixel **10_p** does not induce a kickback phenomenon in the pixel electrode **180** because it is a pixel in which the operation is already finished. For example, as the gate line **122** of the previous pixel **10_p** and the pixel electrode **180** are disposed close to each other to such an extent that the second connection electrode **184₂** overlaps the gate line **122** of the previous pixel **10_p**, an arrangement region of the pixel electrode **180** may be maximized. Accordingly, the transmittance may be maximized.

[0095] Each of the first auxiliary electrode **186₁** and the second auxiliary electrode **186₂** extends along the second direction **D2** and is disposed so as to be connected to both distal ends of the first stem electrode **181**. The first auxiliary electrode **186₁** and the second auxiliary electrode **186₂** may be disposed to be spaced apart from the distal end of the adjacent branch electrode **183**.

[0096] A third fine slit **193** as an opening portion extending along the second direction **D2** is formed between the first auxiliary electrode **186₁** and the branch electrode **183** adjacent thereto, and a fourth fine slit **194** as an opening portion extending along the second direction **D2** may be formed between the second auxiliary electrode **186₂** and the branch electrode **183** adjacent thereto.

[0097] Some of a region in which the first auxiliary electrode **186₁** and the second auxiliary electrodes **186₂** are disposed may overlap the light-shielding pattern **125**, and may not transmit the light accordingly. However, the first auxiliary electrode **186₁** and the second auxiliary electrode **186₂** may improve the visibility of the region in which the third fine slit **193** and the fourth fine slit **194** are disposed by interaction with the adjacent branch electrode **183** and may improve the transmittance.

[0098] The protrusion **187** is for connection with another layer, and protrudes from the first stem electrode **181**. However, the protrusion **187** may also protrude from the second stem electrode **182** in some embodiments, without being limited to protruding from the first stem electrode **181**, and the protrusion **187** may also protrude from one of the branch electrode **183**, the first connection electrodes **184₁**, the second connection electrode **184₂**, the first edge electrode **185**, the first auxiliary electrode **186₁** and the second auxiliary electrode **186₂**. The protrusions **187** may be electrically connected to the drain electrode **166** through the contact hole **188**.

[0099] The extended length of the first stem electrode **181** may be longer than the extended length of the second stem electrode **182**. For example, the extension width of the active region **11** along the first direction **D1** may be greater than the extension width along the second direction **D2**. In this case, the previous pixel **10_p**, the pixel **10**, and the next pixel **10_n** that are consecutively arranged along the second direction **D2** may be different from one another in the color of the color filter layer **172**. For example, the previous pixel **10_p**, the pixel **10** and the next pixel **10_n** that are consecutively arranged along the second direction **D2** may be each of a red pixel **10** for displaying red, a green pixel **10** for displaying green, and a blue pixel **10** for displaying blue. Thus, the red pixel **10**, the green pixel **10**, and the blue pixel **10** that are consecutively arranged along the second direction **D2** are gathered one by one, and may become a basic unit which is recognized as a single color.

[0100] In this ways, when the extended length of the first stem electrode **181** is longer than the extended length of the

second stem electrode **182**, the number of pixels **10** arranged along the second direction **D2** increases, but the number of pixels **10** arranged along the first direction **D1** decreases accordingly. Consequentially, the number of gate lines **122** extending along the first direction **D1** increases, but the number of data lines **162** extending along the second direction **D2** decreases accordingly. Therefore, the required number of gate drivers for providing the gate signal to the gate line **122** increases, but the required number of data drivers for providing the data signal to the data line **162** decreases accordingly. In general, because the manufacturing cost of the gate drivers is lower than the manufacturing cost of the data drivers, the manufacturing cost of the liquid crystal display device can be reduced accordingly.

[0101] The shielding electrode **189** is disposed on the same layer as the pixel electrode **180** and is formed of the same material, but the shielding electrode **189** is physically spaced apart from and is electrically insulated from the pixel electrode **180**. The shielding electrode **189** may be made of a transparent conductive material, and the shielding electrode **189** and the pixel electrode **180** may be simultaneously formed in the same process using a single optical mask.

[0102] The shielding electrode **189** may be disposed in a portion corresponding to the gate line **122** and the data line **162**, of the top of the second passivation film **174**. For example, the shielding electrode **189** is disposed on the upper side of the gate line **122** and the data line **162** to be insulated from the gate line **122** and the data line **162**, and may extend along the extension direction of each of the gate line **122** and the data line **162**.

[0103] A voltage having the same level as the common signal provided to a common electrode **340**, as described further below may be provided to the shielding electrode **189**. However, the shielding electrode **189** may also maintain a floating state that is a state in which the voltage is not intentionally provided, without being limited thereto. Thus, it is possible to minimize a phenomenon in which the liquid crystal layer **200** disposed in the upper direction of the shielding electrode **189** is affected depending on the change in the voltage values of the gate line **122** and the data line **162** arranged in the lower direction of the shielding electrode **189**, thereby improving the display quality.

[0104] Meanwhile, a first alignment film may be further arranged on the pixel electrode **180**. The first alignment film may control an initial alignment angle of the liquid crystal **210** injected into the liquid crystal layer **200**.

[0105] Hereinafter, the second display substrate **300** will be described.

[0106] The second display substrate **300** includes a second base substrate **310**, a light-shielding member **320**, an overcoat layer **330**, and a common electrode **340**.

[0107] The second base substrate **310** is disposed to face the first base substrate **110**. The second base substrate **310** may have durability capable of withstanding an external impact. The second base substrate **310** may be a transparent insulating substrate. For example, the second base substrate **310** may be made of a glass substrate, a quartz substrate, a transparent resin substrate, or the like. The second base substrate **310** may be a flat plate type but may also be curved in a particular direction.

[0108] The light-shielding member **320** is disposed on a surface of the second base substrate **310** that faces the first display substrate **100**. The light-shielding member **320** may be disposed to overlap the gate line **122**, the data line **162**,

the thin film transistor **167**, and the contact hole **188**, for example, to overlap the regions other than the active region **11**, and may cut off the transmission of light in the regions other than the active region **11**.

[0109] The overcoat layer **330** is disposed on a surface of the light-shielding member **320** that faces the first display substrate **100**. The overcoat layer **330** may alleviate a step caused by the light-shielding member **320**. In some embodiments, the overcoat layer **330** may be omitted.

[0110] The common electrode **340** is disposed on a surface of the overcoat layer **330** that faces the first display substrate **100**. The common electrode **340** may be made of a transparent conductive material such as indium tin oxide (ITO), indium zinc oxide (IZO), indium tin zinc oxide (ITZO) and Al-doped zinc oxide (AZO). The common electrode **340** may be formed by a single board over the entire surface of the second base substrate **310**. The common signal provided from the outside is provided to the common electrode **340** and may form an electric field to the liquid crystal layer **200** with the pixel electrode **180**.

[0111] Meanwhile, a second alignment film may be disposed on a surface of the common electrode **340** that faces the first display substrate **100**. The second alignment film may control an initial alignment angle of the liquid crystal **210** injected into the liquid crystal layer **200**, similarly to the first alignment film.

[0112] The liquid crystal layer **200** will be described below.

[0113] The liquid crystal layer **200** includes a plurality of liquid crystals **210** having dielectric anisotropy and refractive index anisotropy. The liquid crystals **210** may be aligned in the direction perpendicular to the first display substrate **100** and the second display substrate **300**, in a state in which the electric field is not formed on the liquid crystal layer **200**. When an electric field is formed between the first display substrate **100** and the second display substrate **300**, the liquid crystals **210** may change the polarization of light by rotating or tilting in a particular direction between the first display substrate **100** and the second display substrate **300**.

[0114] The effect of improving the visibility will be more specifically described below.

[0115] FIG. 5 illustrates a direction in which the liquid crystal **210** disposed in the region A of FIG. 5 is tilted in a state in which a predetermined voltage is provided to the pixel electrode **180**. FIG. 5 illustrates a state in which the predetermined electric field is formed in the liquid crystal layer **200** and the liquid crystals **210** are tilted when the first display substrate **100** is viewed from the top, and an extension direction of the long axis of the liquid crystals **210** means a direction in which the liquid crystals **210** are tilted.

[0116] Referring to FIG. 5, the liquid crystal **210** overlapping the first fine slit **191** may be tilted to form a first included angle (θ_1) with the first direction D1. Further, the liquid crystal **210** overlapping the second fine slit **192** may be tilted to form a second included angle (θ_2) with the first direction D1. However, because there are a very large number of liquid crystals **210** disposed to overlap the first fine slits **191**, it is a matter of course that the long axis of the liquid crystal **210** and the first direction D1 may form an angle other than the first included angle (θ_1). However, because most of the liquid crystals **210** form an angle close to the first included angle (θ_1), this will be mainly described for convenience. This may also be applied to the liquid crystal **210** disposed to overlap the second fine slit **192**.

[0117] Here, the included angle formed with the first direction D1 means an acute angle of the two included angles formed with the first direction D1. In a case where the included angle becomes a positive (+) value when measured in a clockwise direction from the first direction D1, the included angle is measured in the clockwise direction. In a case where the included angle becomes the positive value when measured in a counterclockwise direction from the first direction D1, the included angle indicates the value measured in the counterclockwise direction.

[0118] When a predetermined voltage is applied to the pixel electrode **180**, the liquid crystal **210** disposed in the first fine slit **191** may be tilted along a direction parallel to the extension direction of the branch electrode **183**. The extension direction of the first electrode **183** may form an included angle of about 45° with the first direction D1. Thus, the first included angle may also be about 45° .

[0119] Here, the included angle formed between the long axis of the liquid crystal **210** and the first direction D1 is about 45° . Thus, it may be advantageous for the visibility by interaction with the pair of polarizers. Thus, the liquid crystal **210** disposed in the first fine slit **191** may be tilted in a direction that is advantageous for the visibility.

[0120] When a predetermined voltage is provided to the pixel electrode **180**, the liquid crystal **210** disposed in the second fine slit **192** may be tilted to form a second included angle θ_2 with the first direction D1. The first included angle θ_1 may be larger than the second included angle θ_2 . However, even if the second included angle θ_2 is larger than the first included angle θ_1 , the second included angle θ_2 may have an angle less than 90° by the first edge electrode **185**. For example, because the force in which the liquid crystal **210** attempts to tilt acts from the distal end of the first edge electrode **185** in the direction of the portion in which the first edge electrode **185** and the second stem electrode **182** intersect with each other, the second included angle θ_2 may have a value that is less than 90° and is about 45° , rather than having the value of 90° . Accordingly, the visibility of the region in which the second fine slit **192** is disposed may be improved by the arrangement of the first edge electrode **185**. Further, as the visibility of the arrangement region of the second fine slit **192** is improved, the liquid crystal **210** of the arrangement region of the first edge electrode **185** and the first connection electrode **184_1** as an adjacent region is also affected, and the visibility may be improved.

[0121] Improvements in visibility and transmittance will be described referring to FIGS. 6 to 10.

[0122] FIG. 6 is a graph illustrating the direction in which the liquid crystal is tilted along the line III-III' of FIG. 4 through measurement.

[0123] An x-axis of the graph in FIG. 6 represents a distance measured in a direction in which a point indicated by III' is disposed on the basis of a point indicated by III in FIG. 4 as an origin point, and its unit may be μm . In the graph of FIG. 6, a y-axis represents an included angle formed with the first direction D1 of FIG. 4.

[0124] In the graph of FIG. 6, a first line L1, a second line L2, and a third line L3 represent an included angle formed between the liquid crystal **210** tilted by the structure of the pixel electrode **180** of the liquid crystal display device according to a comparative example and the first direction D1. A fourth line L4, a fifth line L5, and a sixth line L6 represent an included angle formed between the liquid

crystal **210** inclined by the structure of the pixel electrode **180** illustrated in FIG. 4 and the first direction D1.

[0125] Here, the structure of the pixel electrode **180** of the liquid crystal display device according to a comparative example means a structure in which the first edge electrode **185** is omitted from of the pixel electrode **180** structure illustrated in FIG. 4, the length of the branch electrode **183** is further extended, and the first connection electrode **184_1** is disposed at a location of the existing first edge electrode **185**. For example, it means a structure in which the first edge electrode **185** is omitted.

[0126] Further, the first line L1 and the fourth line L4 are measured values when the first voltage level is applied to the pixel electrode **180**, the second line L2 and the fifth line L5 are measured values when the second voltage level is applied to the pixel electrode **180**, and the third line L3 and the sixth line L6 are measured values when the third voltage level is applied to the pixel electrode **180**. Here, the second voltage level has a voltage value higher than the first voltage level, and the third voltage level may have a voltage value higher than the second voltage level.

[0127] Referring to FIG. 6, the fourth line L4 is illustrated on a lower side than the first line L1, the fifth line L5 is illustrated on a lower side than the second line L2, and the sixth line L6 is illustrated on a lower side than the third line L3. For example, in the case of the structure of the pixel electrode **180** according to an example embodiment including the first edge electrode **185**, the included angle formed between the liquid crystal **210** and the first direction D1 may be about 45°, as compared to the case of the structure of the pixel electrode **180** according to the comparative example. For example, it is possible to check that the visibility is improved.

[0128] Further, as indicated in all of the first to third voltage levels, it is possible to check that the visibility is improved in most cases of the voltage level applied to the pixel electrode **180**.

[0129] FIG. 7 is a graph illustrating the degree of improvement in visibility of the liquid crystal display device according to the embodiment illustrated in FIG. 1.

[0130] An x-axis of the graph of FIG. 7 represents the gradation of each pixel **10**, and a y-axis represents the brightness. A maximum value of brightness represented by the y-axis is **100**, and its unit is %. In this graph, the reference of the maximum value of brightness will be defined as a case where the liquid crystal display device having a gradation of 64 is viewed from the front.

[0131] The seventh line L7 in the graph of FIG. 7 represents brightness for each gradation when the liquid crystal display device according to the comparative example is viewed from the front, the eighth line L8 represents brightness for each gradation when the liquid crystal display device according to the comparative example is viewed from the side, and the ninth line L9 represents brightness for each gradation when the liquid crystal display device according to the embodiment illustrated in FIG. 1 is viewed from the side.

[0132] Referring to FIG. 7, in most of the gradations, for example, in the gradations in the range of 0 to 50, the ninth line L9 may be relatively closer to the seventh line L7 than the eighth line L8. For example, in a certain gradation among the gradations in the range of 0 to 50, a difference in measured values along the ninth line L9 and the seventh line L7 may be smaller than a difference in measured values along the eighth line L8 and the seventh line L7. Conse-

quentially, it is possible to understand that the liquid crystal display device according to the embodiment illustrated in FIG. 1 has a difference in front brightness smaller than that of the liquid crystal display device according to the comparative example in most gradation ranges. Accordingly, it is possible to check that the visibility is improved in the case of the liquid crystal display device according to the embodiment illustrated in FIG. 1.

[0133] FIG. 8 is a graph illustrating the degree of improvements in transmittance and visibility of the liquid crystal display device according to the embodiment illustrated in FIG. 1.

[0134] In the graph of FIG. 8, both of a bar graph and a line graph are illustrated. Among them, the bar graph represents the value of the transmittance in unit of %, and the line graph represents the value of visibility. The values of y-axis recorded on the left represent the value of the visibility, and the values of y-axis recorded on the right represent the value of the transmittance.

[0135] Further, the values of the bars and lines described on the left represent the measured values of the case according to the comparative example, and bars and the lines described on the right represent the measured values of the case according to the embodiment illustrated in FIG. 1.

[0136] Referring to FIG. 8, in the case according to the comparative example described above, the transmittance is measured as 100%, and the visibility is measured as 0.438. Meanwhile, in the case according to the embodiment illustrated in FIG. 1, the transmittance is measured as 102.5%, and the visibility is measured as 0.421. Here, as the value of the visibility is low, it means that a difference in brightness between the front and the side is small. As a result, it is possible to understand that the transmittance increases and the visibility is improved according to an example embodiment.

[0137] FIG. 9 is a photograph obtained when a region corresponding to an active region of the liquid crystal display device according to the embodiment illustrated in FIG. 1 is viewed from the front, in the liquid crystal display device according to the comparative example, and FIG. 10 is a photograph obtained when the active region of the liquid crystal display device according to the embodiment illustrated in FIG. 1 is viewed from the front.

[0138] Referring to FIGS. 9 and 10, in the case of the liquid crystal display device according to the comparative example, it is possible to check that the lower end of the region corresponding to the active region **11** is viewed brightly but just above the brightly viewed lower end is viewed darkly. Meanwhile, in the case of the liquid crystal display device according to the embodiment illustrated in FIG. 1, it is possible to check that the lower end portion of the active region **11** has a uniform brightness. Therefore, in the case of the liquid crystal display device according to the embodiment illustrated in FIG. 1, since it represents a generally uniform brightness in the active region **11**, it is possible to check that the display quality is improved as compared to the liquid crystal display device according to the comparative example.

[0139] As described in detail below, the shape of the pixel electrode **180** may be variously modified.

[0140] FIG. 11 is a plan view illustrating the pixel electrode of the liquid crystal display device according to another example embodiment.

[0141] As one example, FIG. 11 illustrates a structure that further includes a second edge electrode **185_2a** in addition to the first edge electrode **185_1a**, as compared to FIG. 4, and illustrates a structure that further includes a fifth fine slit **192_2a** with the addition of the second edge electrode **185_2a**.

[0142] Hereinafter, this structure will be described with reference to FIGS. 1 to 5 and 11. The pixel electrode **180a** according to the present example embodiment further includes a second edge electrode **185_2a** disposed adjacent to the second connection electrodes **184_2** as well as the first edge electrode **185_1a** disposed adjacent to the first connection electrode **184_1**. The second edge electrode **185_2a** intersects with the distal end of the second stem electrode **182** and may extend along the first direction D1. Consequently, the pixel electrode **180a** according to the present example embodiment may include the first edge electrode **185_1a** and the second edge electrode **185_2a** connected to both distal ends of the second stem electrode **182**. For example, the arrangement of the first edge electrode **185_1a** is not limited to be arranged only on one distal end of the second stem electrode **182**.

[0143] The sum of a width dt1 of the first edge electrode **185_1a**, a width dt2 of the first connection electrode **184_1** and a spaced distance dt3 between the first connection electrode **184_1** and the first edge electrode **185_1a** may be, for example, 10.5 μm or less, which may help maintain a relatively high response speed of the liquid crystal display device. Here, the width dt1 of the first edge electrode **185_1a**, the width dt2 of the first connection electrode **184_1**, and the spaced distance dt3 between the first connection electrode **184_1** and the first edge electrode **185_1a** are based on a length measured along the second direction D2.

[0144] For example, the width dt2 of the first connection electrode **184_1** may be less than 3 μm , and the spaced distance dt3 between the first connection electrode **184_1** and the first edge electrode **185_1a** may be 2 μm or more and 4 μm or less.

[0145] The response speed will be further specifically described with reference to FIGS. 12 through 17.

[0146] FIGS. 12 to 14 are photographs of the active region for each time period when the width of the first connection electrode is 2.6 μm , and FIGS. 15 to 17 are photographs of the active region for each time period when the width of the first connection electrodes is 3 μm .

[0147] Here, FIGS. 12 and 15 are photographs of the time when 1800 ms has passed from the time when the data signal begins to be provided to the pixel electrode **180a**, FIGS. 13 and 16 are photographs of the time when 3000 ms has passed from the time when the data signal begins to be provided to the pixel electrode **180a**, and FIGS. 14 and 17 are photographs of the time when 3600 ms has passed from the time when the data signal begins to be provided to the pixel electrode **180a**.

[0148] Referring to FIG. 12 through 17, it is possible to check that the liquid crystal **210** is stabilized within 3600 ms in both of the case where the width dt2 of the first connection electrode **184_1** is 3 μm and the case of 2.6 μm . However, it is possible to check that, when the width dt2 of the first connection electrode **184_1** is 2.6 μm , the liquid crystal **210** is stabilized within 3000 ms, and meanwhile, when the width dt2 of the first connection electrode **184_1** is 3 μm , even if the 3000 ms has passed, the liquid crystal **210** is not

stabilized. For example, it is possible to check that, when the width dt2 of the first connection electrode **184_1** is less than 3 μm , the liquid crystal **210** is further quickly stabilized, and the response speed is improved.

[0149] FIG. 18 is a plan view illustrating the pixel electrode of the liquid crystal display device according to still another example embodiment.

[0150] For example, FIG. 18 illustrates a structure that further includes a second edge electrode **185_2b** in addition to the first edge electrode **185_1b** as compared to FIG. 4, and illustrates a structure that further includes a fifth fine slit **192_2b** with the addition of the second edge electrode **185_2b**.

[0151] Hereinafter, this structure will be described with reference to FIGS. 1 to 5 and 18. The pixel electrode **180b** according to the present example embodiment further includes a second edge electrode **185_2b** disposed adjacent to the first edge electrode **185_1b** on the outside of the first edge electrode **185_1b**, as well as the first edge electrode **185_1b** disposed adjacent to the first connection electrode **184_1**.

[0152] Thus, the first edge electrode **185_1b** intersects with the second stem electrode **182** in a cross shape and extends along the first direction D1, and the second edge electrode **185_2b** intersects with the distal end of the second stem electrode **182** and may extend along the first direction D1.

[0153] Further, the pixel electrode **180b** may further include a fifth fine slit **192_2b** disposed between the first edge electrode **185_1b** and the second edge electrode **185_2b**, as well as the second fine slit **192_1b** disposed between the first connection electrodes **184_1** and the first edge electrode **185_1b**.

[0154] FIG. 19 is an enlarged plan view illustrating a region B of FIG. 18.

[0155] Referring to FIG. 19, the liquid crystal **210** overlapping the first fine slit **191** may be tilted to form a third included angle $\theta 3$ with the first direction D1. The liquid crystal **210** overlapping the second fine slit **192_1b** may be tilted to form a fourth included angle $\theta 4$ with the first direction D1. Further, the liquid crystal **210** overlapping the fifth fine slit **192_2b** may be tilted to form a fifth included angle $\theta 5$ with the first direction D1.

[0156] Here, the degree of improvement in visibility may be compared by comparing the relationship between the third included angle $\theta 3$, the fourth included angle $\theta 4$ and the fifth included angle $\theta 5$ illustrated in FIG. 19 and the first included angle $\theta 1$ and the second included angle $\theta 2$ illustrated in FIG. 5. For example, the third included angle $\theta 3$ may be the same as the first included angle $\theta 1$, the fourth included angle $\theta 4$ may be the same as the second included angle $\theta 2$, and the fifth included angle $\theta 5$ may be smaller than the second included angle $\theta 2$. Without being bound by theory, it is believed that the reason is that, because the second edge electrode **185_2b** and the first edge electrode **185_1b** are included, the force which acts from the distal ends of the first edge electrode **185_1b** and the second edge electrode **185_2b** in the arrangement direction of the second stem electrode **182** is enhanced. Thus, the degree of improvement in visibility may be maximized.

[0157] FIG. 20 is a graph illustrating the degree of improvement in visibility of the liquid crystal display device according to the embodiment illustrated in FIG. 18.

[0158] The x-axis of the graph in FIG. 20 represents the gradation of each pixel 10, and the y-axis represents the brightness. The maximum value of brightness represented by the y-axis is 100, and its unit is %. In this graph, the reference of the maximum value of brightness will be defined as a case where the liquid crystal display device having a gradation of 64 is viewed from the front.

[0159] A tenth line L10 in the graph of FIG. 20 represents brightness for each gradation when the liquid crystal display device according to the embodiment illustrated in FIG. 1 is viewed from the front, an eleventh line L11 represents brightness for each gradation when the liquid crystal display device according to the embodiment illustrated in FIG. 1 is viewed from the side, and a twelfth line L12 represents brightness for each gradation when the liquid crystal display device including the pixel electrode 180b according to the embodiment illustrated in FIG. 1 is viewed from the side.

[0160] Referring to FIG. 20, in most of the gradations, for example, in the gradations in the range of 0 to 48, the twelfth line L12 may be relatively closer to the tenth line L10 than the eleventh line L11. For example, in a certain gradation of the gradations in the range of 0 to 48, a difference in measured values along the twelfth line L12 and the tenth line L10 may be smaller than a difference in measured values along the eleventh line L11 and the tenth line L10. Consequently, it is possible to understand that the liquid crystal display device including the pixel electrode 180b according to the embodiment illustrated in FIG. 18 has a difference in front brightness smaller than that of the liquid crystal display device according to the embodiment illustrated in FIG. 1 in most gradation ranges. Accordingly, it is possible to check that the degree of improvement in the visibility of the liquid crystal display device including the pixel electrode 180b illustrated in FIG. 18 is maximized.

[0161] FIG. 21 is a plan view illustrating the pixel electrode of the liquid crystal display device according to another example embodiment.

[0162] For example, FIG. 21 illustrates a structure which further includes a second edge electrode 185_2c, a third edge electrode 185_3c and a fourth edge electrode 185_4c in addition to the first edge electrode 185_1c, as compared to FIG. 4, and illustrates a structure which further includes a fifth fine slit 192_2c, a sixth fine slit 192_3c and a seventh fine slit 192_4c with the addition of the second to fourth edge electrodes 185_2c, 185_3c and 185_4c.

[0163] Hereinafter, this structure will be described with reference to FIGS. 1 to 5 and 21. The pixel electrode 180c according to the present example embodiment further includes a second edge electrode 185_2c disposed adjacent to the first edge electrode 185_1c to be spaced apart therefrom on the outside of the first edge electrode 185_1c, as well as the first edge electrode 185_1c disposed adjacent to the first connection electrode 184_1. Further, the pixel electrode 180c further includes a third edge electrode 185_3c disposed adjacent to the second connection electrode 184_2 to be spaced apart therefrom, and a fourth edge electrode of 185_4c disposed adjacent to the outer side of the third edge electrode 185_3c to be spaced apart therefrom.

[0164] All of the first to fourth edge electrodes 185_1c, 185_2c, 185_3c, and 185_4c intersect with the second stem electrode 182, and may extend along the first direction D1. For example, the first edge electrode 185_1c and the second edge electrode 185_2c are disposed below the first stem

electrode 181, and the third edge electrode 185_3c and the fourth edge electrode 185_4c may be disposed above the first stem electrode 181.

[0165] A second fine slit 192_1c as an opening portion extending in the first direction D1 may be disposed between the first connection electrode 184_1 and the first edge electrode 185. A fifth fine slit 192_2c as an opening portion extending in the first direction D1 may be disposed between the first edge electrode 185_1c and the second edge electrode 185_2c. Furthermore, a sixth fine slit 192_3c as an opening portion extending in the first direction D1 may be disposed between the second connection electrode 184_2 and the third edge electrode 185_3c, and a seventh fine slit 192_4c as an opening portion extending in the first direction D1 may be disposed between the third edge electrode 185_3c and the fourth edge electrode 185_4c.

[0166] FIG. 22 is a plan view illustrating the pixel electrode of the liquid crystal display device according to still another example embodiment.

[0167] For example, FIG. 22 illustrates a structure in which the first auxiliary electrode 186_1 and the second auxiliary electrode 186_2 are removed as compared to FIG. 4 and illustrates a structure in which the third fine slit 193 and the fourth fine slit 194 are also removed with the removal of the first auxiliary electrode 186_1 and the second auxiliary electrode 186_2.

[0168] Hereinafter, this structure will be described with reference to FIGS. 1 to 5 and 22. The pixel electrode 180d according to the present example embodiment may be constituted to include only a first stem electrode 181, a second stem electrode 182, a branch electrode 183, a first connection electrode 184_1, a second connection electrode 184_2, a first edge electrode 185, and a protrusion 187. For example, the first auxiliary electrode 186_1 and the second auxiliary electrode 186_2 as illustrated in FIG. 4 may be omitted.

[0169] FIG. 23 is a plan view illustrating the pixel electrode of the liquid crystal display device according to still another example embodiment.

[0170] For example, FIG. 23 illustrates a structure that further includes a second edge electrode 185_2e and a third edge electrode 185_3e in addition to the first edge electrode 185_1e as compared to FIG. 4, and illustrates a structure that further includes a fifth fine slit 192_2e and a sixth fine slit 192_3e with the addition of the second edge electrode 185_2e and third edge electrode 185_3e.

[0171] Hereinafter, this structure will be described with reference to FIGS. 1 to 5 and 23. The pixel electrode 180e according to the present example embodiment includes the first edge electrode 185_1e, the second edge electrode 185_2e, and the third edge electrode 185_3e. Here, the first edge electrode 185_1e and the second edge electrode 185_2e are disposed below the first stem electrode 181, and the third edge electrode 185_3e may be disposed above the first stem electrode 181. For example, the number of edge electrodes disposed on both sides based on the first stem electrode 181 may be different.

[0172] FIG. 24 is a plan view illustrating the pixel electrode of the liquid crystal display device according to still another example embodiment.

[0173] For example, FIG. 24 differs from FIG. 4 in that the first edge electrode 185f is connected to the first auxiliary electrode 186_1f and the second auxiliary electrode 186_2f.

Thus, the extended lengths of the third fine slit **193f** and the fourth fine slit **194f** along the second direction **D2** may become relatively short.

[0174] Hereinafter, this structure will be described with reference to FIGS. 1 to 4 and 24. The first edge electrode **185f** of the pixel electrode **180f** according to the present example embodiment is connected to the distal end of the second stem electrode **182**, and may be connected to the distal ends of the first auxiliary electrode **186_1f** and the second auxiliary electrode **186_2f**. Thus, controllability of the liquid crystal **210** disposed in a region in which the first edge electrode **185f** and the first auxiliary electrode **186_1f** are connected to each other and in a region in which the first edge electrode **185f** and the second auxiliary electrode **186_2f** are connected to each other is improved, and the effect of improving the visibility may be further maximized.

[0175] FIG. 25 is a plan view illustrating the pixel electrode of the liquid crystal display device according to still another example embodiment.

[0176] For example, FIG. 25 differs from FIG. 4 in that the first connection electrode **184_1g** extends in an oblique direction to the first direction **D1**. Thus, the extended width of the second fine slit **192g** in the second direction **D2** may also be different depending on the positions.

[0177] Hereinafter, this structure will be described with reference to FIGS. 1 to 4 and 25. The first connection electrode **184_1g** of the pixel electrode **180g** according to the present example embodiment may extend obliquely in the first direction **D1**. The first connection electrode **184_1g** may have an axisymmetric shape on the basis of the second stem electrode **182**. Thus, the extended width of the second fine slit **192g** in the second direction **D2** may increase as it is away from the second stem electrode **182**. Thus, the spaced distance between the first edge electrode **185** and the first connection electrode **184_1g** may increase as it is away from the second stem electrode **182**.

[0178] FIG. 26 is a plan view illustrating the pixel electrode of the liquid crystal display device according to still another example embodiment.

[0179] For example, FIG. 26 illustrates a structure that further includes a second edge electrode **185_2h** in addition to the first edge electrode **185_1h** as compared to FIG. 4, and illustrates a structure that further includes a fifth fine slit **192_2h** with the addition of the second edge electrode **185_2h**. Furthermore, the first connection electrode **184_1h** and the first edge electrode **185_1h** may extend obliquely in the first direction **D1**.

[0180] Hereinafter, this structure will be described with reference to FIGS. 1 to 5 and 26. The first connection electrode **184_1h** and the first edge electrode **185_1h** of the pixel electrode **180h** according to the present example embodiment may extend obliquely in the first direction **D1**. For example, the first connection electrode **184_1h** may extend to form a sixth included angle θ_6 with the first direction **D1**, and the first edge electrode **185_1h** may extend to form a seventh included angle θ_7 with the first direction **D1**. Here, the seventh included angle θ_7 may be greater than the sixth included angle θ_6 . Thus, the extended width of the second fine slit **192_1h** in the second direction **D2** and the extended width of the fifth fine slit **192_2h** in the second direction **D2** may increase as both the extended widths are away from the second stem electrode **182**. Thus, the spaced distance between the first edge electrode **185_1h** and the first connection electrode **184_1h** may increase as it is farther

away from the second stem electrode **182**, and the spaced distance between the first edge electrode **185_1h** and the second edge electrode **185_2h** may also increase as it is away from the second stem electrode **182**.

[0181] FIG. 27 is a plan view illustrating the pixel electrode of the liquid crystal display device according to still another example embodiment.

[0182] For example, FIG. 27 illustrates a structure in which the third domain region **DM3** and the fourth domain region **DM4** are removed and only a first domain region **DM1i** and a second domain region **DM2i** are included as compared to FIG. 4.

[0183] Hereinafter, this structure will be described with reference to FIGS. 1 to 5 and 27. The pixel electrode **180** according to the present example embodiment includes a first stem electrode **181i** extending along the first direction **D1**, a second stem electrode **182i** intersecting with the first stem electrode **181i** and extending along the second direction **D2**, and a plurality of branch electrodes **183i** extending in the oblique direction to the first direction **D1** and the second direction **D2** from the first stem electrode **181i** and the second stem electrode **182i**. The first connection electrode **184i** is disposed to connect the distal ends of the branch electrodes **183i** disposed in the first domain region **DM1i** and the second domain region **DM2i** with each other and may be disposed to intersect with the second stem electrode **182i**.

[0184] The first edge electrode **185i** is disposed adjacent to the first stem electrode **181i** to be spaced apart therefrom, and is disposed parallel to the first stem electrodes **181i**. Thus, a second fine slit **192i** may be formed between the first stem electrode **181i** and the first edge electrode **185i**.

[0185] For example, even if some of the first to fourth domain regions **DM1**, **DM2**, **DM3**, and **DM4** of the embodiment illustrated in FIG. 4 are omitted, it is also possible to improve the visibility as in the pixel electrode **180i** according to the embodiment illustrated in FIG. 27.

[0186] FIG. 28 is a plan view illustrating the pixel electrode of the liquid crystal display device according to still another example embodiment.

[0187] For example, FIG. 28 illustrates a structure in which the first domain region **DM1**, the third domain region **DM3** and the fourth domain region **DM4** are removed and only the second domain region **DM2j** is included as compared to FIG. 4.

[0188] Hereinafter, this structure will be described with reference to FIGS. 1 to 5 and 28. The pixel electrode **180j** according to the present example embodiment includes a first stem electrode **181j** extending along the first direction **D1**, a second stem electrode **182j** intersecting with the first stem electrode **181j** and extending along the second direction **D2**, and a plurality of branch electrodes **183j** extending in an oblique direction to the first direction **D1** and the second direction **D2** from the first stem electrode **181j** and the second stem electrode **182j**. The first connection electrode **184j** is disposed to connect the distal ends of the branch electrodes **183j** disposed in the second domain region **DM2j**, and may be disposed to intersect with the second stem electrode **182j**. The branch electrodes **183j** may be disposed only in the second domain region **DM2j**.

[0189] The first edge electrode **185j** is disposed adjacent to the first stem electrode **181j** to be spaced apart therefrom, and is disposed parallel to the first stem electrodes **181j**.

Thus, a second fine slit **192j** may be formed between the first stem electrode **181j** and the first edge electrode **185j**.

[0190] For example, even if all the rest except one domain region among the first to fourth domain regions **DM1**, **DM2**, **DM3**, and **DM4** of the embodiment illustrated in FIG. 4 are omitted, it is possible to improve the visibility as in the pixel electrode **180j** according to the embodiment illustrated in FIG. 28.

[0191] FIG. 29 is a layout diagram of a single pixel of a liquid crystal display device according to still another example embodiment, and FIG. 30 is an enlarged plan view illustrating the pixel electrode of FIG. 29.

[0192] Referring to FIG. 29, a single pixel **10k** of the liquid crystal display device according to the present example embodiment includes an active region **11k**, a gate line **122k**, a gate electrode **124k**, a sustain electrode **126k**, a semiconductor layer **140k**, a source electrode **165k**, a drain electrode **166k**, a pixel electrode **180k**, a shielding electrode **189k** and a contact hole **188k**. Further, the pixel electrode **180k** includes a first stem electrode **181k**, a second stem electrode **182k**, a branch electrode **183k**, a first connection electrode **184_1k**, a second connection electrode **184_2k**, a first edge electrode **185_1k**, a second edge electrode **185_2k**, a first auxiliary electrode **186_1k**, a second auxiliary electrode **186_2k**, and a protrusion **187k**, and includes a first fine slit **191k**, a second fine slit **192k**, a third fine slit **193k** and a fourth fine slit **194k** as opening portions according to the structure of the pixel electrode **180k**.

[0193] Here, the related description may be applied to the configurations corresponding to the configurations according to the embodiments illustrated in FIGS. 1 and 4 among the respective configurations illustrated in FIGS. 29 and 30, unless there is separate explanation. Thus, differences from the configurations illustrated in FIGS. 1 and 4 among the respective configurations illustrated in FIGS. 29 and 30 will be mainly described.

[0194] Referring to FIGS. 1, 4, 29, and 30, a single pixel **10k** of the liquid crystal display device according to the present example embodiment may have the width extending along the second direction **D2** longer than the width extending along the first direction **D1**. Further, the length of the second stem electrode **182k** extending along the second direction **D2** in the active region **11k** may be longer than the length of the first stem electrode **181k** extending along the first direction **D1** in the active region **11k**. For example, the extension direction of the long axis of the pixel **10** in the embodiment illustrated in FIGS. 1 and 4 may be changed, and the relative length relationship between the first stem electrode **181** and the second stem electrode **182** may also be changed. However, according to the present example embodiment, since the extended lengths of the first electrode **183k** and the second electrode **183k** along the first direction **D1** become relatively short, the degree of improvement in visibility and the degree of improvement in transmittance may be partially reduced as compared to the degree of improvement in visibility and the degree of improvement in transmittance illustrated in FIGS. 1 and 4.

[0195] FIG. 31 is a cross-sectional view taken along a line corresponding to the line I-I' illustrated in FIG. 1 in a liquid crystal display device according to still another example embodiment, and FIG. 32 is a cross-sectional view taken along a line corresponding to the line I-I' illustrated in FIG. 1 in the liquid crystal display device according to the embodiment illustrated in FIG. 31.

[0196] For example, the embodiments according to FIGS. 31 and 32 illustrate a structure in which a column spacer **191/** and a spacer **192/** are further included and a light-shielding member **320** and an overcoat layer **330** are omitted as compared to FIGS. 2 and 3.

[0197] Hereinafter, this structure will be described with reference to FIGS. 1 to 3 and 31 and 32. The liquid crystal display device according to the present example embodiment includes a column spacer **191/** which is disposed to correspond to a region in which the light-shielding member **320** of FIGS. 1 to 3 is disposed. The column spacer **191** may not transmit light and may cut off light provided from the bottom. As the column spacer **191/** cuts off the light, the light-shielding member **320** illustrated in FIGS. 1 through 3 may be omitted. As the light-shielding member **320** is omitted, the overcoat layer **330** illustrated in FIGS. 1 to 3 may also be omitted. Accordingly, the common electrode **340/** may be directly disposed on a surface of the first base substrate **110**.

[0198] Also, the liquid crystal display device may further include a spacer **192/** for maintaining a space in which the liquid crystal layer **200/** is formed. The spacer **192/** may be formed integrally with the column spacer **191/**, and may be formed in a region on which the thin film transistor **167** is disposed.

[0199] The column spacer **191/** may be disposed between the pixels **10** adjacent to each other to extend along the first direction **D1**. However, because the column spacer **191/** may form a step, it may tilt the liquid crystal **210**. Therefore, in the case of the liquid crystal display device formed with the column spacer **191/**, the visibility may be lowered along the edge which extends along the first direction **D1**, among the edges of the active region **11**. In this case, since the first electrode **183** is disposed, it is possible to maximize the effect of improving the visibility.

[0200] By way of summation and review, among the liquid crystal display devices, vertically alignment mode liquid crystal display devices have been developed in which a long axis of the liquid crystal is arrayed to be perpendicular to the upper and lower substrates in a state in which no electric field is applied.

[0201] The vertical alignment mode liquid crystal display devices may have poorer lateral visibility than front visibility. For example, the liquid crystal display device may be more brightly visible when viewed from the side than when viewed from the front, and as the brightness difference between the front and the side is large, the visibility gets worse.

[0202] As described above, embodiments may provide a liquid crystal display device with improved visibility.

[0203] Example embodiments have been disclosed herein, and although specific terms are employed, they are used and are to be interpreted in a generic and descriptive sense only and not for purpose of limitation. In some instances, as would be apparent to one of ordinary skill in the art as of the filing of the present application, features, characteristics, and/or elements described in connection with a particular embodiment may be used singly or in combination with features, characteristics, and/or elements described in connection with other embodiments unless otherwise specifically indicated. Accordingly, it will be understood by those of skill in the art that various changes in form and details may be made without departing from the spirit and scope of the present invention as set forth in the following claims.

What is claimed is:

1. A liquid crystal display device, comprising:
 - a substrate; and
 - a pixel electrode disposed on the substrate, the pixel electrode including:
 - a first stem electrode that extends in a first direction;
 - a second stem electrode that extends in a second direction perpendicular to the first direction and intersects with the first stem electrode;
 - a plurality of branch electrodes, the branch electrodes extending obliquely to the first direction and the second direction from the first stem electrode and the second stem electrode;
 - a first connection electrode that connects distal ends of some of the branch electrodes to each other, extends in the first direction, and intersects with the second stem electrode; and
 - a first edge electrode that is connected to one distal end of the second stem electrode and extends in the first direction.
2. The liquid crystal display device as claimed in claim 1, further comprising:
 - a gate line that is disposed on the substrate, is insulated from the pixel electrode, and extends along the first direction; and
 - a data line that is disposed on the substrate, is insulated from the pixel electrode and the gate line, and extends along the second direction.
3. The liquid crystal display device as claimed in claim 2, further comprising a thin film transistor that is disposed on the substrate, and has an input terminal connected to the data line, an output terminal connected to the pixel electrode, and a control terminal connected to the gate line.
4. The liquid crystal display device as claimed in claim 2, wherein the first edge electrode is disposed between the first connection electrode and the gate line.
5. The liquid crystal display device as claimed in claim 2, wherein an extended length of the first stem electrode is longer than an extended length of the second stem electrode.
6. The liquid crystal display device as claimed in claim 1, wherein a sum of a width in the second direction of the first edge electrode, a width in the second direction of the first connection electrode, and a spaced distance between the first connection electrode and the first edge electrode is 10.5 μm or less.
7. The liquid crystal display device as claimed in claim 6, wherein the width in the second direction of the first connection electrode is less than 3 μm .
8. The liquid crystal display device as claimed in claim 6, wherein the spaced distance between the first connection electrode and the first edge electrode is 4 μm or more and 2 μm or less.
9. The liquid crystal display device as claimed in claim 1, further comprising a second edge electrode that is disposed between the first connection electrode and the first edge electrode, extends along the first direction, and intersects with the second stem electrode.
10. The liquid crystal display device as claimed in claim 1, further comprising a second connection electrode that connects the distal ends of some of the branch electrodes to each other, extends in the first direction, intersects with the second stem electrode, and is disposed on an opposite side of the first connection electrode in the second direction.
11. The liquid crystal display device as claimed in claim 10, further comprising a third edge electrode that is connected the other distal end of the second stem electrode and extends in the first direction.
12. The liquid crystal display device as claimed in claim 11, further comprising a fourth edge electrode that is disposed between the first connection electrode and the first edge electrode, extends along the first direction and intersects with the second stem electrode.
13. The liquid crystal display device as claimed in claim 1, further comprising a second auxiliary electrode that is connected to one distal end of the first stem electrode, is connected to the other distal ends of the first auxiliary electrode and the first stem electrode extending in the second direction, and extends in the second direction.
14. The liquid crystal display device as claimed in claim 1, wherein a spaced distance between the first edge electrode and the first connection electrode increases as it is farther away from the second stem electrode.
15. The liquid crystal display device as claimed in claim 1, wherein the first edge electrode is disposed adjacent to the first stem electrode to be spaced apart therefrom.
16. A liquid crystal display device, comprising:
 - a substrate;
 - a first gate line and a second gate line that are disposed on the substrate, extend in a first direction, and are insulated from each other;
 - a data line that is disposed on the first gate line, is insulated from the first gate line and the second gate line, and extends in a second direction perpendicular to the first direction; and
 - a pixel electrode that is disposed on the data line and is insulated from the first gate line, the second gate line, and the data line, the pixel electrode including:
 - a first stem electrode that extends in a first direction;
 - a second stem electrode that extends in the second direction and intersects with the first stem electrode;
 - a plurality of branch electrodes, the branch electrodes extending obliquely to the first direction and the second direction from the first stem electrode and the second stem electrode;
 - a first connection electrode that connects distal ends of some of the branch electrodes to each other, extends in the first direction, and intersects with the second stem electrode;
 - a second connection electrode that connects the distal ends of the remaining branch electrodes to each other, extends in the first direction, and intersects with the second stem electrode on an opposite side of the first connection electrode; and
 - a first edge electrode that is connected to one distal end of the second stem electrode and extends in the first direction,
 wherein the first edge electrode is disposed between the first connection electrode and the first gate line, and the second connection electrode is disposed to overlap the second gate line.
17. The liquid crystal display device as claimed in claim 16, wherein the extended length of the first stem electrode is longer than the extended length of the second stem electrode.
18. The liquid crystal display device as claimed in claim 17, further comprising a thin film transistor that is disposed on the substrate, and has an input terminal connected to the

data line, an output terminal connected to the pixel electrode, and a control terminal connected to the first gate line.

19. The liquid crystal display device as claimed in claim **18**, wherein the second gate line is electrically insulated from the thin-film transistor.

20. The liquid crystal display device as claimed in claim **17**, further comprising a shielding electrode that is disposed on the same layer as the pixel electrode and spaced apart from the pixel electrode, and extends in the first direction to partially overlap the first gate line and the second gate line.

* * * * *

专利名称(译)	液晶显示装置		
公开(公告)号	US20170322462A1	公开(公告)日	2017-11-09
申请号	US15/351694	申请日	2016-11-15
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	LEE SE HYUN CHANG HAK SUN SHIN CHEOL		
发明人	LEE, SE HYUN CHANG, HAK SUN SHIN, CHEOL		
IPC分类号	G02F1/1343 G02F1/1362 G02F1/1335 G02F1/1333 G02F1/1339 G02F1/1337 H01L27/12 G02F1/1368		
CPC分类号	G02F1/134309 G02F1/1368 G02F1/13439 G02F1/136286 G02F1/13394 G02F1/133512 G02F2001/133357 G02F1/133345 G02F1/133514 H01L27/124 G02F2201/123 G02F2201/121 G02F1/133707 G02F1/134336 G02F1/1362 G02F2001/136218		
优先权	1020160054473 2016-05-03 KR		
其他公开文献	US10203567		
外部链接	Espacenet USPTO		

摘要(译)

一种液晶显示装置，包括基板和设置在基板上的像素电极，像素电极包括沿第一方向延伸的第一杆电极，第二杆电极，其沿垂直于第一方向的第二方向延伸并交叉具有第一杆电极，多个分支电极，分支电极从第一杆电极和第二杆电极倾斜于第一方向和第二方向延伸，第一连接电极连接一些分支电极的远端彼此沿第一方向延伸并与第二杆电极交叉，并且第一边缘电极连接到第二杆电极的一个远端并沿第一方向延伸。

