

(12) **Patent Application Publication**

(43) **Pub. Date:** Apr. 26, 2018

(52) U.S. Cl.
CPC **G02F 1/134309** (2013.01); **G02F 1/13439**
(2013.01)


(22) Filed: **Oct. 21, 2016**

Publication Classification

(51) **Int. Cl.**
G02F 1/1343 (2006.01)

(57) **ABSTRACT**

A liquid crystal display device includes a first substrate, a pixel array formed on the first substrate, a transparent substrate, a liquid crystal layer disposed between the pixel array and the transparent substrate, a transparent electrode disposed between the transparent substrate and the liquid crystal layer, and an input electrode. The transparent electrode has a longer first edge and an orthogonal shorter second edge. The input electrode extends along, and is electrically coupled along, the first edge of the transparent electrode and has lower impedance than a portion of the transparent electrode overlying the pixel array. The input electrode can include additional portion(s) that extend along, and that are electrically-coupled along, the other edges of the transparent electrode. The input electrode reduces the common voltage propagation delay across the transparent electrode and improves reduces intensity variation over the display area, even for high-frequency common voltage waveforms.

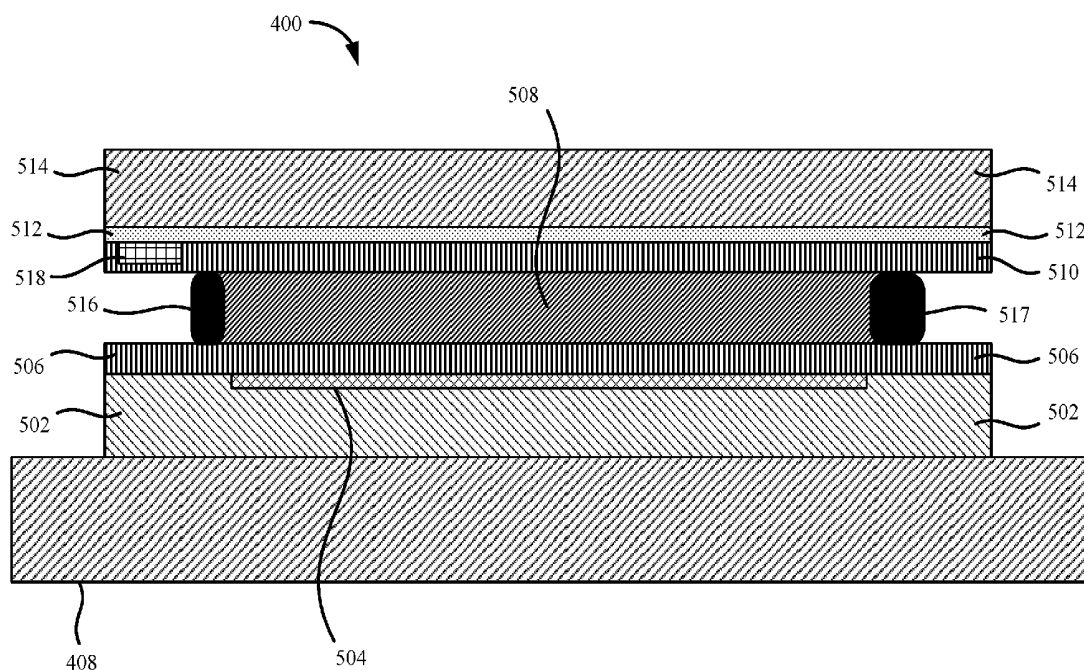

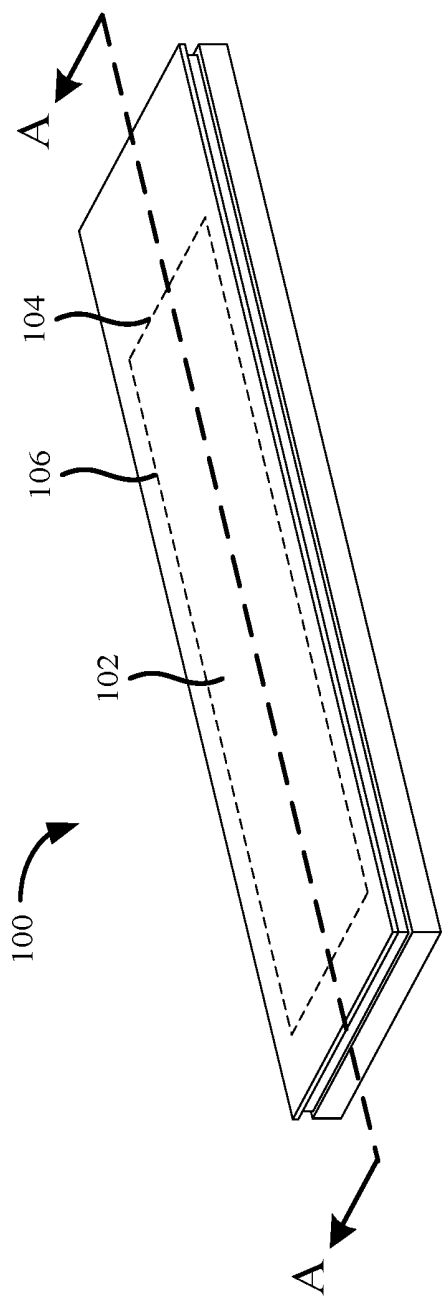


FIG. 1
Prior Art

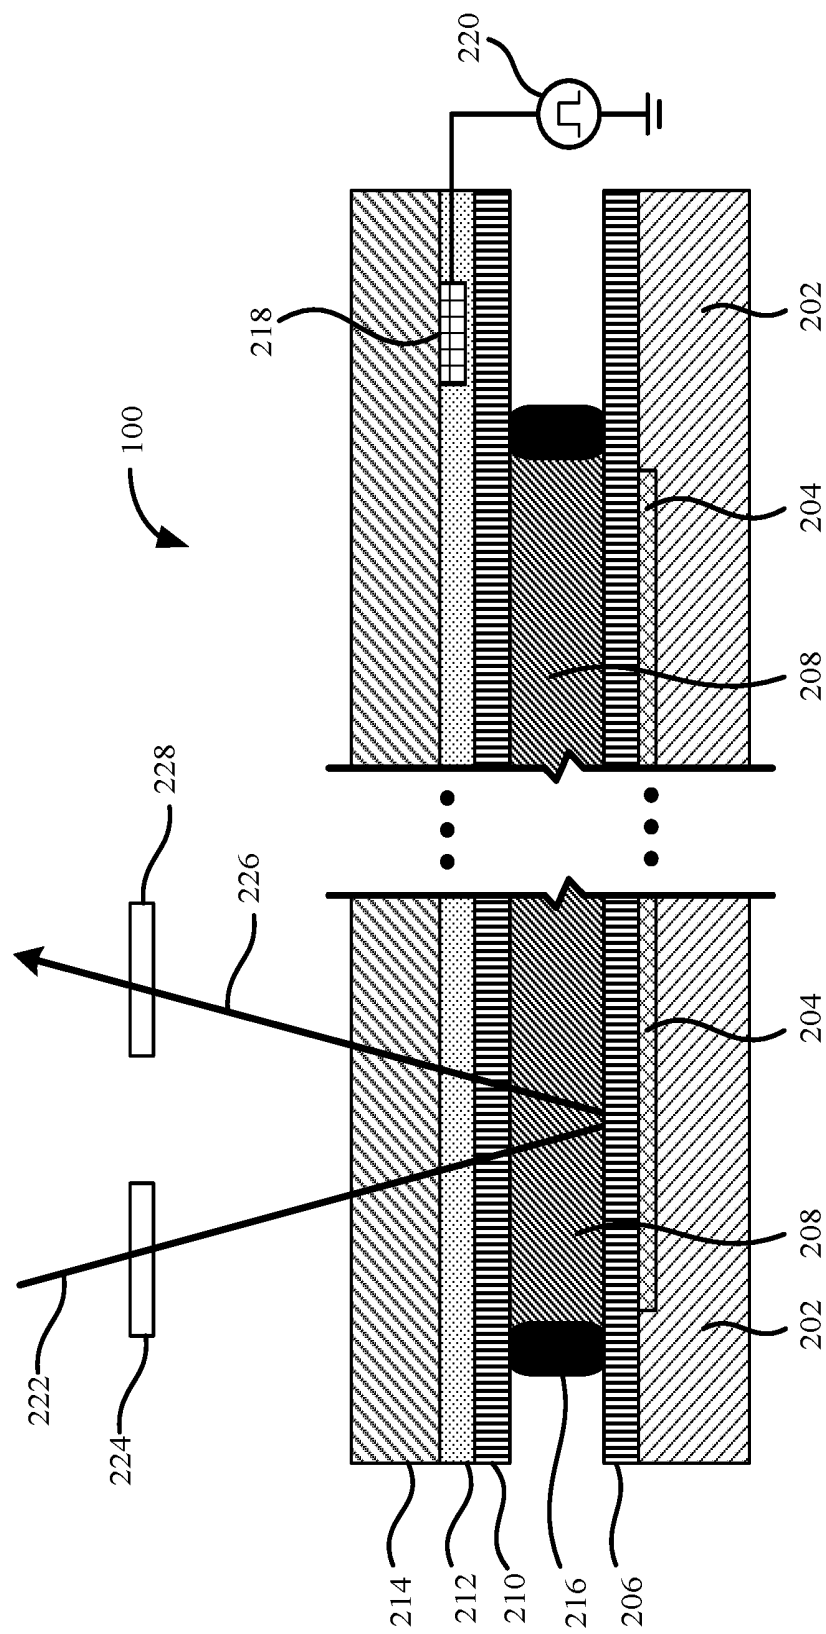


FIG. 2
Prior Art

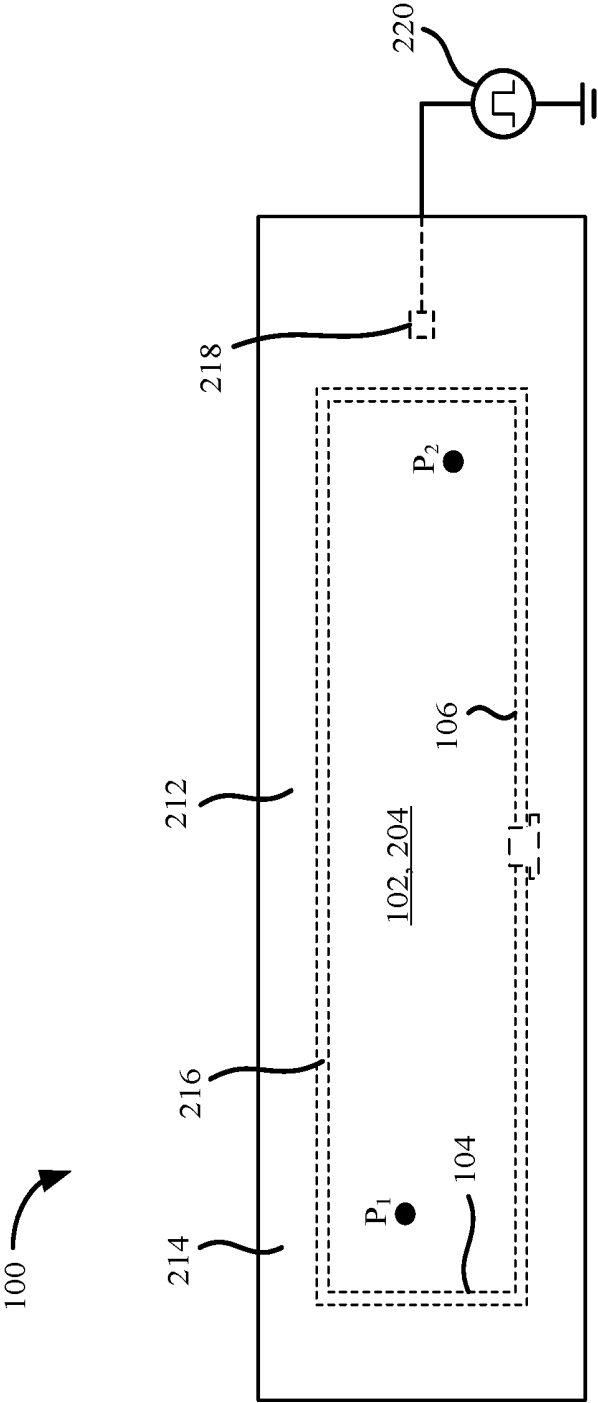


FIG. 3

Prior Art

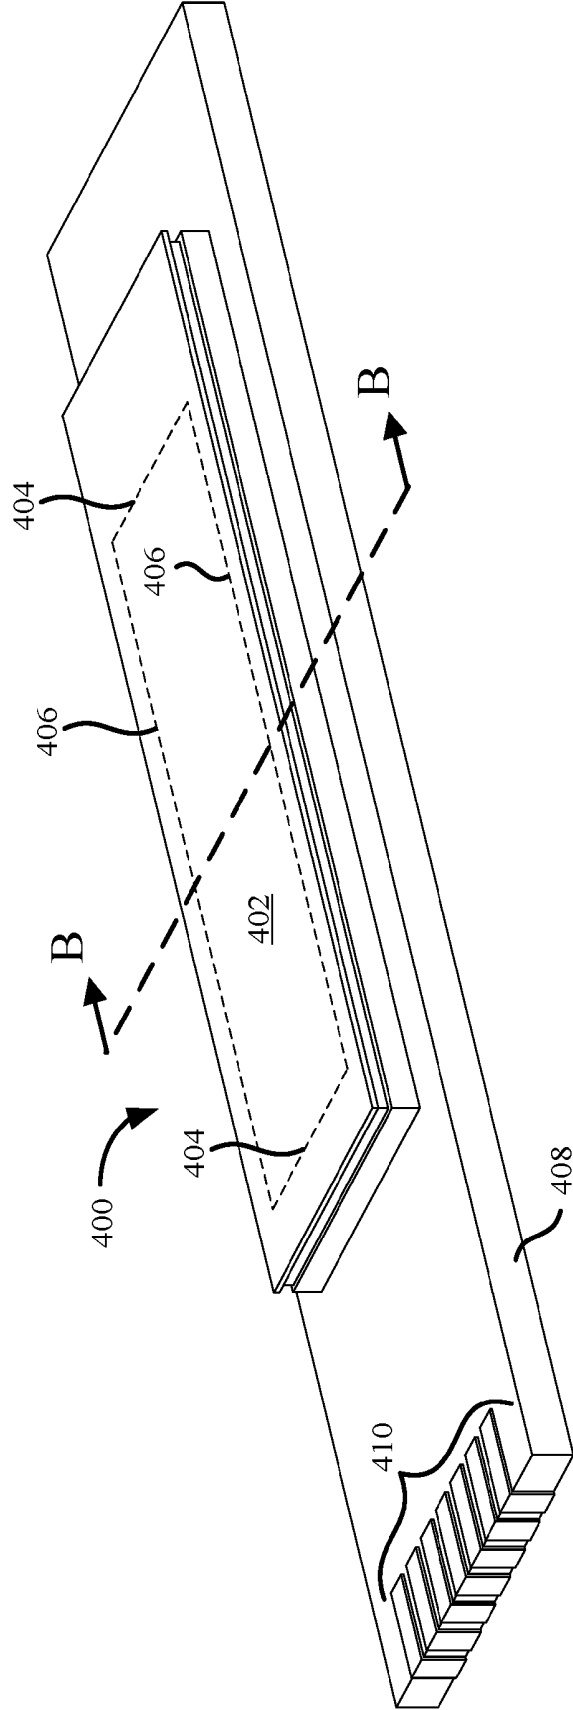


FIG. 4

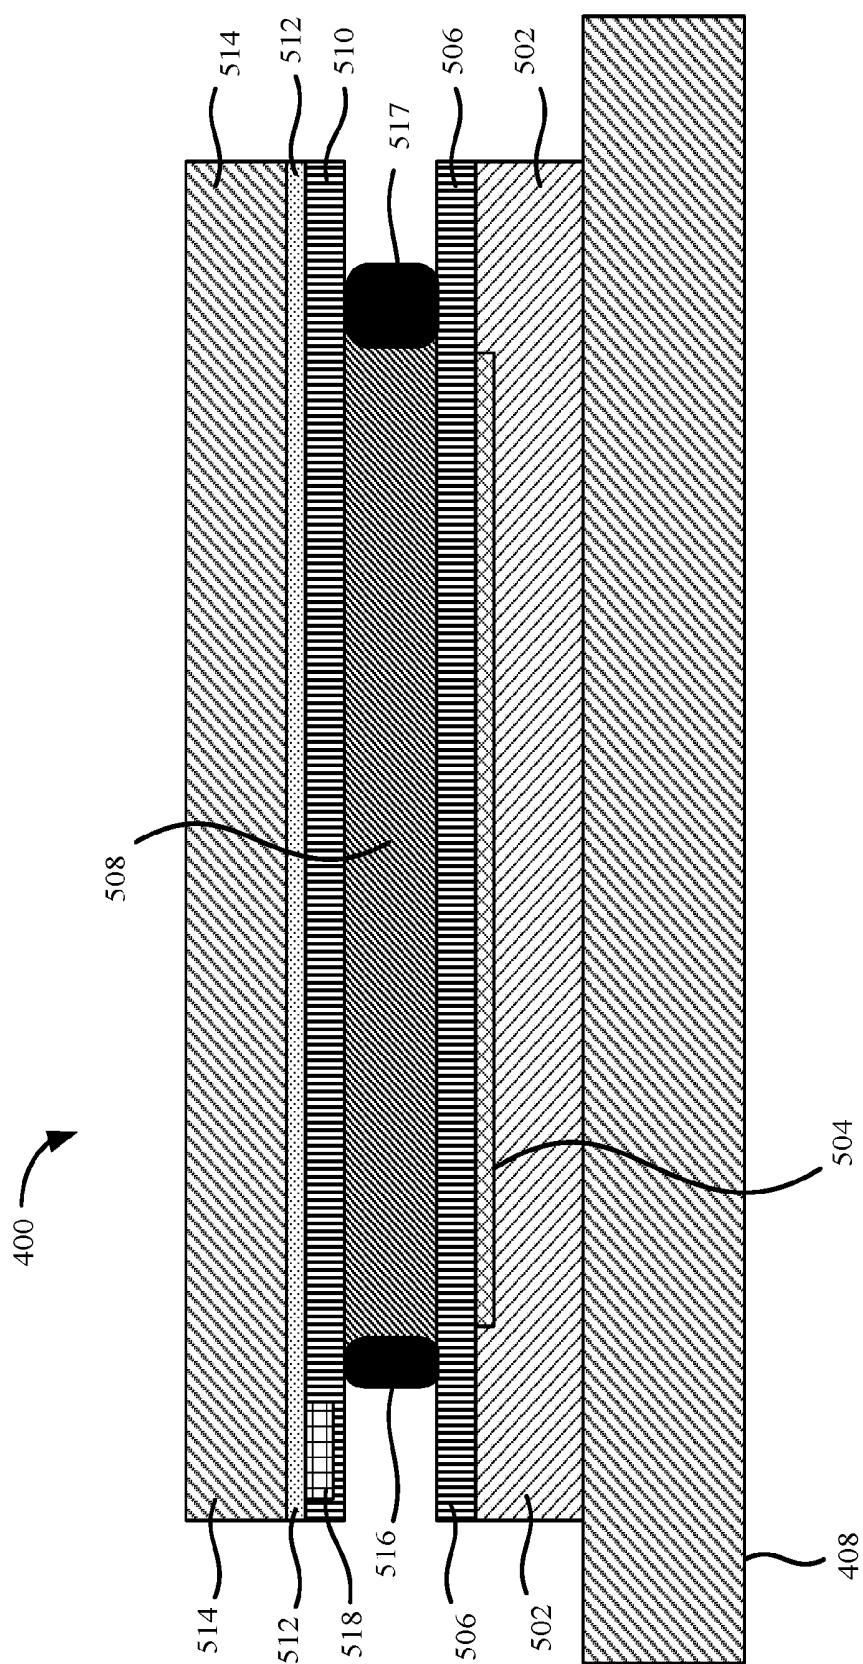


FIG. 5

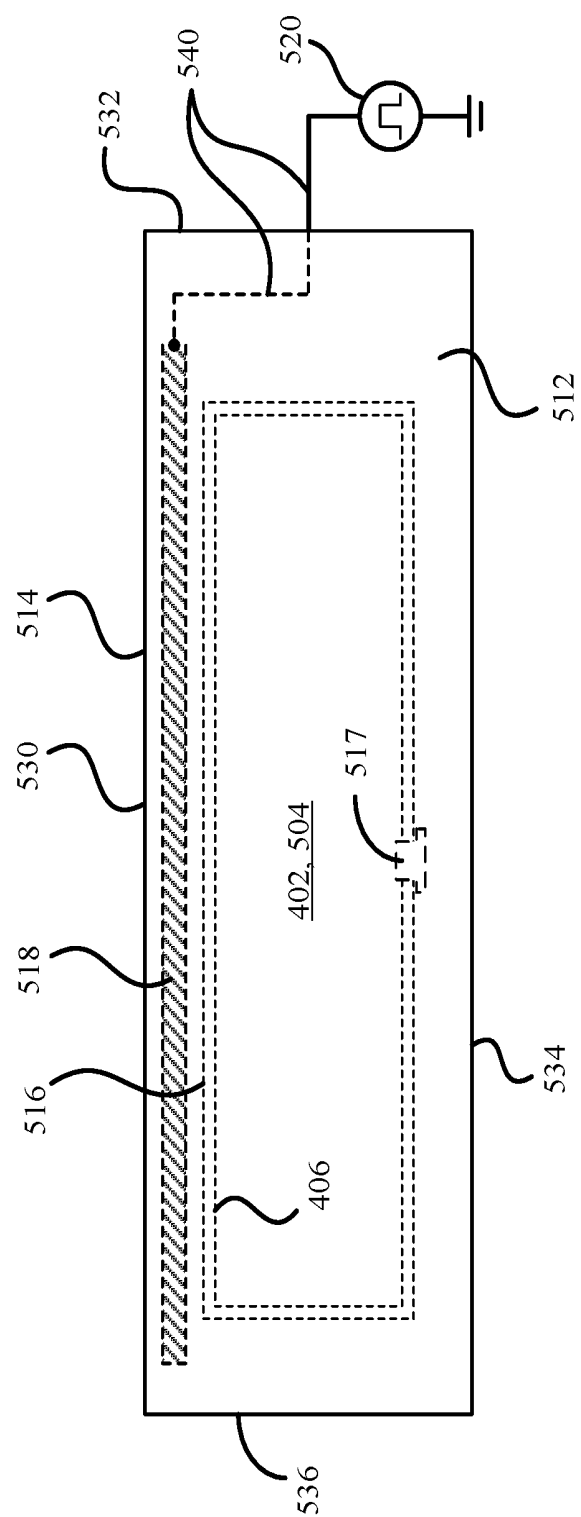


FIG. 6

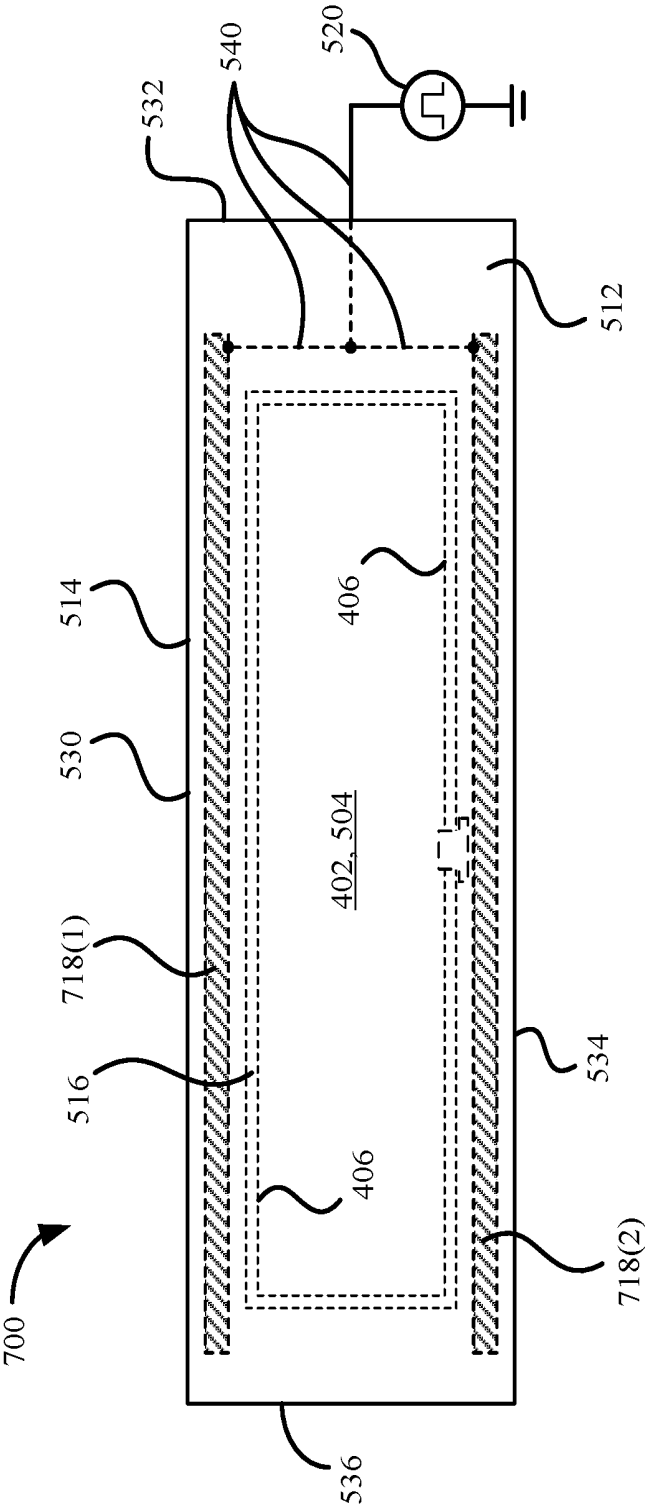


FIG. 7

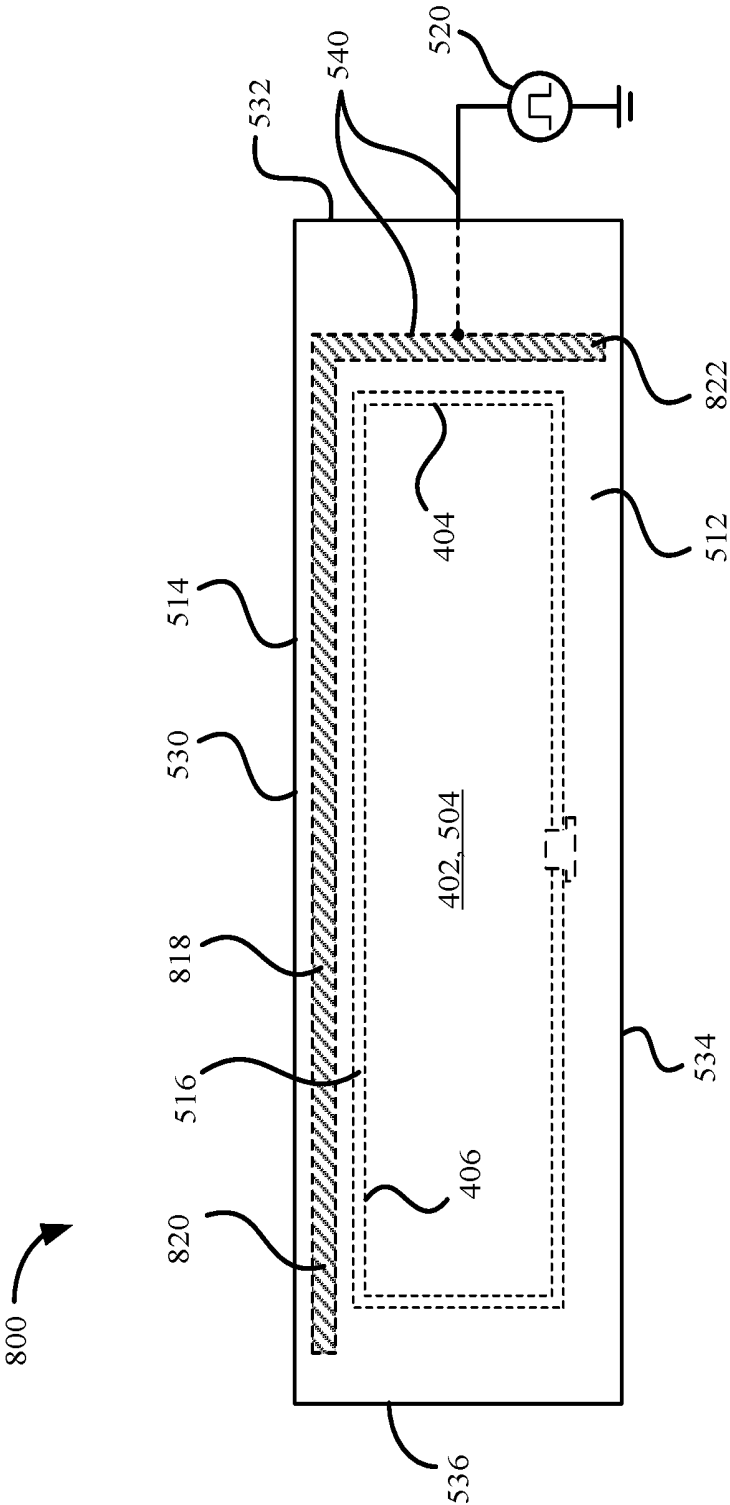


FIG. 8

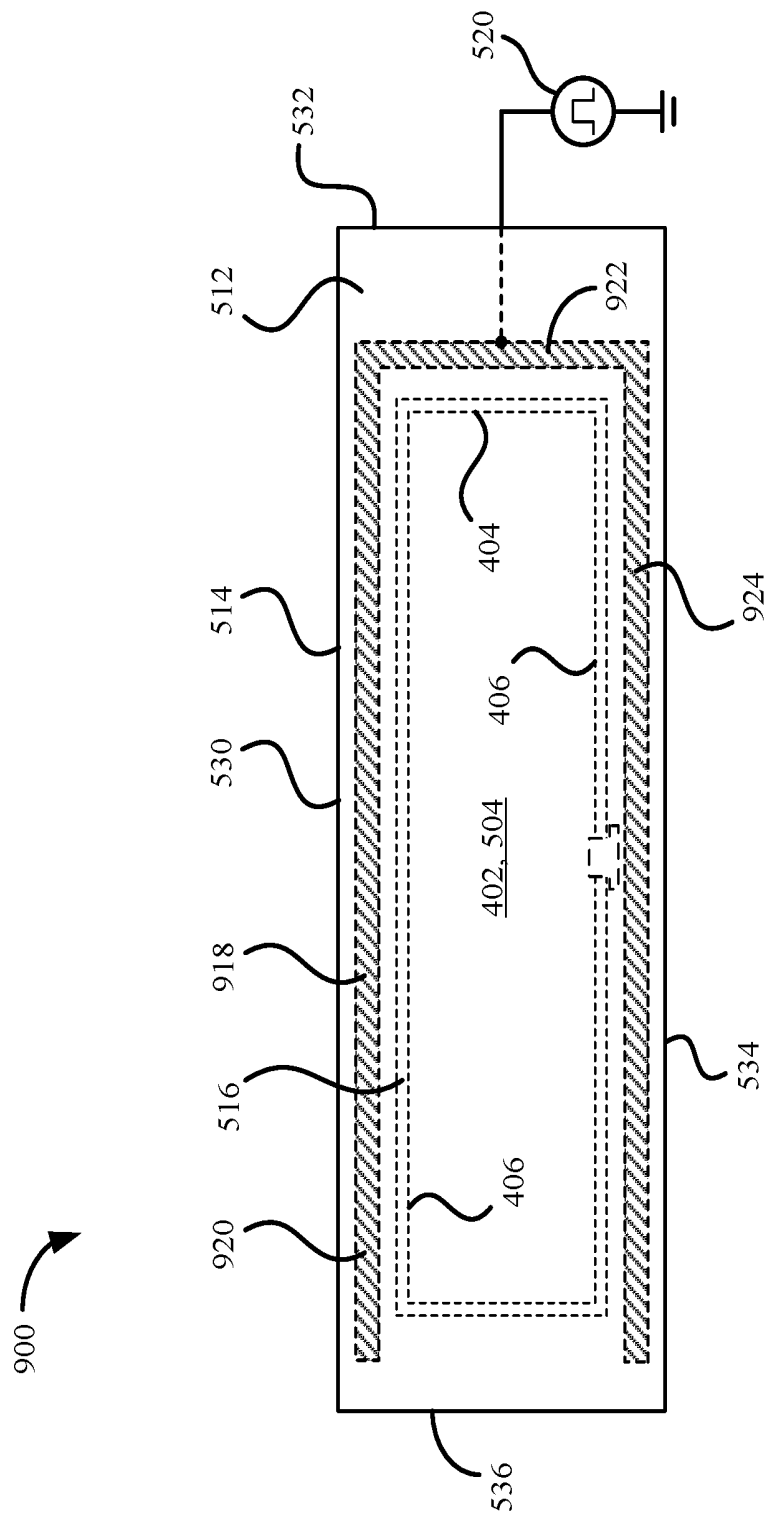


FIG. 9


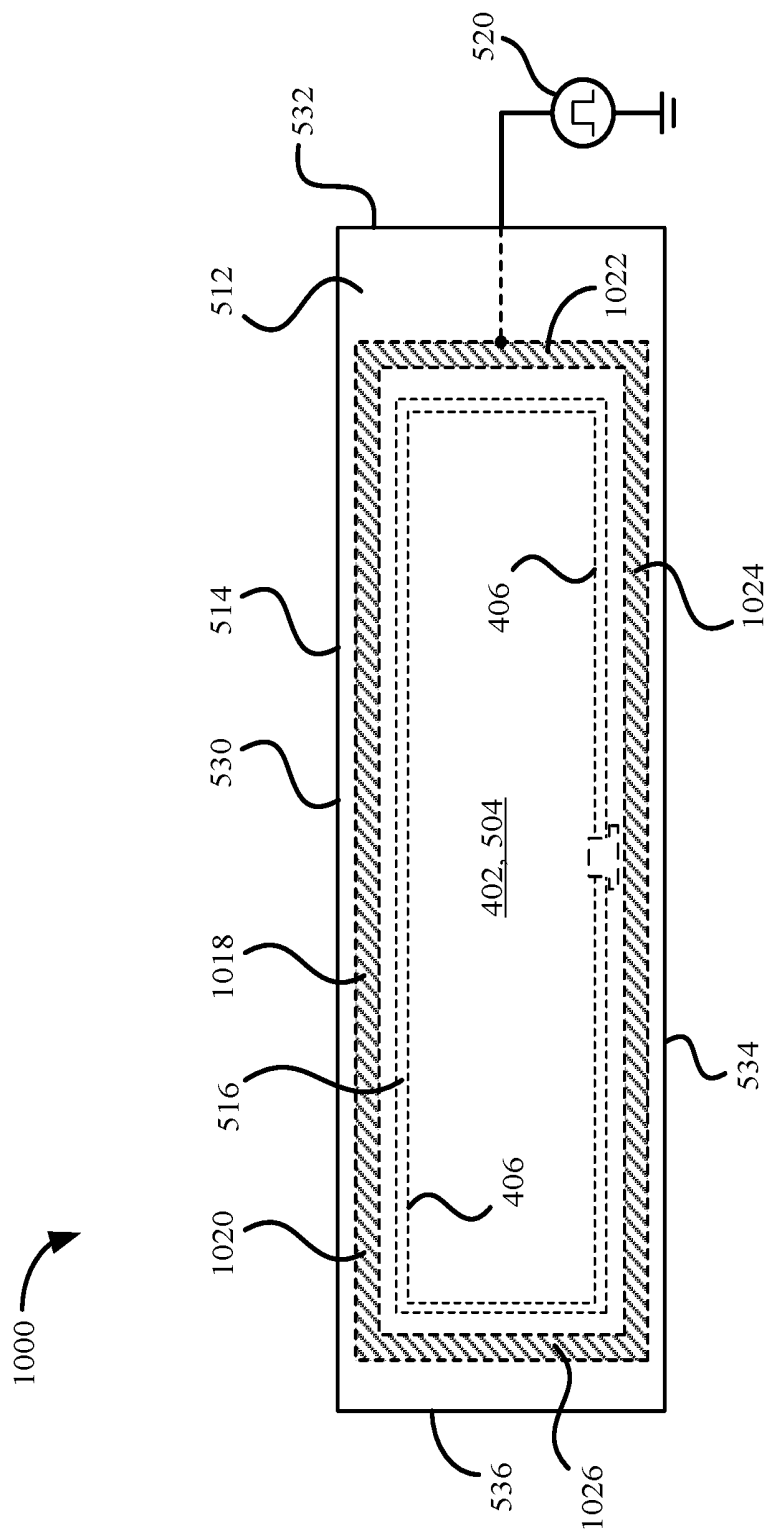


FIG. 10

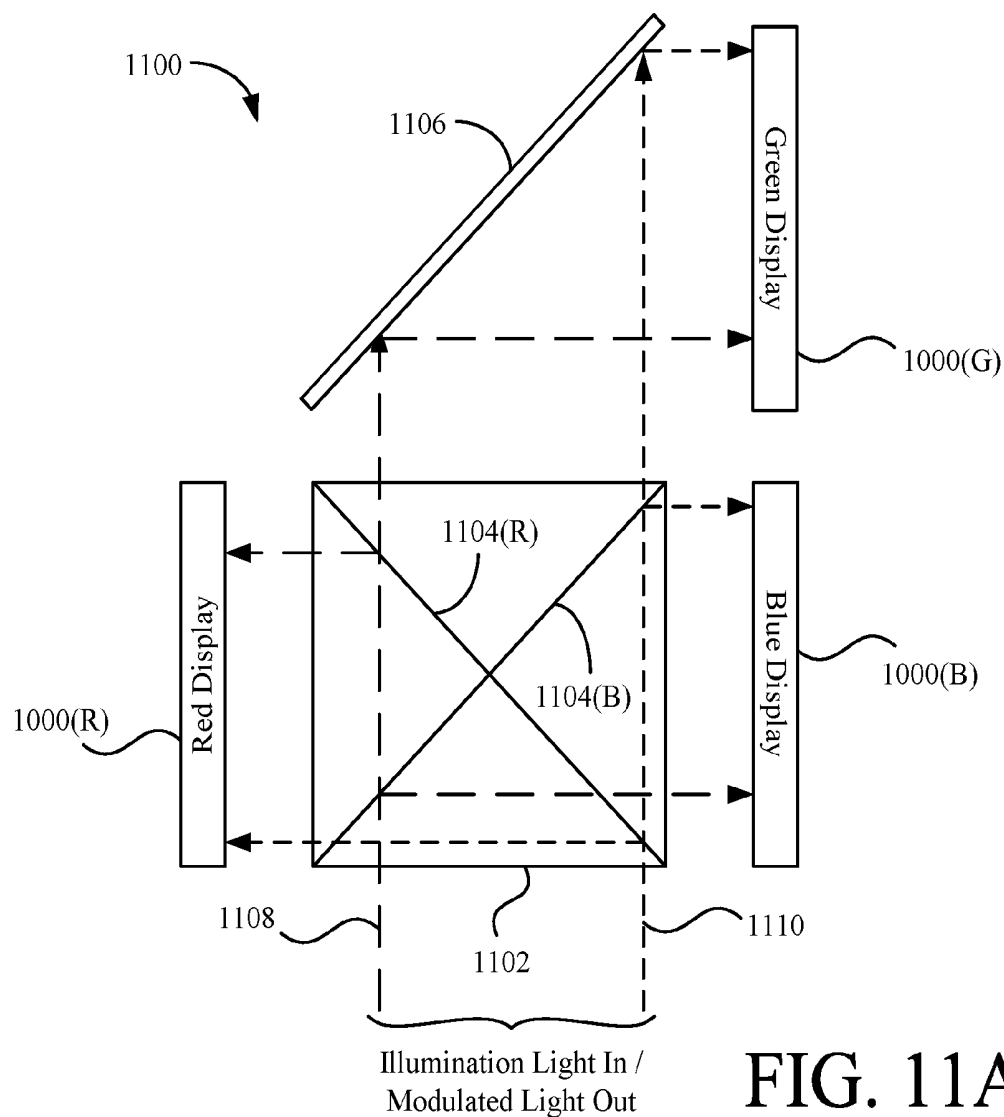

1120

Chromaticity Coordinate	CIE Values - White (Right)	CIE Value - White (Left)	Difference
x	0.3253	0.2985	0.0268
y	0.3414	0.3015	0.0399

FIG. 11B

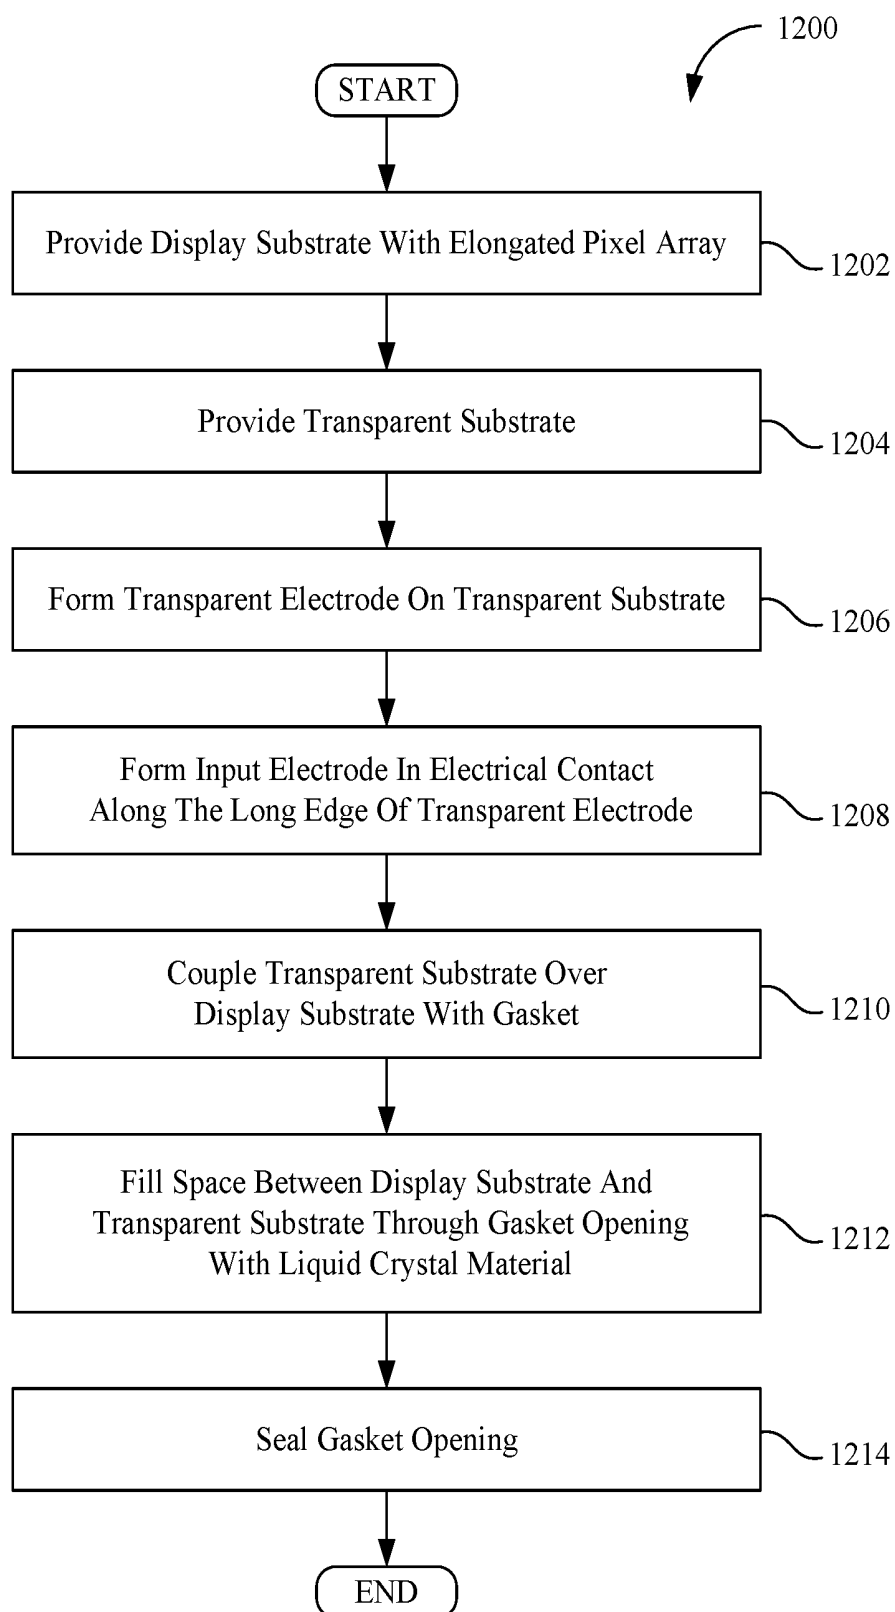


FIG. 12

LIQUID CRYSTAL DISPLAY DEVICE WITH PERIPHERAL ELECTRODE

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] This invention relates generally to liquid crystal displays, and more particularly to liquid crystal on silicon (LCoS) displays.

Description of the Background Art

[0002] Currently there is a demand for miniature display devices in various commercial and consumer applications. For example, LCoS display devices are being incorporated into many different mobile and automotive devices.

[0003] FIG. 1 is a perspective view showing a known liquid crystal display device 100, which is a reflective LCoS light valve. Display device 100 is driven by image processing and control circuitry (not shown) to display images on a display area 102 thereof in accordance with image data received by display device 100. Display area 102 has a long, rectangular format and includes short sides 104 and long sides 106.

[0004] FIG. 2 is a cross-sectional view of display device 100 taken along line A-A of FIG. 1. FIG. 2 shows that display device 100 is formed on a silicon substrate (a chip) 202, which includes a pixel array 204 formed thereon. Pixel array 204 includes a plurality of pixels (not shown) arranged in a plurality of columns and a plurality of rows. Because display device 100 is reflective, those skilled in the art will recognize that the pixels of pixel array 204 include reflective pixel mirrors (not shown) that reflect incident light. Also, pixel array 204 generally defines the extents of display area 102 (FIG. 1), such that the short and long edges of pixel array 204 correspond to the short and long sides 104 and 106 of display area 102, respectively.

[0005] Display device 100 further includes a lower liquid crystal alignment layer 206, a layer of liquid crystal material 208, an upper liquid crystal alignment layer 210, a transparent electrode 212, a transparent (e.g., glass) substrate 214, and a gasket 216 retaining liquid crystal layer 208 between lower and upper alignment layers 206 and 210. Transparent electrode 212 is formed on a bottom surface of transparent substrate 214 from a layer of Indium Tin Oxide (ITO) and functions as a common electrode for display device 100. Alignment layers 206 and 210 are formed over pixel array 204 and transparent electrode 212, respectively, and facilitate alignment of the liquid crystals in liquid crystal layer 208 in a desired direction. An electrical contact 218 is electrically coupled to transparent electrode 212 adjacent a short edge of pixel array 204 and facilitates the assertion of a series of common voltages from a voltage controller 220 on transparent electrode 212. It is desirable to modulate the voltages supplied by voltage controller 220 at high frequency in order to implement imaging techniques such as debiasing of the liquid crystal layer 208, image dithering, etc.

[0006] During operation of display device 100, incident light 222 is polarized in a first predetermined polarization state by a polarizer 224 and enters through the top surface of transparent substrate 214, passes through layers 214, 212, 210, 208, and 206, is reflected off the pixel mirrors of pixel array 204, and then passes again through the layers 206, 208,

210, 212, and 214, before exiting display device 100. The polarization of the light is altered by liquid crystal layer 208, depending on the electrical field applied across the liquid crystal. When transparent electrode 212 is held at a particular voltage, the electrical field across liquid crystal layer 208 is controlled by the voltages asserted on the pixel mirrors (not shown) of pixel array 204. Thus, the polarization of the incident light is spatially modulated in accordance with an image asserted on pixel array 204, and the light is output as a modulated beam 226. The modulated beam 226 is then analyzed by an analyzer 228 having a predetermined polarization state to produce a displayable image. The intensity of light displayed for each pixel thus depends on the polarization imparted by the liquid crystal.

[0007] FIG. 3 shows a top view of display device 100, which illustrates a problem associated with display devices having a long, narrow transparent electrode 212. In particular, pixels located at different points P1 and P2 on pixel array 204 will display the same intensity value differently. For example, if pixels at points P1 and P2 are each driven in a fully “on” or “bright” state, the pixel at point P1 will appear noticeably darker than the pixel at P2. This intensity variation becomes very apparent when the transparent electrode 212 of display device 100 is driven at a high voltage frequency. However, some intensity variation may even be observed even when transparent electrode 212 is driven at a low voltage frequency. Moreover, in three-color systems, such variations in the intensities of individual colors can create perceived color distortions in the displayed image. For these reasons, non-uniformity in the representation of intensity values across the display area is undesirable.

[0008] What is needed, therefore, is an LCoS display device capable of displaying intensity values uniformly across its display area. What is also needed is an LCoS display device that can be driven with a high voltage frequency on its common electrode without sacrificing image quality.

SUMMARY

[0009] The present invention overcomes the problems associated with the prior art by providing a peripheral input electrode that efficiently distributes voltage changes across the transparent electrode of the display. The invention facilitates driving the common electrode of the display device with a high-frequency voltage waveform while improving intensity uniformity across the viewable region of the display.

[0010] A liquid crystal display device according to an exemplary embodiment of the invention includes a first substrate, a pixel array formed on the first substrate, a transparent substrate disposed a spaced distance over the pixel array, a liquid crystal layer disposed between the pixel array and the transparent substrate, a transparent electrode disposed between the transparent substrate and the liquid crystal layer, and an input electrode. The transparent electrode is formed from a thin, conductive material, has a first edge extending in a first direction, and has a second edge extending in a second direction, where the first edge is longer than the second edge. Additionally, the input electrode extends along, and is electrically coupled along, the first edge of the transparent electrode and has lower impedance than a portion of the transparent electrode overlying the pixel array. The liquid crystal display device can also include a liquid crystal alignment layer formed over the

transparent electrode and the input electrode. The input electrode provides a means for uniformly asserting a high-frequency signal on the portion of the transparent electrode overlying the pixel array.

[0011] In various embodiments, the first substrate is a reflective liquid crystal on silicon (LCoS) backplane and/or the transparent electrode is formed from Indium Tin Oxide (ITO). The input electrode can also be formed from a material (e.g., aluminum, etc.) that has a higher electrical conductivity than the conductive material of the transparent electrode. The length of the input electrode along the first direction can also be longer than the length of the pixel array along the first direction. In still another particular embodiment, the thickness of the conductive material of the transparent electrode is approximately 20 nanometers. In yet another embodiment, a ratio of the length of said first edge of the transparent electrode to the length of said second edge is at least 5:1.

[0012] Various particular embodiments of the input electrode are also disclosed. For example, the input electrode can additionally extend along and be electrically coupled along the second edge of the transparent electrode. Still more particularly, where the transparent electrode includes a third edge opposite the first edge that also extends along the first direction, the input electrode can additionally extend along and be electrically coupled along the third edge of the transparent electrode. Even more particularly, where the transparent electrode includes a fourth edge opposite the second edge that extends along the second direction, the input electrode can additionally extend along and be electrically coupled along the fourth edge of the transparent electrode. In still another embodiment, the display device further includes a second input electrode extending along and electrically coupled along a third edge of the transparent electrode, where the third edge is located opposite the first edge and extends along the first direction. In such a case the second input electrode has lower impedance than the portion of the transparent electrode overlying the pixel array.

[0013] A method for manufacturing at least a portion of a liquid crystal display device having a pixel array is also disclosed. The method includes the step of providing a transparent substrate having a transparent electrode formed thereon, where the transparent electrode is formed from a thin, conductive material, has a first edge extending in a first direction, and has a second edge extending in a second direction, where the first edge is longer than the second edge. This method further includes the step of forming an input electrode that extends along the first edge of the transparent electrode and that is also electrically coupled along the first edge, where the input electrode has lower impedance than a portion of the transparent electrode intended for overlying the pixel array. A particular method further includes the steps of providing a display substrate having the pixel array formed thereon, mounting the transparent substrate over the display substrate such that the transparent electrode faces the pixel array, and forming a liquid crystal layer between the transparent electrode and the pixel array.

[0014] Various particular methods of forming input electrodes according to the invention are also disclosed. For example, one particular method further includes forming the input electrode on the transparent electrode such that the input electrode additionally extends along and is electrically coupled along the second edge of the transparent electrode. Where the transparent electrode further includes a third edge

opposite the first edge and that extends along the first direction, a more particular method includes the step of forming the input electrode on the transparent electrode such that the input electrode additionally extends along and is electrically coupled along the third edge. An even more particular method can further include the step of forming the input electrode on the transparent electrode such that the input electrode additionally extends along and is electrically coupled along a fourth edge of the transparent electrode, where the fourth edge is located opposite the second edge and extends along the second direction.

[0015] As yet another option for forming the input electrode, a second input electrode can be formed extending along a third edge of the transparent electrode and being electrically coupled to the transparent electrode along the third edge. In such a method, the second input electrode has lower impedance than the portion of the transparent electrode for overlying the pixel array, and the third edge of the transparent electrode is located opposite the first edge and extends along the first direction.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The present invention is described with reference to the following drawings, wherein like reference numbers denote substantially similar elements:

[0017] FIG. 1 is a perspective view of a prior art display device;

[0018] FIG. 2 is a cross-sectional view of the prior art display device of FIG. 1;

[0019] FIG. 3 is a top view of the prior art display device of FIG. 1;

[0020] FIG. 4 is a perspective view of a display device with an input electrode according to an exemplary embodiment of the present invention;

[0021] FIG. 5 is a cross-sectional view of the display device of FIG. 4;

[0022] FIG. 6 is a top view of the display device of FIG. 4;

[0023] FIG. 7 is a top view of a display device according to another exemplary embodiment of the present invention;

[0024] FIG. 8 is a top view of a display device according to a third exemplary embodiment of the present invention;

[0025] FIG. 9 is a top view of a display device according to a fourth exemplary embodiment of the present invention;

[0026] FIG. 10 is a top view of a display device according to a fifth exemplary embodiment of the present invention; and

[0027] FIG. 11A is a block diagram illustrating a three-color display system incorporating display devices of the present invention;

[0028] FIG. 11B is a table illustrating white point variation in a 3-color display system, which is alleviated by using the display devices of the present invention; and

[0029] FIG. 12 is a flowchart summarizing an exemplary method for manufacturing a display device according to the present invention.

DETAILED DESCRIPTION

[0030] The present invention overcomes the problems associated with the prior art, by providing an input electrode that extends along and that is electrically-coupled along at least a portion of the periphery of the transparent electrode of an LCoS display device. The input electrode facilitates

driving the transparent electrode with a high-frequency voltage waveform while minimizing intensity variation across the device's display area. In the following description, numerous specific details are set forth (e.g., particular input electrode designs, particular display device structures, etc.) in order to provide a thorough understanding of the invention. Those skilled in the art will recognize, however, that the invention may be practiced apart from these specific details. In other instances, details of well-known liquid crystal display manufacturing practices (e.g., pixel array formation, layer formation, etc.) and components have been omitted, so as not to unnecessarily obscure the present invention.

[0031] The inventors have found that the intensity variation in prior art LCoS display devices occurs because the impedance of the transparent electrode **212** increases proportionally with the distance from the voltage source (i.e., electrical contact **218**). Considering FIG. **3** again, the impedance of transparent electrode **212** between point P1 and electrical contact **218** is greater than the impedance of transparent electrode **212** between point P2 and electrical contact **218**.

[0032] This impedance mismatch, in turn, means that the voltage response time of the transparent electrode **212** also increases as the distance from the electrical contact **218** increases. Thus, when voltage controller **220** switches the voltage on transparent electrode **212** at electrical contact **218**, and the voltage has not transitioned to the new value over the entire pixel array **204** by the time data is asserted, then the same intensity value asserted on pixels at different locations of the pixel array will appear differently (non-uniformly). This disparate intensity effect is exacerbated when high-frequency voltage waveforms (e.g., ITO voltage frequencies greater than or equal to 1.0 kHz) are applied to the transparent electrode and/or for long, narrow display devices (e.g., those with a transparent electrode **212** having a long-edge-to-short-edge ratio greater than or equal to 5:1), because the voltages change faster than they can propagate and stabilize across the transparent electrode **212** for the data assertion.

[0033] This impedance mismatch is also more problematic in display devices where the transparent electrode is very thin. For example, the impedance of ITO is inversely proportional to its thickness and increases very rapidly for thin ITO layers (e.g., those of 60 nm or less) as the distance to the voltage source increases. While impedance of the ITO layer can be decreased by increasing its thickness, doing so is not a good solution to reducing impedance variation, because the optical transparency of the ITO is also inversely proportional to its thickness. Thus, increasing the thickness of the ITO would significantly decrease the transparency of the display device and degrade its optical efficiency.

[0034] In summary, the inventors have determined that, to achieve optimal imaging performance and uniformity of intensity across the display area, it is desirable to minimize the impedance of the transparent electrode between the common voltage input and points across the portion of the transparent electrode that overlies the pixel array. To these same ends, it is also desirable for the transparent electrode to have very high optical transparency across the visible spectrum.

[0035] FIG. **4** is a perspective view showing a reflective LCoS display device **400** according to one embodiment of the invention. Display device **400** is driven by image pro-

cessing and control circuitry (not shown) to display an image on its display area **402**. The display area **402** of display device is long and narrow, comprising long sides **406** that are significantly longer than its short sides **404**. FIG. **4** also shows display device **400** electrically-coupled to a circuit substrate **408**, which enables display device **400** to communicate with and be powered by a host device via I/O terminals (pins) **410**. As will be described below, display device **400** includes a peripheral input electrode that ensures rapid voltage propagation across its common transparent electrode, which results in intensity values being displayed uniformly across display area **402**, even for high-frequency waveforms.

[0036] FIG. **5** is a cross-sectional view of display device **400** and substrate **408** taken along line B-B of FIG. **4**. FIG. **5** shows that display device **500** includes a silicon substrate (a chip) **502** having a pixel array **504** formed therein. Display device **500** also includes a lower liquid crystal alignment layer **506** formed over pixel array **504**, a layer of liquid crystal material **508** formed between lower alignment layer **506** and an upper liquid crystal alignment layer **510**, a transparent electrode **512** having alignment layer **510** formed thereon, and a transparent (e.g., glass) substrate **514** having transparent electrode **512** formed thereon. A gasket **516** surrounds and retains liquid crystal layer **508** between lower and upper alignment layers **506** and **510**. Gasket **516** surrounds and retains liquid crystal layer **508**. A plug **517** is inserted in an opening (not shown) of gasket **516** to seal gasket **516** and the liquid crystal material therein. Pixel array **504** includes a plurality of reflective pixels (e.g., pixel mirrors, not shown) arranged in a plurality of columns and a plurality of rows, which modulate incident light in accordance with image data asserted thereon as discussed above.

[0037] Transparent electrode **512** is a layer of conductive material (ITO in this embodiment) formed over substantially the entire bottom surface of transparent substrate **514**. Accordingly, the limits of transparent electrode **512** correspond to the limits of transparent substrate **514**. Here, transparent substrate **514** has dimensions of 25 mm×4 mm, which results in a ratio of long-to-short edges of transparent electrode **512** of 6.25:1. Additionally, the layer of ITO is very thin (e.g., less than 60 nanometers) for high optical performance. In a particular embodiment, the ITO layer has a thickness of approximately 20 nm, which is transparent for about 95% of the wavelengths in the visible spectrum. Thus, transparent electrode **512** has a high resistivity and, without the input electrode of the present invention, would have significant impedance variation, especially along its long dimension.

[0038] To minimize this impedance variation, display device **400** includes an input electrode **518**, which is formed directly on transparent electrode **512** in this embodiment. Input electrode **518** is elongated such that it extends (into and out of the page) along, and is electrically-coupled along, a long edge of transparent electrode **512**. Additionally, input electrode **518** is designed to have lower impedance than the impedance of at least the portion of transparent electrode **512** that overlies pixel array **504**. This ensures that voltage propagation through input electrode **518** is faster than voltage propagation through the portion of transparent electrode **512** overlying pixel array **504**.

[0039] To help meet these impedance goals, input electrode **518** is manufactured from a material that has a significantly lower resistivity, and therefore a higher elec-

trical conductivity, than the material (e.g., ITO) from which transparent electrode **512** is formed. For a transparent electrode **512** made of ITO, input electrode **518** can be made from any of aluminum (Al), silver (Ag), chromium (Cr), or titanium (Ti), each of which has a resistivity that is significantly lower than the resistivity of ITO at a thickness of 20 nm. In a particular embodiment, input electrode **518** is formed from aluminum (e.g., for cost savings) at a line width in the range of 100-300 micrometers (μm) and at a thickness in the range of 100-500 nm. In addition to type of material, impedance can also depend on other variables such as length, cross-sectional area, frequency, capacitance, etc.

[0040] Input electrode **518** can be formed using any suitable deposition process(es) available in the art (e.g., photolithography, sputtering, chemical vapor deposition, etc.). According to a particular method, input electrode **518** is formed by first providing a transparent substrate **514** having transparent electrode **512** formed thereon. Thereafter, a thin metallic (e.g., aluminum) film is applied over transparent electrode **512** either by vapor deposition or by sputter coating.

[0041] Next, a layer of photoresist is applied over the aluminum film and exposed to form (pattern) input electrode **518** in the desired shape. Then, the unexposed portion of the photoresist along with the underlying metal is etched away. During etching, the exposed photoresist protects the portion of the metal layer corresponding to the input electrode **518** and prevents it from being etched away. Thus, the metal input electrode **518** in the desired shape remains. (Opposite patterning and exposure, such as with a positive resist, can also be used to form input electrode **518** in the desired shape.) The transparent electrode **512** and input electrode **518** can then undergo washing and cleaning as needed. Upper liquid crystal alignment layer **510** can thereafter be formed (e.g., by a spin-on process, by chemical vapor deposition, etc.) over input electrode **518**.

[0042] FIG. 6 is a top view of display device **400** showing transparent electrode **512** electrically-coupled to voltage controller **520** via input electrode **518**. (Input electrode **518** is shown in cross-hatching for better viewing purposes only.) As mentioned above, the limits of transparent electrode **512** correspond to the limits of transparent substrate **514** in this embodiment. Therefore, transparent electrode **512** defines a first edge **530** extending in a first direction (horizontal in the view of FIG. 6), a second edge **532** extending in a second direction (vertical in the view of FIG. 6), a third edge **534** extending in a third direction, and a fourth edge **536** extending in a fourth direction. Here, the third and fourth directions correspond to the first direction and second directions, respectively, such that first and third edges **530** and **534** are parallel and second and fourth edges **532** and **536** are parallel. Additionally, the first and third edges **530** and **534** of transparent electrode layer **512** are longer than the second and fourth edges **532** and **536** of transparent electrode layer **512**.

[0043] Input electrode **518** is elongated and extends in the first direction along the majority of the length of first edge **530** of transparent electrode **512**. Similarly, input electrode **518** extends parallel to the entire long-edge of pixel array **504**, and beyond. Input electrode **518** is also electrically coupled to transparent electrode **512** along first edge **530**. In this embodiment, input electrode **518** maintains a generally continuous electrical connection with transparent electrode **512**, but in other embodiments, input electrode **518** can

comprise a plurality of discrete electrical connections with transparent electrode **512** along first edge **530**.

[0044] Input electrode **518** is also electrically coupled to voltage controller **520** via circuitry **540**, which is shown representationally. Circuitry **540** is representative of a highly-conductive electrical pathway that communicates voltage from voltage controller **520** to input electrode **518**. Accordingly, circuitry **540** can be formed on or in any of transparent electrode **512**, silicon chip **502**, circuit substrate **408**, and/or can be part of any other element interposed between voltage controller and input electrode **518** using methods available in the art.

[0045] The invention provides important advantages over the prior art, because it enables a common voltage to be quickly and uniformly asserted across transparent electrode **512**. In particular, the invention reduces the distance that an asserted voltage must propagate through transparent electrode **512** before it is uniformly asserted (asserted at the desired voltage) over all of pixel array **104**. Stated another way, input electrode **518** limits the impedance between input electrode **518** and any point of transparent electrode **512** overlying pixel array **504** to an amount less than the impedance across the short dimension (i.e., across short edges **532** and **536**) of transparent electrode **512**. Therefore, a uniform common voltage can be more quickly asserted on the portion of transparent electrode **512** overlying pixel array **504**, which in turn enables individual intensity values to be displayed more uniformly over the entire pixel array **504**. In contrast to input electrode **518**, any voltage asserted on electrical contact **218** of prior art display device **100** (FIG. 3) needs to traverse the majority of the length of the long sides of display device **100** before the desired voltage will be asserted over the entire pixel array **204**. As explained above, this results in the same intensity value being displayed differently at different locations across the display area **102**, especially when voltage modulated at high frequency is applied to the transparent electrode **212**. For these same reasons, input electrode **518** also enables transparent electrode **512** to be formed from a very thin layer of ITO (e.g., 20 nm thick) that has excellent optical transparency.

[0046] FIG. 7 shows a top view of a display device **700** including a plurality of input electrodes **718** according to another exemplary embodiment of the invention. Display device **700** is similar to display device **400** (FIGS. 4-6). Accordingly, descriptions of elements of display device **700** having like reference numbers to those shown for display device **400** are not repeated.

[0047] Display device **700** includes a first input electrode **718(1)**, which extends along and is electrically coupled along first edge **530** of transparent electrode **512**, and a second input electrode **718(2)**, which extends along and is electrically coupled along third edge **534** of transparent electrode **512**. Thus, each of input electrodes **718(1)** and **718(2)** extend in the same direction, parallel to edges **530** and **534** and the long sides **406** of display area **402** of pixel array **504**. Each of input electrodes **718(1-2)** is substantially similar to input electrode **518** and, therefore, has lower impedance than the portion of transparent electrode **512** overlying pixel array **504**.

[0048] Also like input electrode **518**, each of input electrodes **718(1)** and **718(2)** is electrically coupled to receive a common voltage waveform from voltage controller **520** via circuitry **540** and then apply that voltage waveform to transparent electrode **512**. Input electrodes **718(1-2)** provide

the advantage that transparent electrode **512** can be driven at even higher frequency than display device **400**, without suffering distracting non-uniformities in intensity, because voltage changes will propagate across the portion of transparent electrode **512** overlying pixel array **504** from opposite long sides **406** of pixel array **504**. In this embodiment, a common voltage asserted on input electrodes **718(1)** and **718(2)** needs only to propagate through transparent electrode **512** a distance that is less than one-half the length of one short edges **532** and **536**. Accordingly, the impedance between one of input electrodes **718(1-2)** and any point on transparent electrode **512** over display area **402** is reduced even further over the display device **400**.

[0049] FIG. 8 shows a top view of a display device **800** including an input electrode **818** according to a third exemplary embodiment of the invention. Input electrode **818** is “L-shaped” and is located adjacent two sides of pixel array **504**. In particular, input electrode **818** includes a longer first portion **820** that extends along first edge **530** of transparent electrode **512** and a shorter second portion **822** that extends along second edge **532** of transparent electrode **512**. In this embodiment, voltage controller **520** is electrically coupled via circuitry **540** to the second portion **822** of input electrode **818**. Portions **820** and **822** are connected together, so second portion **822** efficiently communicates voltages to first portion **820**. As before, input electrode **818** has lower impedance than the portion of transparent electrode **512** overlying pixel array **504** and can be formed from aluminum in the proportions discussed above. Input electrode **818** quickly distributes the common voltages provided by voltage controller **520** along both a long edge **406** and a short edge **404** of the display area **402**. Such voltages quickly propagate from there across the portion of transparent electrode **512** overlying pixel array **504**, and intensity values are represented more uniformly over display area **402**.

[0050] FIG. 9 shows a top view of a display device **900** including an input electrode **918** according to a fourth exemplary embodiment of the invention. Input electrode **918** is “U-shaped” in this embodiment and is located adjacent three sides of display area **402**. In particular, input electrode **918** includes a long first portion **920** extending along first edge **530** of transparent electrode **512**, a short second portion **922** extending along second edge **532**, and a long third portion **924** extending along third edge **534**. Thus, input electrode **918** provides a generally continuous electrical connection along three edges of transparent electrode **512**. Input electrode **918** has lower impedance than the portion of transparent electrode **512** overlying pixel array **504** and can again be formed from aluminum in the proportions discussed above. Input electrode **918** distributes the voltages provided by voltage controller **520** along both long edges **406** and one short edge **404** of display area **402** such that changes in voltage quickly propagate across the portion of transparent electrode **512** overlying pixel array **504** due to reduced impedance therebetween, and intensity uniformity across the pixel array **504** of display device **900** is again improved over the prior art.

[0051] FIG. 10 shows a top view of a display device **1000** including an input electrode **1018** according to a fifth exemplary embodiment of the invention. As shown, input electrode **1018** is rectangular and is disposed around the entire perimeter of pixel array **504**. Input electrode **1018** includes a long first portion **1020** extending along first edge **530** of transparent electrode **512**, a short second portion

1022 extending along second edge **532**, a long third portion **1024** extending along third edge **534**, and a short fourth portion **1026** extending along fourth edge **536** of transparent electrode **512**. Thus, input electrode **1018** is electrically coupled (e.g., continuously connected, etc.) along each edge of transparent electrode **512** and all the way around display area **402**. As above, input electrode **1018** has lower impedance than the portion of transparent electrode **512** overlying pixel array **504** and can be formed from aluminum in the proportions discussed above. The voltages provided by voltage controller **520** are, therefore, asserted along each edge of transparent electrode **512** and along each edge of display area **402**. This enables the voltage to propagate through the portion of transparent electrode **512** overlying pixel array **504** very quickly. This, in turn, enables display device **1000** to uniformly display intensity values across pixel array **504**, even for waveforms supplied by voltage controller **520** that switch voltage at high frequency.

[0052] In the above embodiments, the input electrodes have been described as “extending along” various edges of transparent electrode **512**. The phrase “extending along” should be thought of expansively. In the embodiments described above, the input electrodes “extend along” associated perimeter edges **530-536** of transparent electrode **512** in between those edges and the portion of transparent electrode **512** overlying pixel array **504** (display area **402**). However, other embodiments of input electrodes could be envisioned that “extend along” the edges of transparent electrode **512** by being disposed directly over those edges, for example, where transparent electrode **512** does not cover the entire surface of transparent substrate **512**. In still other embodiments, an input electrode can be disposed over the transparent substrate **514** and extend along an edge of transparent electrode **512** but be located outside the coverage area of transparent electrode **512**. Such an input electrode can include multiple spaced apart electrical connections to the edge(s) of transparent electrode **512**. These and other modifications will be apparent in view of the above disclosure.

[0053] In summary, the embodiments described above reduce the voltage signal propagation delay across the transparent electrode **512** in both the long and short directions of the display device. Accordingly, the impedance variation between the input electrode and different locations of the transparent electrode **512** overlying pixel array **504** is minimized along with non-uniformities in the same intensity values asserted at different locations across pixel array **504**. In the case that either a high-frequency (e.g., ≥ 1.0 kHz for LCoS) or low-frequency (e.g., < 1.0 kHz for LCoS) common voltage waveform is applied to transparent electrode **512**, the input electrodes of the present invention reduce the intensity variation across the long and short dimensions of the pixel array **502**, thereby improving the displayed image.

[0054] FIG. 11A is a block diagram illustrating an exemplary three-color display system **1100** utilizing three LCoS display devices **1000** (FIG. 10) of the present invention. Display devices **1000(R)**, **1000(G)**, and **1000(B)** modulate light for the red, green, and blue channels, respectively, of display system **1100**. Light from a white light source (not shown) enters display system **1100** and is separated into red, green, and blue components by a beam splitter/combiner **1102**, which in this embodiment, comprises crossed dichroic filters **1104(R)** and **1104(B)**. Those skilled in the art will understand that the color components need not be mono-

chromatic and that each color component can contain light of various wavelengths. Dichroic filters **1104(R)** and **1104(B)** reflect red and blue light, respectively, and allow the remaining colors to pass. Thus, the blue component of the light, which can pass through dichroic filter **1104(R)**, is reflected by dichroic filter **1104(B)** onto blue display device **1000(B)**. Similarly, the red component of the light, which can pass through dichroic filter **1104(B)**, is reflected by dichroic filter **1104(R)** onto red display device **1000(R)**. The green component of the light passes through both of dichroic filters **1104(R)** and **1104(B)** and is reflected by a mirror **1106** onto green display device **1000(G)**. In addition to separating the illumination beam into red, green, and blue components, dichroic filters **1104(R)** and **1104(B)** also recombine the red, green, and blue components after they are individually modulated by the respective red, green, and blue display devices **1000(R)**, **1000(G)**, and **1000(B)** into a modulated beam containing an image that is intended to be displayed.

[0055] FIG. 11A also illustrates how two different light rays **1108** and **1110** will impinge on the respective display devices **1000(R)**, **1000(G)**, and **1000(B)** at different locations across their long dimensions. (The long dimension of each of display devices **1000(R)**, **1000(G)**, and **1000(B)** correspond to the long dimension defined by long edges **530** and **534** of the display device **1000** shown in FIG. 10.) For example, components of light ray **1108** (long dashes) strike display devices **1000(R)**, **1000(G)**, and **1000(B)** on the right sides of their pixel arrays. In contrast, components of light ray **1110** (short dashes) strike display devices **1000(R)**, **1000(G)**, and **1000(B)** on the left sides of their pixel arrays.

[0056] Because display system **1100** includes display devices **1000(R)**, **1000(G)**, and **1000(B)** of the present invention, it produces displayable images that have substantially more uniform representations of particular colors over the entire image. To better illustrate this advantage, first consider a hypothetical where display devices **1000(R)**, **1000(G)**, and **1000(B)** are replaced with prior art display devices **100** (FIGS. 1-3). In such a case, if a prior art display device **100** was modulating each of the red components of light rays **1108** and **1110** according to the same intensity value (e.g., data corresponding to 100% intensity, data corresponding to 70% intensity, etc.), then the resulting intensities imparted in the reflected, modulated red components **1108** and **1110** would be significantly different due to the impedance variation across the transparent electrode **212** of the prior art display device **100**. This same effect would occur from prior art display devices **100** modulating the green and blue components of light rays **1108** and **1110**, respectively. Thus, due to these intensity variations, if prior art display devices **100** were used, a particular color would appear differently at different locations in the displayed image.

[0057] FIG. 11B is a table **1120** showing the cumulative effect of these intensity variations in 3-color display systems using prior art display devices **100**. The inventors found that the intensity variation in each of the prior art displays **100** actually creates different white points associated with different locations of the reproduced images. (The white point corresponds to the color of white obtained when driving each of the red, green, and blue displays at full intensity.) For example, table **1120** shows chromaticity coordinates in a CIE color space that produce white light for light rays striking right and left positions on the prior art displays **100**, when each of their transparent electrodes **212** is driven by

high ITO voltage frequency. As shown, the coordinates for the white points of the right and left rays vary along the x chromaticity axis by 0.0268 (approximately 8.2% relative to the larger coordinate value). Similarly, the coordinates for the white points of the right and left rays vary along the y chromaticity axis by 0.0399 (approximately 11.7%). Because of these variations, light incident on pixels at different locations that are intended to produce a desired color will instead have a noticeably different color in the displayed image.

[0058] In contrast, each of display devices **1000(R)**, **1000(G)**, and **1000(B)** of display system **1100** includes an input electrode **1018**, which reduces the impedance variation across the portion of transparent electrode **1012** overlying its pixel array **508**. Therefore, for a 3-color display system **1100** incorporating display devices **1000(R)**, **1000(G)**, and **1000(B)**, the differences in each of the x and y chromaticity coordinates for white light can be reduced to less than 0.01 across the entire image when the transparent electrodes **1012** of display devices **1000(R)**, **1000(G)**, and **1000(B)** are driven with high frequency voltage waveforms. A similar, although less dramatic, improvement is also observed when the transparent electrodes **1012** are driven with low frequency voltage waveforms.

[0059] It should be noted here that the advantages provided by the present invention are not limited to color separation and recombination display systems, but are also realized in other multi-color display systems using LCoS display devices (e.g., field-sequential display systems, etc.) It should also be noted that FIG. 11A is shown representationally to illustrate an advantage of the invention in 3-color systems. Therefore, other elements commonly found in such display systems (e.g., lenses, light sources, polarizers, analyzers, etc.) are not shown in FIG. 11A so as not to unnecessarily complicate the present invention.

[0060] An exemplary method for manufacturing a display device according to the present invention will now be described with reference to FIG. 12. For the sake of clear explanation, this method might be described with reference to particular elements of the previously-described embodiments. However, it should be noted that other elements, whether explicitly described herein or created in view of the present disclosure, could be substituted for those cited without departing from the scope of the present invention. Therefore, it should be understood that the method is not limited to any particular elements that perform any particular functions. Furthermore, some steps need not necessarily occur in the order shown and, indeed, two or more method steps may occur simultaneously. These and other variations of the method disclosed herein will be readily apparent, especially in view of the description of the present invention provided previously herein, and are considered to be within the full scope of the invention.

[0061] FIG. 12 shows a flowchart summarizing a method **1200** for manufacturing a display device having an input electrode according to the present invention. In a first step **1202**, a display substrate (e.g., a silicon substrate, etc.) is provided having an elongated pixel array formed therein. In a second step **1204**, a transparent substrate is provided, and in a third step **1206**, a transparent electrode is formed from a thin, conductive material (e.g., ITO) on the transparent substrate such that the transparent electrode has a first edge extending in a first direction and a second edge extending in a second direction, where the first edge is longer than the

second edge. In a fourth step **1208**, an input electrode is formed in electrical contact at least along a long edge of the transparent electrode, where the input electrode has lower impedance than a portion of the transparent electrode overlying the pixel array. Then, in a fifth step **1210**, the transparent substrate is coupled over the display substrate using a gasket, and in a sixth step **1212**, the space between the display substrate and the transparent substrate is filled with liquid crystal material via an opening in the gasket. In a seventh step **1214**, the opening in the gasket is sealed, for example, with a plug.

[0062] The description of particular embodiments of the present invention is now complete. Many of the described features may be substituted, altered or omitted without departing from the scope of the invention. For example, alternative input electrode designs can be used (e.g., L-shaped electrodes at opposing corners of the pixel array, individual electrodes along each edge of the transparent electrode, etc.), may be substituted for the input electrode designs shown. As another example, while the disclosed embodiments show electrodes that provide continuous electrical connections along their lengths to the transparent electrode, in other embodiments the input electrode could be modified to provide multiple spaced apart electrical connections along edge(s) of the transparent electrode. As yet another example, an input electrode of the present invention can be employed in a display device with a transparent electrode having a long-edge-to-short-edge ratio of 10:1 or more. These and other deviations from the particular embodiments shown will be apparent to those skilled in the art, particularly in view of the foregoing disclosure.

I claim:

1. A liquid crystal display device comprising:
 - a first substrate;
 - a pixel array formed on said first substrate;
 - a transparent substrate disposed a spaced distance over said pixel array;
 - a liquid crystal layer disposed between said pixel array and said transparent substrate;
 - a transparent electrode disposed between said transparent substrate and said liquid crystal layer, said transparent electrode being formed from a thin, conductive material, said transparent electrode having a first edge extending in a first direction and a second edge extending in a second direction, said first edge being longer than said second edge; and
 - an input electrode extending along and electrically coupled along said first edge of said transparent electrode, said input electrode having lower impedance than a portion of said transparent electrode overlying said pixel array.
2. The liquid crystal display device of claim 1, wherein said input electrode additionally extends along and is electrically coupled along said second edge of said transparent electrode.
3. The liquid crystal display device of claim 2, wherein:
 - said transparent electrode further includes a third edge opposite said first edge and extending along said first direction; and
 - said input electrode additionally extends along and is electrically coupled along said third edge of said transparent electrode.

4. The liquid crystal display device of claim 3, wherein:
 - said transparent electrode further includes a fourth edge opposite said second edge and extending along said second direction; and
 - said input electrode additionally extends along and is electrically coupled along said fourth edge of said transparent electrode.
5. The liquid crystal display device of claim 1, further comprising:
 - a second input electrode extending along and electrically coupled along a third edge of said transparent electrode, said third edge located opposite said first edge and extending along said first direction; and wherein said second input electrode has lower impedance than said portion of said transparent electrode overlying said pixel array.
6. The liquid crystal display device of claim 1, wherein said first substrate comprises a reflective liquid crystal on silicon (LCOS) backplane.
7. The liquid crystal display device of claim 1, wherein said transparent electrode comprises Indium Tin Oxide (ITO).
8. The liquid crystal display device of claim 1, wherein said input electrode comprises aluminum.
9. The liquid crystal display device of claim 1, wherein said input electrode is formed from a material having a higher electrical conductivity than said conductive material of said transparent electrode.
10. The liquid crystal display device of claim 1, wherein a length of said input electrode along said first direction is greater than a length of said pixel array along said first direction.
11. The liquid crystal display device of claim 1, further comprising a liquid crystal alignment layer formed over said transparent electrode and said input electrode.
12. The liquid crystal display device of claim 1, wherein a ratio of the length of said first edge to the length of said second edge is at least 5:1.
13. The liquid crystal display according to claim 12, wherein the thickness of said conductive material of said transparent electrode is approximately 20 nanometers.
14. A method for manufacturing at least a portion of a liquid crystal display device having a pixel array, said method comprising:
 - providing a transparent substrate having a transparent electrode formed thereon, said transparent electrode being formed from a thin, conductive material and having a first edge extending in a first direction and a second edge extending in a second direction, said first edge being longer than said second edge;
 - forming an input electrode that extends along said first edge of said transparent electrode and that is electrically coupled to said transparent electrode along said first edge; and
 - wherein said input electrode has lower impedance than a portion of said transparent electrode for overlying said pixel array.
15. The method of claim 14, further comprising forming said input electrode on said transparent electrode such that said input electrode additionally extends along and is electrically coupled along said second edge.
16. The method of claim 15, wherein:
 - said transparent electrode further includes a third edge opposite said first edge and extending along said first direction; and

said method further includes forming said input electrode on said transparent electrode such that said input electrode additionally extends along and is electrically coupled along said third edge.

17. The method of claim **16**, wherein:

said transparent electrode further includes a fourth edge opposite said second edge and extending along said second direction; and

said method further includes forming said input electrode on said transparent electrode such that said input electrode additionally extends along and is electrically coupled along said fourth edge.

18. The method of claim **14**, further comprising:

forming a second input electrode extending along a third edge of said transparent electrode and being electrically coupled to said transparent electrode along said third edge; and wherein

said second input electrode has lower impedance than said portion of said transparent electrode for overlying said pixel array; and

said third edge of said transparent electrode is located opposite said first edge and extends along said first direction.

19. The method of claim **14**, further comprising:

providing a display substrate having said pixel array formed thereon;

mounting said transparent substrate over said display substrate such that said transparent electrode faces said pixel array; and

forming a liquid crystal layer between said transparent electrode and said pixel array.

20. A liquid crystal display device comprising:

a first substrate;

a pixel array formed on said first substrate;

a transparent substrate disposed a spaced distance over said pixel array;

a liquid crystal layer disposed between said pixel array and said transparent substrate;

a transparent electrode disposed between said transparent substrate and said liquid crystal layer, said transparent electrode being formed from a thin, conductive material, said transparent electrode having a first edge extending in a first direction and a second edge extending in a second direction, said first edge being longer than said second edge; and

means for uniformly asserting a high-frequency signal on a portion of said transparent electrode overlying said pixel array.

* * * * *

专利名称(译)	具有外围电极的液晶显示装置		
公开(公告)号	US20180113363A1	公开(公告)日	2018-04-26
申请号	US15/299842	申请日	2016-10-21
[标]申请(专利权)人(译)	豪威科技股份有限公司		
申请(专利权)人(译)	OmniVision技术股份有限公司.		
当前申请(专利权)人(译)	OmniVision技术股份有限公司.		
[标]发明人	FAN CHUN SHENG		
发明人	FAN, CHUN-SHENG		
IPC分类号	G02F1/1343		
CPC分类号	G02F1/13439 G02F1/134309 G02F1/1345 G02F1/136277 G06F2203/04113		
其他公开文献	US10108053		
外部链接	Espacenet USPTO		

摘要(译)

液晶显示装置包括第一基板，形成在第一基板上的像素阵列，透明基板，设置在像素阵列和透明基板之间的液晶层，设置在透明基板和液晶层之间的透明电极，和一个输入电极。透明电极具有较长的第一边缘和正交的较短的第二边缘。输入电极沿着透明电极的第一边缘延伸并且沿其电耦合，并且具有比覆盖像素阵列的透明电极的一部分低的阻抗。输入电极可以包括沿着透明电极的其他边缘延伸并且沿着其电连接的附加部分。输入电极降低了透明电极上的公共电压传播延迟，并且改善了显示区域上的强度变化，即使对于高频率的公共电压波形也是如此。

