



US010180604B2

(12) **United States Patent**
Ota

(10) **Patent No.:** **US 10,180,604 B2**
(45) **Date of Patent:** **Jan. 15, 2019**

(54) **LIQUID CRYSTAL DISPLAY PANEL**

(71) Applicant: **Japan Display Inc.**, Tokyo (JP)

(72) Inventor: **Akio Ota**, Tottori (JP)

(73) Assignee: **Japan Display Inc.**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **15/341,758**

(22) Filed: **Nov. 2, 2016**

(65) **Prior Publication Data**

US 2017/0068138 A1 Mar. 9, 2017

Related U.S. Application Data

(63) Continuation of application No. 14/689,379, filed on Apr. 17, 2015, now Pat. No. 9,507,223, which is a (Continued)

(51) **Int. Cl.**
G02F 1/1343 (2006.01)
G02F 1/1335 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC .. **G02F 1/134363** (2013.01); **G02F 1/133345** (2013.01); **G02F 1/133512** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC **G02F 1/133512**; **G02F 1/134309**; **G02F 1/134363**; **G02F 1/136286**;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,617,230 A * 4/1997 Ohgawara G02F 1/133512 349/108
5,936,694 A * 8/1999 Suzuki G02F 1/133345 349/108

(Continued)

FOREIGN PATENT DOCUMENTS

JP 2001-033799 2/2001
JP 3194127 7/2001

(Continued)

OTHER PUBLICATIONS

Japanese Office Action dated Nov. 26, 2013 in corresponding Japanese Patent Application No. 2009-138908.


Primary Examiner — Thoi Duong

(74) *Attorney, Agent, or Firm* — K&L Gates LLP

(57) **ABSTRACT**

A transverse electric field type liquid crystal display panel includes a pair of substrates opposed with a liquid crystal layer interposed therebetween. A plurality of sub-pixels having at least one curved portion in a display area are provided in a matrix on one side of the pair of substrates, and a pair of electrodes having at least one curved portion are formed in the plurality of sub-pixels. A light shield layer shielding a non-display area positioned on an outer peripheral side of the display area and between the plurality of sub-pixels is formed on the other side of the pair of substrates. The light shield layer of the non-display area is formed in a shape in which the outermost peripheral side of the display area is rectangular.

9 Claims, 8 Drawing Sheets

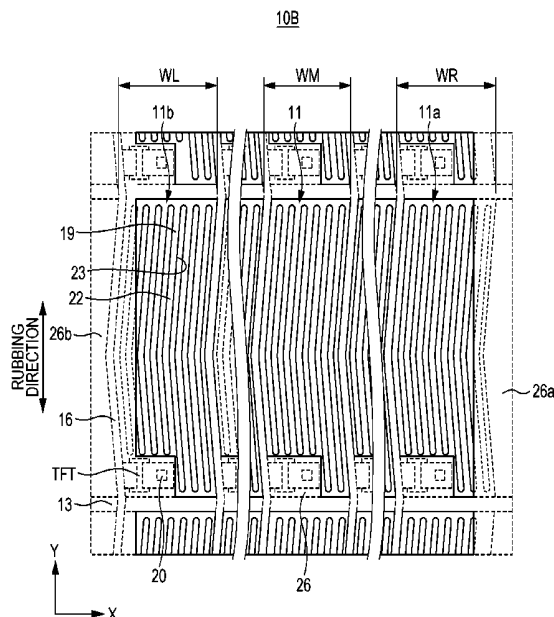

Related U.S. Application Data

continuation of application No. 14/048,113, filed on Oct. 8, 2013, now Pat. No. 9,041,884, which is a continuation of application No. 13/330,150, filed on Dec. 19, 2011, now Pat. No. 8,582,060.

349/145, 146; 257/59, 72

See application file for complete search history.

- (51) **Int. Cl.**
G02F 1/1337 (2006.01)
G02F 1/1333 (2006.01)
- (52) **U.S. Cl.**
 CPC .. *G02F 1/133707* (2013.01); *G02F 1/134336* (2013.01); *G02F 2001/133388* (2013.01); *G02F 2001/134345* (2013.01); *G02F 2001/134372* (2013.01)
- (58) **Field of Classification Search**
 CPC *G02F 1/134336*; *G02F 1/133707*; *G02F 1/136227*; *G02F 1/1368*; *G02F 1/1333*; *G02F 1/1343*; *G02F 1/1362*; *G02F 2001/133388*; *G02F 2001/134345*; *G02F 2001/134372*; *G02F 2201/52*; *G02F 2201/123*; *G02F 1/133514*; *G09G 2300/0443*; *G09G 2300/0413*; *G09G 2300/0439*; *G09G 2300/0809*; *G09G 2320/029*; *G09G 3/006*; *H01L 27/3276*; *H01L 27/3223*
 USPC 349/110, 139, 143, 141, 144, 149, 54,

(56)

References Cited

U.S. PATENT DOCUMENTS

6,744,048	B2	6/2004	Hosokawa et al.	
6,801,275	B2	10/2004	Lim	
6,897,930	B2	5/2005	Nakayoshi et al.	
6,914,657	B2	7/2005	Kim et al.	
7,253,856	B2	8/2007	Kim et al.	
7,466,371	B2	12/2008	Matsuda	
9,041,884	B2	5/2015	Ota	
2004/0119927	A1	6/2004	Kang et al.	
2009/0109358	A1	4/2009	Tanaka et al.	
2009/0195481	A1 *	8/2009	Taguchi	G02B 5/201 345/55
2009/0225267	A1 *	9/2009	Atarashiya	G02F 1/134363 349/139
2010/0289994	A1	11/2010	Nonaka	

FOREIGN PATENT DOCUMENTS

JP	2002014374	1/2002
JP	2005-062760	3/2005
JP	2008-020660	1/2008
JP	2008083386	4/2008
JP	2009-109820	5/2009

* cited by examiner

FIG. 1

10

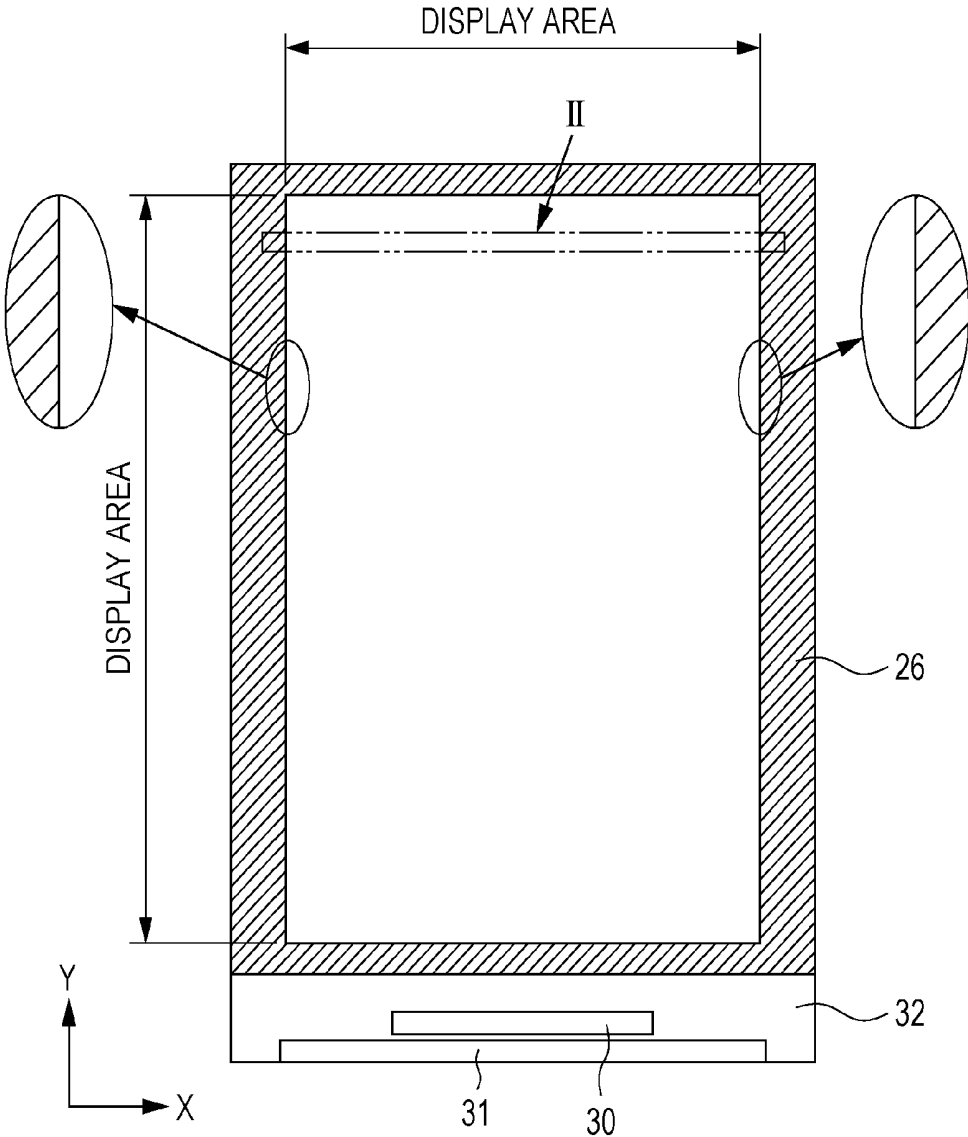


FIG. 3

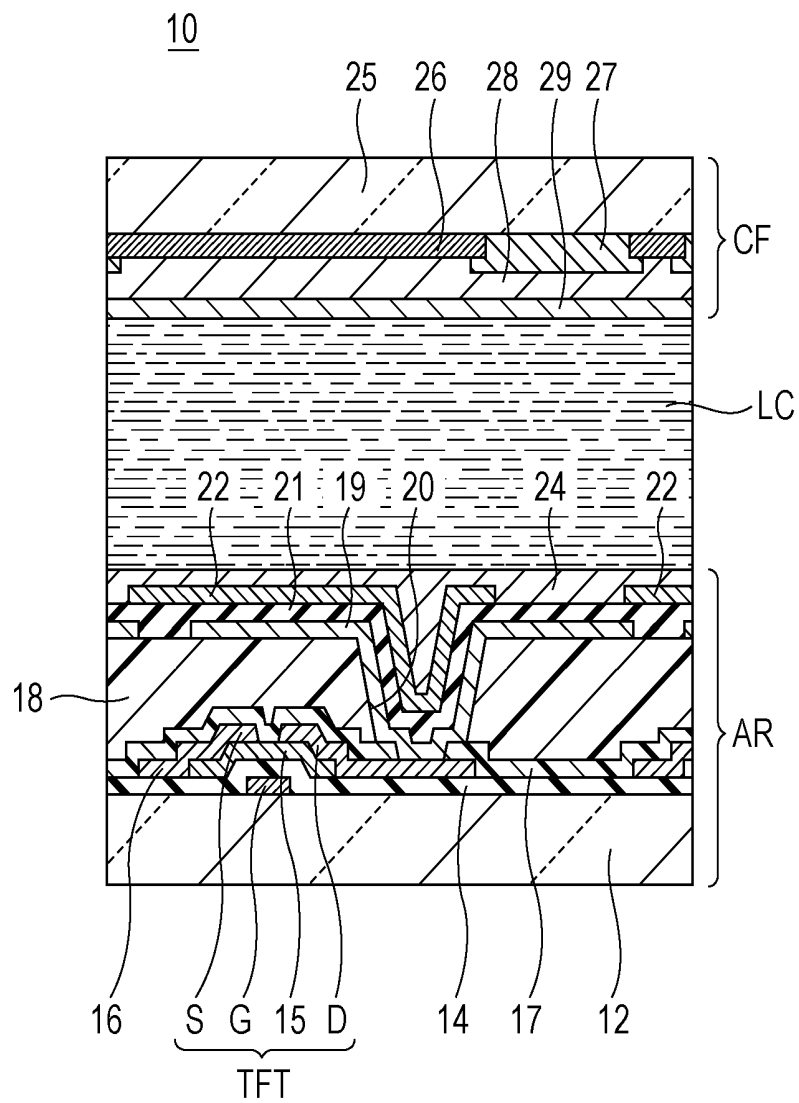


FIG. 4

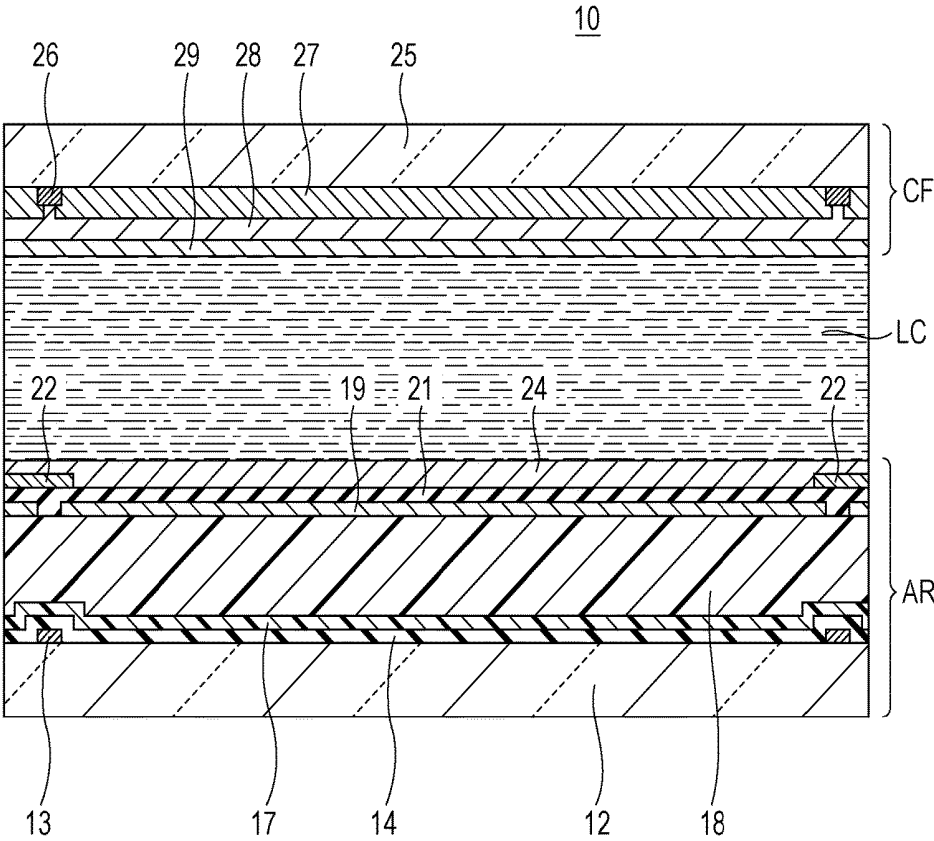


FIG. 5

10A

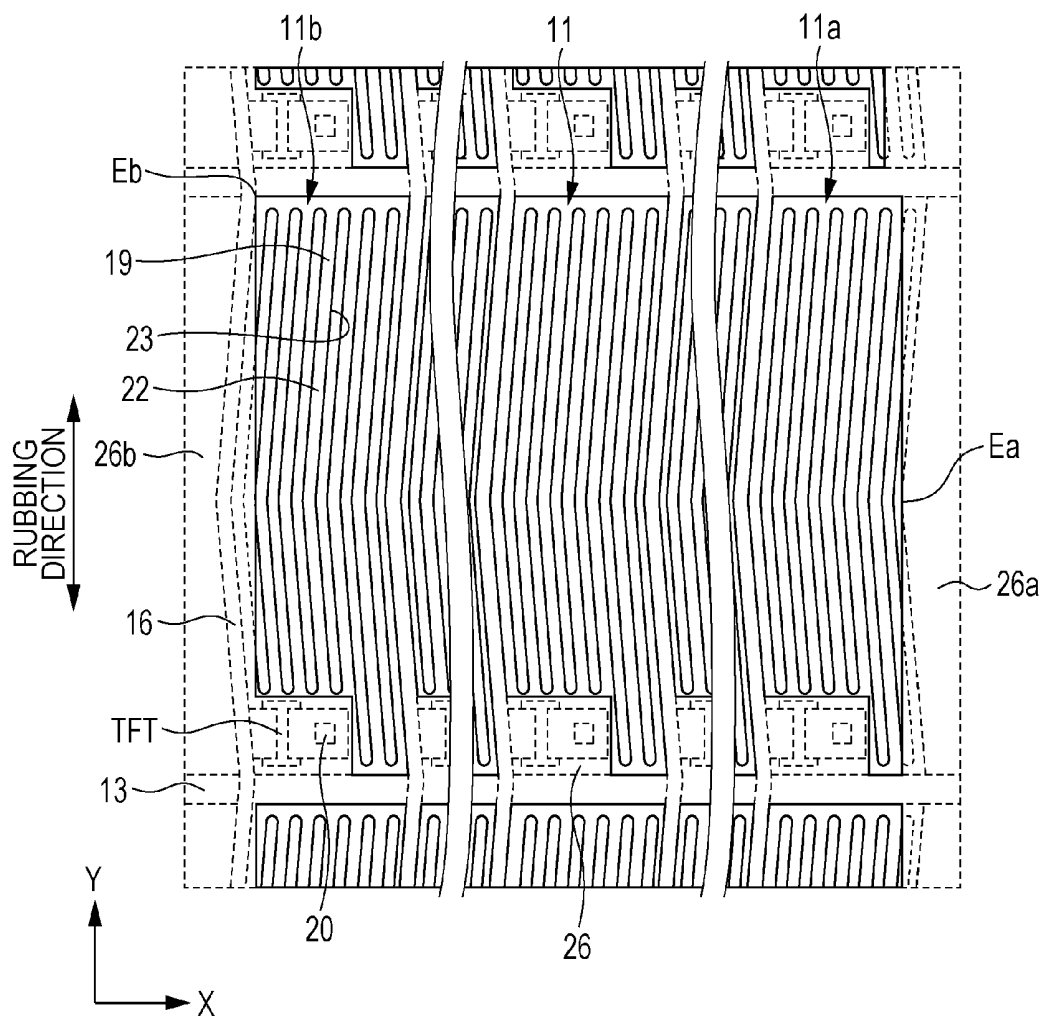


FIG. 6

10B


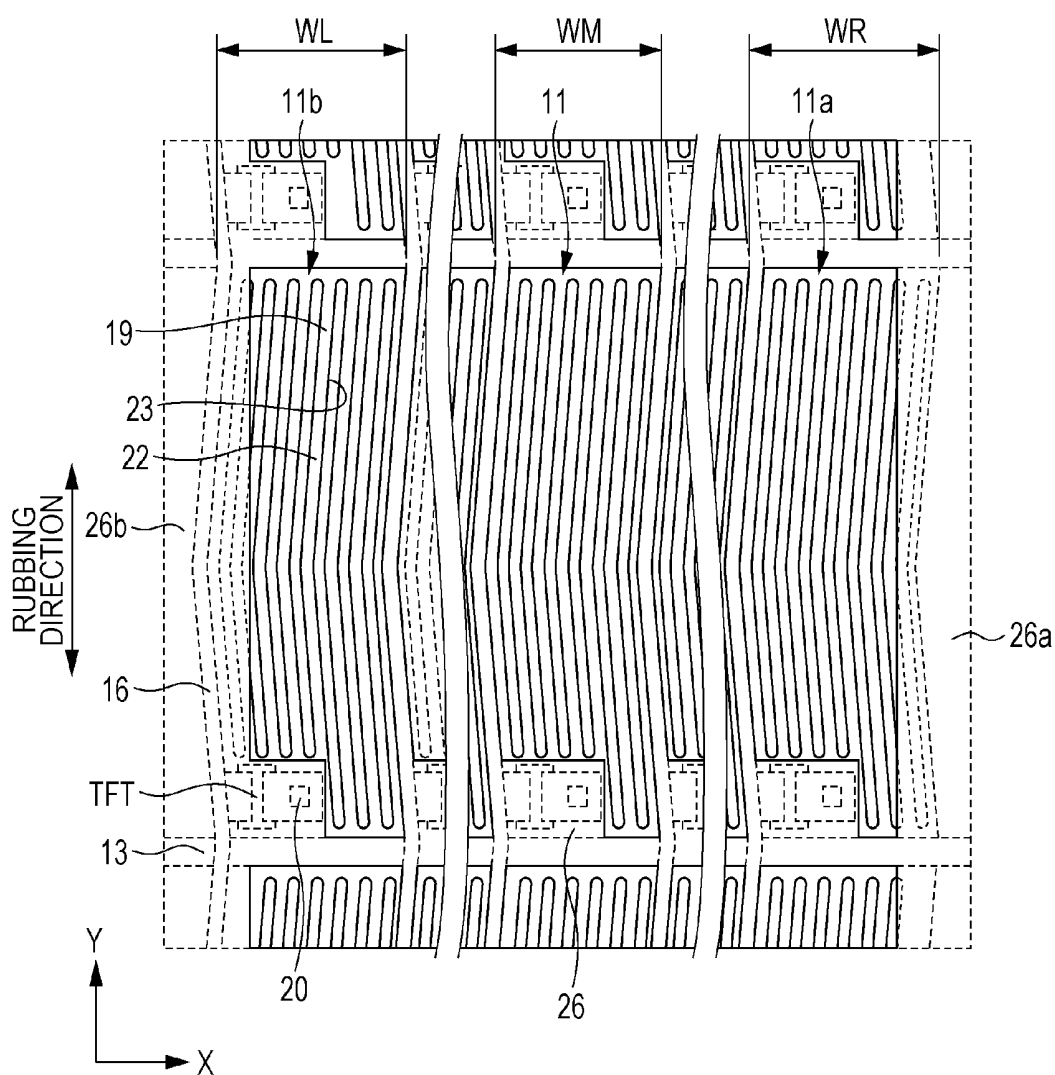


FIG. 8A

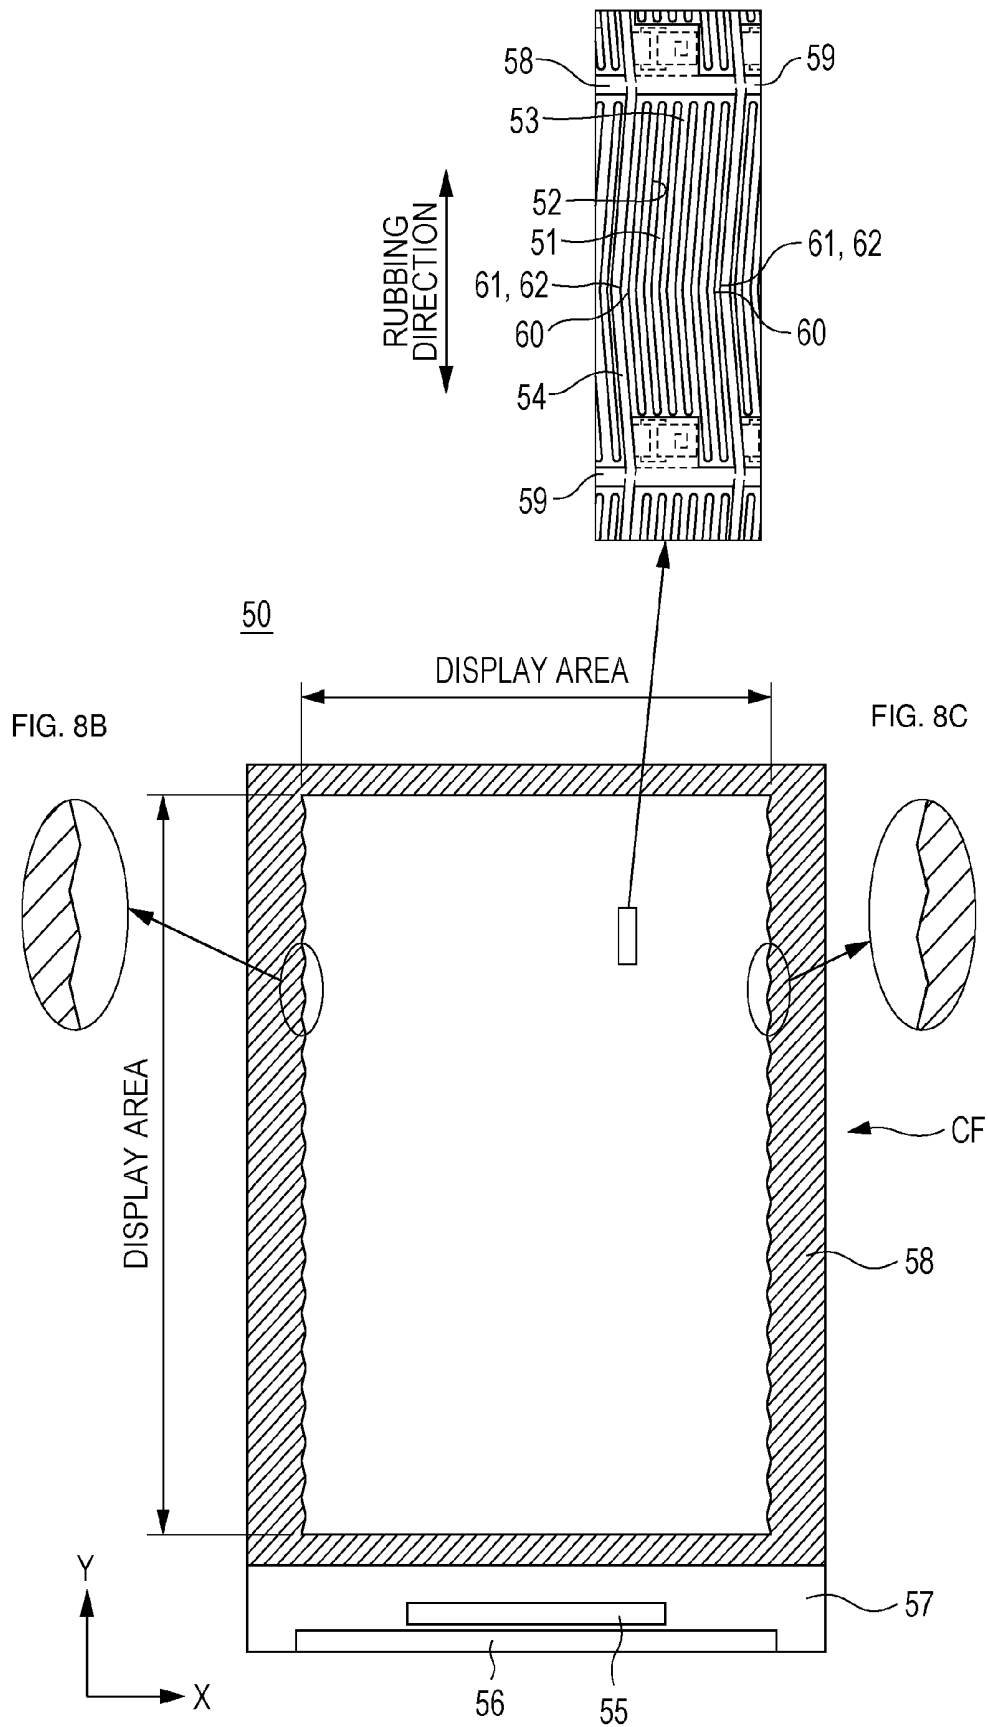

LIQUID CRYSTAL DISPLAY PANEL

CROSS REFERENCES TO RELATED APPLICATIONS

The present application is a continuation of U.S. patent application Ser. No. 14/689,379, filed on Apr. 17, 2015, which application is a continuation of U.S. patent application Ser. No. 14/048,113, filed Oct. 8, 2013, issued as U.S. Pat. No. 9,041,884 on May 26, 2015, which application is a continuation of U.S. patent application Ser. No. 13/330,150, filed on Dec. 19, 2011, issued as U.S. Pat. No. 8,582,060 on Nov. 12, 2013, which contains subject matter related to Japanese Patent Application JP 2009-138908 filed in the Japan Patent Office on Jun. 10, 2009, the entire content of which is hereby incorporated by reference.

BACKGROUND

The present disclosure relates to a transverse electric field type liquid crystal display panel, and more particularly, to a transverse electric field type liquid crystal display panel with a high aperture ratio, in which a shape of a sub-pixel has a curved portion and an end portion of a display area is rectangular.

Liquid crystal display panels have the characteristics of being light weight, thin, and having low power consumption as compared with CRTs (cathode ray tubes), and thus are used in various electronic apparatuses as displays. Through the use of a rubbing-processed alignment film, a liquid crystal display panel changes the direction of liquid crystal molecules arranged in a predetermined direction by an electric field, thereby changing a transmittance ratio or a reflectance ratio of light to display an image.

As a method of applying an electric field to a liquid crystal layer of the liquid crystal display panel, there are a longitudinal electric field manner and a transverse electric field manner. In the longitudinal electric field type liquid crystal display panel, a substantially longitudinal electric field is applied to liquid crystal molecules by a pair of electrodes disposed with a liquid crystal layer interposed therebetween. As the longitudinal electric field type liquid crystal display panel, a TN (Twisted Nematic) mode, a VA (Vertical Alignment) mode, an MVA (Multi-domain Vertical Alignment) mode and the like are known. In the transverse electrical field type liquid crystal display panel, a pair of electrodes insulated from each other are provided on the inside of one of a pair of substrates disposed with a liquid crystal layer interposed therebetween, and a substantially transverse electric field is applied to the liquid crystal molecules. As the transverse electric field type liquid crystal display panel, one of an IPS (In-Plane Switching) mode in which a pair of electrodes are not overlapped in the plan view, and one of an FFS (Fringe Field Switching) mode in which a pair of electrodes are overlapped are known.

In the IPS mode liquid crystal display panel, a pair of electrodes, such as a pixel electrode and a common electrode, is formed in a tooth shape to engage with each other in a state of electrical insulation, and a transverse electric field is applied to the liquid crystal between the pixel electrode and the common electrode. The IPS mode liquid crystal display device has an advantage of a wide view angle wider than that of the longitudinal electric field type liquid crystal display device.

In the FFS mode liquid crystal display panel, a pair of electrodes such as an upper electrode and a lower electrode are provided on layers different from each other with an

insulating film interposed therebetween, a slit-shaped aperture is provided in the upper electrode, and a substantially transverse electric field passing through the slit-shaped aperture is applied to a liquid crystal layer. Since the FFS mode liquid crystal display panel is capable of obtaining a wide view angle and has an effect whereby image contrast is capable of being improved, recently, it has come into widespread use.

In the transverse electric field type liquid crystal display panel, the slit-shaped aperture (case of FFS mode) formed in the upper electrode or an aperture (case of IPS mode, hereinafter, also referred to as "slit-shaped aperture") formed between both electrodes in the plan view extends to be slightly inclined with respect to a rubbing direction, to enable rotation of the liquid crystal molecules in the same direction. In a color display liquid crystal display panel, it is possible to reduce the change of color caused by the view angle, by a multi-domain process of dividing the inclination angle with respect to the rubbing direction of the slit-shaped aperture into two positive and negative areas. However, since it is difficult to form an electric field in a desired direction at an end portion of the slit-shaped aperture, when the slit-shaped apertures in the extending directions different from each other are separated, the number of end portions of the slit-shaped apertures increases and as a result the aperture ratio is lowered.

In a liquid crystal display panel disclosed in Japanese Unexamined Patent Application Publication No. 2002-014374 or Japanese Unexamined Patent Application Publication No. 2008-083386, a slit-shaped aperture is provided with a curved portion, the multi-domain process is achieved and the aperture ratio is increased by connecting slit-shaped apertures extending in different directions.

SUMMARY

When the slit-shaped aperture provided with the curved portion is formed in the sub-pixel demarcated by a signal line and a scanning line longitudinally and transversely extending in a linear shape like the transverse electric field type liquid crystal display panel disclosed Japanese Unexamined Patent Application Publication No. 2002-014374 or Japanese Unexamined Patent Application Publication No. 2008-083386, the width of a part of the electrodes becomes large. Accordingly, an electrode area, which is away from the slit-shaped aperture and does not particularly contribute to the generation of an electric field for driving the liquid crystal, is created, and thus the aperture ratio decreases.

For this reason, as disclosed in Japanese Patent No. 3194127, the signal lines and the scanning lines are curved to be parallel to the slit-shaped aperture provided with the curved portion such that the shape of the electrode is the same shape as that of the slit-shaped aperture provided with the curved portion, and thus the sub-pixel has the same curved shape as that of the slit-shaped aperture. A liquid crystal display panel 50 disclosed in Japanese Patent No. 3194127 will be described with reference to FIG. 8A, FIG. 8B, and FIG. 8C. FIG. 8A, FIG. 8B, and FIG. 8C are a plan view and partially enlarged views of the liquid crystal display panel disclosed in Japanese Patent No. 3194127.

As shown in the partially enlarged view of FIG. 8A of one sub-pixel, the liquid crystal display panel 50 is the FFS mode liquid crystal display panel, the upper electrode 51 is provided with a slit-shaped aperture 52, and the upper electrode 51 and the lower electrode 53 have curved shapes similarly to the slit-shaped aperture 52. An array substrate AR has an extending portion 57 provided with a driver

terminal **55** and a flexible printed board terminal **56**. A color filter substrate CF can be bonded to a part other than the extending portion **57** of the array substrate AR. The color filter substrate CF is provided with a light shield layer **58** forming an aperture of the display area by shielding a non-display area.

The upper electrode **51** of the sub-pixel of the display area has a slit-shaped aperture **52** extending in a direction (Y-axis direction in FIG. **8A**) of the signal line **54**. The scanning line **59** linearly extends in a direction (X-axis direction in FIG. **8A**) intersecting with the signal line **54**, and the areas surrounded with the signal lines **54** and the scanning lines **59** in the plan view constitute the sub-pixels. The slit-shaped aperture **52** is provided with a “<”-shaped curved portion **60**. The slit-shaped aperture **52** extends in the positive and negative reverse direction with respect to the rubbing process performed in the Y-axis direction in FIG. **8A**. Accordingly, in the liquid crystal display panel **50**, it is possible to reduce the change of color caused by the view angle.

The upper electrode **51** and the lower electrode **53**, and the signal line **54** are also provided with the curved portion **61** and the curved portion **62** taken along the curved portion **60** of the slit-shaped aperture **52**, respectively. Accordingly, the slit-shaped aperture **52**, and the upper electrode **51** and the signal line **54** are parallel to each other, and thus the area where the electric field becomes weak is not formed in the upper electrode **51**. Therefore, the aperture ratio becomes high as compared with the liquid crystal display panel disclosed in Japanese Unexamined Patent Application Publication No. 2002-014374 or Japanese Unexamined Patent Application Publication No. 2008-083386.

As described above, when the signal line **54** is provided with the curved portion and each sub-pixel has the curved portion, the light shield layer **58** of the color filter substrate for preventing light leakage between the sub-pixels is also provided with the curved portion taken along the signal line **54**, as described in Japanese Patent No. 3194127. However, as shown in the partially enlarged views of FIG. **8B** and FIG. **8C**, the innermost peripheral side of the light shield layer **58** of the non-display area forming the aperture end portion of the display area is also provided with the curved portion, and thus there is a problem that the periphery of the display area is jagged. The problem occurs also in the case of the IPS mode liquid crystal display panel.

It is desirable to provide a transverse electric field type liquid crystal display panel with a high aperture ratio in which an aperture end of a display area is rectangular in a transverse electric field type liquid crystal display panel in which a shape of each-sub-pixel has a curved portion.

According to an embodiment of the present disclosure, there is provided a transverse electric field type liquid crystal display panel including a pair of substrates opposed with a liquid crystal layer interposed therebetween, wherein a plurality of sub-pixels having at least one curved portion in a display area are provided in a matrix on one side of the pair of substrates, and a pair of electrodes having at least one curved portion are formed in the plurality of sub-pixels, wherein a light shield layer shielding a non-display area positioned on an outer peripheral side of the display area and between the plurality of sub-pixels is formed on the other side of the pair of substrates, and wherein the light shield layer of the non-display area is formed in a shape in which the outermost peripheral side of the display area is rectangular.

In the transverse electric field type liquid crystal display panel of the present disclosure, the plurality of sub-pixels having at least one curved portion are provided in a matrix

in the display area on one side of the pair of substrates, that is, an array substrate side, and the plurality of sub-pixels are provided with a pair of electrodes having at least one curved portion. With such a configuration, the area which is not used for display becomes narrow, and thus it is possible to obtain the transverse electric field type liquid crystal display panel with a high aperture ratio and high brightness. However, the light shield layer shielding the non-display area positioned on the outer peripheral side of the display area and between the plurality of sub-pixels is formed on the other side of the pair of substrates, that is, a color filter substrate. However, the innermost peripheral side of the light shield layer of the non-display area forming the aperture end portion of the display area is also provided with the curved portion, and thus the periphery of the display area becomes jagged.

According to the liquid crystal display panel of the embodiment of the present disclosure, the light shield layer of the non-display area is formed in the shape in which the outermost peripheral side of the display area is rectangular. Accordingly, the aperture end portion of the display area can be made rectangular, and thus the periphery of the display area becomes smooth, which is visually satisfactory.

In the liquid crystal display panel according to an embodiment of the present disclosure, signal lines and scanning lines may be formed on one side of the pair of substrates, and the signal lines and the scanning lines may be curved along the shape of the sub-pixels.

When the sub-pixel is provided with the curved portion, one side of the signal line and the scanning line is curved according to the shape of the curved sub-pixel, and the other side of the signal line and the scanning line linearly extends. For this reason, according to the liquid crystal display panel according to the embodiment of the present disclosure, the pair of electrodes can be disposed throughout the area between the signal lines and between the scanning lines, and thus it is possible to improve the aperture ratio. According to the embodiment of the present disclosure, it is possible to obtain the effect of the present disclosure even in any of a case where the sub-pixels are curved in a column direction along the signal lines and a case where the sub-pixels are curved in a line direction along the scanning lines.

In the liquid crystal display according to the embodiment of the present disclosure, it is preferable that when the outermost side of the sub-pixel positioned on the outermost peripheral side of the display area is an inner angle side, the light shield layer of the non-display area is formed to pass through a curved point of the inner angle side of the sub-pixel.

According to the embodiment of the present disclosure, it is possible to make the periphery of the display area smooth while preventing the aperture ratio from decreasing. When the outermost side of the sub-pixel positioned on the outermost peripheral side of the display area is the inner angle side, and when the shielding is performed to the side closer to the display area than the curved point of the inner angle side positioned on the outermost side of the display area by the light shield layer of the non-display area, the jaggedness does not occur in the periphery of the display area, but the bright area of the sub-pixels is widely shielded, which is not preferable. Similarly, when the side closer to the non-display area side than the curved point of the inner angle side positioned on the outermost side of the display area is covered by the light shield layer of the non-display area, the outer angle side of the signal lines and the scanning lines is exposed to the display area side, and the jaggedness occurs in the periphery of the display area, which is not preferable.

In the liquid crystal display panel according to the embodiment of the present disclosure, it is preferable that when the outermost side of the sub-pixel positioned on the outermost peripheral side of the display area is an outer angle side, the light shield layer of the non-display area is formed to pass through an end point of the outer angle side of the sub-pixel.

In the present disclosure, “the end point of the outer angle side” means an angled portion of the outer angle side of angled portions of four corners of each sub-pixel. In the liquid crystal display device according to the embodiment of the present disclosure, it is possible to make the periphery of the display area smooth while preventing the aperture ratio from decreasing. When the outermost side of the sub-pixel positioned on the outermost peripheral side of the display area is the outer angle side, and when the shielding is performed to the display area over the end point of the outer angle side positioned on the outermost side of the display area by the light shield layer of the non-display area, the jaggedness does not occur in the periphery of the display area, but the bright area of the sub-pixels is widely shielded, which is not preferable. Similarly, when the side closer to the non-display area side than the end point of the outer angle side positioned on the outermost side of the display area is shielded by the light shield layer of the non-display area, the inner angle side of the signal lines and the scanning lines is exposed to the display area side, and the jaggedness occurs in the periphery of the display area, which is not preferable.

In the liquid crystal display panel according to the embodiment of the present disclosure, it is preferable that the sub-pixels of the outermost peripheral side of the display area have an area wider than that of the other sub-pixels.

When the sub-pixels of the outermost peripheral side of the display area are covered by the light shield layer of the non-display area, the area of the aperture portion of the sub-pixels of the outermost peripheral side of the display area becomes small. According to the liquid crystal display device of the embodiment of the present disclosure, the sub-pixels of the outermost peripheral side of the display area have the area wider than that of the other sub-pixels. Accordingly, even when the sub-pixels of the outermost peripheral side of the display area are covered by the light shield layer of the non-display area, the area of the aperture portion can be the same as that of the other sub-pixels, and thus the sub-pixels of the outermost peripheral side of the display area are prevented from being dark.

In the liquid crystal display panel of the embodiment of the present disclosure, it is preferable that a dummy pixel is formed on the outside of the display area, and the dummy pixel is in an inactive state.

The dummy pixel simulates the same configuration as that of the sub-pixel. For example, the dummy pixel may serve as an electrostatic protective circuit. In the transverse electric field type liquid crystal display panel, on the further outer peripheral side of the sub-pixels of the outermost peripheral side of the display area, liquid crystal of the outside thereof is not driven, and thus a domain (alignment defect) occurs. According to the embodiment of the present disclosure, the domain occurring on the further outer peripheral side of the sub-pixels of the outermost peripheral side of the display area can be made into an unrecognizable state by the light shield layer of the non-display area. For this reason, according to the liquid crystal display panel of the embodiment of the present disclosure, even when the dummy pixel is provided, the deterioration of the display image quality of the sub-pixels of the outermost peripheral side of the display area is reduced.

In the liquid crystal display panel of the embodiment of the present disclosure, it is preferable that the pair of electrodes are formed of a lower electrode, an insulating film formed on the lower electrode, and an upper electrode formed on the insulating film and provided with a slit-shaped aperture curved along the shape of the sub-pixel.

According to the liquid crystal display panel of the embodiment of the present disclosure, it is possible to obtain the FFS mode liquid crystal display panel having the effect of the present disclosure.

In the liquid crystal display panel of the embodiment of the present disclosure, it is preferable that the pair of electrodes are opposed to each other in a pectinated shape, and are curved along the shape of the sub-pixel.

According to the liquid crystal display panel of the embodiment of the present disclosure, it is possible to obtain the IPS mode liquid crystal display panel having the effect of the present disclosure.

Additional features and advantages are described herein, and will be apparent from the following Detailed Description and the figures.

BRIEF DESCRIPTION OF THE FIGURES

FIG. 1 is a plan view illustrating a display area of a liquid crystal display panel of a first embodiment.

FIG. 2 is an enlarged view of a part II shown in FIG. 1.

FIG. 3 is a cross-sectional view taken along the line shown in FIG. 2.

FIG. 4 is a cross-sectional view taken along the line IV-IV shown in FIG. 2.

FIG. 5 is a plan view illustrating a liquid crystal display panel of a second embodiment.

FIG. 6 is a plan view illustrating a liquid crystal display panel of a third embodiment.

FIG. 7 is a plan view illustrating a liquid crystal display panel of a fourth embodiment.

FIG. 8A to FIG. 8C are plan views illustrating a display area of a liquid crystal display panel of the related art.

DETAILED DESCRIPTION

Hereinafter, embodiments of the present disclosure will be described with reference to the drawings, exemplifying a case of an FFS mode transverse electric field type liquid crystal display panel. However, the following embodiments do not intend that the present disclosure is limited to the description, and the present disclosure may be applied to various modifications in the same manner without deviating from the technical concept described in the Claims. In the drawings for description in the specification, the scales are different according to layers and members in order that the layers and members are recognizable on the drawings, and they are not necessarily proportional to the actual size.

First Embodiment

A configuration of main parts of a liquid crystal display panel 10 of a first embodiment will be described with reference to FIG. 1 to FIG. 4. The liquid crystal display panel 10 operates in the FFS mode, and has a plurality of sub-pixels 11 arranged in a matrix. In the liquid crystal display panel 10, a liquid crystal layer LC is interposed between an array substrate AR and a color filter substrate CF as shown in FIG. 3 and FIG. 4. A base substrate of the array substrate AR is a first transparent substrate 12 formed of transparent insulating glass, quartz, plastic, or the like. On

the first transparent substrate **12**, scanning lines **13** formed of metal such as opaque aluminum and molybdenum are formed in the X-axis direction (line direction) shown in FIG. 2 on the side coming in contact with the liquid crystal layer LC. A gate electrode G is provided to extend from the scanning line **13**, for example, on the left downside of each sub-pixel **11**.

A transparent gate insulating film **14** formed of silicon nitride or silicon oxide is laminated to cover the scanning line **13** and the gate electrode G. A semiconductor layer **15** formed of amorphous silicon or polycrystalline silicon is formed on the gate insulating film **14** overlapping with the gate electrode G in the plan view. A plurality of signal lines **16** formed of metal such as aluminum and molybdenum is formed on the gate insulating film **14** in the Y-axis direction (column direction) shown in FIG. 1. Each of areas partitioned by the scanning lines **13** and the signal lines **16** is a sub-pixel area. A source electrode S is provided to extend from the signal line **16**, and the source electrode S comes in partial contact with the surface of the semiconductor layer **15**.

A drain electrode D simultaneously formed of the same material as that of the signal line **16** and the source electrode S is provided on the gate insulating film **14**, and the drain electrode D is provided close to the source electrode S to come in partial contact with the surface of the semiconductor layer **15**. Since one substantially square pixel (not shown) is configured by three sub-pixels of R (red), G (green), and B (blue), the sub-pixels **11** trisecting the pixel are rectangular in which the side of the scanning line **13** is a short side and the side of the signal line **16** is a long side. A thin film transistor TFT that is a switching element is configured by the gate electrode G, the gate insulating film **14**, the semiconductor layer **15**, the source electrode S, and the drain electrode D, and each sub-pixel **11** is provided with the TFT.

A transparent passivation film **17** formed of, for example, silicon nitride or silicon oxide is laminated to cover an exposed part of the signal line **16**, the thin film transistor TFT, and the gate insulating film **14**. An interlayer resin film **18** formed of a transparent resin material such as photoresist is laminated to cover the passivation film **17**. A lower electrode **19** formed of a transparent conductive material such as ITO (Indium Thin Oxide) and IZO (Indium Zinc Oxide) is formed to cover the interlayer resin film **18**. A contact hole **20** passing through the first interlayer resin film **18** and the passivation film **17** and reaching the drain electrode D is formed, and the lower electrode **19** and the drain electrode D are electrically connected to each other through the contact hole **20**. For this reason, the lower electrode **19** operates as a pixel electrode.

A transparent interlayer insulating film **21** formed of, for example, silicon nitride or silicon oxide is laminated to cover the lower electrode **19**. An upper electrode **22** formed of a transparent conductive material such as ITO or IZO is formed to cover the interlayer insulating film **21**. In the liquid crystal display device **10** of the first embodiment, the upper electrode **22** is connected (not shown) to a common line at a peripheral portion of the display area, and operates as a common electrode. In the liquid crystal display device **10**, the upper electrode may operate as a pixel electrode, and the lower electrode may operate as a common electrode.

As shown in FIG. 2, the upper electrode **22** is provided with a plurality of slit-shaped apertures **23**. The slit-shaped apertures **23** are formed by exposing, developing, and then etching a photoresist material applied onto the surface of the upper electrode **22** according to photolithography. A specific

shape and the like of the slit-shaped apertures **23** will be described later. A first alignment film **24** formed of polyimide is laminated to cover the upper electrode **22**. A liquid crystal direction alignment process, that is, a rubbing process is performed on the first alignment film **24** in the Y-axis direction (a direction substantially parallel to the extending direction of the signal line **16**) shown in FIG. 2.

A base substrate of the color filter substrate CF is a second transparent substrate **25** formed of transparent insulating glass, quartz, plastic, or the like. The second transparent substrate **25** is provided with a light shield layer **26** and a color filter layer **27** passing different colors of light (e.g., R (red), G (green), and B (blue)) for each sub-pixel. The light shield layer **26** is formed of a part formed to overlap with the scanning line **13**, the signal line **16**, the TFT, and the drain electrode D in the plan view, and a part covering a non-display area of the second transparent substrate **25** to form the apertures of the display area. The display area is an area where an image recognizable by a user is substantially displayed.

The color filter layer **27** is formed in the area of the sub-pixel **11** where the light shield layer **26** is not formed. An overcoat layer **28** formed of, for example, a transparent resin material such as photoresist is laminated to cover the light shield layer **26** and the color filter layer **27**. The overcoat layer **28** is formed to planarize a level difference caused by the color filter layer **27** for a different color and to prevent impurities flowing out of the light shield layer **26** or the color filter layer **27** from entering the liquid crystal layer LC. A second alignment film **29** formed of polyimide is formed to cover the overcoat layer **28**. A rubbing process in the reverse direction to the first alignment film **24** is performed on the second alignment film **29**.

The array substrate AR and the color filter substrate CF formed as described above are opposed to each other, a seal member (not shown) is provided in the periphery of both substrates to bond and combine both substrates, thereby obtaining a liquid crystal display panel **10** according to the first embodiment. A spacer (not shown) for keeping the liquid crystal layer LC to be a predetermined thickness is formed on the color filter substrate CF. The array substrate AR has an extending portion **32** in which a driver terminal **30** and a flexible printed board terminal **31** are provided. A part other than the extending portion **32** of the array substrate AR is adhered to the color filter substrate CF.

In the configuration described above, when the TFT is turned on and voltage is applied between the lower electrode **19** and the upper electrode **22**, an electric field occurs between both electrodes **19** and **22** to change an alignment direction of liquid crystal molecules of the liquid crystal layer LC. Accordingly, optical transmissivity of the liquid crystal layer LC is changed to display an image. Assistant capacitance is incidentally formed by the lower electrode **19**, the upper electrode **22**, and the interlayer insulating film **21**. When the TFT is turned off, the electric field between both electrodes **19** and **22** is kept for a predetermined time.

The slit-shaped apertures **23** formed in the upper electrode **22** will be described with reference to FIG. 2. In the FFS mode liquid crystal display panel **10**, the electric field occurs due to a potential difference between the upper electrode **22** and the lower electrode **19** positioned under the slit-shaped apertures **23**. The electric field occurs substantially in parallel to the face of the array substrate AR, and the direction of the electric field in the plan view is a perpendicular line direction of an edge of the slit-shaped aperture **23**. Since the electric field direction is different from the electric field direction of the long side part of the slit-shaped aperture **23**

at both ends of the slit-shaped aperture **23**, a reverse twist domain occurs. In the reverse twist domain, since normal displaying is not performed, a decrease of an aperture ratio is caused.

Around both ends of the slit-shaped apertures **23**, there are areas for closing the slit-shaped apertures **23**, and thus the aperture ratio further decreases. Since the sub-pixel **11** in the liquid crystal display panel **10** of the embodiment is longitudinal, the number of end portions of the slit-shaped apertures **23** when the slit-shaped apertures **23** extend in the transverse direction is greatly increased. In the liquid crystal display panel **10** of the embodiment, as shown in FIG. 2, the extending direction of the slit-shaped aperture **23** is the extending direction (Y-axis direction shown in FIG. 2) of the signal lines **16**, thus the number of end portions of the slit-shaped apertures **23** is reduced, and the aperture ratio is prevented from being lowered.

The extending direction of the slit-shaped apertures **23** is inclined by a predetermined angle (e.g., about 5° to about 15°) with respect to the direction of the rubbing process. Accordingly, the liquid crystal molecules can be rotated in the same direction. When all the slit-shaped apertures **23** are rotated clockwise or anticlockwise, the liquid crystal molecules can be twisted. Accordingly, a phenomenon of changing a color according to a view direction occurs. The reason is because retardation in the external view is changed according to the direction of viewing the liquid crystal molecules. To reduce the phenomenon, the liquid crystal display panel **10** of the embodiment is provided with two domains in which the extending direction of the slit-shaped apertures **23** is inclined in the positive and negative reverse direction with respect to the clockwise direction. That is, it is the multi-domain process.

When the slit-shaped apertures **23** of the domains in different alignment directions are separated, the end portions of the slit-shaped aperture **23** increases. Accordingly, the area where the normal displaying is not performed becomes wide, and thus the aperture ratio decreases. In the liquid crystal display panel **10** of the embodiment, as shown in FIG. 2, the slit-shaped aperture **23** is provided with a curved portion **33** in a “<” shape, and the domains in the different alignment directions are connected. The curved portion **33** of the slit-shaped aperture **23** is formed of an inner angle side curved portion **33a** formed at an edge of the inner angle side, and an outer angle side curved portion **33b** formed at an edge of the outer angle side. As described above, when the slit-shaped aperture is curved in the “<” shape, the area where the normal displaying is not performed is reduced as compared with the case of separating the slit-shaped apertures **23**. Accordingly, it is possible to raise the aperture ratio.

For this reason, in the liquid crystal display panel **10** of the embodiment, the upper electrode **22** also extends in the extending direction (Y-axis direction shown in FIG. 2) of the signal line **16** and is formed in the “<” shape by providing a curved portion **34**. The curved portion **34** of the upper electrode **22** is also formed of an inner angle side curved portion **34a** formed at an edge of the inner angle side, and an outer angle side curved portion **34b** formed at an edge of the outer angle side. The signal line **16** is also provided with a curved portion **35** to be formed in the “<” shape. The curved portion **35** of the signal line **16** is also formed of an inner angle side curved portion **35a** formed at an edge of the inner angle side, and an outer angle side curved portion **35b** formed at an edge of the outer angle side. Accordingly, since the signal line **16** and the upper electrode **22** are parallel to the slit-shaped aperture **23**, the area where the electric field

strength becomes weak in the liquid crystal display panel described in Japanese Patent No. 3194127 does not occur. Therefore, it is possible to prevent brightness from decreasing.

In the liquid crystal display panel **10** of the embodiment, each sub-pixel **11** formed of the area surrounded by the signal lines **16** and the scanning lines **13** in the plan view has a shape curved in the “<” shape, by the configuration described above. A curved point of the inner angle side of each sub-pixel **11** is Ea, and an angled portion of the outer angle side among angled portions of four corners of each sub-pixel **11** is an end point Eb.

Since the signal line **16** is provided with the curved portion **35**, the light shield layer **26** overlapping with the signal line **16** of the display area is also curved along the curved portion **35** of the signal line **16**. However, as shown in FIG. 1, the light shield layers **26a** and **26b** of the non-display area forming the aperture of the rectangular display area are not curved, and are linearly formed. That is, in the liquid crystal display panel **10** of the first embodiment, in the sub-pixel **11a** (right end in FIG. 2) in which the outermost side of the sub-pixel **11** positioned on the outermost peripheral side of the display area is the inner angle side, the light shielding is performed over the curved point Ea of the inner angle side of the sub-pixel **11a** to the display area side by the light shield layer **26a** of the non-display area. In the sub-pixel **11b** (left end in FIG. 2) in which the outermost side of the sub-pixel **11** positioned on the outermost peripheral side of the display area is the outer angle side, the light shielding is performed over the end point Eb of the outer angle side of the sub-pixel **11b** to the display area side by the light shield layer **26a** of the non-display area.

Accordingly, the signal line **16** formed on the sub-pixel **11a** and **11b** sides of both ends of the display area is shielded by the light shield layers **26a** and **26b** of the non-display area, the jaggedness does not occur in the display area, and it is possible to make the periphery of the display area smooth.

Second Embodiment

Next, a liquid crystal display panel **10A** according to a second embodiment will be described with reference to FIG. 5. In FIG. 5, the same reference numerals and signs are given to the same configuration as the liquid crystal display panel **10**, and the detailed description is omitted. The liquid crystal display panel **10A** of the second embodiment is different in size of the light shield layer **26** forming the apertures of the display area from that of the first embodiment.

In the liquid crystal display panel **10** of the first embodiment, as shown in FIG. 2, in the sub-pixel **11a** (right end in FIG. 2) in which the outermost side of the sub-pixel **11** positioned on the outermost peripheral side of the display area is the inner angle side, the light shielding is performed over the curved point Ea of the inner angle side of the sub-pixel **11a** to the display area side by the light shield layer **26a** of the non-display area. In the sub-pixel **11b** (left end in FIG. 2) in which the outermost side of the sub-pixel **11** positioned on the outermost peripheral side of the display area is the outer angle side, the light shielding is performed over the end point Eb of the outer angle side of the sub-pixel **11b** to the display area side by the light shield layer **26b** of the non-display area. With such a configuration, even when there is superposition misalignment between the array sub-

strate AR and the color filter substrate CF, or production error, it is possible to make the periphery of the display area smooth.

However, in the liquid crystal display panel **10** of the first embodiment, the light shielding is performed on the display area by the light shield layers **26a** and **26b** of the non-display area. Accordingly, the area of the sub-pixel of the outermost peripheral side is reduced, and thus the sub-pixel becomes darker than the sub-pixels of the other parts. In the liquid crystal display panel **10A** of the second embodiment, the jaggedness does not occur in the periphery of the display area and the sub-pixel of the outermost peripheral side becomes the brightest.

In the liquid crystal display panel **10A** of the second embodiment, when the sub-pixel positioned on the outermost peripheral side of the display area is the sub-pixel **11a** in which the outermost side is the inner angle side, the light shield layer **26a** of the non-display area is formed to pass through the curved point Ea of the inner angle side of the sub-pixel **11a**. In addition, when the sub-pixel positioned on the outermost peripheral side of the display area is the sub-pixel **11b** in which the outermost side is the outer angle side, the light shield layer **26a** of the non-display area is formed to pass through the end point Eb of the outer angle side of the sub-pixel.

According to the liquid crystal display panel **10A** of the second embodiment with such a configuration, the signal lines **16** are shielded by the light shield films **26a** and **26b**. Accordingly, the jaggedness does not occur in the periphery of the display area. According to the liquid crystal display panel **10A** of the second embodiment, when the display area side is further covered by the light shield layers **26a** and **26b** of the non-display area, the jaggedness does not occur in the periphery of the display area. However, the aperture area of the sub-pixel is reduced, and thus the sub-pixel becomes dark. On the contrary, when the light shield layers **26a** and **26b** of the non-display area are retreated to the non-display area, the aperture area of the sub-pixel is increased to be bright. However, the signal line **16** appears in the periphery of the display area, and thus the jaggedness occurs.

According to the liquid crystal display panel **10A** of the second embodiment shown in FIG. 5, the jaggedness does not occur in the periphery of the display area, and it becomes the brightest state. In liquid crystal display panel of the second embodiment, the jaggedness does not occur in the periphery of the display area even in any of the sub-pixels **11a** and **11b** of the outermost peripheral side, and it becomes the brightest state, but both are not necessarily in such a state. That is, only one side of the sub-pixels **11a** and **11b** of the outermost peripheral side may employ the same configuration as the case of the liquid crystal display panel **10A** of the second embodiment, and the other side may employ the same configuration as the case of the liquid crystal display panel **10** of the first embodiment.

Third Embodiment

Next, a liquid crystal display panel **10B** according to a third embodiment will be described with reference to FIG. 6. In FIG. 6, the same reference numerals and signs are given to the same configuration as the liquid crystal display panel **10** of the first embodiment, and the detailed description is omitted. The liquid crystal display panel **10B** of the third embodiment is different from that of the first embodiment in regard to the size of the sub-pixels **11a** and **11b** of the outermost peripheral side of the display area.

In the liquid crystal display panel **10** of the first embodiment, as shown in FIG. 2, the sub-pixels **11** have the same size, including the sub-pixels **11a** and **11b** of the outermost peripheral side of the display area. In this respect, in the liquid crystal display panel **10B** of the third embodiment, as shown in FIG. 6, a width of the sub-pixels **11** other than both ends of the display area is WM, a width of the sub-pixel **11a** of the right end is WR (WR>WM) larger than WM, and a width of the sub-pixel **11b** of the left end is WL (WL>WM) larger than WM.

With such a configuration, even when most of the display area side is covered by the light shield layers **26a** and **26b** to solve the jaggedness of the sub-pixels **11a** and **11b** of the peripheral portion of the display area, the aperture areas of the sub-pixels **11a** and **11b** of the periphery of the display area can be made equal to the aperture area of the sub-pixels **11** of the other parts. For this reason, according to the liquid crystal display panel **10B** of the third embodiment, the jaggedness does not occur in the sub-pixels **11a** and **11b** of the peripheral portion of the display area, and the aperture ratio of the sub-pixels **11a** and **11b** of the peripheral portion of the display area can be made equal to the aperture ratio of the sub-pixels **11** of the other parts. Accordingly, it is possible to suppress a coloring defect or a decrease of brightness in the peripheral portion.

Fourth Embodiment

Next, a liquid crystal display panel **10C** according to a fourth embodiment will be described with reference to FIG. 7. In FIG. 7, the same reference numerals and signs are given to the same configuration as the liquid crystal display panel **10** of the first embodiment, and the detailed description is omitted. The liquid crystal display panel **10C** of the fourth embodiment is different from that of the liquid crystal display panel **10** of the first embodiment in respect to the presence or absence of a dummy pixel of the non-display area.

As shown in FIG. 7, in the liquid crystal display panel **10C** of the fourth embodiment, in the non-display area covered with the light shield layer **26**, a dummy pixel **36** is provided adjacent to the outer peripheral side of the sub-pixel of the display area. The dummy pixel **36** has the same configuration as that of the sub-pixel **11**, but is different from the sub-pixels **11**, **11a**, and **11b** of the display area, and the electric field is not applied to the liquid crystal layer LC. For example, the dummy pixel **36** simulates the same configuration as that of the sub-pixel, forms a dummy pixel electrostatic protective circuit, and is used to form a protective unit against the infiltration of static electricity from the outside.

As described above, when the area where the electric field is applied and the area where the electric field is not applied are adjacent at the boundary portion between the display area and the non-display area, the alignment of the display area where the electric field is applied is disarranged, and thus a domain (alignment defect) occurs. However, in the liquid crystal display panel **10C** of the fourth embodiment, the domain occurring on the further peripheral side of the sub-pixels **11a** and **11b** of the outermost peripheral side of the display area can be made into a state where it is not recognizable by the light shield layers **26a** and **26b** of the non-display area. Accordingly, there is no adverse influence on display image quality.

In the embodiment described above, the example of the FFS mode liquid crystal display panel in which the sub-pixel is provided with one curved portion curved in the "<" shape

is described, but the present disclosure may be applied to an FFS mode liquid crystal display panel in which the sub-pixel is provided with a plurality of zigzag curved portions. In the embodiment described above, the example of the FFS mode liquid crystal display panel in which one curved portion curved in the “<” shape along the signal line is formed as the sub-pixel is described, but the present disclosure may be applied to an FFS mode liquid crystal display panel provided with one curved portion or a plurality of zigzag curved portions curved in the “<” shape along the signal line is formed as the sub-pixel. In the embodiment described above, the example of the FFS mode liquid crystal display panel is described, but the present disclosure may be applied to the IPS mode liquid crystal display panel.

It should be understood that various changes and modifications to the presently preferred embodiments described herein will be apparent to those skilled in the art. Such changes and modifications can be made without departing from the spirit and scope of the present subject matter and without diminishing its intended advantages. It is therefore intended that such changes and modifications be covered by the appended claims.

The invention is claimed as follows:

1. A liquid crystal display panel comprising:

- a liquid crystal layer;
- a plurality of sub-pixels arranged in first and second directions, wherein each of the sub-pixels includes a lower electrode and an upper electrode that has one or more slit-shaped apertures and that is closer to the liquid crystal layer than the lower electrode, and a thin film transistor, and each of the sub-pixels in a display area has a first width in the first direction, a first side that is bent in a protruding shape in the first direction, and a second side that is bent in a recessed shape in the first direction;
- a light shield layer shielding a non-display area positioned on an outer peripheral side of the display area and between the sub-pixels; and
- a plurality of outer-most-sub-pixels that are positioned in an outermost peripheral side among the sub-pixels, wherein each of the outermost-sub-pixels includes the lower electrode, the upper electrode having the at least one slit-shaped aperture, and the thin film transistor, wherein the light shield layer covers an entire area of at least one of the slit-shaped apertures of each outermost-sub-pixel, wherein each of the outermost-sub-pixels has a second width in the first direction, the first side that is bent in the protruding shape in the first direction, and the second side that is bent in the recessed shape in the first direction, and
- wherein the second width of each of the outer-most-sub-pixels is wider than the first width of the sub-pixels in the display area.

2. The liquid crystal display panel according to claim 1, wherein the light shield layer is formed to shield at least

an innermost portion of the first side of the outermost-sub-pixels arranged at an end portion of the display area in the first direction and

an innermost portion of the second side of the outermost-sub-pixels arranged at the other end portion of the display area.

3. The liquid crystal display panel according to claim 1, wherein signal lines and scanning lines are formed on one side of a pair of substrates, and the signal lines are curved along the shape of the sub-pixels.

4. The liquid crystal display panel according to claim 1, wherein when an outermost side of outermost-sub-pixels is an inner angle side, the light shield layer of the non-display area is formed to pass through a curved point of the inner angle side of the sub-pixel.

5. The liquid crystal display panel according to claim 1, wherein when an outermost side of outermost-sub-pixels is an outer angle side, the light shield layer of the non-display area is formed to pass through an end point of the outer angle side of the sub-pixel.

6. The liquid crystal display panel according to claim 1, further comprising a plurality of shield-area-sub-pixels arranged in the non-display area, wherein the shield-area-sub-pixels are dummy pixels, the dummy pixels are in an inactive state.

7. The liquid crystal display panel according to claim 1, wherein the upper electrode is a common electrode, and the lower electrode is a pixel electrode,

electrodes wherein each of the sub-pixels includes: an insulating film provided on the pixel electrode; and the common electrode that is provided on the insulating film and that has the at least one slit-shaped aperture curved along the shape of the sub-pixel, and

wherein each of the outermost-sub-pixels includes: an insulating film provided on the pixel electrode; and the common electrode that is provided on the insulating film and that has the at least one slit-shaped aperture curved along the shape of the shield-area-sub-pixel.

8. The liquid crystal display panel according to claim 1, wherein the upper electrode and the lower electrode are opposed to each other in a pectinate shape, and they are curved along the shape of the sub-pixel.

9. The liquid crystal display panel according to claim 1, wherein the upper electrode is a common electrode, and the lower electrodes is a pixel electrode,

wherein, in each of the sub-pixels, the common electrode has a plurality of first slit-shaped apertures, each curved along the shape of the sub-pixel,

wherein, in each of the outermost-sub-pixels, the common electrode has a plurality of second slit-shaped apertures, each curved along the shape of the shield-area-sub-pixel, and

wherein a number of the second slit-shaped apertures in each of the outermost-sub-pixels is greater than a number of the first slit-shaped apertures in each of the sub-pixels.

* * * * *

专利名称(译)	液晶显示面板		
公开(公告)号	US10180604	公开(公告)日	2019-01-15
申请号	US15/341758	申请日	2016-11-02
[标]申请(专利权)人(译)	株式会社日本显示器		
申请(专利权)人(译)	日本展示INC.		
当前申请(专利权)人(译)	日本展示INC.		
[标]发明人	OTA AKIO		
发明人	OTA, AKIO		
IPC分类号	G02F1/1343 G02F1/1337 G02F1/1335 G02F1/1333		
CPC分类号	G02F1/134363 G02F1/133345 G02F1/133512 G02F1/134336 G02F1/133707 G02F2001/134372 G02F2001/133388 G02F2001/134345		
优先权	14/048113 2015-05-26 US		
其他公开文献	US20170068138A1		
外部链接	Espacenet		

摘要(译)

横向电场型液晶显示板包括与液晶层相对的一对基板。在所述一对基板的一侧上以矩阵形式提供在显示区域中具有至少一个弯曲部分的多个子像素，并且在所述多个子像素中形成具有至少一个弯曲部分的一对电极。屏蔽位于显示区域的外周侧上和多个子像素之间的非显示区域的遮光层形成在该对基板的另一侧上。非显示区域的遮光层形成成为显示区域的最外周侧为矩形的形状。

