

(10) **Patent No.:** US 8,743,323 B2
(45) **Date of Patent:** Jun. 3, 2014

(54) TRANSMISSIVE LIQUID CRYSTAL DISPLAY PANEL COMPRISING A SUBPIXEL FOR DISPLAY AND A SUBPIXEL FOR CONTROL OF A VIEW ANGLE WHEREIN A LIGHT BLOCKING MEMBER IS FORMED IN A CENTRAL POSITION OF EACH OF A PLURALITY OF SLIT-LIKE OPENINGS

(75) Inventors: **Toshiharu Matsushima**, Tottori (JP);
Aya Yoso, Tottori (JP)

(73) Assignee: **Japan Display West Inc.**, Chita-Gun,
Aichi-Ken (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 154 days.

(21) Appl. No.: 13/014,824

(22) Filed: **Jan. 27, 2011**

(65) **Prior Publication Data**

US 2011/0187950 A1 Aug. 4, 2011

(30) **Foreign Application Priority Data**

Feb. 1, 2010 (JP) P2010-020001

(51) **Int. Cl.**
G02F 1/1333 (2006.01)
G02F 1/1337 (2006.01)
G02F 1/1343 (2006.01)

(52) **U.S. Cl.**
USPC **349/110; 349/132; 349/141**

(58) **Field of Classification Search**
USPC 349/110, 132, 141
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2004/0160555	A1 *	8/2004	Nemoto et al.	349/113
2007/0176872	A1	8/2007	Kazuyoshi et al.	
2009/0180062	A1 *	7/2009	Kim	349/106
2009/0201455	A1 *	8/2009	Murai	349/139
2009/0231530	A1	9/2009	Nishimura	
2009/0237594	A1 *	9/2009	Matsushima	349/62

FOREIGN PATENT DOCUMENTS

JP	5-108023	4/1993
JP	2007-178736	7/2007
JP	2009-222747	10/2009

* cited by examiner

Primary Examiner — Paul Lee

(74) *Attorney, Agent, or Firm* — K&L Gates LLP

(57) **ABSTRACT**

A liquid crystal display panel includes: a first substrate and a second substrate disposed so as to face each other with a liquid crystal layer being held between the first substrate and the second substrate, a first electrode and a second electrode across which an electric field is applied to the liquid crystal layer being formed on the first substrate, a subpixel for display and a subpixel for control of a view angle being disposed on the same electrode, in which a plurality of slit-like openings are formed in the second electrode in the subpixel for control of a view angle, and a light blocking member is formed in a central position of a width of each of the plurality of slit-like openings in terms of planar view.

8 Claims, 10 Drawing Sheets

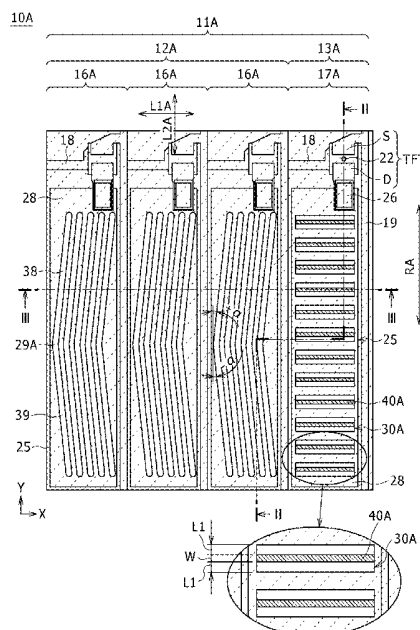
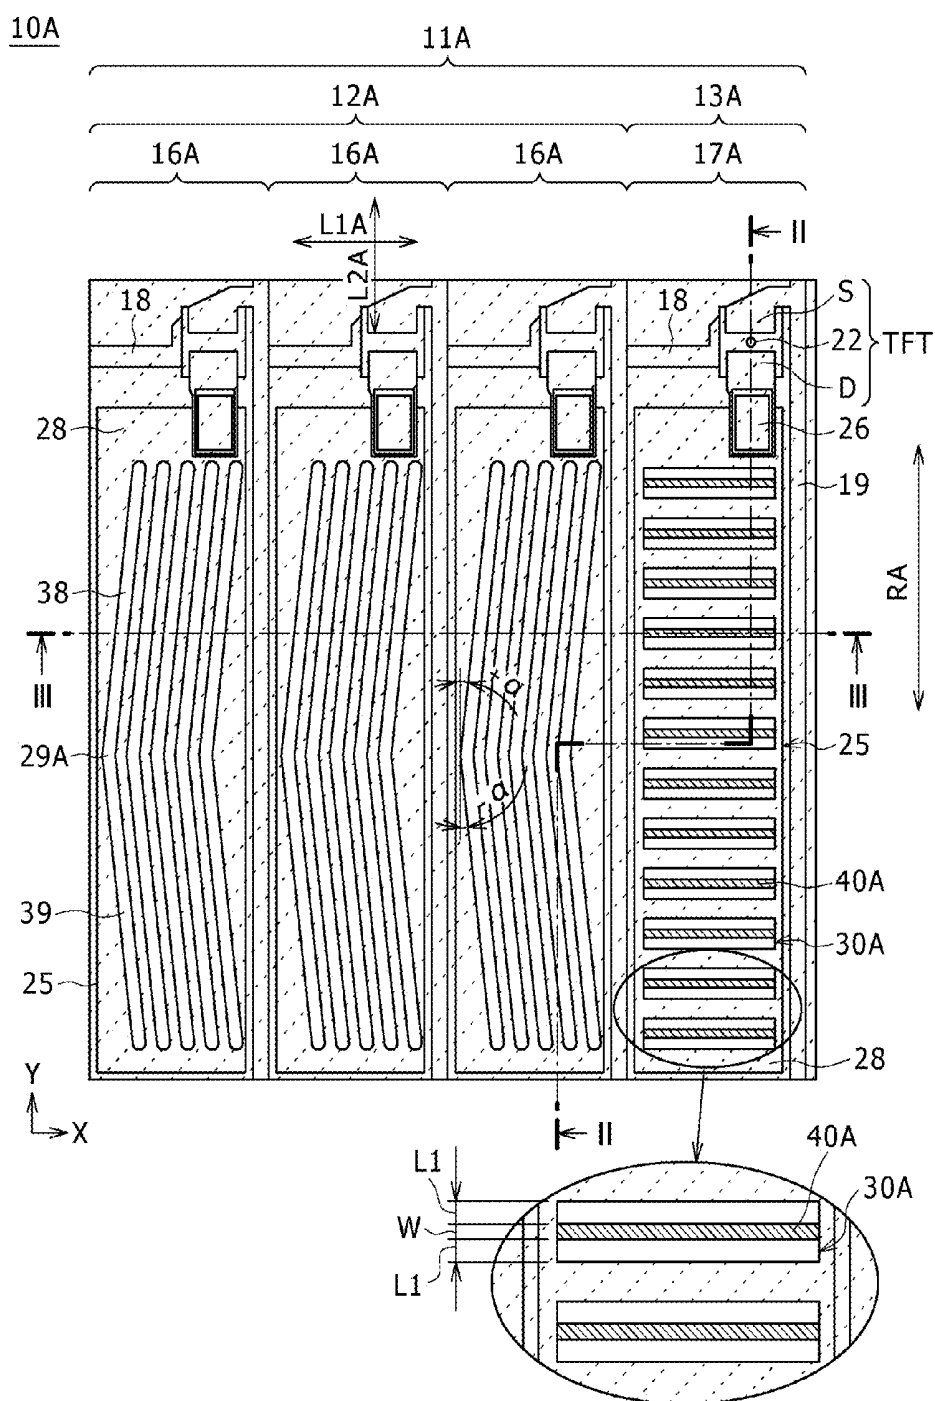


FIG. 1



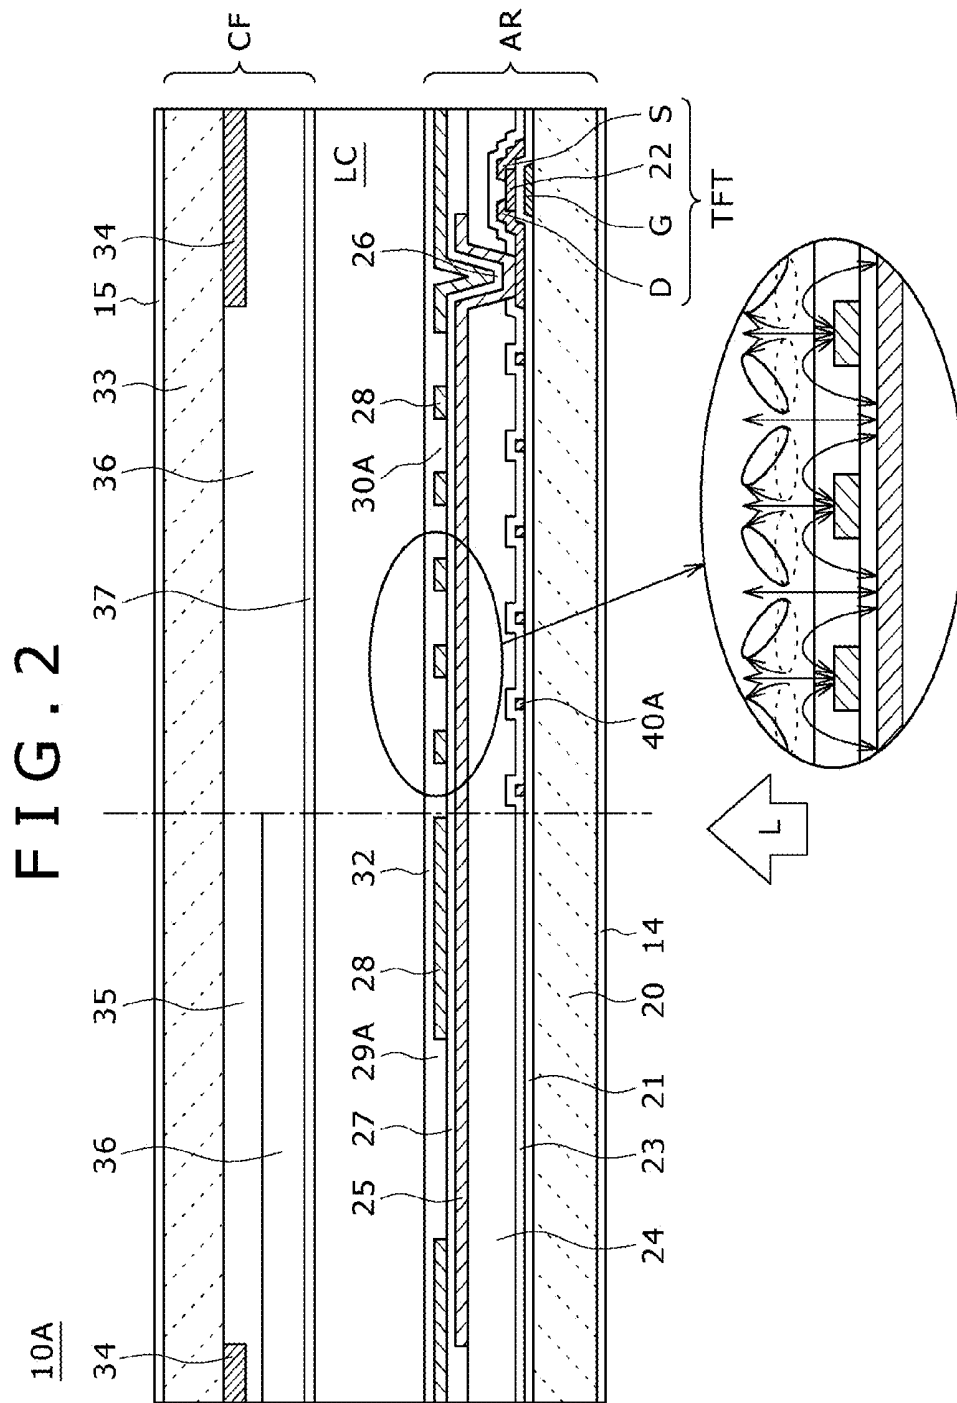


FIG. 3

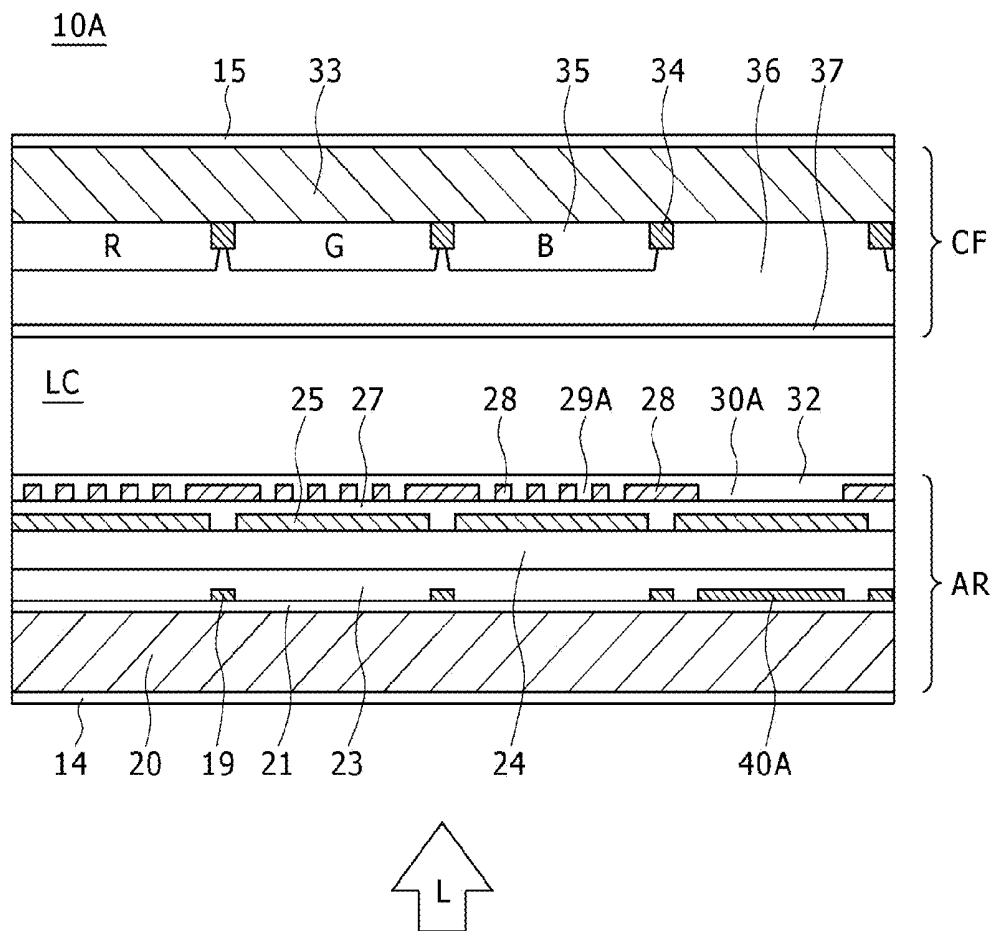
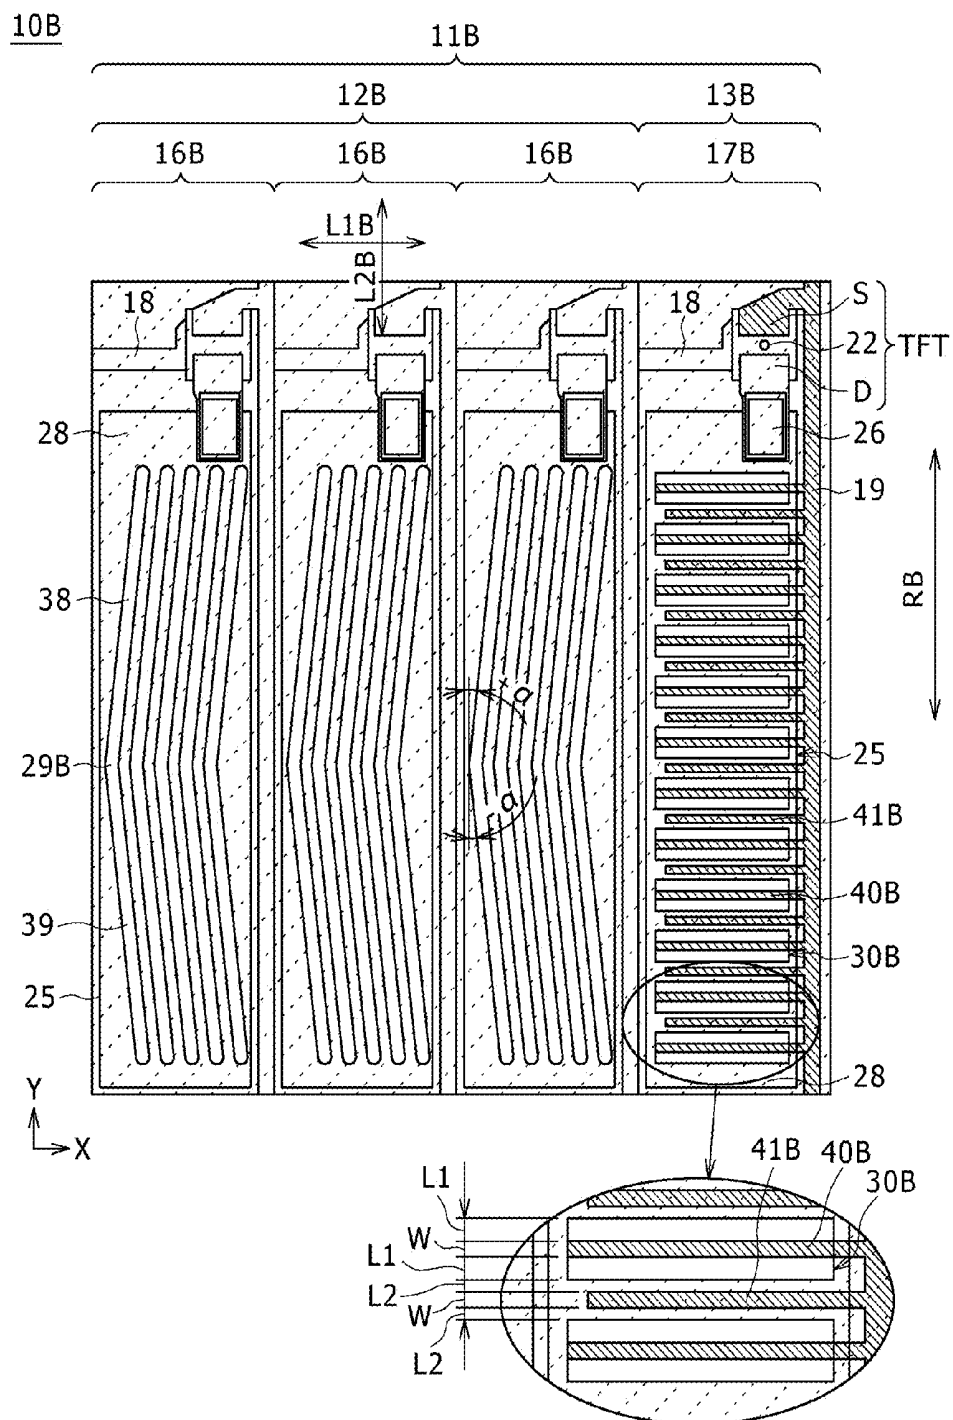


FIG. 4



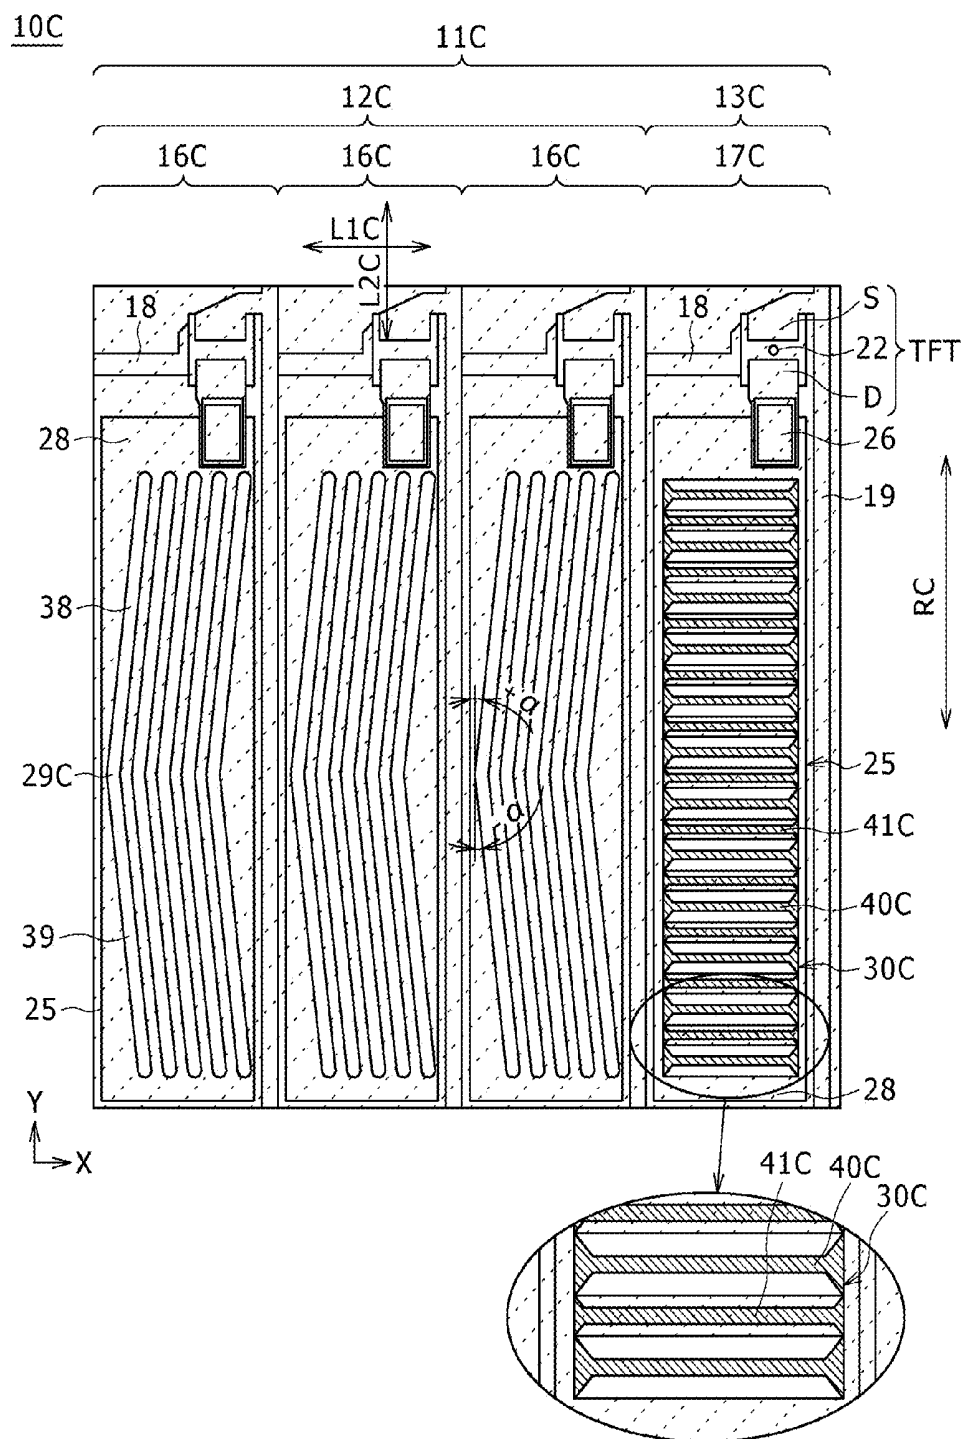


FIG. 6A

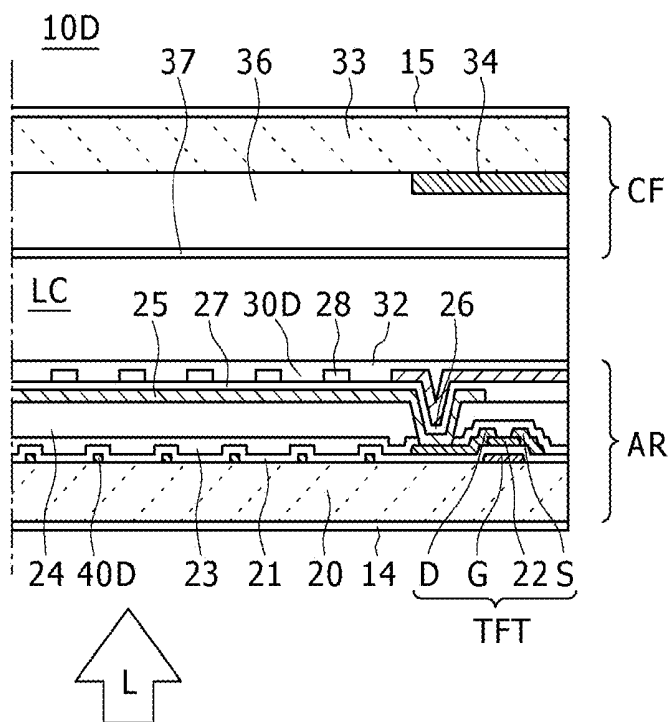


FIG. 6B

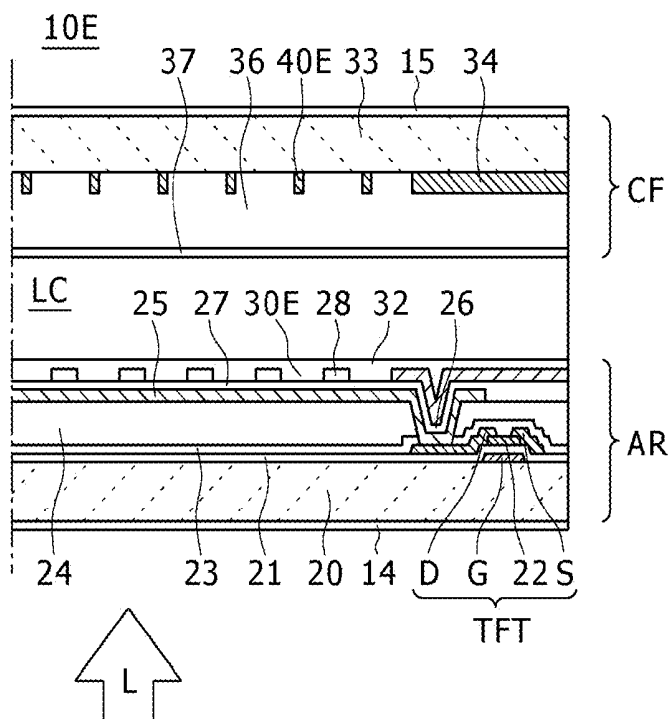


FIG. 8

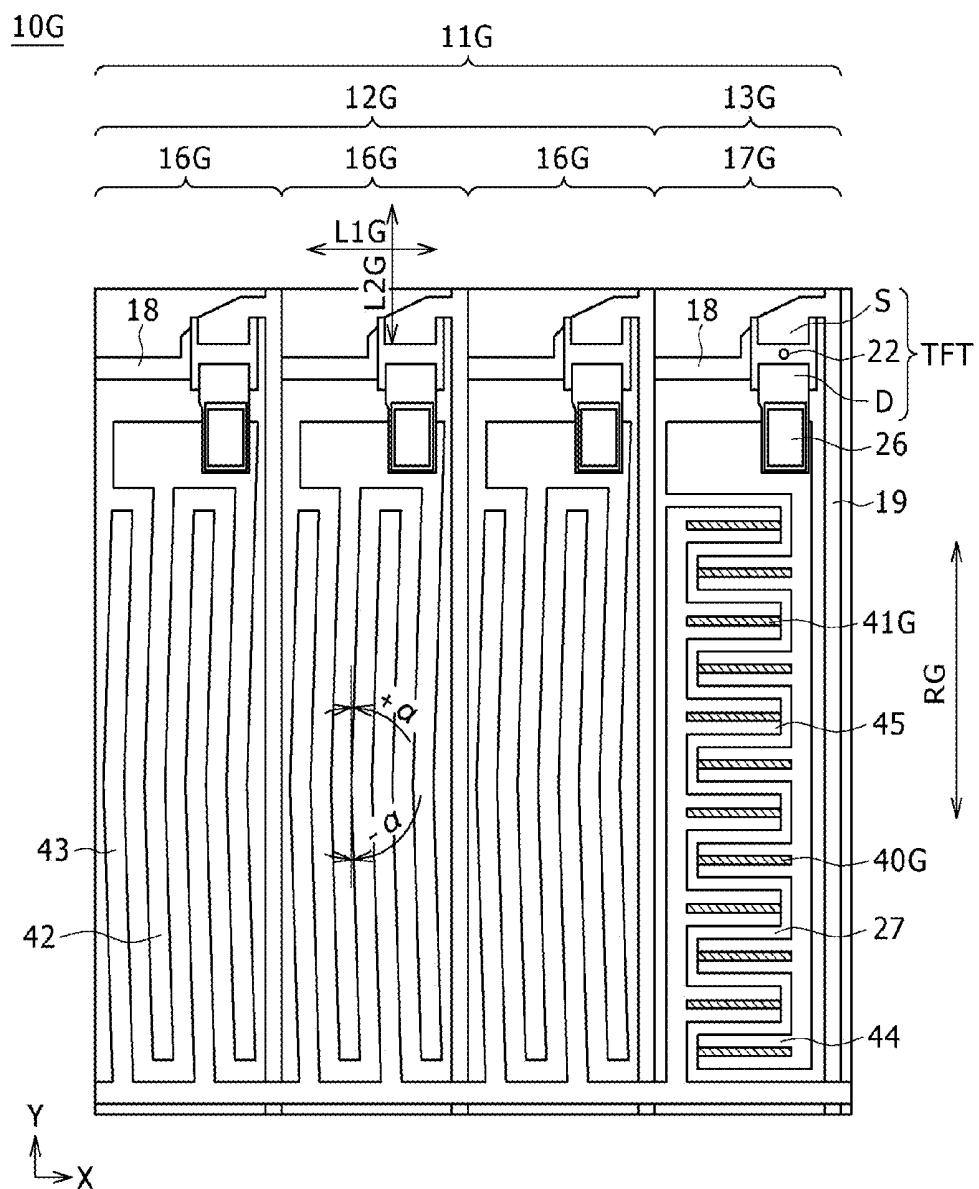


FIG. 9


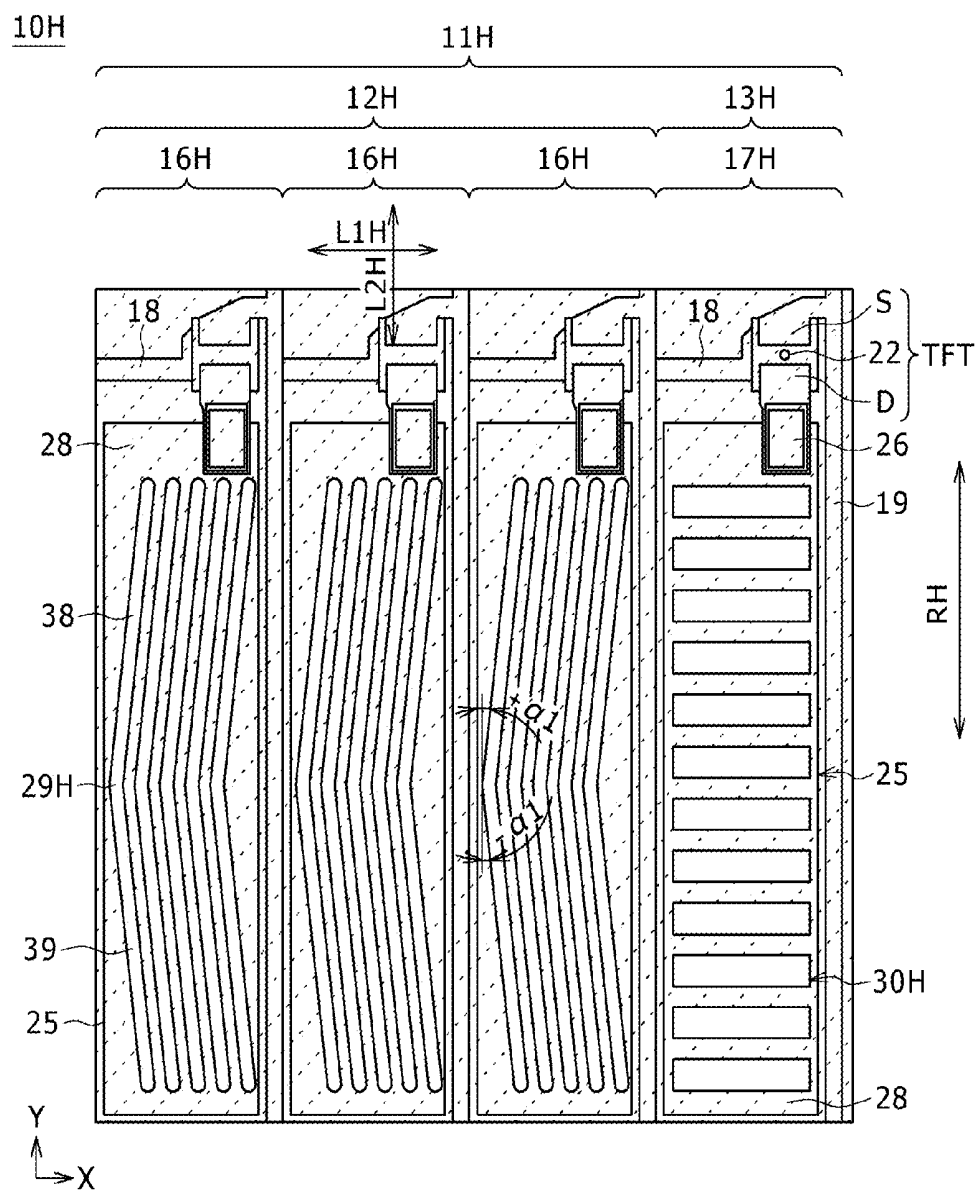


FIG. 10

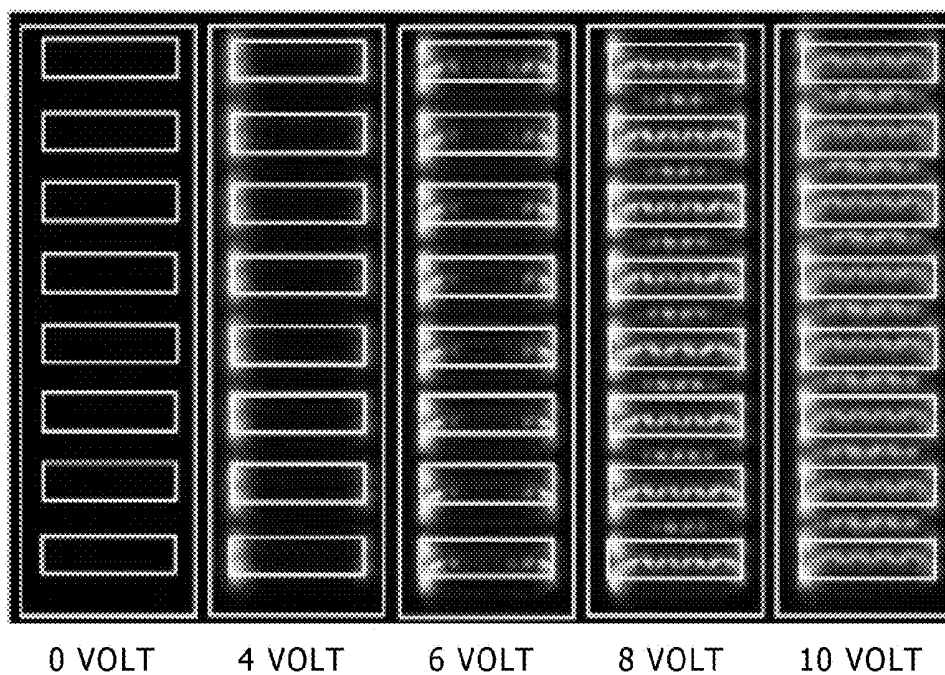

**TRANSMISSIVE LIQUID CRYSTAL DISPLAY
PANEL COMPRISING A SUBPIXEL FOR
DISPLAY AND A SUBPIXEL FOR CONTROL
OF A VIEW ANGLE WHEREIN A LIGHT
BLOCKING MEMBER IS FORMED IN A
CENTRAL POSITION OF EACH OF A
PLURALITY OF SLIT-LIKE OPENINGS**

**CROSS REFERENCES TO RELATED
APPLICATIONS**

The present application claims priority to Japanese Priority Patent Application JP 2010-020001 filed in the Japan Patent Office on Feb. 1, 2010, the entire content of which is hereby incorporated by reference.

BACKGROUND

The present invention relates to a liquid crystal display panel using a transverse electric field system and including a subpixel for control of a view angle, and an electronic apparatus using the same. More particularly, the invention relates to a liquid crystal panel in which a subpixel for control of a view angle also operates in accordance with a transverse electric field system, and an electronic apparatus using the same.

A liquid crystal display panel is used as a display panel in many electronic apparatuses because the liquid crystal display panel has the features such as light weight, slimness and low power consumption as compared with a Cathode Ray Tube (CRT). The liquid crystal display panel is such that an alignment of liquid crystal molecules arranged in a predetermined direction is changed by application of an electric field to change an amount of light transmitted through a liquid crystal layer, thereby displaying an image on the liquid crystal display panel. With regard to such a liquid crystal display panel, reflection type one, transmission type one, and semi-transmission type one including both the reflection type one and the transmission type one exist. In this case, in the reflection type liquid crystal display panel, an outside light is made incident to a liquid crystal layer, and is reflected by a reflective plate to be transmitted through the liquid crystal layer again to be emitted. Also, in the transmission type liquid crystal display panel, an incident light radiated from a backlight unit is transmitted through a liquid crystal layer.

A longitudinal electric field system and a transverse electric field system are known as those used in a method of applying an electric field to a liquid crystal layer of the liquid crystal display panel. With the liquid crystal display panel using the longitudinal electric field system, an electric field directed approximately in the longitudinal direction is applied to liquid crystal molecules through a pair of electrodes disposed so as to hold the liquid crystal layer between the paired electrodes. A liquid crystal display panel having a Twisted Nematic (TN) mode, a liquid crystal display panel having a Vertical Alignment (VA) mode, a liquid crystal display panel having a Multi-domain Vertical Alignment (MVA) mode or the like is known as the liquid crystal display panel using the longitudinal electric field system. With the liquid crystal display panel using the transverse electric field system, a pair of electrodes is provided in an inner surface side of one of a pair of substrates disposed so as to hold the liquid crystal layer between the paired substrates with the paired electrodes being insulated from each other. Also, an electric field directed approximately in the transverse direction is applied to the liquid crystal molecules. A liquid crystal display panel having an In-Plane Switching (IPS) mode in which

a pair of electrodes does not overlap in terms of planar view, and a liquid crystal display panel having a Fringe Field Switching (FFS) mode in which a pair of electrodes overlaps in terms of planar view are known as the liquid crystal display panel using the transverse electric field system.

Of them, in the liquid crystal display panel having the IPS mode, a pair of electrodes composed of a pixel electrode and a common electrode is formed in a pectinate shape so that the paired electrodes are engaged with each other with the paired electrodes being electrically insulated from each other. Also, the transverse electric field is applied across the pixel electrode and the common electrode. The liquid crystal display device having the IPS mode has such an advantage that its view angle is wider than that of the liquid crystal display device having the longitudinal electric field.

In addition, in the liquid crystal display panel having the FFS mode, a pair of electrodes is composed of an upper electrode and a lower electrode. Also, the paired upper and lower electrodes are disposed in different layers, respectively, through an insulating film. A slit-like opening is provided in the upper electrode, and the electric field directed approximately in the transverse direction and passing through the slit-like opening is applied to the liquid crystal layer. The liquid crystal display panel having the FFS mode has been used recently in many cases because the liquid crystal display panel having the FFS mode has an effect that the wide view angle can be obtained and also the image contrast can be improved.

Although as described above, the liquid crystal display panel using the transverse electric field system has the wide view angle, when secret information which is not desired to be peeped is displayed, for the purpose of preventing the secret information from being visibly recognized by anyone else, it is preferable to use the narrow view angle other than the wide view angle. Then, as described in Japanese Patent Laid-Open No. Hei 5-108023, there is known a method of controlling view angle characteristics by adding a liquid crystal panel for control of a view angle to a liquid crystal panel for display. However, this method involves such a problem that the addition of the liquid crystal panel for control of a view angle results in a large increase in thickness of the liquid crystal display panel. In order to cope with this problem, as described in Japanese Patent Laid-Open Nos. 2007-178736 and 2009-222747 (hereinafter referred to as Patent Documents 1 and 2), there is known a method of adding a subpixel for control of a view angle in addition to subpixels for display of Red (R), Green (G) and Blue (B), and controlling a voltage applied to the subpixel for control of a view angle, thereby controlling view angle characteristics.

Here, a structure of the liquid crystal display panel, having the FFS mode, to which the subpixel for control of a view angle disclosed in Patent Documents 1 and 2 is added will now be described with reference to FIG. 9. It is noted that FIG. 9 is a top plan view showing an outline of an array substrate for one pixel of the existing liquid crystal display panel, having the FFS mode, to which the subpixel for control of a view angle is added.

As shown in FIG. 9, one pixel 11H of a liquid crystal display panel 10H is composed of a display region 12H and a view angle control region 13H disposed adjacent to the display region 12H. The display region 12H is composed of three subpixels 16H for display of R, G and B. Also, a color of corresponding one of the pixels is determined based on a mixed color of lights having R, G and B, respectively. The view angle control region 13H includes one subpixel 17H for control of a view angle. An upper electrode 28 of the liquid crystal display panel 10H operates as a common electrode in

this case, and is formed over all the pixels. In addition, a lower electrode 25 of the liquid crystal display panel 10H operates as a pixel electrode, and is formed every subpixel 16H for display and pixel 17H for control of a view angle.

Also, a first slit-like opening 29H having a dogleg shape is formed in the upper electrode 28 of the display region 12H. An alignment film (not shown) is formed on a surface of the upper electrode 28 and an inner surface of the first slit-like opening 29H. The alignment film is subjected to a rubbing treatment in the same direction as an extension direction (a Y-axis direction in FIG. 9) of a signal line 19. The first slit-like opening 29H is composed of a first subslit-like opening 38 which is inclined with respect to the rubbing treatment direction by $+\alpha$, and a second subslit-like opening 39 which is inclined with respect to the rubbing treatment direction by $-\alpha$. A second slit-like opening 30H which extends in a direction vertical to the rubbing treatment direction is formed in the upper electrode 28 of the view angle control region 13H.

As described in Patent Document 2, in the liquid crystal display panel 10H, when a drive voltage is applied across the upper electrode 28 and the lower electrode 25, liquid crystal molecules in the view angle control region 13H are each inclined with respect to a surface of an array substrate. Therefore, although there is no influence of the view angle control in a direct vision direction for the front of the liquid crystal display panel 10H, since the contrast becomes deteriorated due to light leakage in an oblique vision direction, an image displayed becomes difficult to see. As a result, it is possible to offer the view angle control effect.

SUMMARY

However, in the existing liquid crystal display panel 10H, in a central portion of the second slit-like opening 30H and a central portion of a width between the second slit-like openings 30H in the view angle control region 13H, a direction of the electric field in an ON phase of the electric field becomes vertical to that of the liquid crystal molecules in an OFF phase of the electric field. Therefore, a rotational direction of the liquid crystal molecules is hardly determined. For this reason, as shown in FIG. 10, as the applied voltage is increased, the light leakage is generated in the central portion of the second slit-like opening 30H, and in the central portion of the width between the second slit-like openings 30H in the direct vision direction. The light leakage in the view angle control region is similarly generated in the liquid crystal display panel as well having the IPS mode.

The present invention has been made in order to solve the problems involved in the related art, and it is therefore desirable to provide a liquid crystal display panel, using a transverse electric field system having an FFS mode or an IPS mode, and including a subpixel for control of a view angle, which is excellent in view angle control function because light leakage in a direct vision direction is reduced when the view angle control is carried out, and an electronic apparatus using the same.

In order to attain the desire described above, according to an embodiment, there is provided a liquid crystal display panel including: a first substrate and a second substrate disposed so as to face each other with a liquid crystal layer being held between said first substrate and said second substrate, a first electrode and a second electrode across which an electric field is applied to the liquid crystal layer being formed on the first substrate, a subpixel for display and a subpixel for control of a view angle being disposed on the same pixel, in which a plurality of slit-like openings are formed in the second electrode in the subpixel for control of a view angle, and a light

blocking member is formed in a central position of a width of each of the plurality of slit-like openings in terms of planar view.

In the liquid crystal display panel according to the embodiment, since both the first electrode and the second electrode are formed on the first substrate, both the subpixel for display, and the subpixel for control of a view angle operate in accordance with the transverse electric field system. Also, in the liquid crystal panel of the embodiment, a rotational direction of liquid crystal molecules is hardly determined in a portion in which a direction of the electric field in an ON phase of the electric field is vertical to that of the liquid crystal molecules in an OFF phase of the electric field, especially, in the central portion of the width of the slit-like opening in the second electrode through which the electric field is applied to the liquid crystal layer in the subpixel for control of a view angle for carrying out the control of the view angle in accordance with which the light leakage is obliquely generated for the control of the view angle. For this reason, the light leakage may be generated in the subpixel for control of a view angle in a direct vision direction depending on the magnitude of the voltage applied across the first electrode and the second electrode. According to the liquid crystal display panel of the embodiment, since the light blocking member is formed in the central position of the width of each of the slit-like openings in the second electrode in terms of the planar view in the subpixel for control of a view angle, it is possible to reduce the light leakage in the direct vision direction.

In the liquid crystal display panel of the embodiment, preferably, the light blocking member is formed in a central position as well of a width of the second electrode in terms of planar view.

When the slit-like openings are formed in the second electrode, the central position of the width of the second electrode between the slit-like openings is also a region in which a rotational direction of the liquid crystal molecules is hardly determined. Therefore, the light leakage may be generated in the direct vision direction as well in the subpixel for control of a view angle depending on the magnitude of the voltage applied across the first electrode and the second electrode. In the liquid crystal display panel of the embodiment, since the light blocking member is formed in the central position as well of the width of the second electrode in terms of the planar view, it is possible to further block the light leakage in the subpixel for control of a view angle.

In addition, in the liquid crystal display panel of the embodiment, preferably, the first electrode is formed on a lower side of the first substrate through an insulating layer, and the second electrode is formed on an upper side of the first substrate.

According to the liquid crystal display panel of the embodiment, the liquid crystal display panel, using the FFS mode, which has the wide view angle and a high luminance is obtained while the effect described above is offered.

In addition, in the liquid crystal display panel of the embodiment, preferably, a thin film transistor (TFT) for driving either the first electrode or the second electrode is formed on the first substrate, and the light blocking member is formed in the same layer as that of either a source electrode or a gate electrode of the thin film transistor.

According to the liquid crystal display panel of the embodiment, since the light blocking member can be formed in the same process as that for either the source electrode or the gate electrode of the TFT, it is unnecessary to add a process for forming the light blocking member. In addition thereto, since the light blocking member is formed on the first substrate (array substrate), even if position shift is caused

5

when the first substrate and the second substrate (color filter substrate) are stuck to each other, any of the positions between the light blocking member, and the first electrode and the second electrode is prevented from being shifted.

In addition, in the liquid crystal display panel of the embodiment, preferably, a light blocking layer is formed on the second substrate, and the light blocking member is formed in the same layer as that of the light blocking layer.

The light blocking layer referred to as a black matrix is formed on the second substrate (color filter substrate) of the liquid crystal display panel. According to the liquid crystal display panel of the embodiment, since the light blocking member can be formed in the same process as that for the light blocking layer of the second substrate, it is unnecessary to especially add a process for forming the light blocking member.

In addition, according to the liquid crystal display panel of the embodiment, preferably, a length of the light blocking member in a position where corresponding one of the slit-like openings of the second electrode is longer than that of the light blocking member formed on a surface between corresponding ones of the slit-like openings of the second electrode.

A length of the light leakage in the position where the corresponding one of the slit-like openings of the second electrode of the subpixel for control of a view angle is formed is longer than that of the light leakage in the position of the surface between the corresponding ones of the slit-like openings of the second electrodes. Therefore, in the liquid crystal display panel of the embodiment, the length of the light blocking member in the position where the corresponding one of the slit-like openings of the second electrode is formed is made longer than that of the light blocking member formed on the surface between the corresponding ones of the slit-like openings of the second electrode. As a result, it is possible to effectively carry out the control of the view angle, and it is also possible to further enhance the effect of preventing the light leakage in the direct vision direction.

According to another embodiment, there is provided an electronic apparatus including the liquid crystal display panel according to the embodiment.

Additional features and advantages are described herein, and will be apparent from the following Detailed Description and the figures.

BRIEF DESCRIPTION OF THE FIGURES

FIG. 1 is a top plan view showing an outline of an array substrate for one pixel in a liquid crystal display panel according to a first embodiment;

FIG. 2 is a cross sectional view taken on line II-II of FIG. 1;

FIG. 3 is a cross sectional view taken on line of FIG. 1;

FIG. 4 is a top plan view showing an outline of an array substrate for one pixel in a liquid crystal display panel according to a second embodiment;

FIG. 5 is a top plan view showing an outline of an array substrate for one pixel in a liquid crystal display panel according to a third embodiment;

FIGS. 6A and 6B are, respectively, a cross sectional view of a portion corresponding to the cross sectional view taken on line II-II of FIG. 1 in a liquid crystal display panel according to a fourth embodiment, and a cross sectional view of a portion corresponding to the cross sectional view taken on line II-II of FIG. 1 in a liquid crystal display panel according to a fifth embodiment;

6

FIG. 7 is a top plan view showing an outline of an array substrate for one pixel in a liquid crystal display panel according to a sixth embodiment;

FIG. 8 is a top plan view showing an outline of an array substrate for one pixel in a liquid crystal display panel according to a seventh embodiment;

FIG. 9 is a top plan view showing an outline of an existing array substrate for one pixel; and

FIG. 10 is a top plan view showing light leakage in an existing view angle subpixel.

DETAILED DESCRIPTION

Embodiments of the present application will be described below in detail with reference to the drawings.

However, embodiments which will be described below are not intended to limit the present invention to the contents described herein, and thus the present invention is equally applied to various kinds of changes made without departing from the technical idea disclosed in the appended claims. In addition, in the drawings used for the description in this specification, for the purpose of drawing layers and members in such sizes that they can be recognized on the drawings, the layers and the members are drawn on different scale sizes, respectively, and thus are not necessarily drawn in proportion to their actual sizes.

1. First Embodiment

A structure of a main portion of a liquid crystal display panel 10A according to a first embodiment will now be described with reference to FIGS. 1 to 3. The liquid crystal display panel 10A of the first embodiment includes a display region 12A complying with an FFS mode for color display, and a view angle control region 13A complying with the FFS mode in each of pixels 11A. As shown in FIGS. 2 and 3, in the liquid crystal display panel 10A, a liquid crystal layer LC is held between an array substrate AR and a color filter substrate CF. Also, a first polarizing plate 14 is provided on an outer surface of the array substrate AR on a side opposite to the liquid crystal layer LC, and a second polarizing plate 15 is provided on an outer surface of the color filter substrate CF on a side opposite to the liquid crystal layer LC. In the liquid crystal display panel 10A of the first embodiment, the first polarizing plate 14 and the second polarizing plate 15 are mutually disposed in a cross-Nicol fashion, and operate in a normally black mode.

The liquid crystal display panel 10A has a plurality of pixels 11A disposed in a row direction (in an X-axis direction in FIG. 1), and in a column direction (in a Y-axis direction in FIG. 1). As shown in FIG. 1, one pixel 11A is composed of a display region 12A, and a view angle control region 13A disposed adjacent to the display region 12A. The display region 12A, for example, is composed of three subpixels 16A for display of three colors of Red (R), Green (G) and Blue (B). Also, a color of corresponding one of the pixels 11A is determined based on a mixed color of lights having R, G and B, respectively. The view angle control region 13A includes one subpixel 17A for control of a view angle.

Each of the subpixel 16A for display, and the subpixel 17A for control of a view angle in the array substrate AR includes a scanning line 18, a signal line 19, and a thin film transistor TFT. In this case, the scanning line 18 is made of an opaque metal such as aluminum or molybdenum, and extends in the row direction. The signal line 19 is made of an opaque metal such as aluminum or molybdenum, and extends in the column direction. Also, the thin film transistor TFT is disposed in the

vicinity of an intersection portion between the scanning line **18** and the signal line **19**. It is noted that the thin film transistor TFT of the subpixel **16A** for display, and the thin film transistor TFT of the subpixel **17A** for control of a view angle have the same structure.

The array substrate AR has a first transparent substrate **20**, for example, made of a glass, quartz, a plastic or the like which is transparent and has an insulating property as a base. The scanning line **18** is formed on a side of the first transparent substrate **20** facing the liquid crystal layer LC, and a gate electrode G is disposed so as to extend from corresponding one of the scanning lines **18**. A transparent gate insulating film **21**, for example, made of a silicon nitride, a silicon oxide or the like is laminated so as to cover both the scanning line **18** and the gate electrode G. Also, a semiconductor layer **22**, for example, made of amorphous silicon, polycrystalline silicon or the like is formed on the gate insulating film **21** overlapping the gate electrode G in terms of planar view.

In addition, a plurality of signal lines **19** each, for example, made of a metal such as aluminum or molybdenum are formed on the gate insulating film **21** in the column direction. Regions which are measured by these scanning lines **18** and signal lines **19** become subpixel regions, respectively. A source electrode S is disposed so as to extend from corresponding one of the signal lines **19**, and partially contacts a surface of the semiconductor layer **22**.

In addition, a drain electrode D which is formed from the same material as that of each of the signal lines **19** concurrently with each of the signal lines **19** is provided on the gate insulating film **21**. The drain electrode D is disposed close to the source electrode S and partially contacts the surface of the semiconductor layer **22**. The three subpixels **16A** for display of R, G and B compose the display region **12A** having approximately a square shape of one pixel **11A**. Thus, each of the subpixels **16A** for display which are obtained by trisecting the display region **12A** has a rectangular shape in which the scanning line **18** side is a short side, and the signal line **19** side is a long side. The thin film transistor TFT serving as a switching element is composed of the gate electrode G, the gate insulating film **21**, the semiconductor layer **22**, the source electrode S, and the drain electrode D.

In addition, a transparent passivation film **23**, for example, made of a silicon nitride, a silicon oxide or the like is laminated so as to cover exposed portions of the signal line **19**, the thin film transistor TFT and the gate insulating film **21**. Also, an interlayer resin film **24**, for example, made of a transparent resin material such as a photo resist is laminated so as to cover the passivation film **23**. The interlayer resin film **24** planarizes an irregular surface of the passivation film **23** caused by the signal line **19**, the thin film transistor TFT and the gate insulating film **21**.

Also, a lower electrode **25** (corresponding to a first electrode in the present invention), for example, made of a transparent conductive material such as an Indium Tin Oxide (ITO) or an Indium Zinc Oxide (IZO) is formed so as to cover the interlayer resin film **24**. A contact hole **26** is formed so as to completely extend through both the interlayer resin film **24** and the passivation film **23** to reach the drain electrode D. The lower electrode **25** and the drain electrode D are electrically connected to each other through the contact hole **26**. For this reason, the lower electrode **25** operates as the pixel electrode.

A transparent interelectrode insulating film **27**, for example, made of a silicon nitride, a silicon oxide or the like is laminated so as to cover the lower electrode **25**. Also, an upper electrode **28** (corresponding to a second electrode in the present invention), for example, made of a transparent conductive material such as an ITO or an IZO is formed so as

to cover the interelectrode insulating film **27**. The upper electrode **28** is formed over the pixels **11A**, and is electrically connected to a common wiring (not shown). For this reason, the upper electrode **28** operates as a common electrode.

As shown in FIG. 1, a plurality of first slit-like openings **29A** are formed in the upper electrode **28** in the subpixel **16A** for display. Also, a plurality of second slit-like openings **30A** are formed in the upper electrode **28** in the subpixel **17A** for control of a view angle. After a photo resist material applied onto the surface of the upper electrode **28** is exposed and developed by using a photolithography method, the selective etching is carried out by using the resulting photo resist material as an etching mask, thereby forming these first and second slit-like openings **29A** and **30A**. Also, a first alignment film **32**, for example, made of polyimide is laminated so as to cover both the upper electrode **28** and inner surfaces of the first and second slit-like openings **29A** and **30A**. The first alignment film **32** is subjected to a rubbing treatment. When no electric field is applied to the liquid crystal layer LC, the liquid crystal molecules are got in a line in a rubbing treatment direction.

The color filter substrate CF has a second transparent substrate **33**, for example, made of a glass, quartz, a plastic or the like which is transparent and has an insulating property as a base. A light blocking layer **34**, for example, having a light blocking property is formed in a position facing the opaque scanning line **18**, the signal line **19**, and the thin film transistor TFT of the array substrate AR on the surface on the liquid crystal layer LC side of the second transparent substrate **33**. Also, color filter layers **35** which transmit lights having different colors (R, G and B), respectively, are formed in the three subpixels **16A** for display, respectively. As shown in FIG. 3, no color filter layer **35** is formed in the subpixel **17A** for control of a view angle.

Also, an overcoat layer **36**, for example, made of a transparent resin material such as a photo resist is laminated so as to cover both the light blocking layer **34** and the color filter layer **35**. The overcoat layer **36** of the color filter substrate CF is formed for the purpose of planarizing stepped portions caused by the color filter layers **35** having the different colors, respectively, and blocking an impurity from the light blocking layer **34** or the color filter layer **35** so as for such an impurity not to enter the liquid crystal layer LC. Also, a second alignment film **37**, for example, made of polyimide is formed so as to cover the overcoat layer **36**. The second alignment film **37** is subjected to the rubbing treatment whose direction is either parallel with or the orthogonal to each of optical axes of the first and second polarizing plates **14** and **15**.

Next, a detailed description will be given with respect to the first slit-like opening **29A** of the upper electrode **28** in the subpixel **16A** for display, the second slit-like opening **30A** of the upper electrode **28** in the subpixel **17A** for control of a view angle, and the direction of the rubbing treatment. As shown in FIG. 1, the first slit-like opening **29A** is formed in a dogleg shape so as to extend in an extension direction of the signal line **19**. Since the subpixel **16A** for display is vertically long, when the first slit-like openings **29A** are made to transversely extend, the number of both ends of the first slit-like openings **29A** increases. An end portion of the first slit-like opening **29A** becomes an abnormal alignment region. Then, in the liquid crystal display panel **10A** of the first embodiment, the extension direction of the first slit-like opening **29A** is set as a longitudinal direction, whereby the number of end portions of the first slit-like openings **29A** is reduced and a decrease in aperture ratio is reduced.

In addition, the first slit-like opening **29A** having the dog-leg shape is composed of a first subslit-like opening **38** which is inclined with respect to the extension direction of the signal line **19** by $+\alpha$ (a clockwise direction is set as being positive, and α is taken to be positive), and a second subslit-like opening **39** which is inclined with respect to the extension direction of the signal line **19** by $-\alpha$. Although α differs depending on various kinds of conditions, preferably, α is in the range of 3° to 15° . When all the first slit-like openings **29A** are inclined either in the clockwise direction or in the counterclockwise direction with respect to the direction of the rubbing treatment, a phenomenon appears such that a color changes depending on viewing angles because the liquid crystal molecules are rotated in one direction. The reason for this is because an apparent retardation changes depending on the direction along which the liquid crystal molecules are seen. In this case, 5° which is close to an optimal value is adopted as α . In addition, as shown in FIG. 1, the second slit-like opening **30A** is formed so as to extend in parallel with the extension direction of the scanning line **18**.

Next, a description will be given with respect to the light blocking member for measures taken to cope with the light leakage in the subpixel **17A** for control of a view angle. As shown in a partially enlarged part of FIG. 2, in each of a central portion of a width of the second slit-like opening **30A** of the upper electrode **28** in the subpixel **17A** for control of a view angle, and a central portion of a width between the second slit-like openings **30A**, a direction of the electric field in the ON phase of the electric field becomes approximately vertical to the alignment direction of the liquid crystal molecules in the OFF phase of the electric field. For this reason, the liquid crystal molecules in the central portion of the width of the second slit-like opening **30A**, and the liquid crystal molecules in the central portion of the width between the second slit-like openings **30A** are not determined in their rotational directions. For this reason, as the applied voltage is increased, as shown in FIG. 10, the light leakage having a maximum width of about $2\text{ }\mu\text{m}$ is generated in the direct vision direction. As the applied voltage is gradually increased, the light leakage is earlier generated and is generated in a longer range in the central portion of the width of the second slit-like opening **30A** than in the central portion of the width between the second slit-like openings **30A**.

Then, in the first embodiment, as shown in FIG. 1, a first light blocking member **40A** having a predetermined width W is provided in the central portion of the width of the second slit-like opening **30A** and over the entire length of the second slit-like opening **30A** in terms of planar view. Since the light leakage has the width of up to $2\text{ }\mu\text{m}$, preferably, the width W of the first light blocking member **40A** for blocking the leaked light is set as being equal to or larger than $2\text{ }\mu\text{m}$ and equal to or smaller than $3\text{ }\mu\text{m}$. When the width W of the first light blocking member **40A** is set as being smaller than $2\text{ }\mu\text{m}$, it may be impossible to perfectly prevent the light leakage in the direct vision direction. On the other hand, when the second slit-like opening **30A** is set as being larger than $3\text{ }\mu\text{m}$, the view angle control function is reduced.

It is noted that although in the first embodiment, the width W of the first light blocking member **40A** is set as being equal to or larger than $2\text{ }\mu\text{m}$ and equal to or smaller than $3\text{ }\mu\text{m}$ so as to correspond to $2\text{ }\mu\text{m}$ as the maximum width of the light leakage, this results from that the width of the second slit-like opening **30A** is set in the range of 5 to $6\text{ }\mu\text{m}$. Therefore, the width W of the first light blocking member **40A** may be formed so as to become half the width of the second slit-like opening **30A**.

The first light blocking member **40A** is formed from the same member as that of the opaque source electrode **S**, in the same layer as that of the opaque source electrode **S**, and in the same process as that of the opaque source electrode **S**. As a result, the first light blocking member **40A** can be formed without specially adding a process. The light leakage in the central portion of the width of the second slit-like opening **30A** can be reduced by the first light blocking member **40A**. In addition, the first light blocking member **40A** is formed in the same layer as that of the source electrode **S**, whereby the first light blocking member **40A** is formed in the array substrate **AR**. Thus, even when the position shift is generated when the array substrate **AR** and the color filter substrate **CF** are stuck to each other, the position of the first light blocking member **40A**, and the position of the second slit-like opening **30A** can be prevented from being shifted from each other.

The array substrate **AR** and the color filter substrate **CF** which are formed in the manner as described above are made to face each other, and sealing materials (not shown) are provided in the circumferences of both the array substrate **AR** and the color filter substrate **CF**, respectively, thereby sticking both the array substrate **AR** and the color filter substrate **CF** to each other. Also, the liquid crystal is filled in a space defined between both the array substrate **AR** and the color filter substrate **CF**, thereby obtaining the liquid crystal display panel **10A** according to the first embodiment. The liquid crystal display panel **10A** operates in accordance with the normally black mode. Thus, as shown in FIG. 1, an optical axis (transmission axis) **L1A** of the first polarizing plate **14** in the array substrate **AR** is identical in direction to each of the scanning lines **18**. Also, an optical axis **L2A** of the second polarizing plate **15** in the color filter substrate **CF** is identical in direction to each of the signal lines **19**. In addition, an incident light **L** is radiated from a backlight unit (not shown) disposed on a back surface of the liquid crystal display panel **10A** (refer to FIGS. 2 and 3).

In the display region **12A**, when the thin film transistor **TFT** is held in an OFF state, the incident light which has been converted into a linearly polarized light in the same direction as that of each of the scanning lines **18** by the first polarizing plate **14** is made incident to the second polarizing plate **15** as it is. Therefore, the incident light cannot be transmitted through the liquid crystal display panel **10A**, and thus the black display is provided. When the thin film transistor **TFT** is turned ON, an electric field is generated across the lower electrode **25** and the upper electrode **28**, the alignment of the liquid crystal molecules of the liquid crystal layer **LC** changes, and the light passing through the liquid crystal layer **LC** is given a predetermined phase difference ($1/2$ wavelength). As a result, since the incident light which has been converted into the linearly polarized light parallel with each of the scanning lines **18** by the first polarizing plate **14** is changed in phase by 90° , and is then made incident to the second polarizing plate **15**, the incident light can pass through the liquid crystal display panel **10A**. Thus, the chromatic color display can be carried out through the color filter layer **35**.

When the thin film transistor **TFT** is held in the OFF state, since the liquid crystal molecules located within the second slit-like opening **30A** in the subpixel **17A** for control of a view angle are parallel with the plane of the array substrate **AR**, no light leakage is generated in the direct vision direction and in the eye squinting direction for the liquid crystal display panel **10A**. Therefore, no influence is exerted on the display in the display region **12A**. When the thin film transistor **TFT** is turned ON, the electric field is generated across the lower electrode **25** and the upper electrode **28**. Thus, as shown in the

partially enlarged part of FIG. 2, the liquid crystal molecules located within the second slit-like opening 30A in the subpixel 17A for control of a view angle are inclined with respect to the plane of the array substrate AR. As a result, the incident light radiated from the backlight light source leaks in the inclination direction. For this reason, with the exception of the light leakage described above, no influence of the display is exerted on the direct vision direction for the liquid crystal display panel 10A. However, the contrast becomes deteriorated for the eye squinting direction for the liquid crystal display panel 10A, and thus an image becomes difficult to visibly recognize.

2. Second Embodiment

Next, a liquid crystal display panel 10B according to a second embodiment will be described in detail with reference to FIG. 4. FIG. 4 corresponds to FIG. 1 showing the liquid crystal display panel 10A of the first embodiment. In the liquid crystal display panel 10B of the second embodiment, the same constituent elements as those in the liquid crystal display panel 10A of the first embodiment in terms of a structure are designated by the same reference numerals, respectively. With regard to the reference numerals each having a suffix A added thereto, the suffix A is changed to a suffix "B," and a detailed description of the constituent elements each having the suffix B added thereto is omitted here for the sake of simplicity. The liquid crystal display panel 10B of the second embodiment is mainly different in width of the light blocking member from the liquid crystal display panel 10A of the first embodiment.

As shown in FIG. 4, a first light blocking member 40B of the liquid crystal display panel 10B of the second embodiment extends up to the signal line 19, and has the same potential as that of the signal line 19. Also, a second light blocking member 41B is formed in a position as well of a central portion of a width between second slit-like openings 30B in terms of planar view. Similarly to the case of the first light blocking member 40B, the second light blocking member 41B is formed from the same member as that of the source electrode S, in the same layer as that of the source electrode S, and in the same process as that of the source electrode S so as to have a width equal to or larger than 2 μm and equal to or smaller than 3 μm . Also, the second light blocking member 41B extends up to the signal line 19 and has the same potential as that of the signal line 19.

As described above, in the liquid crystal display panel 10B of the second embodiment, since the light leakage between the second slit-like openings 30B can also be blocked, the light leakage in the direct vision direction can be further reduced. It is noted that since the length of the light leakage between the second slit-like openings 30B is shorter than that of the light leakage in the central portion of the width of the second slit-like opening 30B, the length of the second light blocking member 41B is shorter than that of the first light blocking member 40B. As a result, it is possible to effectively carry out the view angle control, and it is also possible to enhance the effect of preventing the light leakage in the direct vision direction.

3. Third Embodiment

Next, a liquid crystal display panel 10C according to a third embodiment will be described in detail with reference to FIG. 5. It is noted that in FIG. 5, an illustration of the first alignment film is omitted. FIG. 5 corresponds to FIG. 1 showing the liquid crystal display panel 10A of the first embodiment. In

the liquid crystal display panel 10C of the third embodiment, the same constituent elements as those in the liquid crystal display panel 10A of the first embodiment in terms of a structure are designated by the same reference numerals, respectively. With regard to the reference numerals each having a suffix A added thereto, the suffix A is changed to a suffix "C," and a detailed description of the constituent elements each having the suffix C added thereto is omitted here for the sake of simplicity. The liquid crystal display panel 10C of the third embodiment is mainly different in width of the light blocking member from the liquid crystal display panel 10A of the first embodiment.

As shown in FIG. 5, the both ends of the first light blocking member 40C of the liquid crystal display panel 10C of the third embodiment gradually spread up to the positions of entire ridge lines of end portions of a second slit-like opening 30C in terms of planar view. Also, a second light blocking member 41C is formed in a position as well of a central portion of a width between the second slit-like openings 30C in terms of planar view. The second light blocking member 41C is provided in a position of a central portion of a width of a second slit-like opening 30C over the entire length of the second slit-like opening 30C so as to have a width equal to or larger than 2 μm and equal to or smaller than 3 μm in terms of planar view similarly to the case of the first light blocking member 40C. The second light blocking member 41C is formed from the same member as that of the source electrode S, in the same layer as that of the source electrode S, and in the same process as that of the source electrode S. Also, the both ends of the second light blocking member 41C gradually spread up to the positions of the entire ridge lines of the end portions of the slit-like opening 30C in terms of planar view. As described above, in the liquid crystal display panel 10C of the third embodiment, the both end portions of the second slit-like opening 30C in which the direction of the electric field is different from that of the rubbing treatment are also light-blocked. Therefore, it is possible to further reduce the light leakage in the direct vision direction.

4. Fourth and Fifth Embodiments

Next, liquid crystal display panels 10D and 10E according to fourth and fifth embodiments will be described with reference to FIGS. 6A and 6B, respectively. FIG. 6A corresponds to the cross sectional view showing a subpixel 17D for control of a view angle of FIG. 2 in the liquid crystal display panel 10D of the fourth embodiment. FIG. 6B corresponds to the cross sectional view showing the subpixel 17E for control of a view angle of FIG. 2 in the liquid crystal display panel 10E of the fifth embodiment. In the liquid crystal display panels 10D and 10E of the fourth and fifth embodiments, the same constituent elements as those in the liquid crystal display panel 10A of the first embodiment in terms of a structure are designated by the same reference numerals, respectively. With regard to the reference numerals each having the suffix A added thereto, the suffix A is changed to a suffix "D" in the case of the fourth embodiment and the suffix A is changed to a suffix "E" in the case of the fifth embodiment. Also, a detailed description of the constituent elements each having the suffix D added thereto and a detailed description of the constituent elements each having the suffix E added thereto are omitted here for the sake of simplicity. Each of the fourth and fifth embodiments is different in position where the light blocking member is formed and material thereof from the liquid crystal display panel 10A of the first embodiment in terms of a structure.

13

As shown in FIG. 6A, a first light blocking member 40D in the liquid crystal display panel 10D of the fourth embodiment is formed from the same member as that of the opaque gate electrode G, in the same layer as that of the opaque gate electrode G, and in the same process as that of the opaque gate electrode G. The first light blocking member 40D in the fourth embodiment is formed in the array substrate AR similarly to the case of the first light blocking member 40A in the first embodiment. Therefore, in the case where when the array substrate AR and the color filter substrate CF are stuck to each other and their positions are shifted from each other, the position of the first light blocking member 40D, and the position of the second slit-like opening 30D are prevented from being shifted from each other.

As shown in FIG. 6B, a first light blocking member 40E of the liquid crystal display panel 10E of the fifth embodiment is formed from the same member as that of the opaque light blocking layer 34 of the color filter substrate CF, in the same layer as that of the opaque light blocking layer 34 of the color filter substrate CF, and in the same process as that of the opaque light blocking layer 34 of the color filter substrate CF. As has been described, even when the first light blocking member 40E is formed in the same process as that of the gate electrode G, or in the same process as that of the light blocking layer 34 of the color filter substrate CF, it is possible to prevent the number of processes for forming the first light blocking member 40E from being increased. It is noted that the second light blocking member can also be formed on the gate electrode G or in the color filter substrate CF.

5. Sixth Embodiment

Next, a liquid crystal display panel 10F according to a sixth embodiment will be described with reference to FIG. 7. FIG. 7 corresponds to FIG. 1 showing the liquid crystal display panel 10A of the first embodiment. In the liquid crystal panel 10F of the sixth embodiment, the same constituent elements as those in the liquid crystal display panel 10A of the first embodiment in terms of a structure are designated by the same reference numerals, respectively. With regard to the reference numerals each having the suffix A added thereto, the suffix A is changed to a suffix "F," and a detailed description of the constituent elements each having the suffix F added thereto is omitted here for the sake of simplicity. The liquid crystal display panel 10F of the sixth embodiment is mainly different from the liquid crystal display device 10A of the first embodiment in that the extension direction of each of the second slit-like openings 30A of the view angle control region 13A in the first embodiment is parallel with each of the scanning lines 18, whereas an extension direction of each of second slit-like openings 30F of a view angle control region 13F in the sixth embodiment is parallel with each of the signal lines 19.

In the liquid crystal display panel 11F of the sixth embodiment, the extension direction of a first slit-like opening 29F of the display region 12F is not of a multi-domain type, but is inclined with respect to each of the scanning lines 18 by an angle $+\alpha$. Also, the extension direction of the second slit-like opening 30F of the view angle control region 13F is parallel with each of the signal lines 19. A first light blocking member 40F of the view angle control region 13F is provided in a position of a central portion of a width of the second slit-like opening 30F over the entire length of the second slit-like opening 30 so as to have a width equal to or larger than 2 μ m and equal to or smaller than 3 μ m in terms of planar view similarly to the case of the first embodiment. Also, the first light blocking member 40F is formed from the same member

14

as that of the source electrode S, in the same layer as that of the source electrode S, and in the same process as that of the source electrode S. In addition, a second light blocking member 41F is formed in a position between the second slit-like openings 30F so as to be slightly shorter than the entire length of the second slit-like opening 30F and so as to have a thickness equal to or larger than 2 μ m and equal to or smaller than 3 μ m in terms of planar view. Also, the second light-blocking member 41F is formed from the same member as that of the source electrode S, in the same layer as that of the source electrode S, and in the same process as that of the source electrode S. As has been described, the present invention can be applied to the liquid crystal display panel as well in which the slit-like opening of the view angle control region is parallel with each of the signal lines 19.

6. Seventh Embodiment

Next, a liquid crystal display panel 10G according to a seventh embodiment will be described with reference to FIG. 8. FIG. 8 corresponds to FIG. 1 showing the liquid crystal display panel 10A of the first embodiment. In the liquid crystal panel 10G of the seventh embodiment, the same constituent elements as those in the liquid crystal display panel 10A of the first embodiment in terms of a structure are designated by the same reference numerals, respectively. With regard to the reference numerals each having the suffix A added thereto, the suffix A is changed to a suffix "G," and a detailed description of the constituent elements each having the suffix G added thereto is omitted here for the sake of simplicity. The liquid crystal display panel 10G of the seventh embodiment is mainly different from the liquid crystal display device 10A of the first embodiment in that the liquid crystal display panel 10A of the first embodiment has the FFS mode, whereas the liquid crystal display panel 10G of the seventh embodiment has the IPS mode.

As shown in FIG. 8, in the liquid crystal display panel 10G of the seventh embodiment, the first electrode 42 (corresponding to the first electrode in the present invention) operating as the pixel electrode in the display region 12G, and the second electrode 43 (corresponding to the second electrode in the present invention) operating as the common electrode have slot-like openings, respectively. Also, the first electrode 42 and the second electrode 43 are formed in slender pectinate shapes each having a dogleg shape and extend so as to make at angles of $+\alpha$ and $-\alpha$ with each of the signal lines 19, respectively. Thus, the first electrode 42 and the second electrode 43 are formed in a form such that the other electrode is formed in the slit-like opening of one electrode, and thus one electrode and the other electrode are engaged with each other in terms of planar view. The first electrode 44 operating as the pixel electrode of the view angle control region 13G, and the second electrode 45 operating as the common electrode are formed so as to have a pectinate shape having a plurality of slit-like openings in the direction (in the X-axis direction) of each of the scanning lines 18. Thus, the first electrode 44 and the second electrode 45 are formed in a form such that the other electrode is formed in the slit-like opening of one electrode, and thus one electrode and the other electrode are engaged with each other in terms of planar view.

Also, as shown in FIG. 8, a first light blocking member 40G is formed in a position of a central portion of a width of the slit-like opening of the second electrode 45, in other words, in a position of a central portion of a width of the first electrode 44 over the entire length of the first electrode 44 so as to have a width equal to or larger than 2 μ m and equal to or smaller than 3 μ m in terms of planar view. Also, a second light

15

blocking member 41G is formed in a position of a central portion of a width of the slit-like opening of the first electrode 44, in other words, in a position of a central portion of a width of the second electrode 45 over the entire length of the second electrode 45 so as to have a width equal to or larger than 2 μm and equal to or smaller than 3 μm in terms of planar view. In the manner as shown in FIG. 6B, each of the first light blocking member 40G and the second light blocking member 41G is formed from the same member as that of the opaque light blocking layer 34 of the color filter substrate CF, in the same layer as that of the opaque light blocking layer 34 of the color filter substrate CF, and in the same process as that of the opaque light blocking layer 34 of the color filter substrate CF.

7. Eighth Embodiment

The liquid crystal display panel has been described so far in the form of the first to seventh embodiments. Such a liquid crystal display panel of the present invention can be used in various kinds of electronic apparatuses such as a personal computer, a mobile phone, a handheld terminal, and a car navigation system.

An electronic apparatus according to an eighth embodiment includes the liquid crystal display panel according to any one of the first to seventh embodiments.

It is noted that since the basic configurations of these various kinds of electronic apparatuses are well known to those skilled in the art, a detailed description thereof is omitted here for the sake of simplicity.

It should be understood that various changes and modifications to the presently preferred embodiments described herein will be apparent to those skilled in the art. Such changes and modifications can be made without departing from the spirit and scope and without diminishing its intended advantages. It is therefore intended that such changes and modifications be covered by the appended claims.

The application is claimed as follows:

1. A transmissive liquid crystal display panel, comprising: a first substrate and a second substrate disposed so as to face each other with a liquid crystal layer being held between said first substrate and said second substrate; a first electrode and a second electrode across which an electric field is applied to said liquid crystal layer being formed on the first substrate; a subpixel for display; and a subpixel for control of a view angle being disposed on a same pixel, wherein a plurality of slit-like openings are formed in said second electrode made of a transparent conductive material in a view angle control region of said subpixel for control of a view angle, wherein a light blocking member is disposed on a different layer than that of the second electrode, wherein in a planar view the light blocking member is arranged in an area to occupy a part of each of the

16

slit-like openings and is formed in a central position of a width of each of the slit-like openings.

2. The liquid crystal display panel according to claim 1, wherein said light blocking member is formed in a central position as well of a width of said second electrode in terms of planar view.

3. The liquid crystal display panel according to claim 1, wherein said first electrode is formed on a lower side of said first substrate through an insulating layer, and said second electrode is formed on an upper side of said first substrate.

4. The liquid crystal display panel according to claim 1, wherein a thin film transistor for driving either said first electrode or said second electrode is formed on said first substrate, and said light blocking member is formed in the same layer as that of either a source electrode or a gate electrode of said thin film transistor.

5. The liquid crystal display panel according to claim 1, wherein a light blocking layer is formed on said second substrate, and said light blocking member is formed in the same layer as that of said light blocking layer.

6. The liquid crystal display panel according to claim 1, wherein a length of said light blocking member in a position where corresponding one of said slit-like openings of said second electrode is longer than that of said light blocking member formed on a surface between corresponding ones of said slit-like openings of said second electrode.

7. An electronic apparatus comprising:

a transmissive liquid crystal display panel including

a first substrate and a second substrate disposed so as to face each other with a liquid crystal layer being held between said first substrate and said second substrate, a first electrode and a second electrode across which an electric field is applied to said liquid crystal layer being formed on the first substrate, a subpixel for display and a subpixel for control of a view angle being disposed on a same pixel,

wherein a plurality of slit-like openings are formed in said second electrode made of a transparent conductive material in a view angle control region of said subpixel for control of a view angle,

wherein a light blocking member is disposed on a different layer than that of the second electrode,

wherein in a planar view the light blocking member is arranged in an area to occupy a part of each of the slit-like openings and is formed in a central position of a width of each of the slit-like openings.

8. The liquid crystal display panel according to claim 1, wherein the light blocking member has a length that is substantially the same as a length of a long side of each of the slit-like openings, and

wherein the light blocking member has a width that is shorter than a length of a short side of each of the slit-like openings.

* * * * *

专利名称(译)	透射式液晶显示面板，包括用于显示的子像素和用于控制视角的子像素，其中光阻挡构件形成在多个狭缝状开口中的每一个的中心位置		
公开(公告)号	US8743323	公开(公告)日	2014-06-03
申请号	US13/014824	申请日	2011-01-27
[标]申请(专利权)人(译)	索尼公司		
申请(专利权)人(译)	索尼公司		
当前申请(专利权)人(译)	日本展示WEST INC.		
[标]发明人	MATSUSHIMA TOSHIHARU YOSO AYA		
发明人	MATSUSHIMA, TOSHIHARU YOSO, AYA		
IPC分类号	G02F1/1337 G02F1/1343 G02F1/1333		
CPC分类号	G02F1/133		
审查员(译)	LEE , PAUL		
优先权	2010020001 2010-02-01 JP		
其他公开文献	US20110187950A1		
外部链接	Espacenet USPTO		

摘要(译)

一种液晶显示面板，包括：第一基板和第二基板，设置成彼此面对，液晶层保持在第一基板和第二基板之间；第一电极和第二电极，电场是第一电极和第二电极应用于在第一基板上形成的液晶层，用于显示的子像素和用于控制视角的子像素设置在同一电极上，其中在第二电极中形成多个狭缝状开口。用于控制视角的子像素，并且在平面视图中，光阻挡构件形成在多个狭缝状开口中的每个的宽度的中心位置。

