



US 20160246106A1

(19) **United States**(12) **Patent Application Publication**
MA et al.(10) **Pub. No.: US 2016/0246106 A1**(43) **Pub. Date: Aug. 25, 2016**(54) **LIQUID CRYSTAL DISPLAY PANEL
STRUCTURE AND MANUFACTURE
METHOD THEREOF****Publication Classification**(51) **Int. Cl.****G02F 1/1335** (2006.01)**G02F 1/1339** (2006.01)**G02F 1/1368** (2006.01)(52) **U.S. Cl.**CPC **G02F 1/133512** (2013.01); **G02F 1/1368**
(2013.01); **G02F 1/133514** (2013.01); **G02F**
1/1339 (2013.01); **G02F 1/13394** (2013.01);
G02F 2001/13398 (2013.01)(71) Applicant: **SHENZHEN CHINA STAR
OPTOELECTRONICS
TECHNOLOGY CO., LTD.**, Shenzhen,
Guangdong (CN)(72) Inventors: **Chao MA**, Shenzhen, Guangdong (CN);
Yungjui LEE, Shenzhen, Guangdong
(CN); **Xiaolong MA**, Shenzhen,
Guangdong (CN)(73) Assignee: **Shenzhen China Star Optoelectronics
Technology Co., Ltd.**, Shenzhen,
Guangdong (CN)(21) Appl. No.: **14/426,988**(22) PCT Filed: **Sep. 19, 2014**(86) PCT No.: **PCT/CN2014/086892**

§ 371 (c)(1),


(2) Date: **Mar. 9, 2015**(30) **Foreign Application Priority Data**

Sep. 2, 2014 (CN) 201410443892.2

(57)

ABSTRACT

The present invention provides a liquid crystal display panel structure and a manufacture method thereof. The liquid crystal display panel structure comprises a CF substrate (1), a TFT substrate (3), a liquid crystal layer filled between the CF substrate (1) and the TFT substrate (3), sealant (7) coated between the CF substrate (1) and the TFT substrate (3) and a black matrix (5) arranged between the CF substrate (1) and the TFT substrate (3); the black matrix (5) is positioned at periphery of an active area (AA) on the CF substrate (1), and a height thereof is smaller than a distance between the CF substrate (1) and the TFT substrate (3), and the black matrix (5) comprises a plurality of trenches (51), and each of the trenches (51) penetrates the black matrix (5) to form a hollow construction, and the sealant (7) is positioned on the black matrix (5) and fills in the trenches (51). Such structure is capable of promoting the adhesive force between the CF substrate and the TFT substrate and preventing separation of the CF substrate and the TFT substrate without any additional cost.

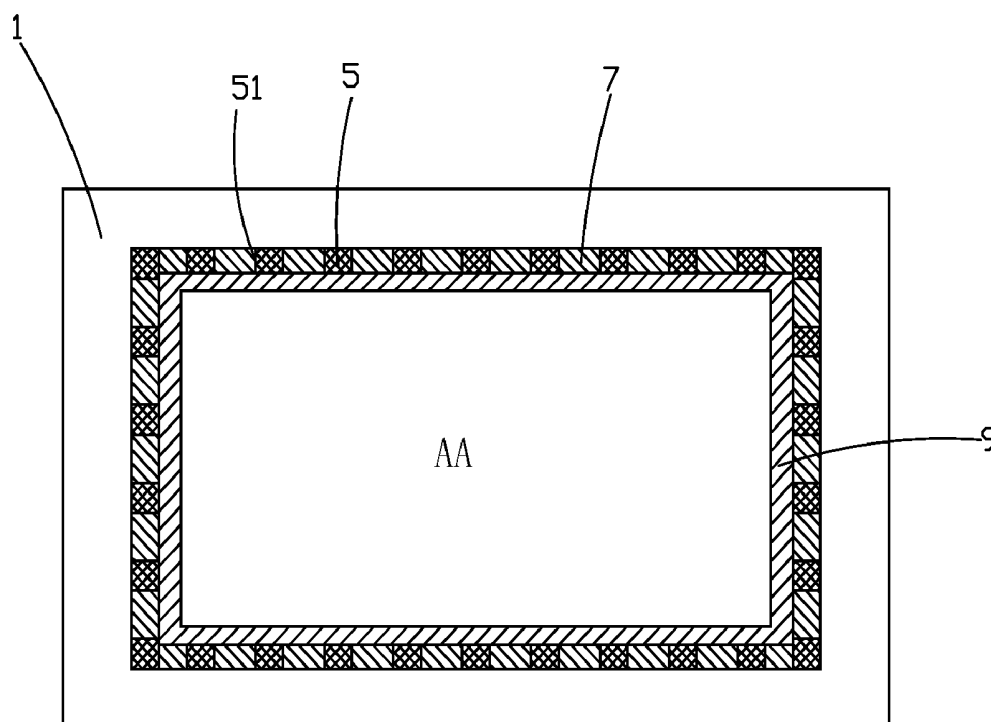

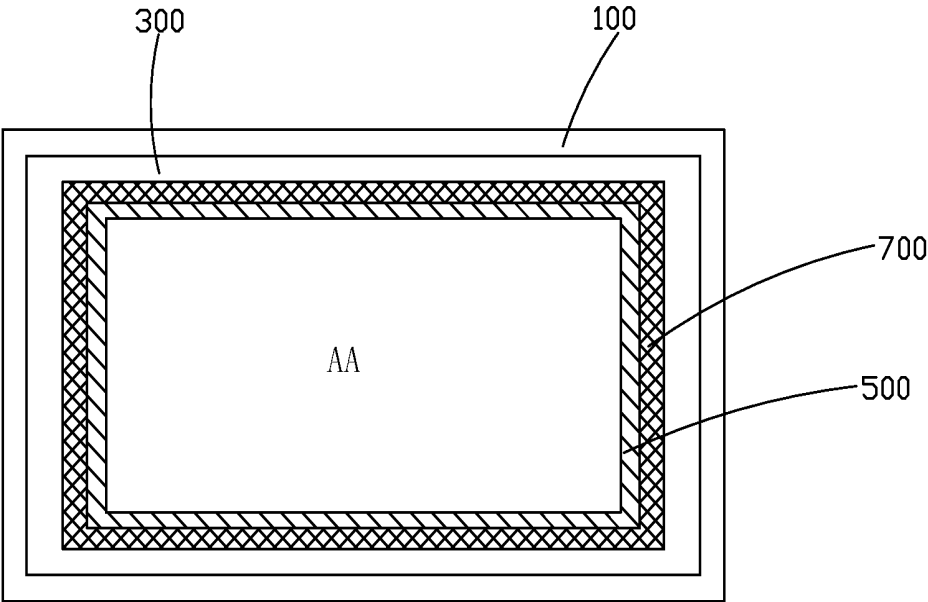


Fig. 1

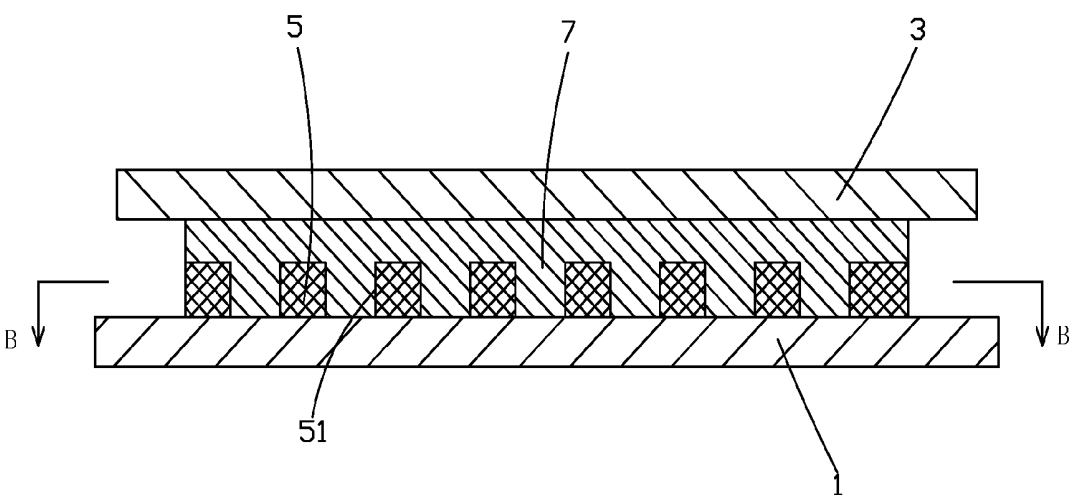


Fig. 2

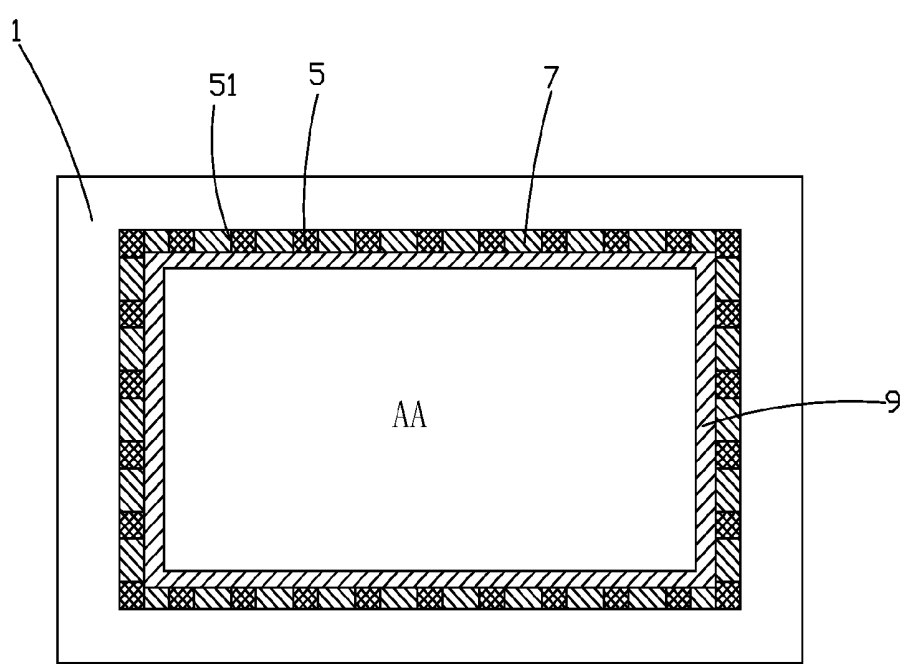


Fig. 3

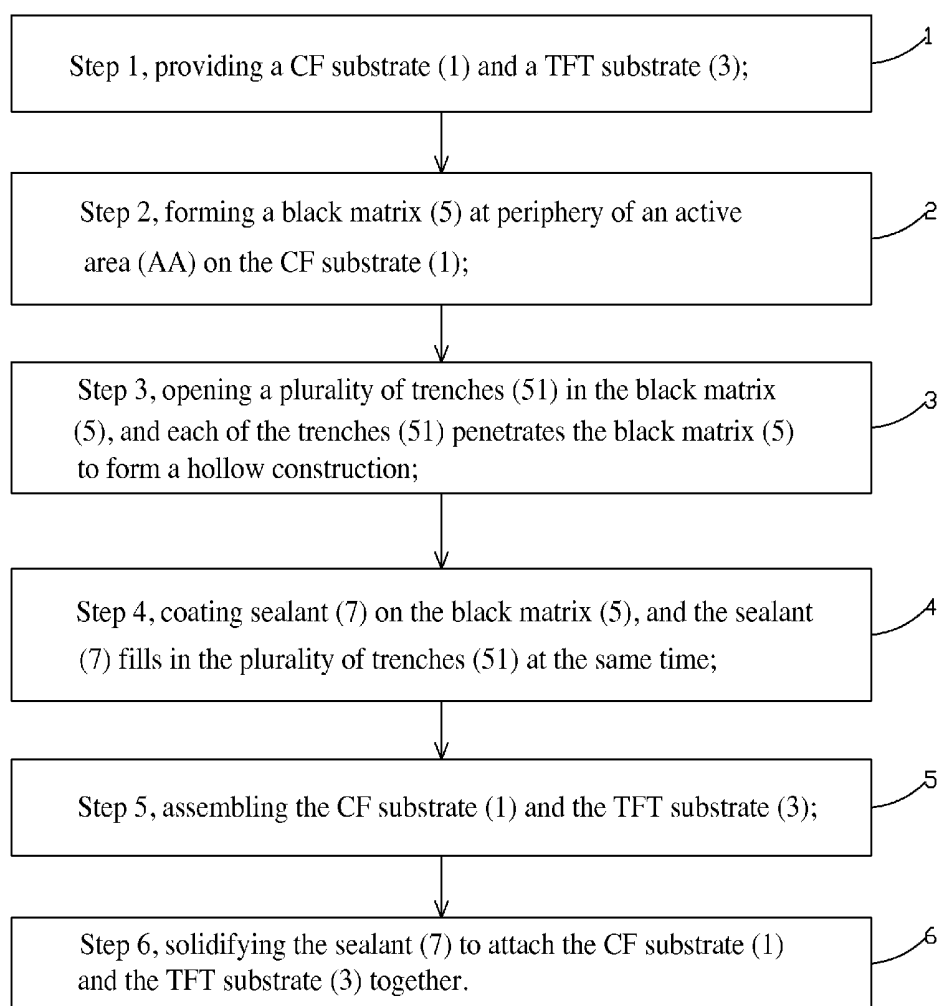


Fig. 4

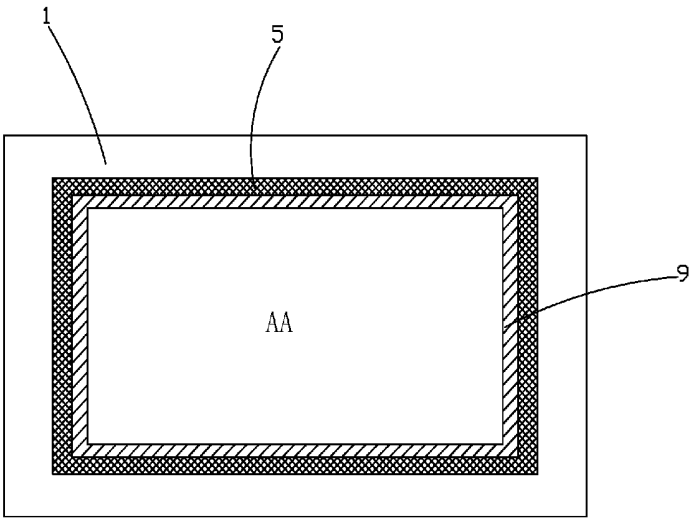


Fig. 5

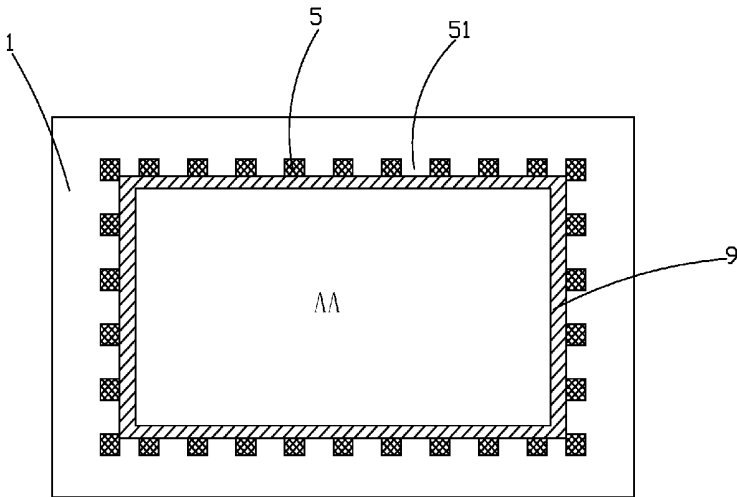


Fig. 6

LIQUID CRYSTAL DISPLAY PANEL STRUCTURE AND MANUFACTURE METHOD THEREOF

FIELD OF THE INVENTION

[0001] The present invention relates to a display technology field, and more particularly to a liquid crystal display panel structure and a manufacture method thereof.

BACKGROUND OF THE INVENTION

[0002] LCD (Liquid Crystal Display) possesses many advantages of being ultra thin, power saved and radiation free. It has been widely utilized in, such as mobile phones, PDAs (personal digital assistance), digital cameras, laptop screens or notebook screens.

[0003] The present thin film transistor liquid crystal display comprises a shell, a LCD panel located in the shell and a backlight module located in the shell. Particularly, the structure of the LCD panel mainly comprise a TFT Array Substrate (Thin Film Transistor Array Substrate), a CF (Color Filter) and a Liquid Crystal Layer. The working principle is that the light of backlight module is reflected to generate images by applying driving voltages to the two glass substrate for controlling the rotations of the liquid crystal molecules.

[0004] Generally, the CF substrate and the TFT substrate are assembled and attached with sealant. The sealant generally comprises acrylic, epoxy resin, photoinitiator and et cetera. By heating the sealant, irradiating the sealant with UV light or heating and UV light irradiating the sealant simultaneously, the solidification of the sealant is achieved to assemble and attach the CF substrate and the TFT substrate together. In prior arts, the main way of solidifying the sealant is simultaneous heating plus UV light irradiation. FIG. 1 is a top view diagram of a liquid crystal display panel structure according to prior art. The CF substrate 100 and the TFT substrate 300 of the liquid crystal display panel structure are assembled and attached with the sealant. For preventing the damages caused by the sealant to the Polyimide (PI) alignment film and liquid crystal material inside the CF substrate 100 and the TFT substrate 300 during the solidifying process of the sealant 500 with UV light irradiation, a Black Matrix (BM) 700 is further arranged at the peripheral district of the active area AA

[0005] For achieving the formation of the narrow frame of the liquid crystal display panel, the sealant is generally coated on the black matrix to overlap the black matrix and the sealant. The position which previously is prepared for coating sealant can be saved for increasing the active area and attaching the CF substrate and the TFT substrate at the same time.

[0006] However, issues exist as coating the sealant on the black matrix, which affects the adhesive force between the CF substrate and the TFT substrate. Because the black matrix directly contacts the CF substrate and the adhesive force of the black matrix to the glass substrate is smaller which can easily cause the separation of the CF substrate and the TFT substrate. Therefore, most of the separation phenomena of the two substrates in the liquid crystal display panels happen between the black matrix and the CF substrate. Particularly, as the dimensions of the liquid crystal display panels increases, some unreasonable structure designs of the assembly modules can cause the separation of the CF substrate and the TFT substrate more easily and more serious losses.

[0007] By improving the material of the black matrix, the adhesive force of the black matrix to the glass substrate can be promoted for attempting to solve the aforesaid issues. However, the cost for developing the new black matrix material is much higher.

SUMMARY OF THE INVENTION

[0008] An objective of the present invention is to provide a Liquid crystal display panel structure, which the structure is capable of promoting the adhesive force between the CF substrate and the TFT substrate and preventing separation of the CF substrate and the TFT substrate without any additional cost.

[0009] Another objective of the present invention is to provide a manufacture method of a Liquid crystal display panel structure, which is capable of promoting the adhesive force between the CF substrate and the TFT substrate and preventing separation of the CF substrate and the TFT substrate under circumstance of adding zero cost.

[0010] For realizing the aforesaid objective, the present invention first provides a Liquid crystal display panel structure, comprising a CF substrate, a TFT substrate oppositely positioned to the CF substrate, a liquid crystal layer filled between the CF substrate and the TFT substrate, sealant coated between the CF substrate and the TFT substrate and a black matrix arranged between the CF substrate and the TFT substrate, and the black matrix is positioned at periphery of an active area on the CF substrate, and a height thereof is smaller than a distance between the CF substrate and the TFT substrate, and the black matrix comprises a plurality of trenches, and each of the trenches penetrates the black matrix to form a hollow construction, and the sealant is positioned on the black matrix and fills in the trenches for assembling and attaching the CF substrate and the TFT substrate.

[0011] The sealant is black sealant.

[0012] An OD value of the black sealant is 3.2.

[0013] The plurality of trenches is evenly spread out along respective sides of the black matrix.

[0014] The trenches are rectangular trenches.

[0015] The liquid crystal display panel structure further comprises a photosensitive spacer material retaining wall, and the photosensitive spacer material retaining wall is positioned between the sealant and the active area, and a height thereof is same as a height of a cell gap.

[0016] The present invention further provides a manufacture method of a Liquid crystal display panel structure, comprising steps of:

[0017] Step 1, providing a CF substrate and a TFT substrate;

[0018] Step 2, forming a black matrix at periphery of an active area on the CF substrate;

[0019] Step 3, opening a plurality of trenches in the black matrix with one mask exposure, and each of the trenches penetrates the black matrix to form a hollow construction;

[0020] Step 4, coating sealant on the black matrix, and the sealant fills in the plurality of trenches at the same time;

[0021] Step 5, assembling the CF substrate and the TFT substrate;

[0022] Step 6, solidifying the sealant to attach the CF substrate and the TFT substrate together.

[0023] The step 2 further comprises forming a photosensitive spacer material retaining wall between the active area and the black matrix on the CF substrate.

[0024] The sealant is black sealant, and an OD value of the black sealant is 3.2.

[0025] The plurality of trenches is evenly spread out along respective sides of the black matrix, and the trenches are rectangular trenches.

[0026] The benefits of the present invention are: according to the liquid crystal display panel structure provided by the present invention, the hollow trenches are formed in the black matrix and the sealant fills in the trenches to make the CF substrate directly contact not merely the black matrix but the sealant too. Accordingly, the adhesive force between the black matrix and the CF substrate is promoted to prevent the separation of the CF substrate and the TFT substrate without any additional cost and influence to the narrow frame formation of the liquid crystal display panel. According to the manufacture method of the liquid crystal display panel structure provided by the present invention, by opening a plurality of trenches in the black matrix and filling in the trenches with the sealant to make the CF substrate directly contact the black matrix and the sealant. Under circumstance of adding zero cost, the adhesive force between the CF substrate and the TFT substrate is promoted to prevent the separation of the CF substrate and the TFT substrate.

[0027] In order to better understand the characteristics and technical aspect of the invention, please refer to the following detailed description of the present invention is concerned with the diagrams, however, provide reference to the accompanying drawings and description only and is not intended to be limiting of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028] The technical solution, as well as beneficial advantages, of the present invention will be apparent from the following detailed description of an embodiment of the present invention, with reference to the attached drawings.

[0029] In drawings,

[0030] FIG. 1 is a top view diagram of a liquid crystal display panel structure according to prior art;

[0031] FIG. 2 is a sectional diagram of a liquid crystal display panel structure according to the present invention;

[0032] FIG. 3 is a sectional diagram in accordance with the B-B line in FIG. 2;

[0033] FIG. 4 is a flowchart of a manufacture method of a liquid crystal display panel structure according to the present invention;

[0034] FIG. 5 is a diagram of step 2 of the manufacture method of the liquid crystal display panel structure according to the present invention;

[0035] FIG. 6 is a diagram of step 3 of the manufacture method of the liquid crystal display panel structure according to the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0036] In order to better understand the characteristics and technical aspect of the invention, please refer to the following detailed description of the present invention is concerned with the diagrams.

[0037] Please refer to FIG. 2 and FIG. 3 at the same time. The present invention provides a liquid crystal display panel structure. The liquid crystal display panel structure comprises a CF substrate 1, a TFT substrate 3 oppositely positioned to the CF substrate 1, a liquid crystal layer (not shown) filled

between the CF substrate 1 and the TFT substrate 3, sealant 7 coated between the CF substrate 1 and the TFT substrate and a black matrix 5 arranged between the CF substrate 1 and the TFT substrate 3

[0038] The black matrix 5 is positioned at periphery of an active area AA on the CF substrate 1, and a height thereof is smaller than a distance between the CF substrate 1 and the TFT substrate 3. That is, a gap exists between the black matrix 5 and the substrate 3. The black matrix 5 comprises a plurality of trenches 51, and each of the trenches 51 penetrates the black matrix 5 to form a hollow construction, and exposes the surface of the CF substrate 1 under the trench 51. Furthermore, the plurality of trenches 51 is evenly spread out along respective sides of the black matrix 5. The trenches 51 are rectangular trenches. The distance between each two adjacent trenches 51 and the distribution density of the trenches 51 can be adjustable based on design demands.

[0039] The sealant 7 is positioned on the black matrix 5 and fills in the trenches 51. With the sealant 7, the CF substrate 1 and the TFT substrate 3 are assembled and attached. Because the trench 51 of the black matrix 5 has a hollow construction and the sealant 7 fills in the trenches 51. That is, the sealant 7 directly contacts the CF substrate 1 to promote the adhesive force between the black matrix 5 and the CF substrate 1 and effectively prevent the separation of the CF substrate and the TFT substrate without neither additional cost nor influence to the narrow frame formation of the liquid crystal display panel.

[0040] Furthermore, the present main sealant appears with cream white color after solidification and forms obvious color contrast with the black matrix. For being more artistic the structure can, the sealant 7 can be black sealant to get close to the color of the black matrix 5. Specifically, the Optical Density (OD) value of the black sealant is about 3.2.

[0041] Significantly, the liquid crystal display panel structure further comprises a photosensitive spacer material retaining wall 9, and the photosensitive spacer material retaining wall 9 is positioned between the sealant 7 and the active area AA on the CF substrate 1. A height thereof is same as a height of a cell gap. The photosensitive spacer material retaining wall 9 can restricts the flow of the sealant 7 during the coating and solidifying processes to prevent the influence of the sealant 7 to the active area AA and the PI alignment film.

[0042] Please refer from FIG. 4 to FIG. 6 in conjunction with FIG. 2, FIG. 3. The present invention further provides a manufacture method of a Liquid crystal display panel structure, comprising steps of:

[0043] Step 1, providing a CF substrate 1 and a TFT substrate 3.

[0044] Step 2, as shown in FIG. 5, forming a black matrix 5 at periphery of an active area AA on the CF substrate 1.

[0045] The black matrix 5 formed in the Step 2 can be a continuously distributed rectangular.

[0046] For preventing the flow of the sealant during the following coating and solidifying processes to prevent the influence of the sealant 7 to the active area AA and the PI alignment film, the Step 2 further comprises forming a photosensitive spacer material retaining wall 9 between the active area AA and the black matrix 5 on the CF substrate 1. The height of the photosensitive spacer material retaining wall 9 can be determined according to the given cell gap of the liquid crystal layer.

[0047] Step 3, as shown in FIG. 6, opening a plurality of trenches 51 in the black matrix 5, and each of the trenches 51 penetrates the black matrix 5 to form a hollow construction.

[0048] Specifically, the plurality of trenches 51 is evenly spread out along respective sides of the black matrix 5, and the trenches 51 are rectangular trenches.

[0049] The Step 3 is to expose the black matrix 5 with one mask. Ultimately, the plurality of trenches 51 is formed without any additional cost.

[0050] After the Step 3 is accomplished, the surface of the CF substrate 1 under the trench 51 is exposed because the trenches 51 are hollow.

[0051] Step 4, as shown in FIG. 3, coating sealant 7 on the black matrix 5, and the sealant 7 fills in the plurality of trenches 51 at the same time.

[0052] Moreover, the sealant 7 is black sealant to get close to the color of the black matrix 5 to prevent obvious color contrast of the two. Specifically, the OD value of the black sealant is about 3.2.

[0053] Step 5, as shown in FIG. 1, assembling the CF substrate 1 and the TFT substrate 3.

[0054] Step 6, solidifying the sealant 7 to attach the CF substrate 1 and the TFT substrate 3 together.

[0055] In the aforesaid method, because the trench 51 of the black matrix 5 has a hollow construction and the sealant 7 fills in the trenches 51. That is, the sealant 7 directly contacts the CF substrate 1 to promote the adhesive force between the black matrix 5 and the CF substrate 1 and effectively prevent the separation of the CF substrate and the TFT substrate without neither additional cost nor influence to the narrow frame formation of the liquid crystal display panel.

[0056] In conclusion, according to the liquid crystal display panel structure of the present invention, the hollow trenches are formed in the black matrix and the sealant fills in the trenches to make the CF substrate directly contact not merely the black matrix but the sealant too. Accordingly, the adhesive force between the black matrix and the CF substrate is promoted to prevent the separation of the CF substrate and the TFT substrate without any additional cost and influence to the narrow frame formation of the liquid crystal display panel. According to the manufacture method of the liquid crystal display panel structure provided by the present invention, by opening a plurality of trenches in the black matrix and filling in the trenches with the sealant to make the CF substrate directly contact the black matrix and the sealant. Under circumstance of adding zero cost, the adhesive force between the CF substrate and the TFT substrate is promoted to prevent the separation of the CF substrate and the TFT substrate.

[0057] Above are only specific embodiments of the present invention, the scope of the present invention is not limited to this, and to any persons who are skilled in the art, change or replacement which is easily derived should be covered by the protected scope of the invention. Thus, the protected scope of the invention should go by the subject claims.

What is claimed is:

1. A liquid crystal display panel structure, comprising a CF substrate, a TFT substrate oppositely positioned to the CF substrate, a liquid crystal layer filled between the CF substrate and the TFT substrate, sealant coated between the CF substrate and the TFT substrate and a black matrix arranged between the CF substrate and the TFT substrate, and the black matrix is positioned at periphery of an active area on the CF substrate, and a height thereof is smaller than a distance between the CF substrate and the TFT substrate, and the black

matrix comprises a plurality of trenches, and each of the trenches penetrates the black matrix to form a hollow construction, and the sealant is positioned on the black matrix and fills in the trenches for assembling and attaching the CF substrate and the TFT substrate.

2. The liquid crystal display panel structure according to claim 1, wherein the sealant is black sealant.

3. The liquid crystal display panel structure according to claim 2, wherein an OD value of the black sealant is 3.2.

4. The liquid crystal display panel structure according to claim 1, wherein the plurality of trenches is evenly spread out along respective sides of the black matrix.

5. The liquid crystal display panel structure according to claim 4, wherein the trenches are rectangular trenches.

6. The liquid crystal display panel structure according to claim 1, further comprising a photosensitive spacer material retaining wall, and the photosensitive spacer material retaining wall is positioned between the sealant and the active area, and a height thereof is same as a height of a cell gap.

7. A manufacture method of a liquid crystal display panel structure, comprising steps of:

Step 1, providing a CF substrate and a TFT substrate;

Step 2, forming a black matrix at periphery of an active area on the CF substrate;

Step 3, opening a plurality of trenches in the black matrix with one mask exposure, and each of the trenches penetrates the black matrix to form a hollow construction;

Step 4, coating sealant on the black matrix, and the sealant fills in the plurality of trenches at the same time;

Step 5, assembling the CF substrate and the TFT substrate;

Step 6, solidifying the sealant to attach the CF substrate and the TFT substrate together.

8. The manufacture method of the liquid crystal display panel structure according to claim 7, wherein the second step further comprises forming a photosensitive spacer material retaining wall between the active area and the black matrix on the CF substrate.

9. The manufacture method of the liquid crystal display panel structure according to claim 7, wherein the sealant is black sealant, and an OD value of the black sealant is 3.2.

10. The manufacture method of the liquid crystal display panel structure according to claim 7, wherein the plurality of trenches is evenly spread out along respective sides of the black matrix, and the trenches are rectangular trenches.

11. A manufacture method of a liquid crystal display panel structure, comprising steps of:

Step 1, providing a CF substrate and a TFT substrate;

Step 2, forming a black matrix at periphery of an active area on the CF substrate;

Step 3, opening a plurality of trenches in the black matrix with one mask exposure, and each of the trenches penetrates the black matrix to form a hollow construction;

Step 4, coating sealant on the black matrix, and the sealant fills in the plurality of trenches at the same time;

Step 5, assembling the CF substrate and the TFT substrate;

Step 6, solidifying the sealant to attach the CF substrate and the TFT substrate together;

wherein the second step further comprises forming a photosensitive spacer material retaining wall between the active area and the black matrix on the CF substrate;

wherein the sealant is black sealant, and an OD value of the black sealant is 3.2;

wherein the plurality of trenches is evenly spread out along respective sides of the black matrix, and the trenches are rectangular trenches.

* * * * *

专利名称(译)	液晶显示面板结构及其制造方法		
公开(公告)号	US20160246106A1	公开(公告)日	2016-08-25
申请号	US14/426988	申请日	2014-09-19
[标]申请(专利权)人(译)	深圳市华星光电技术有限公司		
申请(专利权)人(译)	深圳市中国星光电科技有限公司.		
当前申请(专利权)人(译)	深圳市中国星光电科技有限公司.		
[标]发明人	MA CHAO LEE YUNGJUI MA XIAOLONG		
发明人	MA, CHAO LEE, YUNGJUI MA, XIAOLONG		
IPC分类号	G02F1/1335 G02F1/1339 G02F1/1368		
CPC分类号	G02F1/1339 G02F1/1341 G02F1/133512 G02F2001/13398 G02F1/13394 G02F1/1368 G02F1/133514		
优先权	201410443892.2 2014-09-02 CN		
其他公开文献	US9632349		
外部链接	Espacenet USPTO		

摘要(译)

本发明提供一种液晶显示面板结构及其制造方法。液晶显示面板结构包括CF基板(1)，TFT基板(3)，填充在CF基板之间的液晶层(1)和TFT基板(3)，在CF基板(1)和TFT基板之间涂覆密封剂(7)(3)和在CF基板(1)和TFT基板之间布置的黑色矩阵(53)；黑矩阵(5)位于CF基板上的有源区(AA)的外围(1)，并且其高度小于CF基板(1)与TFT基板(3)之间的距离，并且黑矩阵(5)包括多个沟槽(51)，并且每个沟槽(51)穿透黑色矩阵(5)形成空心结构，密封胶(7)位于黑色矩阵(5)上并填充沟槽(5) b>51的)。这种结构能够促进CF基板和TFT基板之间的粘合力，并且能够防止CF基板和TFT基板分离。附加费用。

