



US 20150160521A1

(19) **United States**(12) **Patent Application Publication**
TOMIOKA et al.(10) **Pub. No.: US 2015/0160521 A1**(43) **Pub. Date: Jun. 11, 2015**(54) **LIQUID CRYSTAL DISPLAY DEVICE**(52) **U.S. CL.**(71) Applicant: **Japan Display Inc.**, Tokyo (JP)CPC **G02F 1/134336** (2013.01); **G02F 1/133512**
(2013.01)(72) Inventors: **Yasushi TOMIOKA**, Tokyo (JP);
Toshimasa ISHIGAKI, Tokyo (JP);
Hidehiro SONODA, Tokyo (JP);
Sumito UETA, Tokyo (JP)(57) **ABSTRACT**

To prevent a phenomenon that an alignment film material is difficult to flow into the through-hole where a diameter of a through-hole for connecting between a pixel electrode and a source electrode is reduced.

(73) Assignee: **Japan Display Inc.**

A liquid crystal display device comprising a TFT substrate having pixels each including a common electrode formed on an organic passivation film, an interlayer insulating film formed so as to cover the common electrode, a pixel electrode having a slit and formed on the interlayer insulating film, a through-hole formed in the organic passivation film and the interlayer insulating film, and a source electrode electrically conducted to the pixel electrode via the through-hole. A taper angle at a depth of D/2 of the through-hole is equal to or more than 50 degrees. The pixel electrode covers part of a side wall of the through-hole but does not cover the remaining part of the side wall of the through-hole. This configuration facilitates the alignment film material to flow into the through-hole, thereby solving a thickness unevenness of the alignment film in vicinity of the through-hole.

(21) Appl. No.: **14/564,129**(22) Filed: **Dec. 9, 2014**(30) **Foreign Application Priority Data**

Dec. 9, 2013 (JP) 2013-254205

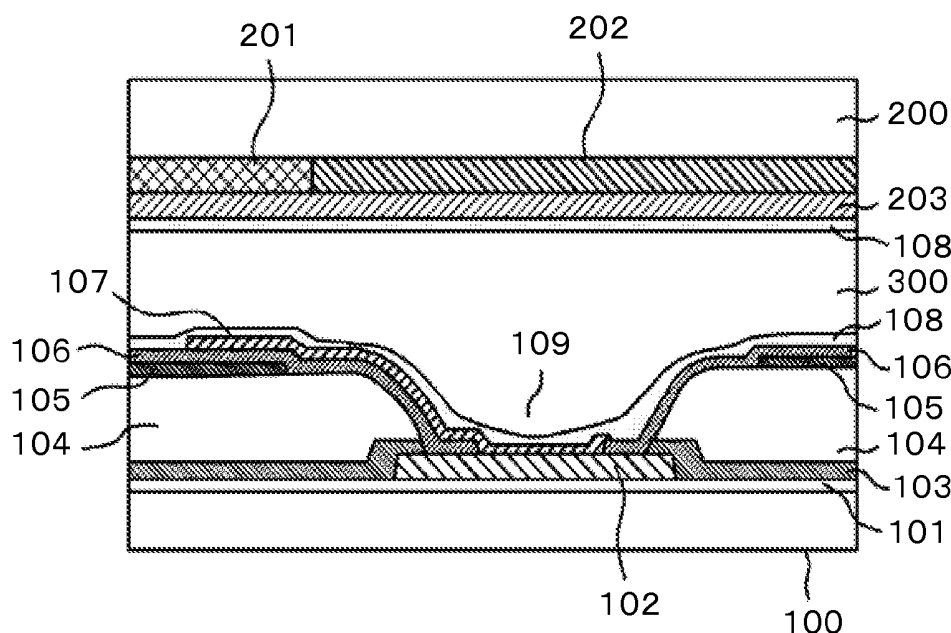
Publication Classification(51) **Int. Cl.****G02F 1/1343** (2006.01)**G02F 1/1335** (2006.01)

FIG. 1

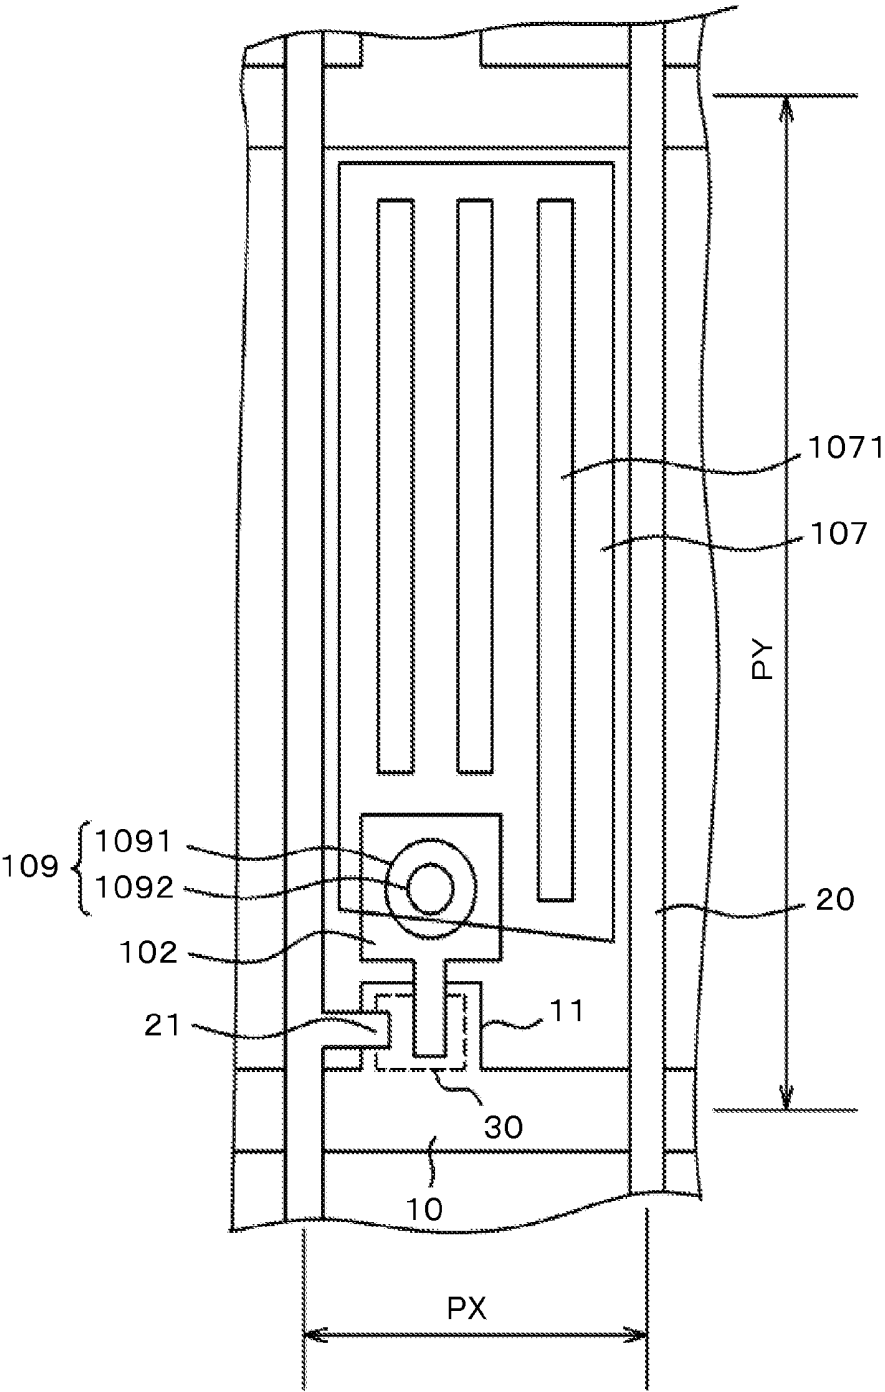


FIG. 2

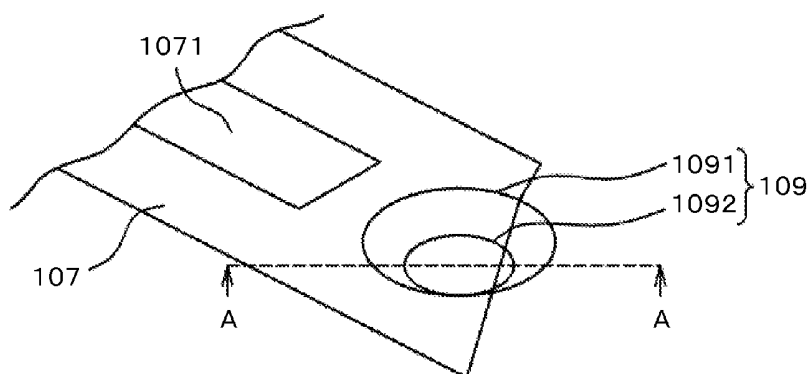


FIG. 3

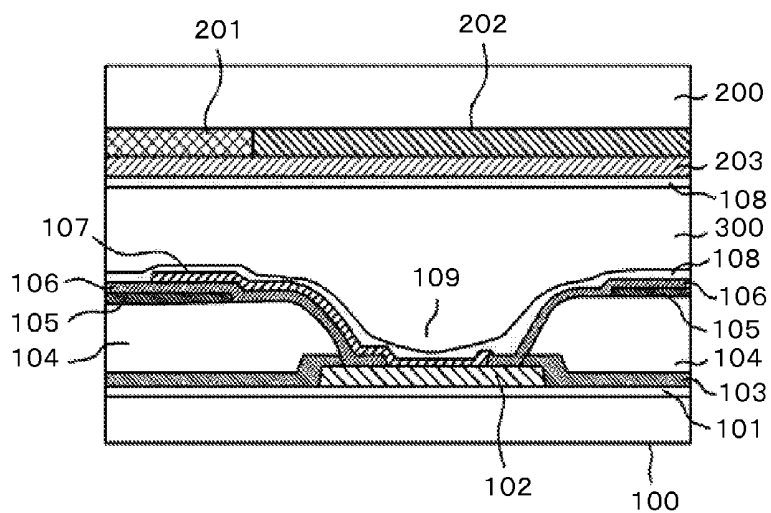


FIG. 4

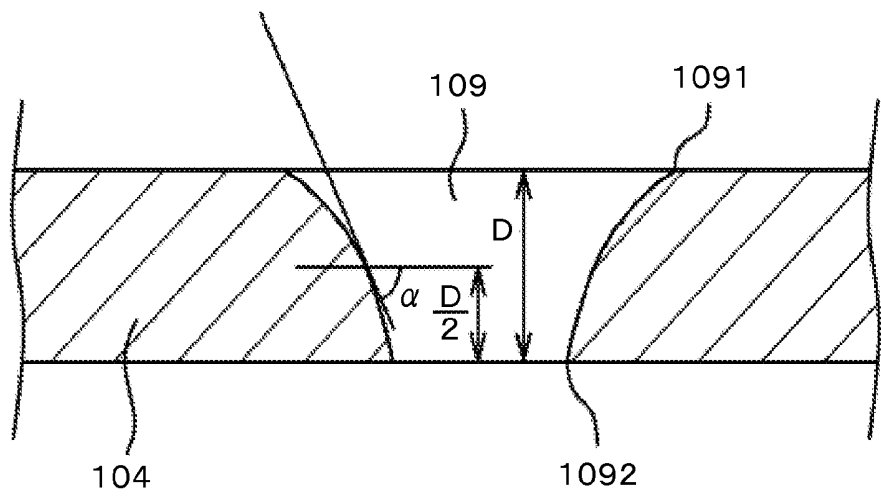


FIG. 5

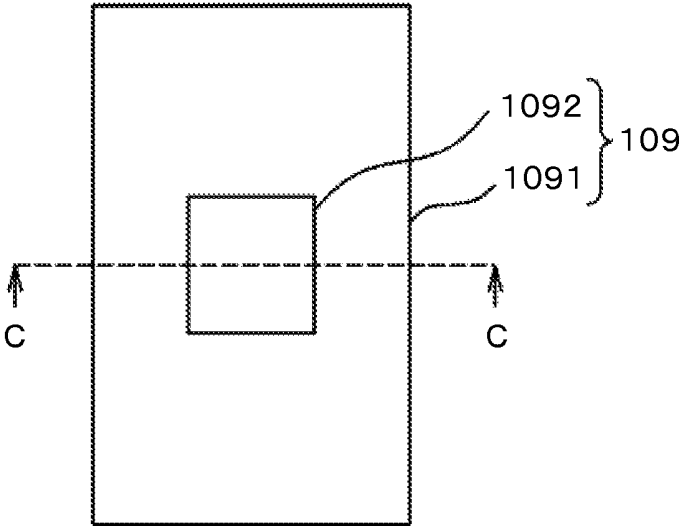
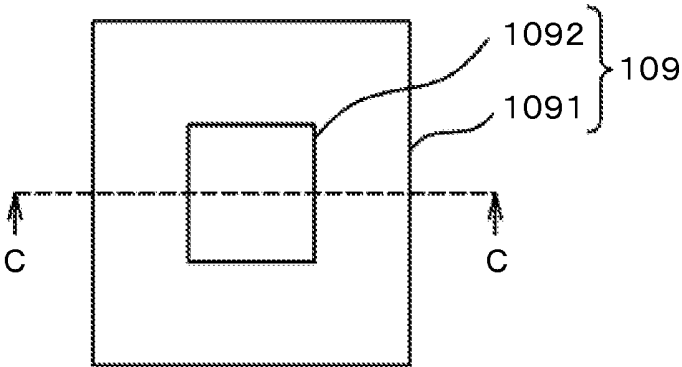
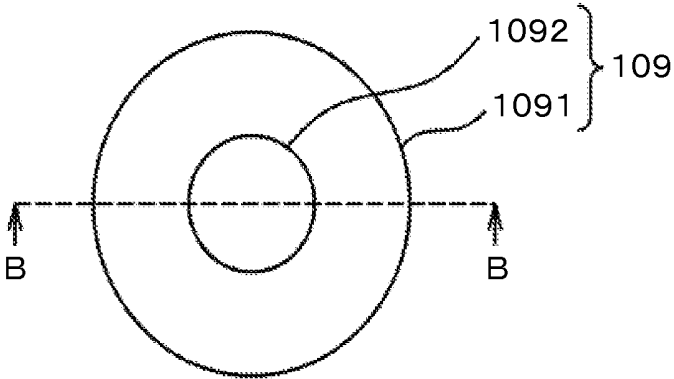


FIG. 6

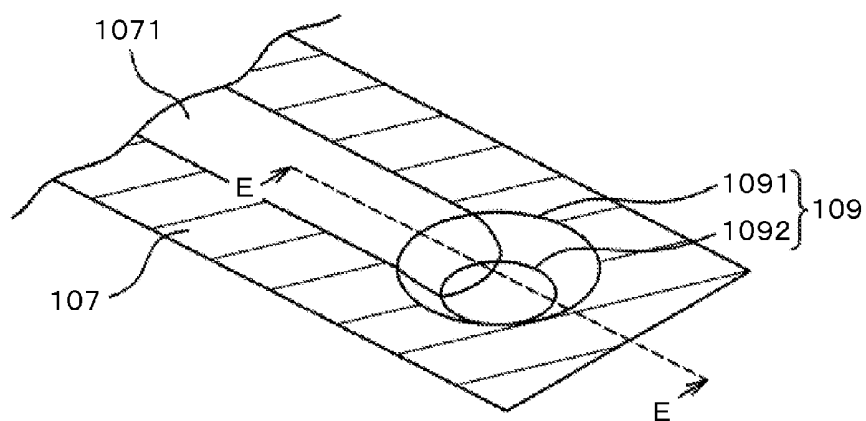


FIG. 7

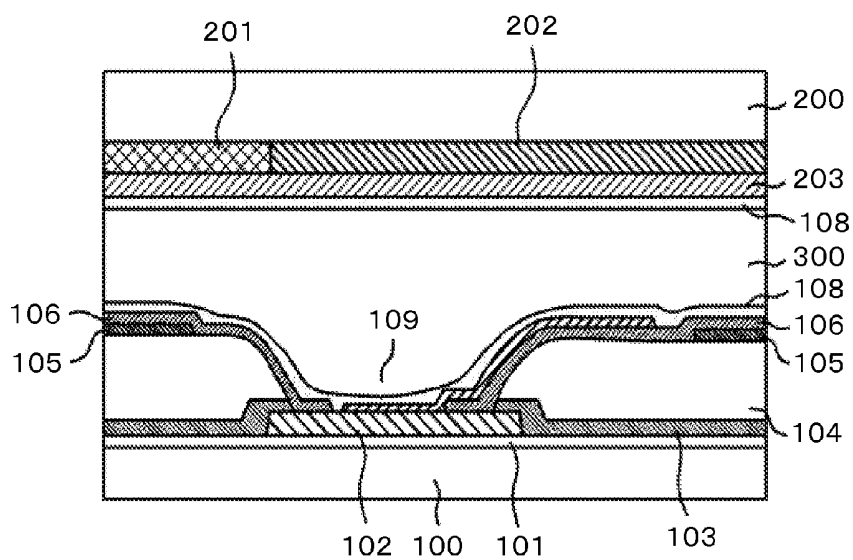


FIG. 8

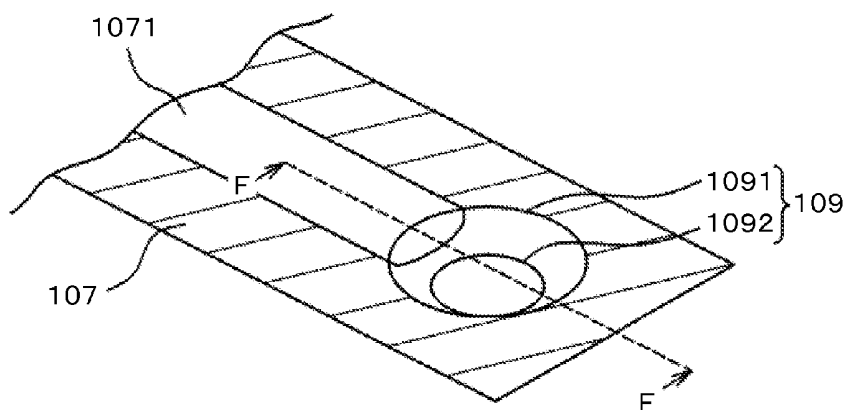


FIG. 9

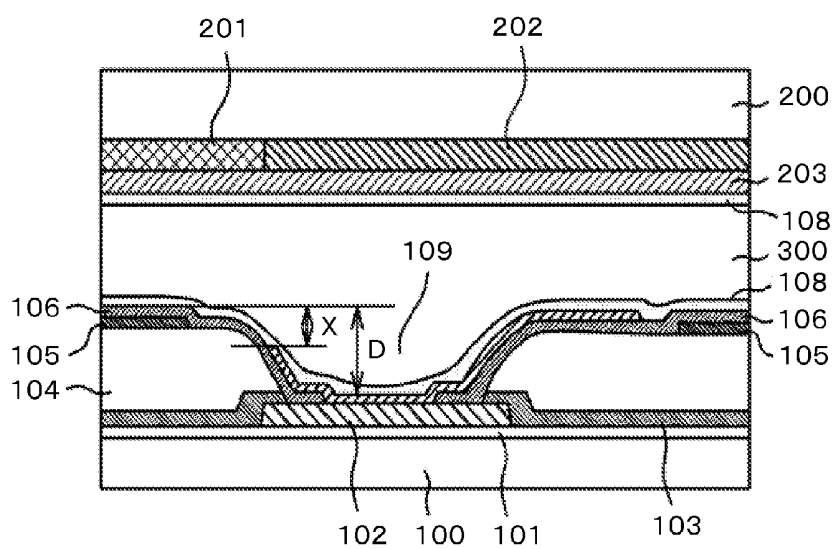


FIG. 10

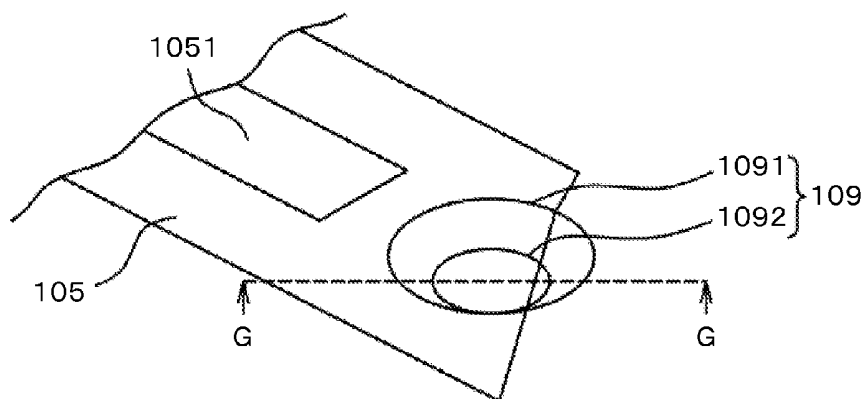


FIG. 11

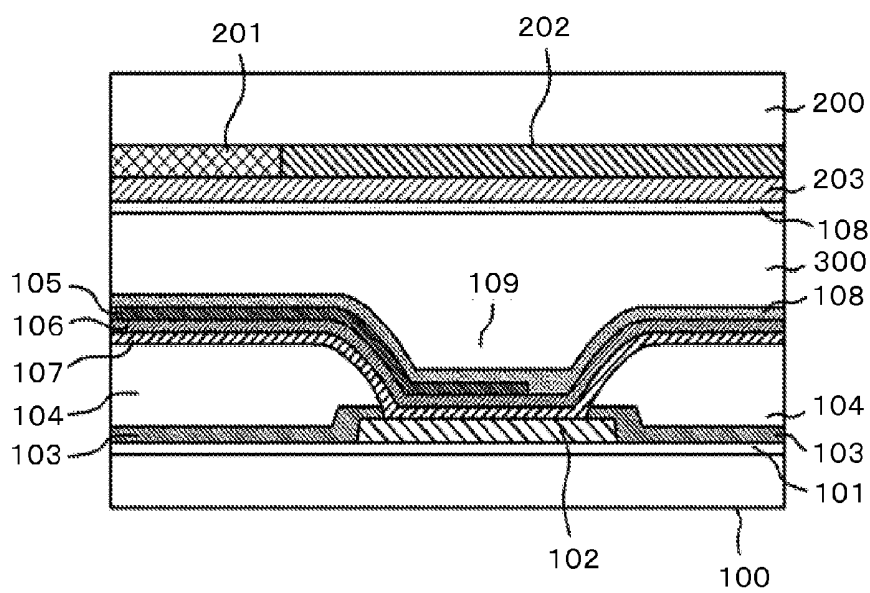


FIG. 12

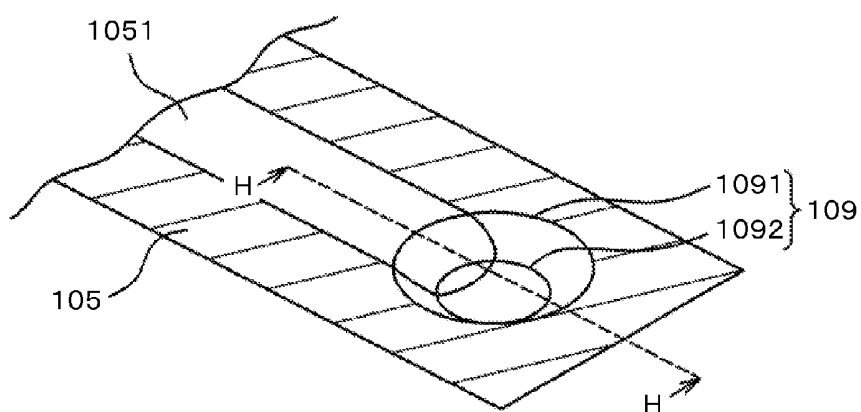


FIG. 13

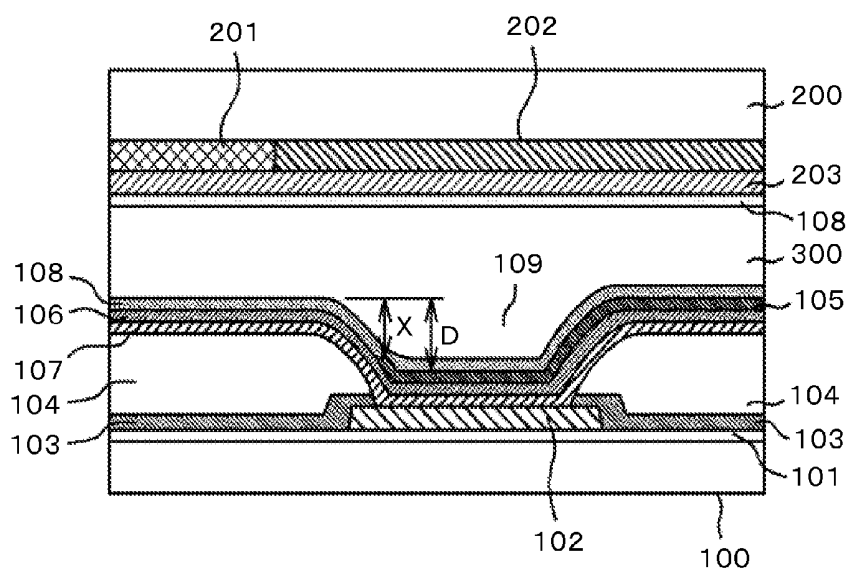


FIG. 14

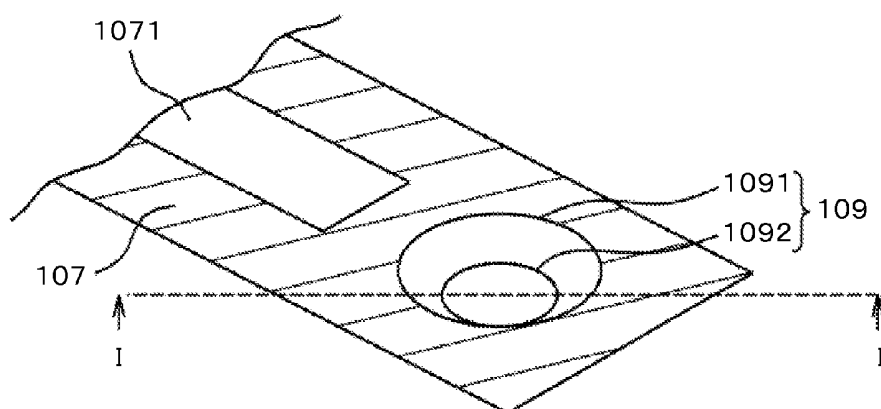


FIG. 15

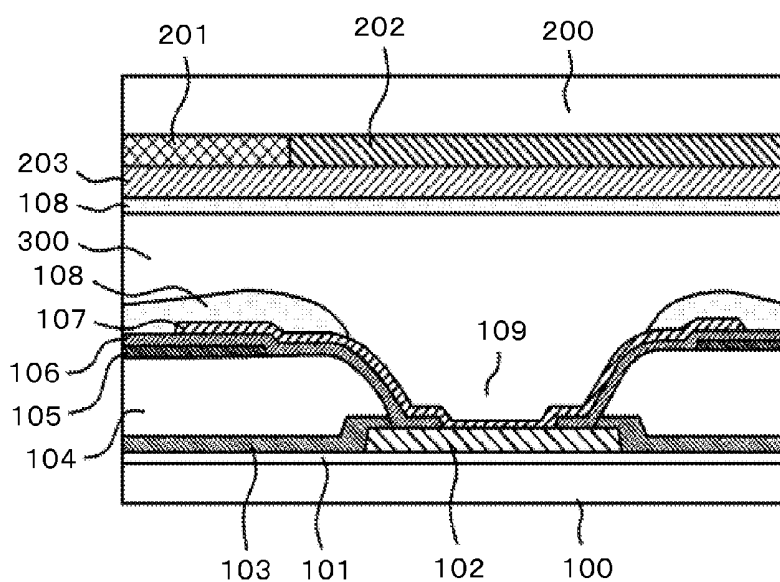


FIG. 16A

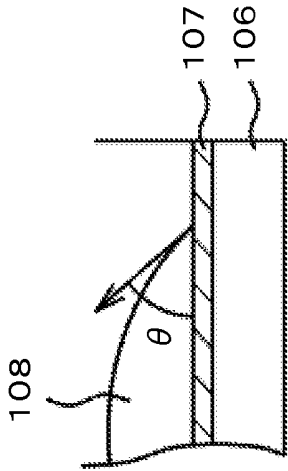


FIG. 16B


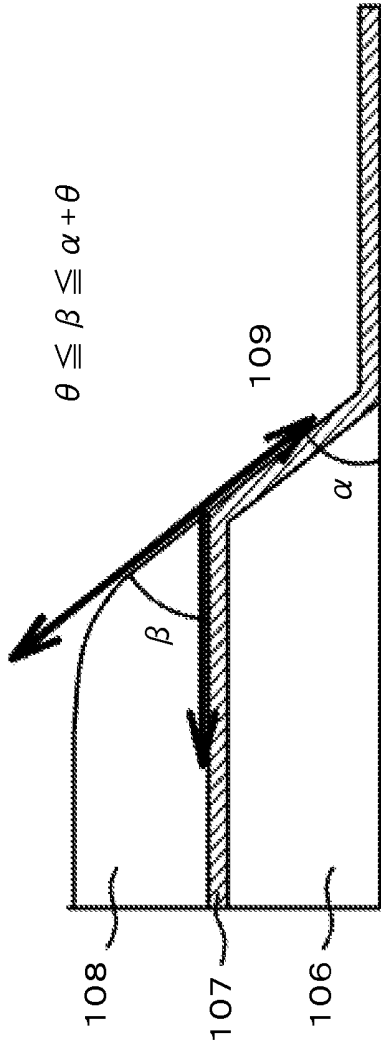


FIG. 17

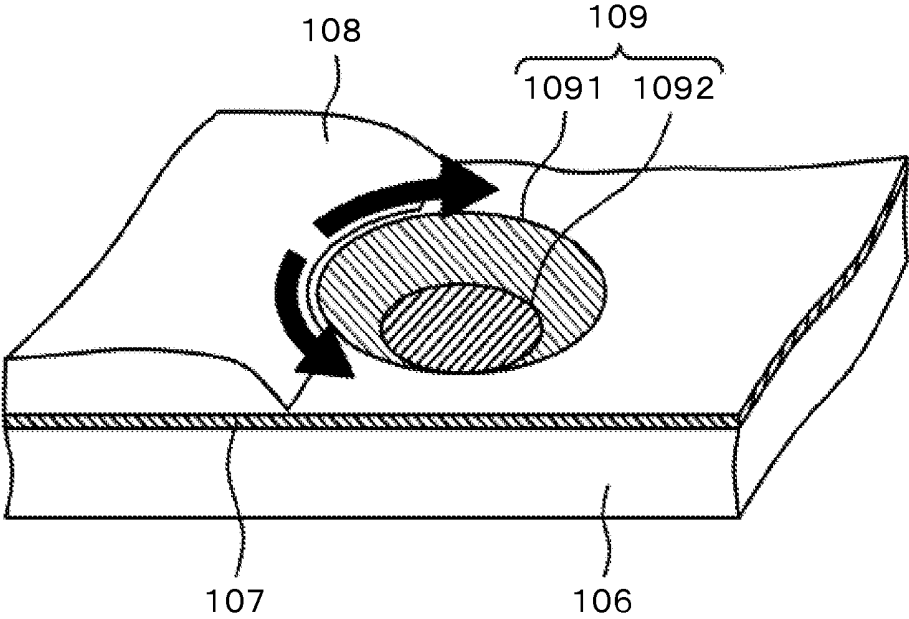

LIQUID CRYSTAL DISPLAY DEVICE

CLAIM OF PRIORITY

[0001] The present application claims priority from Japanese Patent Application JP 2013-254205 filed on Dec. 9, 2013, the content of which is hereby incorporated by reference into this application.

BACKGROUND OF THE INVENTION

[0002] 1. Field of the Invention

[0003] The present invention relates to a display device. The invention more particularly relates to a liquid crystal display device in which reduction in transmissivity is small even in a case where the screen is a high-definition screen, the liquid crystal display device having few pixel defects in the high-definition screen.

[0004] 2. Description of the Related Art

[0005] In a liquid crystal display device, a thin film transistor (TFT) substrate in which pixels each including a pixel electrode, a TFT, and the like are formed like a matrix, a counter substrate facing the TFT substrate and having color filters formed at positions in facing relation to the pixel electrodes on the TFT substrate are arranged, and liquid crystal is sandwiched between the TFT substrate and the counter substrate. The liquid crystal display device forms images by controlling light transmissivity of liquid crystal molecules at each pixel.

[0006] The liquid crystal display device is flat and lightweight. Thus, the application of the liquid crystal display device has been extended in various fields. A small liquid crystal display device has widely been used in portable information terminals, such as mobile phones, smartphones, and Digital Still Cameras (DSCs). A viewing angle characteristic is a key issue in liquid crystal display devices. The viewing angle characteristic relates to a phenomenon that brightness or chromaticity changes between cases where a screen of the liquid crystal display device is viewed from front and where the screen is viewed from an oblique direction. An In-Plane Switching (IPS, which is a registered trademark of Japan Display Inc.) system causing a horizontal electric field to operate liquid crystal molecules has an excellent viewing angle characteristic.

[0007] Although various IPS systems exist, e.g., a system in which a common electrode is formed in a planar and solid manner and in which a comb-teeth pixel electrode is arranged above the common electrode so as to sandwich an insulating film between the pixel electrode and the common electrode, and to cause an electric field generated between the common electrode and the pixel electrode to rotate liquid crystal molecules. This system can increase the transmissivity. Accordingly, this system is currently a mainstream. The common electrode and an interlayer insulating film are formed on an organic passivation film serving also as a planarizing film.

[0008] Meanwhile, if a pixel size is reduced by providing the liquid crystal display device with a high-definition screen, a ratio of a radial cross-sectional area of a through-hole connecting between a pixel electrode and a source electrode of the TFT is increased.

[0009] In the above IPS liquid crystal display device, if the ratio of the radial cross-sectional area of the through-hole to the pixel size increases, an adhesion strength between the organic passivation film and the interlayer insulating film formed thereon decreases. Thus, a problem occurs, in which

the interlayer insulating film peels off. JP-2011-59314-A describes a device which reduces stress on the interlayer insulating film and which prevents peeling-off of the interlayer insulating film by forming the interlayer insulating film not in the through-hole but only on the organic passivation film.

[0010] If a diameter of the through-hole is reduced as the pixel size is reduced by provision of the high-definition screen, a taper angle of a wall portion of the through-hole (hereinafter sometimes referred to also as a taper angle of the through-hole) should be increased. On the other hand, an alignment film is used to initially align the liquid crystal. A material of the alignment film, which is initially in a liquid state, is applied by flexographic printing, inkjet printing, or the like.

[0011] If the taper angle of the through-hole is increased, applying the material of the alignment film may cause a phenomenon that the material of the alignment film does not go into the through-hole. Then, a display defect, such as a luminance unevenness, occurs due to a fact that no alignment film exists in the through-hole, or to a thickness unevenness of the alignment film in a periphery of the through-hole. JP-2007-322563-A describes a device that varies a height at a periphery of the through-hole thereby to facilitate the alignment film to flow into the through-hole.

[0012] If the pixel size is reduced, a ratio of a pixel electrode to each pixel is relatively reduced, so that a transmissivity at each pixel is decreased. According to photoalignment of the alignment film initially aligning the liquid crystal, an alignment treatment can be performed on an inner wall portion of the through-hole. Thus, the inner wall portion of the through-hole can be used as a display area. JP-2013-140386-A describes a device that increases the transmissivity at each pixel by utilizing photoalignment to utilize an inside of the through-hole as a display area.

SUMMARY OF THE INVENTION

[0013] Recently, even a small liquid crystal display device requires a high-definition screen such as a Video Graphics Array (VGA) screen using 640×480 dots. Incidentally, a dot is a set of three pixels, i.e., a red pixel, a green pixel, and a blue pixel. Therefore, the VGA screen uses pixels the number of which is 1920×480. To enable VGA on a 3-inch screen, the shorter diameter of each pixel is set to be very small, e.g., 32 μm . Further, another high-definition screen has been developed, in which the shorter diameter of each pixel is less than 30 μm .

[0014] Even if each pixel is reduced in size, in order to maintain a predetermined transmissivity, it is necessary to arrange the TFT, the through-hole, and the like in a small area, and to increase the ratio of the area of the pixel electrode to the pixel as much as possible. If the radial cross-sectional area of the through-hole is reduced, the taper angle of the through-hole is increased. Thus the material of the alignment film becomes difficult to flow into the through-hole. Consequently, a display defect, such as a luminance unevenness, occurs. If a height difference is provided among upper surrounding portions of the through-hole like the device described in JP-2007-322563-A, what is called an organic passivation film cannot be used. This is because of the following reasons. That is, the organic passivation film is formed thick to have a thickness of 2 μm to 4 μm . Thus, a surface of

the organic passivation film is flat. Consequently, it is difficult to form a height difference among the surrounding portions of the through-hole.

[0015] On the other hand, to meet demands for uniformizing a thickness of the liquid crystal layer, some types of the liquid crystal display devices need to use an organic passivation film. Since the organic passivation film is formed thick to have a thickness of 2 μm to 4 μm , a problem of increasing the radial cross-sectional area of the through-hole becomes increasingly serious if a through-hole is formed in the organic passivation film.

[0016] FIG. 14 is a perspective view illustrating the above problem of an IPS liquid crystal display device. FIG. 15 is a cross-sectional view taken along line I-I shown in FIG. 14. In FIG. 14, a pixel electrode 107 having a slit 1071 provided therein is connected through a through-hole to a source electrode 102. An interlayer insulating film (not shown) exists under the pixel electrode 107. Under the interlayer insulating film, a common electrode (not shown) exists.

[0017] FIG. 15 is a cross-sectional view illustrating a through-hole 109 and a neighborhood thereof. In FIG. 15, a gate insulating film 101 is formed on a TFT substrate 100. On the gate insulating film 101, a source electrode 102 extending from a TFT is formed. An inorganic passivation film 103 is formed on the source electrode 102 and the gate insulating film 101. An organic passivation film 104 is formed on the inorganic passivation film 103. A common electrode 105 is formed on the organic passivation film 104. An interlayer insulating film 106 is formed so as to cover the common electrode 105. A pixel electrode 107 having a slit is formed on the interlayer insulating film 106. This structure may be configured without providing an inorganic passivation film under the organic passivation film.

[0018] In FIG. 15, a counter substrate 200 is arranged opposite to the TFT substrate 100. A liquid crystal layer 300 is sandwiched between the TFT substrate 100 and the counter substrate 200. A black matrix 202 is formed on part of the counter substrate 200 in facing relation to the through-hole 100. A color filter 201 is formed on part of the counter substrate 200 in facing relation to the pixel electrode 107. An overcoat film 203 is formed so as to cover the black matrix 202 and the color filter 201. An alignment film 108 is formed on the overcoat film 203.

[0019] At the side of the TFT substrate 100, the pixel electrode 107 is connected to the source electrode 102 via the through-hole 109 formed in the inorganic passivation film 103, the organic passivation film 104, and the interlayer insulating film 106. If the screen is changed to a high-definition screen so as to reduce the area of each pixel, in order to ensure a transmissivity at each pixel, it is necessary to increase the taper angle of the inner wall of the through-hole 109 and to reduce the radial cross-sectional area of the through-hole 109.

[0020] However, as illustrated in FIG. 15, if the taper angle of the through-hole 109 is large, the alignment film material 108, which is initially liquid, is difficult to flow into the through-hole 109 from a top face 1091 (see FIG. 17) of the through-hole 109. Thus, a problem occurs, in which no alignment film is formed in the through-hole. In addition, another problem occurs, in which the thickness of the alignment film 108 is increased on the periphery of the through-hole 109, so that the thickness unevenness of the alignment film 108 occurs. Then, display defects, such as a luminance unevenness, occur due to absence of an alignment film in the

through-hole 109, or due to the thickness unevenness of the alignment film in the periphery of the through-hole 109.

[0021] The reason why thus the alignment film does not flow into the through-hole 109 is considered as follows. FIGS. 16A and 16B illustrate a contact angle of the alignment film material 108. FIG. 16A illustrates a case where the alignment film material 108 is dropped onto the planar pixel electrode 107 formed of ITO. In this case, the contact angle is θ . FIG. 16B illustrates a contact angle in a case where the alignment film material 108 of a liquid form exists and is near the top face 1091 of the through-hole 109 having a taper angle α .

[0022] In FIG. 16B, the contact angle in vicinity of the top face of the through-hole 109 is β which is larger than θ . That is, it can be said that the alignment film material 108 is more difficult to wet and spread at the top face of the through-hole 109 than on the pixel which is flat. Here, assuming that " α " denotes the taper angle of the through-hole 109, that " β " denotes the contact angle of the alignment film material 108 at the top face of the through-hole 109, and that " θ " denotes the contact angle of the alignment film material 108 on the planar pixel electrode 107 shown in FIG. 16A, a relationship among α , β , and θ is given by the following expression.

$$\theta \leq \beta \leq \alpha + \theta$$

[0023] Accordingly, the alignment film material 108 spreads over the pixel electrode 107 formed of ITO in vicinity of the through-hole 109 without going into the through-hole 109. That is, as illustrated in FIG. 15, the alignment film material 108 is formed thick on the periphery of the through-hole 109.

[0024] An object of the present invention is to provide a liquid crystal display device using an organic passivation film in a TFT substrate, which is configured to facilitate each alignment film material to go into a through-hole even in a case where the area of each pixel is reduced using a high-definition screen, and where the radial cross-sectional area of the through-hole is limited.

[0025] The present invention is accomplished to overcome the above problems. Specific means according to the present invention are as follows.

[0026] (1) A liquid crystal display device includes: a TFT substrate having pixels each having a common electrode formed on an organic passivation film, an interlayer insulating film formed so as to cover the common electrode, a pixel electrode having a slit and formed on the interlayer insulating film, a through-hole formed in the organic passivation film and the interlayer insulating film, and a source electrode electrically conducted to the pixel electrode via the through-hole; a counter substrate having color filters formed in facing relation to the pixels, and a black matrix formed among the color filters; and liquid crystal sandwiched between the TFT substrate and the counter substrate. When the through-hole formed in the organic passivation film assumes a cross-section in which a top face is defined on the side of the counter substrate and a bottom face is defined on the side of the source electrode, the top face has a diameter larger than that of the bottom face, and the through-hole has a depth of D, then, a taper angle at a depth of D/2 of the through-hole is equal to or more than 50 degrees. The common electrode covers part of a side wall of the through-hole but does not cover the remaining part of the side wall of the through-hole.

[0027] (2) A liquid crystal display device includes: a TFT substrate having pixels each having a common electrode

formed on an organic passivation film, an interlayer insulating film formed so as to cover the common electrode, a pixel electrode having a slit and formed on the interlayer insulating film, a through-hole formed in the organic passivation film and the interlayer insulating film, and a source electrode electrically conducted to the pixel electrode via the through-hole; a counter substrate having color filters formed in facing relation to the pixels, and a black matrix formed among the color filters; and liquid crystal sandwiched between the TFT substrate and the counter substrate. When the through-hole formed in the organic passivation film assumes a cross-section in which a top face is defined on the side of the counter substrate and a bottom face is defined on the side of the source electrode, the top face has a diameter larger than that of the bottom face, and the through-hole has a depth of D , then, a taper angle at a depth of $D/2$ of the through-hole is equal to or more than 50 degrees, and the slit of the pixel electrode extends to a depth of 1 μm or more from a top surface of the organic passivation film or to a depth of $D/4$ or more from the top surface of the organic passivation film.

[0028] According to the present invention, a liquid crystal display device using a high-definition screen to thereby reduce the area of each pixel and also using an organic passivation film in a TFT substrate is provided, which can stably form an alignment film in a through-hole, even if a through-hole diameter is reduced. Accordingly, the liquid crystal display device according to the present invention can prevent a display defect such as a luminance unevenness due to absence of the alignment film or due to the thickness unevenness of the alignment film in the periphery of the through-hole.

BRIEF DESCRIPTION OF THE DRAWINGS

[0029] FIG. 1 is a plan view of a pixel of a liquid crystal display device to which the present invention is applied;

[0030] FIG. 2 is a perspective view illustrating a pixel electrode and a through-hole according to a first embodiment;

[0031] FIG. 3 is a cross-sectional view taken on line A-A shown in FIG. 2;

[0032] FIG. 4 illustrates a definition of a taper angle of the through-hole;

[0033] FIG. 5 illustrates an example of a planar shape of the through-hole;

[0034] FIG. 6 is a perspective view illustrating a pixel electrode and a through-hole according to a second embodiment;

[0035] FIG. 7 is a cross-sectional view taken on line E-E shown in FIG. 6;

[0036] FIG. 8 is a perspective view illustrating a pixel electrode and a through-hole of another configuration of the second embodiment;

[0037] FIG. 9 is a cross-sectional view taken on line F-F shown in FIG. 8;

[0038] FIG. 10 is a perspective view illustrating a common electrode and a through-hole according to a third embodiment;

[0039] FIG. 11 is a cross-sectional view taken on line G-G shown in FIG. 10;

[0040] FIG. 12 is a perspective view illustrating a common electrode and a through-hole according to a fourth embodiment;

[0041] FIG. 13 is a cross-sectional view taken on line H-H shown in FIG. 12;

[0042] FIG. 14 is a perspective view illustrating a pixel electrode and a through-hole according to the related art;

[0043] FIG. 15 is a cross-sectional view taken on line I-I shown in FIG. 14;

[0044] FIGS. 16A and 16B illustrate a definition of a contact angle; and

[0045] FIG. 17 is a perspective view illustrating a moving direction of a material of an alignment film according to the related art.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0046] Hereinafter, the present invention is described in detail with reference to embodiments.

First Embodiment

[0047] FIG. 1 is a plan view of a pixel in a TFT substrate of a liquid crystal display device to which the present invention is applied. FIG. 1 illustrates an example of an IPS liquid crystal display device. In FIG. 1, scanning lines 10 extend in a lateral direction and are arranged in a longitudinal direction at a predetermined pitch PY. Video signal lines 20 extend in the longitudinal direction and are arranged in the lateral direction at a predetermined pitch PX. Each region surrounded by the scanning line 10 and the video signal line 20 is a pixel.

[0048] In FIG. 1, a gate electrode 11 branches from the scanning line 10. A semiconductor layer 30 is formed on the gate electrode 11. On the other hand, a source electrode 102 is formed on the semiconductor layer 30. The source electrode 102 extends in the direction of a pixel electrode 107 and increases in width at part thereof overlapping with a pixel electrode 106 and under a through-hole 109. The source electrode 102 serves also, as a light shielding film preventing occurrence of light leakage in the through-hole 109.

[0049] In FIG. 1, the pixel electrode 107 having a slit 1071 is formed like a rectangle. An interlayer insulating film is formed under the pixel electrode 107. A planar common electrode is formed under the interlayer insulating film. Lines of electric force from the pixel electrode 107 are formed so as to pass through a slit 1071 toward the common electrode.

[0050] In FIG. 1, the pixel electrode 107 is connected to the source electrode 102 via the through-hole 109. The through-hole 109 is formed in an organic passivation film whose thickness is large. Thus, the through-hole 109 has a taper so as to have a larger-diameter top face 1091 and a smaller-diameter bottom face 1092. According to the present embodiment, the source electrode 102 is formed so as to be slightly larger than the through-hole 109, and serves also as a light shielding film for the through-hole 109. The source electrode 102 may be shaped cross-sectionally like a circle corresponding to a shape of the through-hole 109. To obtain a desired transmissivity, the pixel may be configured so that part of the top face 1091 or the bottom face 1092 of the through-hole 109 protrudes from the source electrode 102.

[0051] FIG. 2 is a perspective view illustrating a relationship between the pixel electrode 107 and the through-hole 109. In FIG. 2, the pixel electrode 107 having the slit 1071 covers the through-hole 109 and is electrically conducted to the source electrode 102. However, according to the present embodiment, the pixel electrode 107 does not cover the entire inner wall of the through-hole 109. In an outside of the pixel electrode 107, the pixel electrode 107 does not cover the inner wall and the periphery of the top face of the through-hole 109.

[0052] In a configuration illustrated in FIG. 2, when an alignment film material 108 of a liquid form is applied, the

alignment film material **108** spreads over a SiN film configuring the interlayer insulating film **106** from an ITO film configuring the pixel electrode **107**. Thus, the alignment film material **108** flows into the through-hole **109**, starting from a boundary portion of a step-like part, which is about 50 nm, of the ITO film. Further, since the alignment film material **108** is easier to wet and spread on the SiN film than on the ITO film, the alignment film material **108** can flow into the through-hole **109** via the interlayer insulating film **106** made of SiN.

[0053] Accordingly, as illustrated in FIG. 3, the alignment film material **108** flows into the through-hole **109**. Even in a periphery of the through-hole **109**, the alignment film **108** can be formed so as to have a uniform thickness. FIG. 3 is a cross-sectional view of the liquid crystal display device, which corresponds to a cross-section taken along line A-A shown in FIG. 2. Description of configurations of each of the TFT substrate **100** and the counter substrate **200** illustrated in FIG. 3, which have been described with reference to FIG. 15, is omitted here.

[0054] A main difference between the configurations illustrated in FIGS. 3 and 15 is that the pixel electrode **107** in the configuration illustrated in FIG. 3 is not completely formed on the entire through-hole **109**. The pixel electrode **107** is formed on a left-side periphery and a left-side inner wall of the through-hole **109**, as viewed in FIG. 3. However, the pixel electrode **107** is not formed on a right-side periphery and a right-side inner wall of the through-hole **109**, as viewed in FIG. 3. That is, the alignment film material **108** illustrated in FIG. 3 flows into the through-hole **109** from the right side of the through-hole **109**, as viewed in FIG. 3. With this configuration, even if a taper angle of the through-hole **109** is large, the alignment film material **108** can stably flow into the through-hole **109**.

[0055] Incidentally, if the taper angle of the through-hole **109** is about 50 degrees in the conventional configuration, at a certain frequency, a phenomenon occurs, in which the alignment film material **108** does not flow into the through-hole **109**. Further, if the taper angle of the through-hole **109** is equal to or more than 60 degrees, the alignment film material **108** hardly flows into the through-hole **109**. Accordingly, a display unevenness occurs over a wide range of the screen.

[0056] Meanwhile, as illustrated in FIG. 3, because an organic passivation film **104** serves as a planarizing film, the organic passivation film **104** is formed thick, e.g., a thickness of 2 μm to 4 μm . That is, the organic passivation film **104** is very thick, as compared with other films. Therefore, it can be considered that the shape of the through-hole **109** is determined by the shape of the through-hole formed in the organic passivation film **104**. That is, the taper angle of the inner wall of the organic passivation **109** can be considered as the taper angle of the through-hole formed in the organic passivation film **104**.

[0057] FIG. 4 is a cross-sectional view for defining the taper angle of the through-hole **109**. The through-hole **109** in this case is the through-hole **109** formed in the organic passivation film **104**. As illustrated in FIG. 4, assuming that a depth of the through-hole **109** formed in the organic passivation film **104** is D, a taper angle α of the through-hole **109** is defined as an angle formed by a tangent line to the wall at a depth of D/2, i.e., half the depth of the through-hole **109**, and a line connecting between cross-sections of top surfaces of the organic passivation film **104**.

[0058] A cross-section of the through-hole **109** varies depending on a planar shape of the through-hole **109** or at

what part of the through-hole **109** is cut to form the cross-section. FIGS. 5A to 5C illustrate definitions of a cross-section in various cases of the planar shape of the through-hole **109**. FIG. 5A corresponds to a case where the planar shape of the through-hole **109** is a circle. In this case, a cross-section taken along line B-B passing through the center of the circle corresponds to FIG. 4. FIG. 5B corresponds to a case where the planar shape of the through-hole **109** is a square. In this case, a cross-section taken along line C-C on an axis of the square corresponds to FIG. 4. FIG. 5C corresponds to a case where the planar shape of the top face of the through-hole **109** is a rectangle. In this case, a cross-section taken along line D-D on a short axis of the through-hole **109** corresponds to FIG. 4. That is, in a case where a plan view of the top face of the through-hole **109** has a long axis and a short axis, the taper angle of the through-hole **109** is defined by the taper angle α on a short-axis cross-section, which is illustrated in FIG. 4.

[0059] In a conventional structure, if the angle α illustrated in FIG. 4 is about 50 degrees, at a certain frequency, the phenomenon occurs, in which the alignment film material **108** does not flow into the through-hole **109**. If the angle α is equal to or larger than 60 degrees, the phenomenon occurs, in which the alignment film material **108** hardly flows into the through-hole **109**. However, according to the present embodiment, even in a case where the angle α is equal to or larger than 50 degrees, the alignment film material **108** can flow into the through-holes **109** formed in all pixels. In addition, according to the present embodiment, even in a case where the angle α is equal to or larger than 60 degrees, the alignment film material **108** can flow into the through-holes **109** formed in all pixels. Accordingly, according to the present embodiment, display defects due to a thickness failure of the alignment film can be resolved.

Second Embodiment

[0060] FIG. 6 is a perspective view illustrating a relationship between a pixel electrode **107** and a through-hole **109** according to a second embodiment of the present invention. In FIG. 6, a slit **1071** formed in a pixel electrode **107** extends in a through-hole **109**. In the slit **1071**, a surface thereof is formed of SiN configuring an interlayer insulating film **106**, instead of ITO. Thus, an alignment film material **108** of a liquid form can flow into the through-hole **109**, starting from a boundary portion of a step-like part of the ITO film. Further, because the surface is formed of the SiN film in the slit **1071**, the alignment film material **108** is easier to wet and spread in this case than a case of using the ITO film. Thus, also from this aspect, the alignment film material **108** is easier to flow into the through-hole **109**.

[0061] FIG. 7 is a cross-sectional view of a liquid crystal display device, which corresponds to a cross-section taken on line E-E shown in FIG. 6. FIG. 7 is similar to FIG. 3 illustrating the first embodiment, except for a configuration of the pixel electrode **107**. In FIG. 7, the pixel electrode **107** extends in the through-hole **109** from the right side of the through-hole **109**, and is connected to a source electrode **102**. On the other hand, at the left side of the through-hole **107** shown in FIG. 7, the slit **1071** is formed, so that the pixel electrode **107** does not exist. Surfaces of an inner wall of the through-hole **109** and a periphery of a top face thereof are formed of SiN configuring the interlayer insulating film **106**. Accordingly, the

alignment film material **108** flows into the through-hole **109** from the left side of the through-hole **109**, which corresponds to the slit **1071**.

[0062] FIG. 8 illustrates another configuration of the present embodiment. In FIG. 8, the slit **1071** of the pixel electrode **107** is not formed to a bottom face of the through-hole **109**. FIG. 9 is a cross-sectional view of the liquid crystal display device, which corresponds to a cross-section taken on line F-F shown in FIG. 8. FIG. 9 is similar to FIG. 7, except for a configuration of the pixel electrode **107**.

[0063] In FIG. 8, in a left-side vicinity of a top face of the through-hole **109**, and a portion extending from the top face to a position at a depth X thereof, the slit **1071** is formed, and no ITO film configuring the pixel electrode **107** exists. In FIG. 8, assuming that a depth of the through-hole **109** is D, part in which no ITO exists extends from the top face of the through-hole **109** to the position at the depth of X thereof. Under this part, an ITO film configuring the pixel electrode **107** exists. Incidentally, a value of X is equal to or larger than a smaller one of D/4 and 1 μm . That is, if a portion where the SiN film configuring the interlayer insulating film **106** is exposed is smaller than X shown in FIG. 9, effects of causing the alignment film material **108** to flow into the through-hole **109** are small. Incidentally, the depth D of the through-hole **109** shown in FIG. 9 corresponds to a range from a top surface of the interlayer insulating film **106** to a top surface of the pixel electrode **107** provided in the through-hole **109**. The depth X is determined with reference to a top surface of the interlayer insulating film **106**. Since the thickness of the insulating film and the ITO film is small in comparison with the thickness of the organic passivation film, similar effects can be obtained even if the depth of D of the through-hole **109** shown in FIG. 9 is changed to the depth of

[0064] D of the through-hole **109** formed in the organic passivation film **104** shown in FIG. 4, and if the value of X is changed to represent a value from the top surface of the organic passivation film **104**.

[0065] Thus, even according to the present embodiment, the alignment film material **108** can preferably flow into the through-hole **109**. According to the present embodiment, even in a case where the angle α is equal to or larger than 50 degrees, the alignment film material **108** can flow into the through-holes **109** respectively formed in all pixels. In addition, according to the present embodiment, even in a case where the angle α is equal to or larger than 60 degrees, the alignment film material **108** can flow into the through-holes **109** formed in all pixels. Accordingly, display defects due to a thickness failure of the alignment film **108** can be resolved by the present embodiment.

Third Embodiment

[0066] A third embodiment is an IPS liquid crystal display device configured so that a pixel electrode **107** formed in a planar and solid manner is arranged on a lower side, and that a common electrode **105** having a slit **1051** is provided on an upper side via an interlayer insulating film **106**, contrary to the first embodiment.

[0067] FIG. 10 is a perspective view illustrating a relationship between a common electrode **105** and a through-hole **109** according to the third embodiment. In FIG. 10, the common electrode **105** having the slit **1051** does not cover the entire inner wall of the through-hole **109**. In an outside of the

common electrode **105**, the common electrode **105** does not cover the inner wall and the periphery of the top face of the through-hole **109**.

[0068] FIG. 11 is a cross-sectional view of the liquid crystal display device, which corresponds to the cross-section taken on line G-G shown in FIG. 10. The common electrode **105** is formed on a left-side periphery and a left-side inner wall of the through-hole **109**, as viewed in FIG. 11. However, the common electrode **105** is not formed on a right-side periphery and a right-side inner wall of the through-hole **109**.

[0069] When an alignment film material **108** of a liquid form is applied in such a configuration, the alignment film material **108** spreads over a SiN film configuring the interlayer insulating film **106** from an ITO film configuring the common electrode **105**, similarly to the first embodiment in which surface condition is approximately same to that of the third embodiment. As illustrated in FIG. 11, the alignment film material **108** flows into the through-hole **109**, so that the thickness of the alignment film **108** can be uniformized even in a periphery of the through-hole **109**.

[0070] According to the present embodiment, even when the angle α is equal to or larger than 50 degrees, the alignment film material **108** can flow into the through-holes **109** formed in all pixels. In addition, according to the present embodiment, even when the angle α is equal to or larger than 60 degrees, the alignment film material **108** can stably flow into the through-holes **109** formed in all pixels. Accordingly, display defects due to a thickness failure of the alignment film can be resolved by the present embodiment.

Fourth Embodiment

[0071] A fourth embodiment is an IPS liquid crystal display device configured so that a pixel electrode **107** formed in a planar and solid manner is arranged on a lower side, and that a common electrode **105** having a slit **1051** is provided on an upper side via an interlayer insulating film **106**, contrary to the second embodiment.

[0072] FIG. 12 is a perspective view illustrating a relationship between a common electrode **105** and a through-hole **109** according to the fourth embodiment. In FIG. 12, a slit **1051** formed in the common electrode **105** extends in the through-hole **109**. In an inner wall part of the slit **1051**, a surface thereof is formed of SiN configuring an interlayer insulating film **106**, instead of ITO, similarly to the second embodiment. Accordingly, via the slit **1051** formed in the common electrode **105**, the alignment film material **108** of a liquid form can flow into the through-hole **109**, starting from a boundary portion of a step-like part of the ITO film.

[0073] FIG. 13 is a cross-sectional view of the liquid crystal display device, which corresponds to a cross-section taken on line H-H shown in FIG. 12. FIG. 13 is similar to FIG. 11 illustrating the third embodiment, except for a configuration of the common electrode **105**. Since the slit **1051** is provided at the left side of the through-hole **109**, as viewed in FIG. 13, the common electrode **105** does not exist there. Surfaces of an inner wall and a periphery of a top face of the through-hole **109** are formed of SiN configuring the interlayer insulating film **106**. Thus, the alignment film material **108** easily flows into the through-hole **109** from the left side of the through-hole **109**, which corresponds to the slit **1051**.

[0074] In a case where the slit **1051** of an uppermost layer is not formed to a bottom face of the through-hole **109**, as shown in FIG. 8 illustrating the second embodiment, similarly, assuming that the depth of the through-hole **109** is D, a

slit is formed in a left-side vicinity of a top face of the through-hole **109**, and a portion extending from the top face to a position at a depth X thereof. Under this slit, an ITO film configuring the pixel electrode **107** exists.

[0075] Incidentally, a value of X is equal to or larger than a smaller one of $D/4$ and $1\ \mu\text{m}$. For example, in a case where the slit **1051** reaches a bottom face of the through-hole **109**, the value of X is equal to the value of D . According to the present embodiment, even in a case where the taper angle α is equal to or larger than 50 degrees, the alignment film material **108** can flow into the through-holes **109** formed in all pixels. Accordingly, according to the present embodiment, a display unevenness due to a thickness failure of the alignment film **108** can be resolved.

[0076] Incidentally, although it has been described that each of the pixel electrode and the common electrode is formed of an ITO film, the ITO film may be changed to a transparent electrically-conductive film, such as an IZO film. Further, in the second to fourth embodiments, the slit formed in the pixel electrode or in the common electrode extends in the through-hole. Thus, the liquid crystal can be driven in the through-hole. Therefore, the liquid crystal display device may have a structure in which the entire slit or part of the slit is exposed from the source electrode.

[0077] Incidentally, the present invention can be applied to an alignment film subjected to a photo-alignment treatment using polarized ultraviolet rays as well as the alignment film subjected to the alignment treatment using a rubbing method.

[0078] In the foregoing description, it has been described that the color filters are formed in the counter substrate. However, according to the present invention, the color filters may be formed in the TFT substrate. In this case, a color filter may be used instead of the organic passivation film. Alternatively, both of the organic passivation film and the color filter may be used.

[0079] In the foregoing description, a term “black matrix” is used. It is noted that “black matrix” includes the meaning of so called “black stripes” or its equivalent structures.

What is claimed is:

1. A liquid crystal display device comprising:

- a TFT substrate having pixels each including
 - a common electrode formed on an organic passivation film,
 - an interlayer insulating film formed so as to cover the common electrode,
 - a pixel electrode formed on the interlayer insulating film, the pixel electrode having a slit,
 - a through-hole formed in the organic passivation film and the interlayer insulating film, and
 - a source electrode electrically conducted to the pixel electrode via the through-hole;
 - a counter substrate having a black matrix formed thereon; and
 - liquid crystal sandwiched between the TFT substrate and the counter substrate,
- wherein, where the through-hole formed in the organic passivation film assumes a cross-section in which a top face is defined on the side of the counter substrate and a bottom face is defined on the side of the source electrode, the top face having a diameter larger than that of the bottom face, the through-hole having a depth of D , a taper angle at a depth of $D/2$ of the through-hole is equal to or more than 50 degrees, and

wherein the pixel electrode covers part of a side wall of the through-hole but does not cover the remaining part of the side wall of the through-hole.

2. A liquid crystal display device comprising:

- a TFT substrate having pixels each including
 - a pixel electrode formed on an organic passivation film,
 - a through-hole formed in the organic passivation film,
 - a source electrode electrically conducted to the pixel electrode via the through-hole,
 - an interlayer insulating film formed so as to cover the pixel electrode, and
 - a common electrode formed on the interlayer insulating film, the common electrode having a slit;
 - a counter substrate having a black matrix formed thereon; and
 - liquid crystal sandwiched between the TFT substrate and the counter substrate,
- wherein, where the through-hole formed in the organic passivation film assumes a cross-section in which a top face is defined on the side of the counter substrate and a bottom face is defined on the side of the source electrode, the top face having a diameter larger than that of the bottom face, the through-hole having a depth of D , a taper angle at a depth of $D/2$ of the through-hole is equal to or more than 50 degrees, and
- wherein the common electrode covers part of a side wall of the through-hole but does not cover the remaining part of the side wall of the through-hole.

3. A liquid crystal display device according to claim 1, wherein the taper angle of the through-hole is equal to or more than 60 degrees.

4. A liquid crystal display device according to claim 2, wherein the taper angle of the through-hole is equal to or more than 60 degrees.

5. A liquid crystal display device comprising:

- a TFT substrate having pixels each including
 - a common electrode formed on an organic passivation film,
 - an interlayer insulating film formed so as to cover the common electrode,
 - a pixel electrode formed on the interlayer insulating film, the pixel electrode having a slit,
 - a through-hole formed in the organic passivation film and the interlayer insulating film, and
 - a source electrode electrically conducted to the pixel electrode via the through-hole;
 - a counter substrate having a black matrix formed thereon; and
 - liquid crystal sandwiched between the TFT substrate and the counter substrate,
- wherein, where the through-hole formed in the organic passivation film assumes a cross-section in which a top face is defined on the side of the counter substrate and a bottom face is defined on the side of the source electrode, the top face having a diameter larger than that of the bottom face, the through-hole having a depth of D , a taper angle at a depth of $D/2$ of the through-hole is equal to or more than 50 degrees, and
- the slit of the pixel electrode extends to a depth of $1\ \mu\text{m}$ or more from a top surface of the organic passivation film or to a depth of $D/4$ or more from the top surface of the organic passivation film.

6. A liquid crystal display device comprising:
a TFT substrate having pixels each including
a pixel electrode formed on an organic passivation film,
a through-hole formed in the organic passivation film,
a source electrode electrically conducted to the pixel
electrode via the through-hole,
an interlayer insulating film formed so as to cover the
pixel electrode, and
a common electrode formed on the interlayer insulating
film, the common electrode having a slit;
a counter substrate having a black matrix formed thereon;
and
liquid crystal sandwiched between the TFT substrate and
the counter substrate,
wherein, where the through-hole formed in the organic
passivation film assumes a cross-section in which a top
face is defined on the side of the counter substrate and a
bottom face is defined on the side of the source elec-
trode, the top face having a diameter larger than that of
the bottom face, the through-hole having a depth of D,
a taper angle at a depth of D/2 of the through-hole is
equal to or more than 50 degrees, and

the slit of the pixel electrode extends to a depth of 1 μm
or more from a top surface of the organic passivation
film or to a depth of D/4 or more from the top surface
of the organic passivation film.

7. A liquid crystal display device according to claim 5,
wherein the slit extends to the bottom face of the through-
hole.

8. A liquid crystal display device according to claim 6,
wherein the slit extends to the bottom face of the through-
hole.

9. A liquid crystal display device according to claim 5,
wherein the taper angle of the through-hole is equal to or more
than 60 degrees.

10. A liquid crystal display device according to claim 6,
wherein the taper angle of the through-hole is equal to or more
than 60 degrees.

11. A liquid crystal display device according to claim 7,
wherein the taper angle of the through-hole is equal to or more
than 60 degrees.

12. A liquid crystal display device according to claim 8,
wherein the taper angle of the through-hole is equal to or more
than 60 degrees.

* * * * *

专利名称(译)	液晶显示装置		
公开(公告)号	US20150160521A1	公开(公告)日	2015-06-11
申请号	US14/564129	申请日	2014-12-09
[标]申请(专利权)人(译)	株式会社日本显示器		
申请(专利权)人(译)	日本展示INC.		
当前申请(专利权)人(译)	日本展示INC.		
[标]发明人	TOMIOKA YASUSHI ISHIGAKI TOSHIMASA SONODA HIDEHIRO UETA SUMITO		
发明人	TOMIOKA, YASUSHI ISHIGAKI, TOSHIMASA SONODA, HIDEHIRO UETA, SUMITO		
IPC分类号	G02F1/1343 G02F1/1335		
CPC分类号	G02F1/133512 G02F1/134336 G02F1/136227 G02F1/133345 G02F1/1337 G02F1/133707 G02F1/1368 G02F2001/133357 G02F2201/121 G02F2201/123		
优先权	2013254205 2013-12-09 JP		
其他公开文献	US9519196		
外部链接	Espacenet USPTO		

摘要(译)

为了防止取向膜材料难以流入通孔的现象，其中用于连接像素电极和源电极的通孔的直径减小。一种液晶显示装置，包括：TFT基板，具有像素，每个像素包括形成在有机钝化膜上的公共电极；层间绝缘膜，形成为覆盖公共电极；像素电极，具有狭缝，形成在层间绝缘膜上，形成在有机钝化膜和层间绝缘膜中的通孔，以及通过通孔电连接到像素电极的源电极。在通孔的深度D/2处的锥角等于或大于50度。像素电极覆盖通孔侧壁的一部分，但不覆盖通孔侧壁的其余部分。这种结构有利于取向膜材料流入通孔，从而解决了通孔附近的取向膜的厚度不均匀性。

