



US 20150192812A1

(19) **United States**(12) **Patent Application Publication**
HWANG et al.(10) **Pub. No.: US 2015/0192812 A1**(43) **Pub. Date: Jul. 9, 2015**(54) **LIQUID CRYSTAL DISPLAY HAVING
IMPROVED TRANSMITTANCE AND
LUMINANCE CHARACTERISTICS**(52) **U.S. CL.**
CPC G02F 1/13306 (2013.01); G02F 1/134309
(2013.01)(71) Applicant: **Samsung Display Co., Ltd.,**
Yongin-City (KR)(72) Inventors: **Hyun Sik HWANG**, Hwaseong-si (KR);
In-Jae HWANG, Suwon-si (KR); **Dong**
Hwa SHIN, Yongin-si (KR)(21) Appl. No.: **14/468,187**(22) Filed: **Aug. 25, 2014**(30) **Foreign Application Priority Data**

Jan. 9, 2014 (KR) 10-2014-0003021

Publication Classification(51) **Int. Cl.**
G02F 1/133 (2006.01)
G02F 1/1343 (2006.01)(57) **ABSTRACT**

A liquid crystal display according to an exemplary embodiment includes: a first subpixel electrode configured to have a first voltage applied thereto; a second subpixel electrode configured to have a second voltage applied thereto; a third subpixel electrode configured to have a third voltage applied thereto; an insulating layer between the first subpixel electrode and the second subpixel electrode or between the second subpixel electrode and the third subpixel electrode; and a common electrode configured to have a common voltage applied thereto, wherein the second subpixel electrode and the third subpixel electrode overlap each other with the insulating layer positioned therebetween, the first subpixel electrode and the third subpixel electrode are disposed at opposing sides of the gate line, and the first voltage and the third voltage are different.

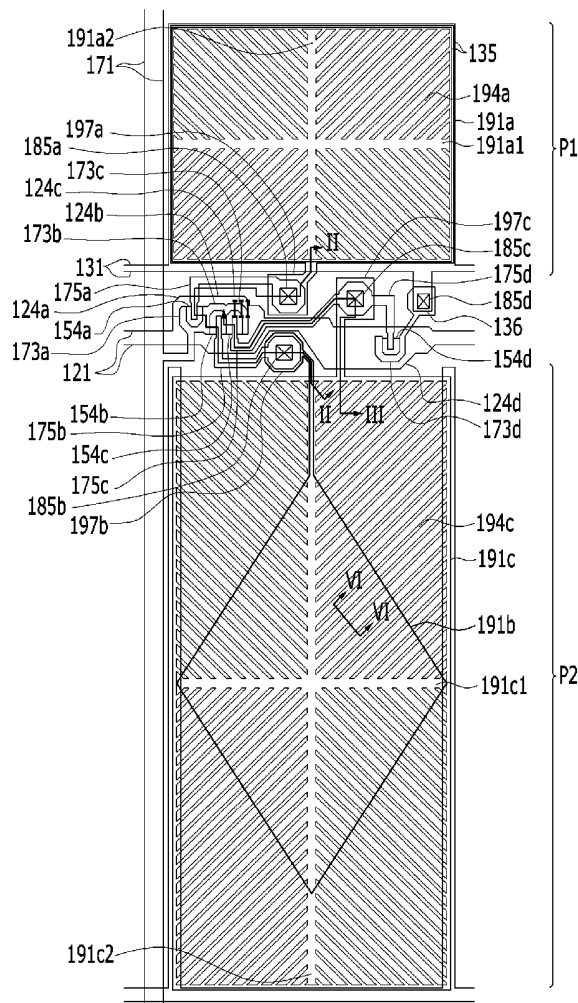


FIG. 1

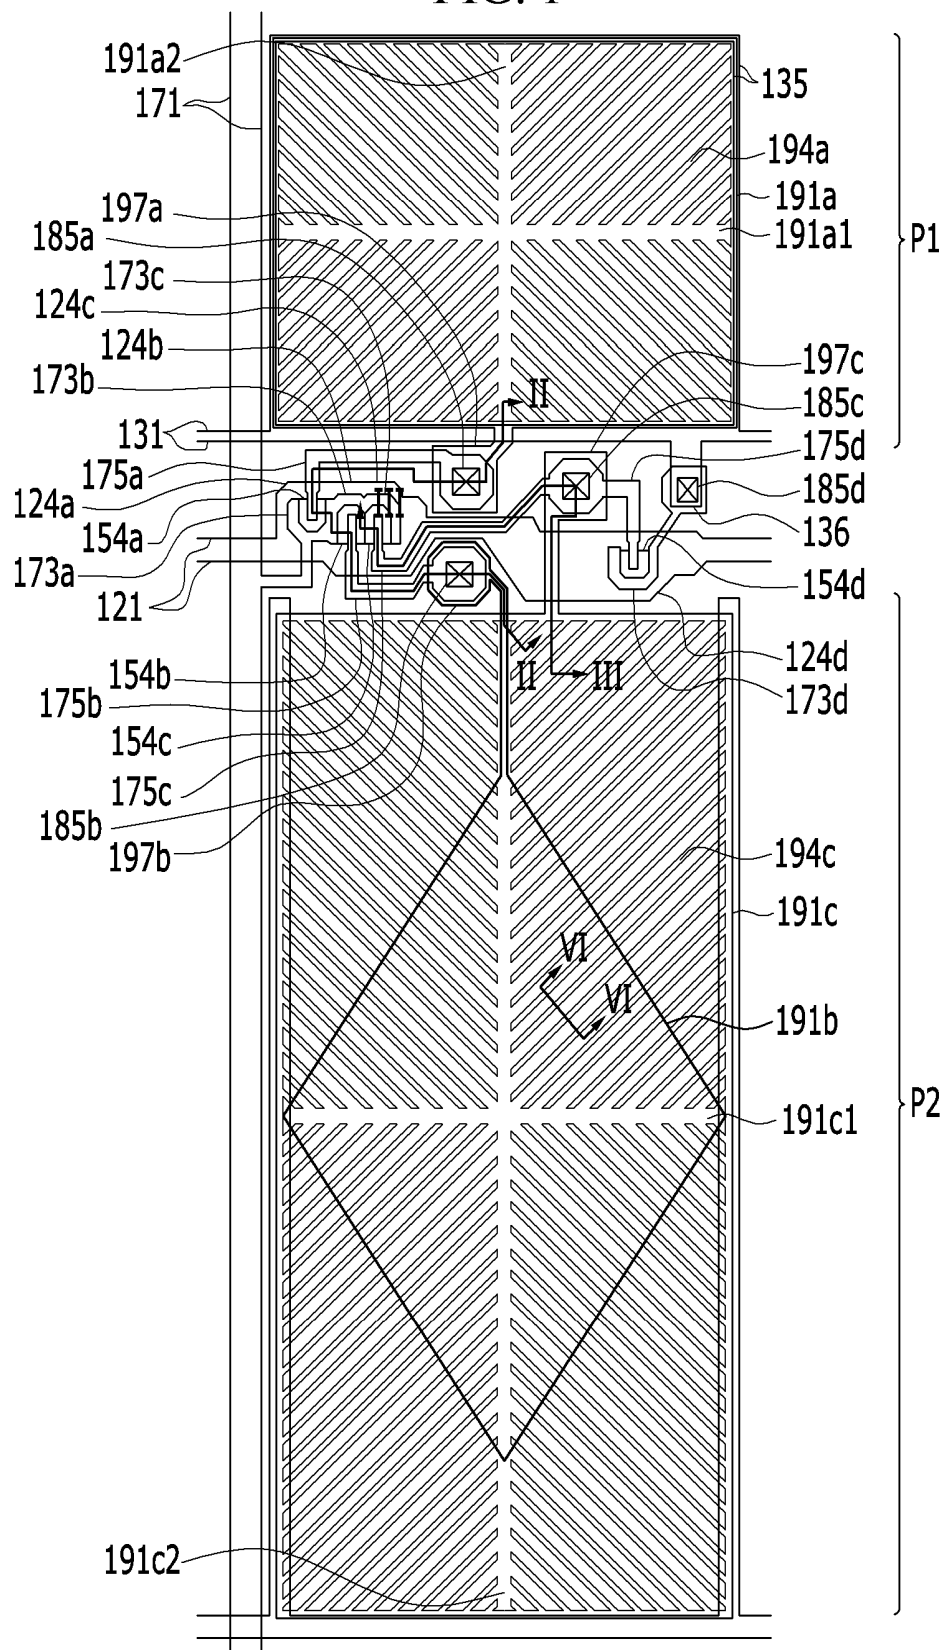


FIG. 2

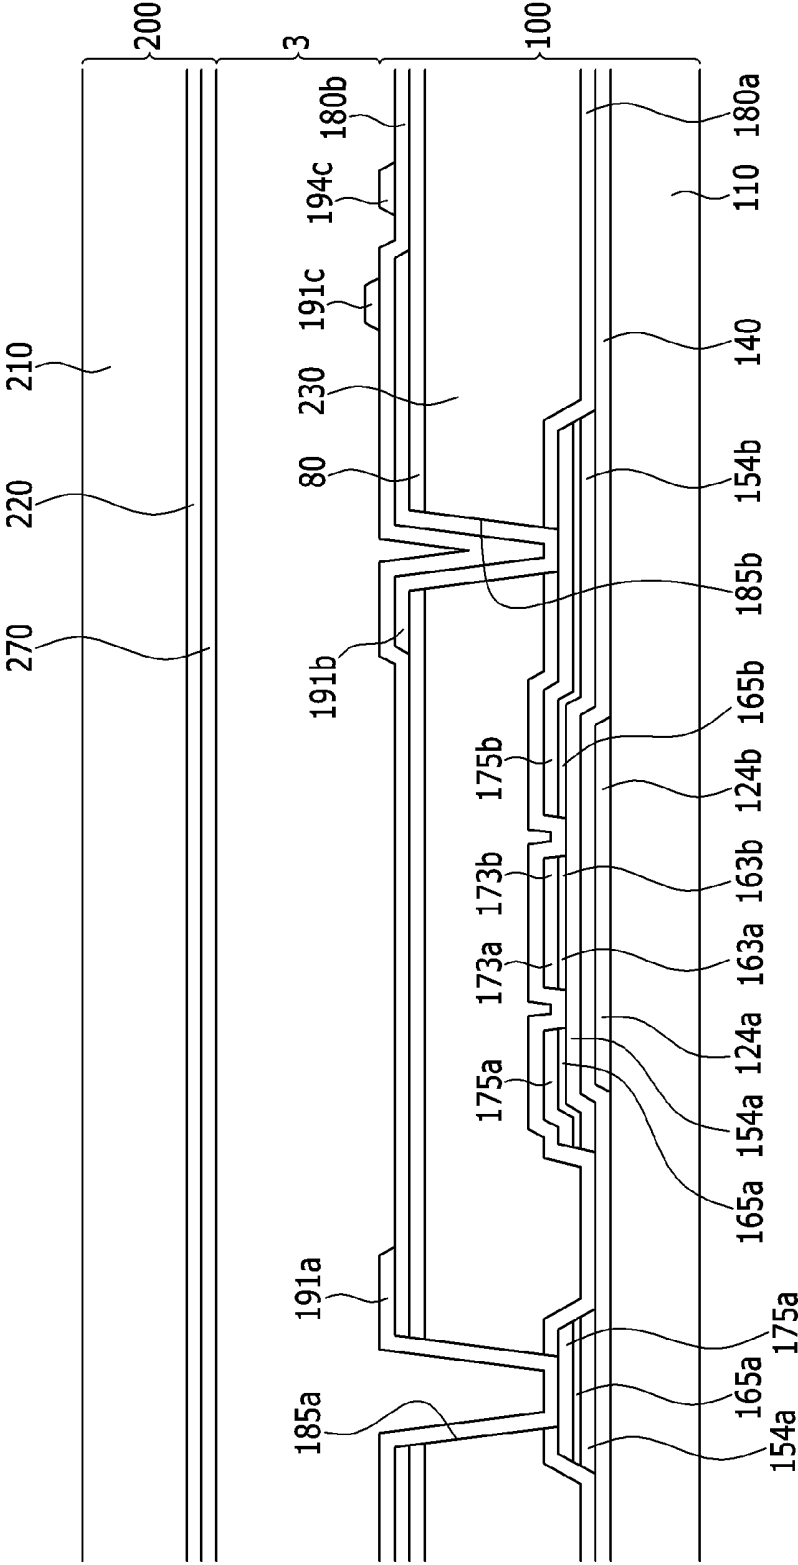


FIG. 3

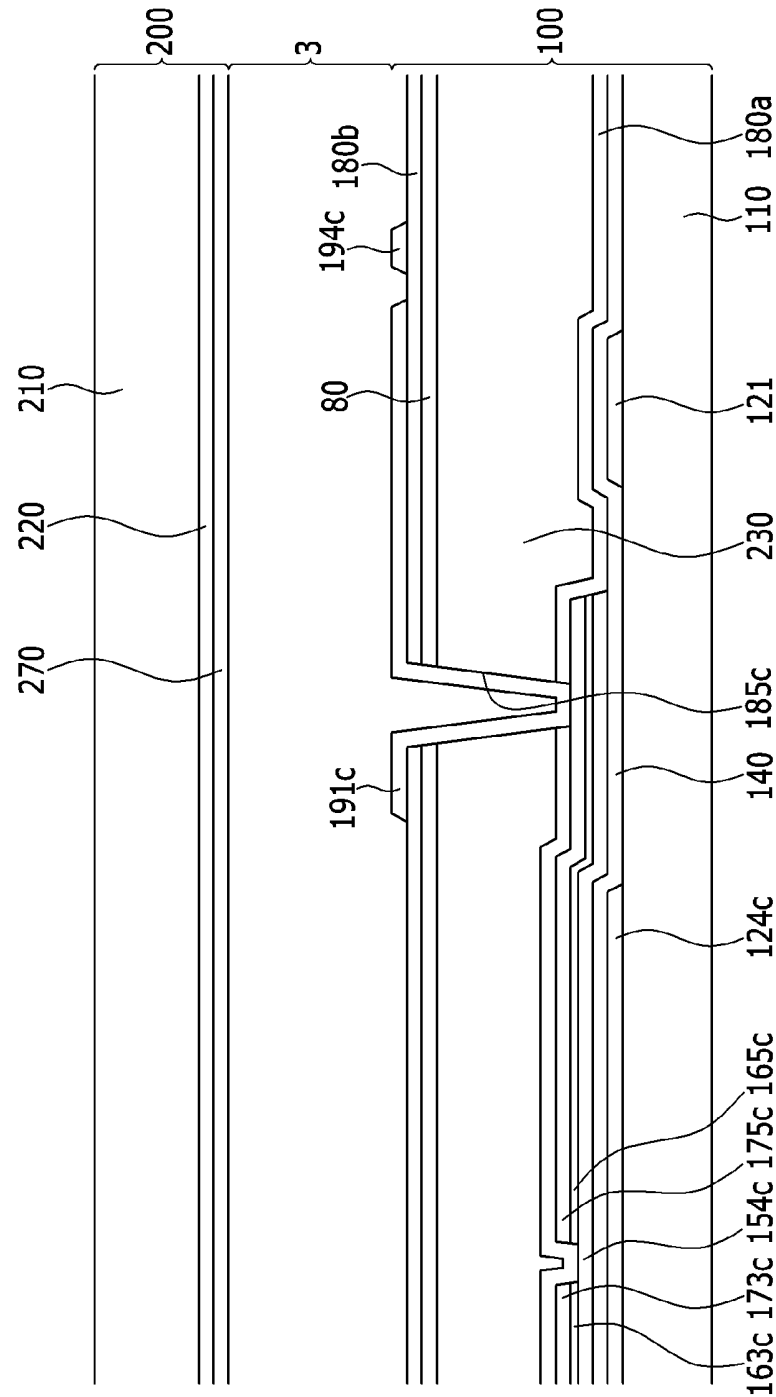


FIG. 4

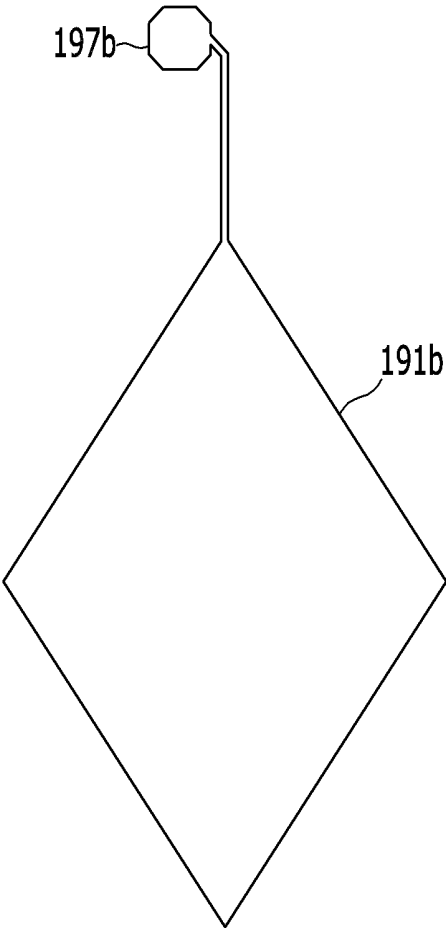


FIG. 5

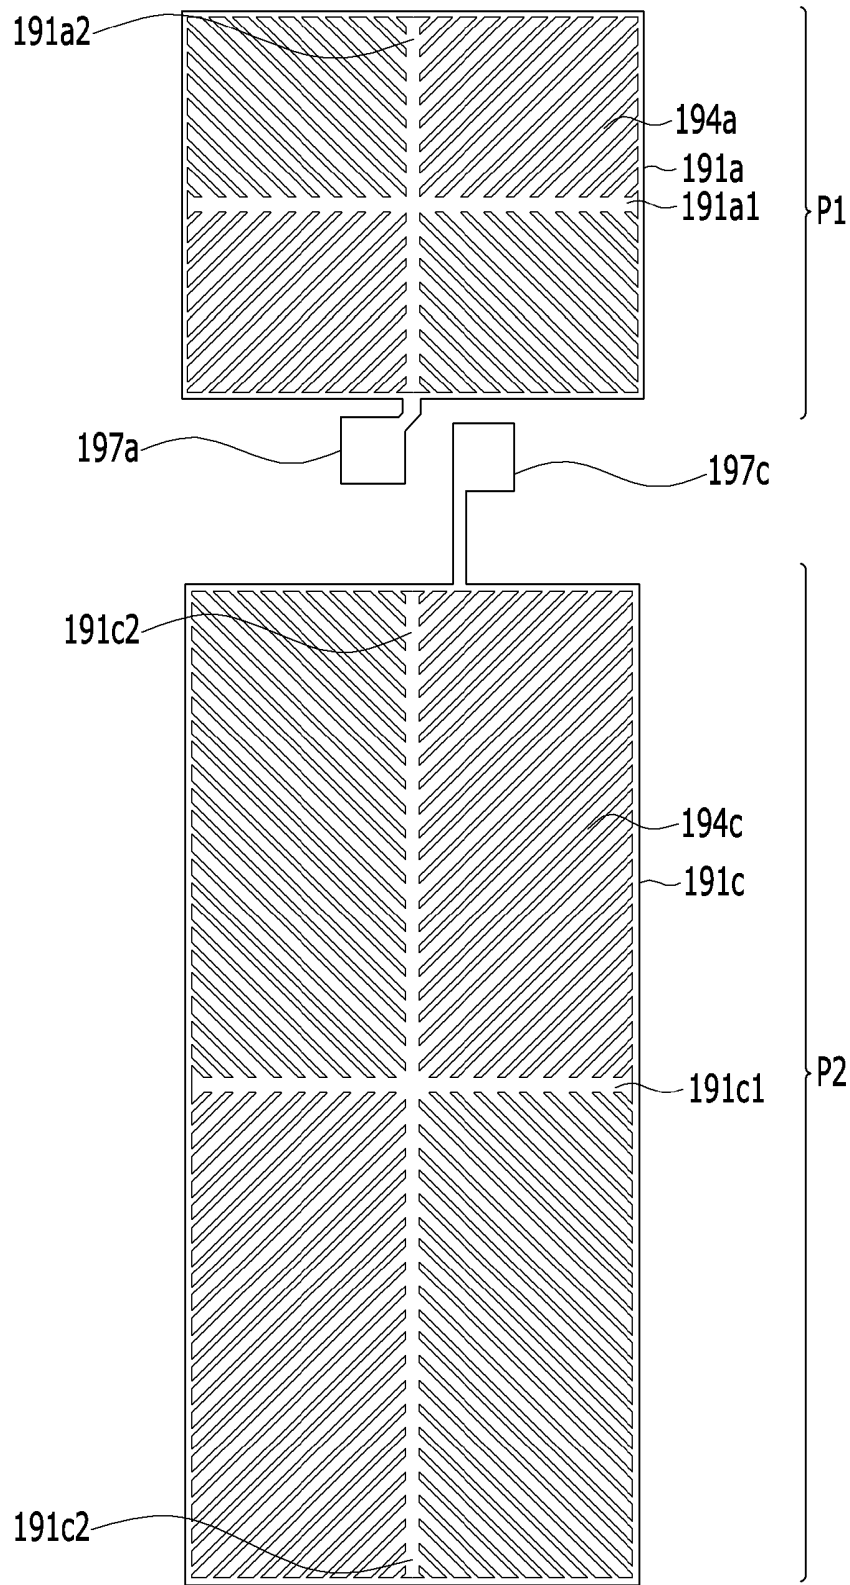


FIG. 6

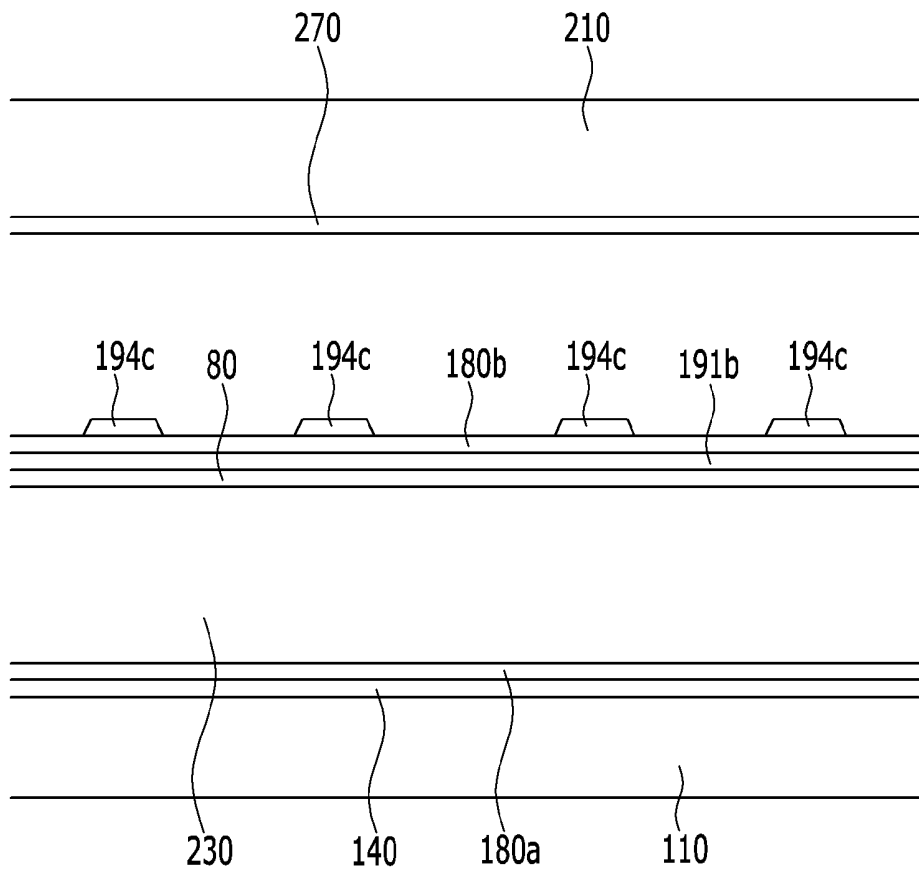


FIG. 7

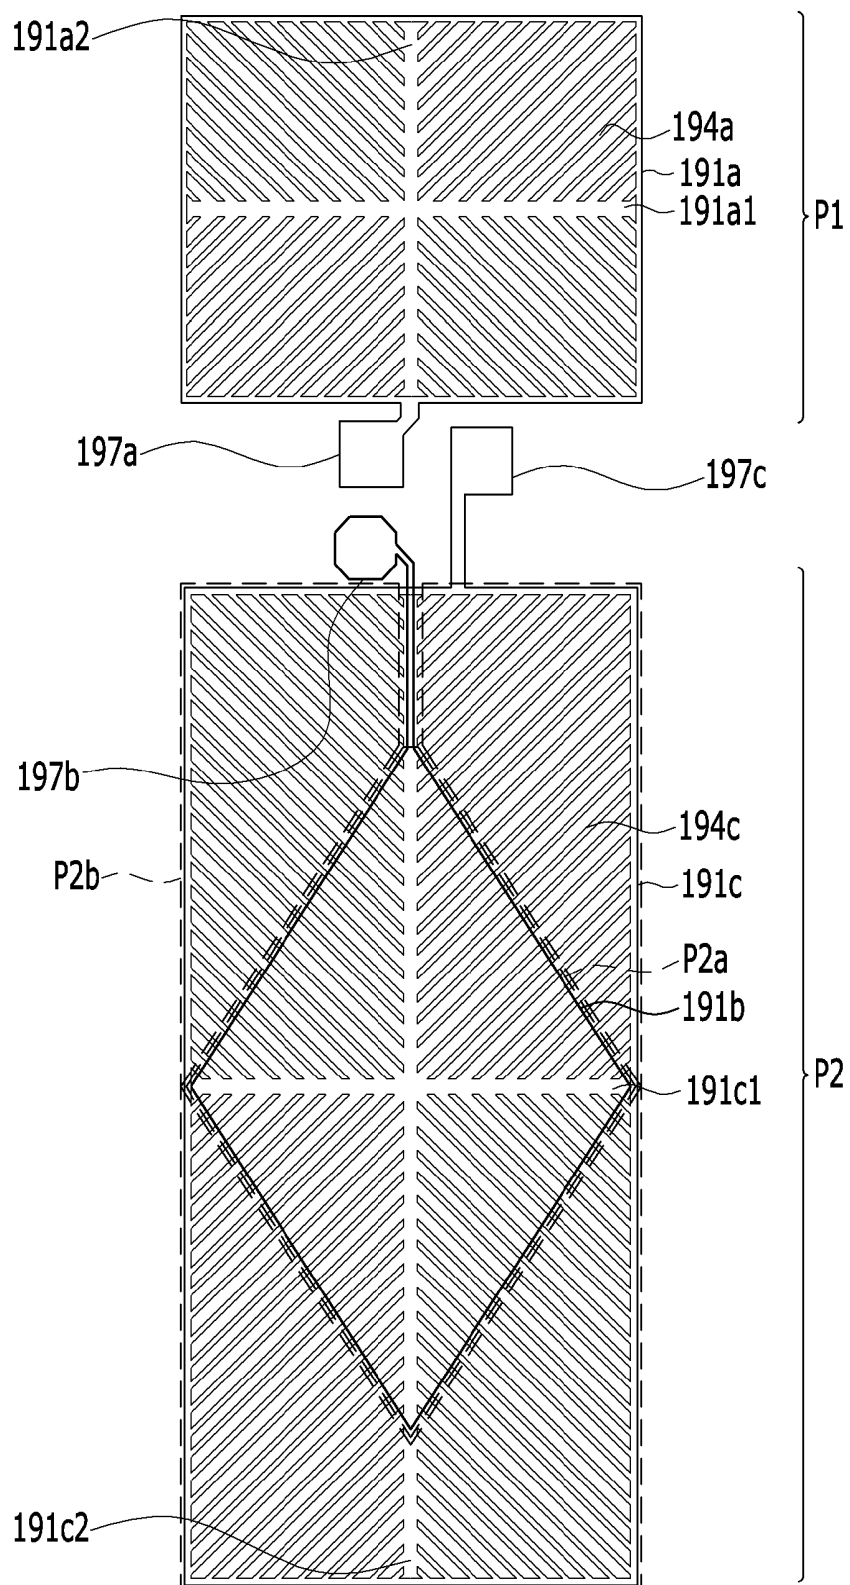


FIG. 8

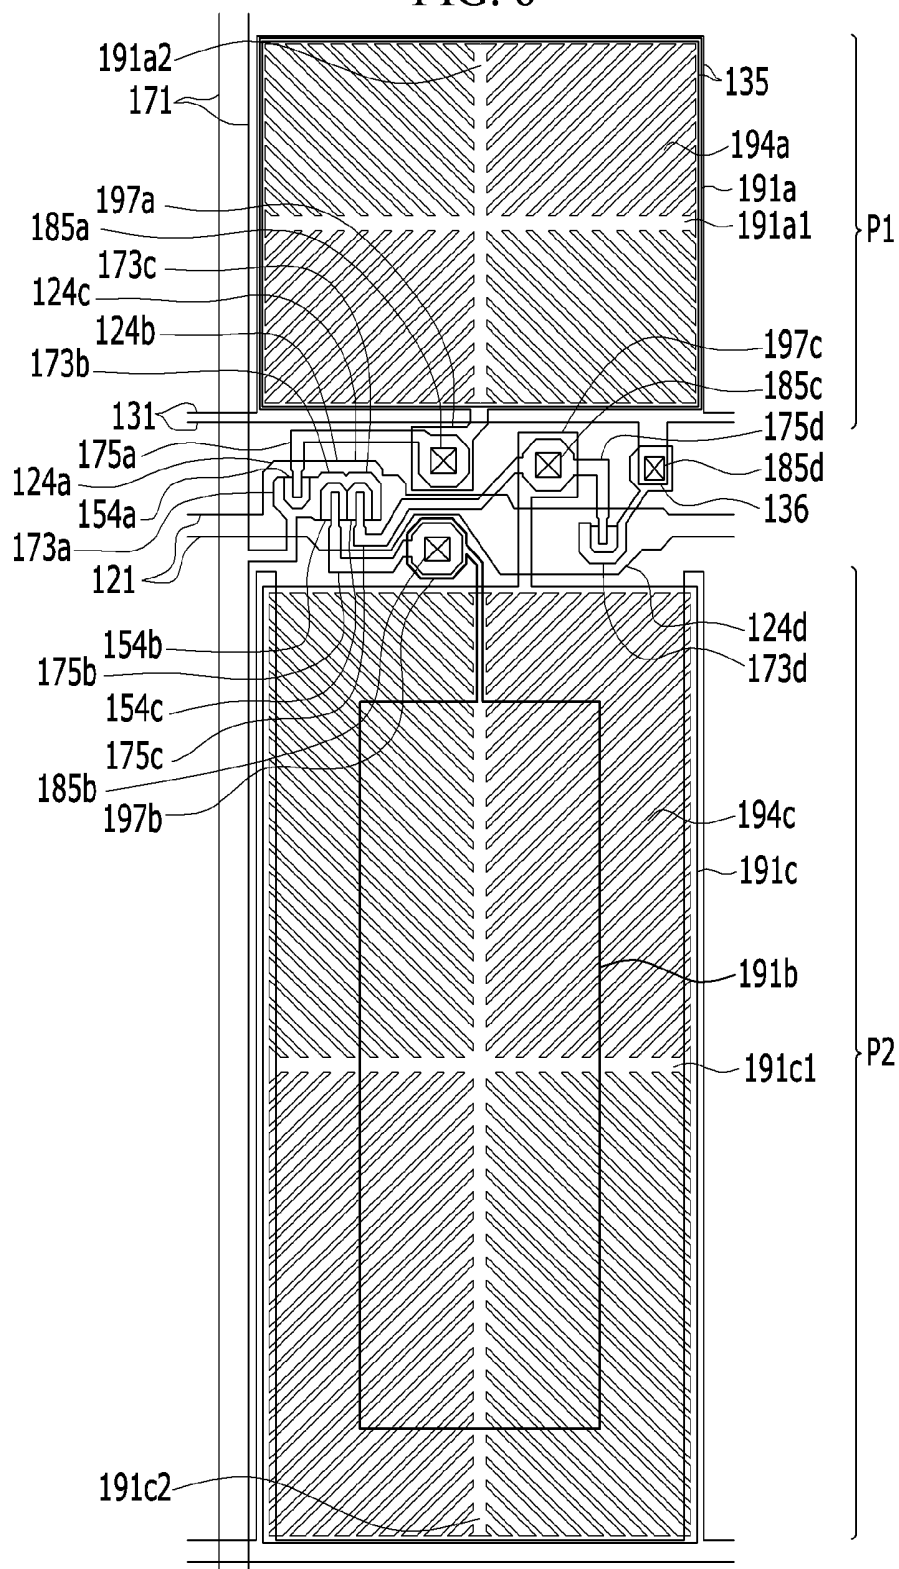


FIG. 9

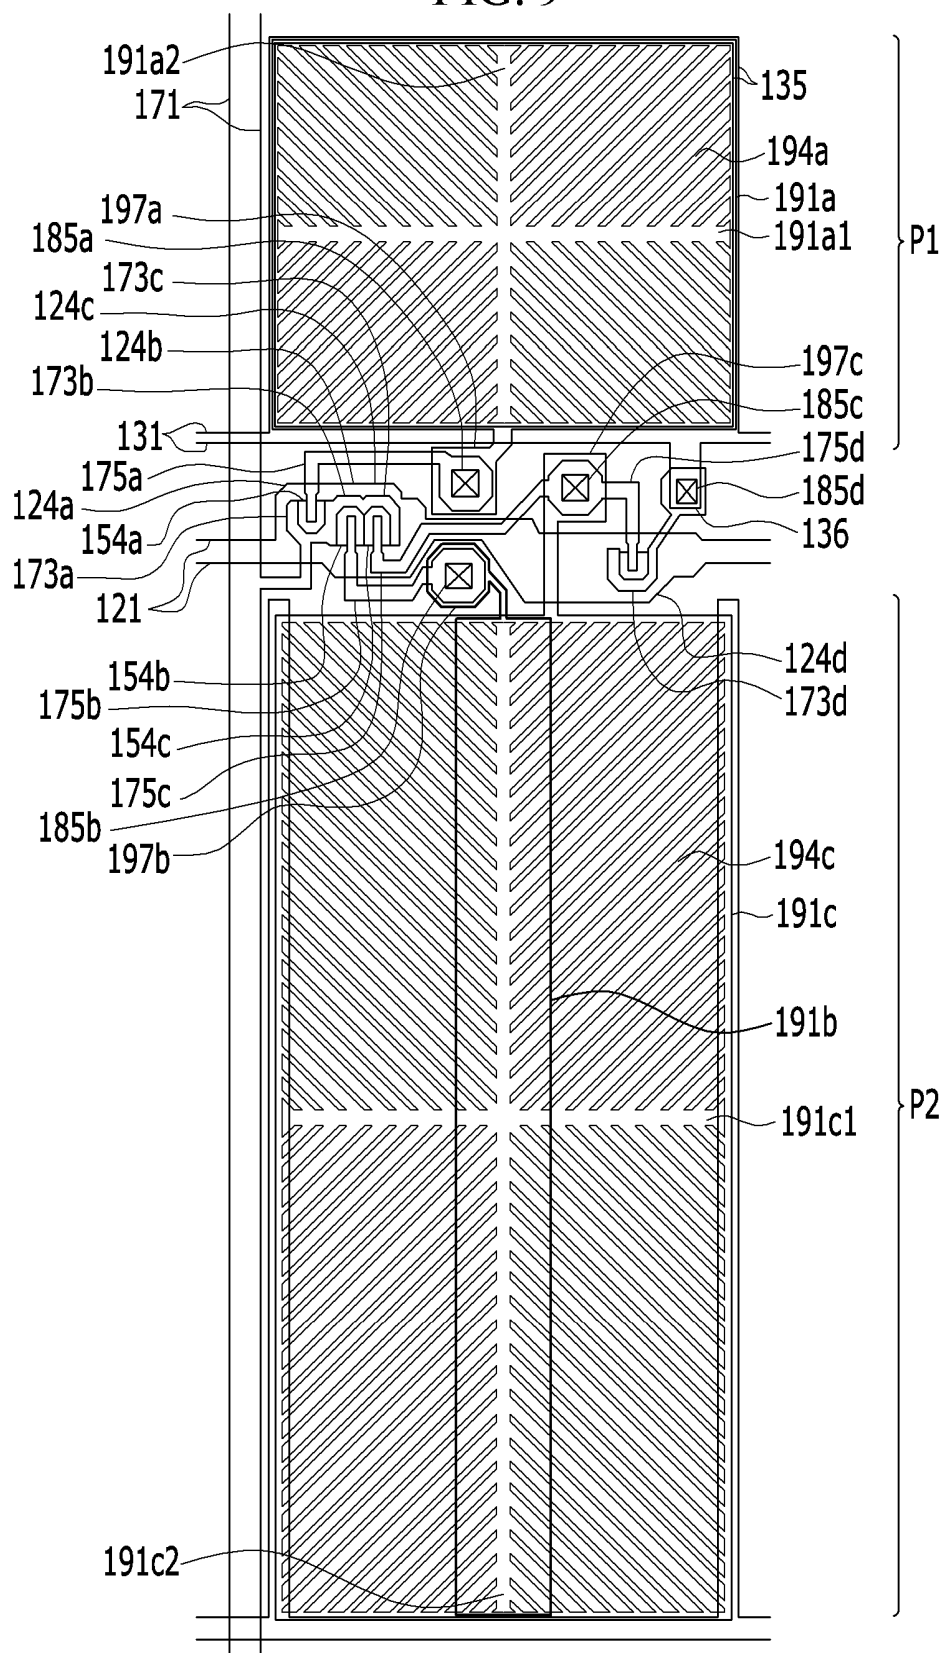


FIG. 10

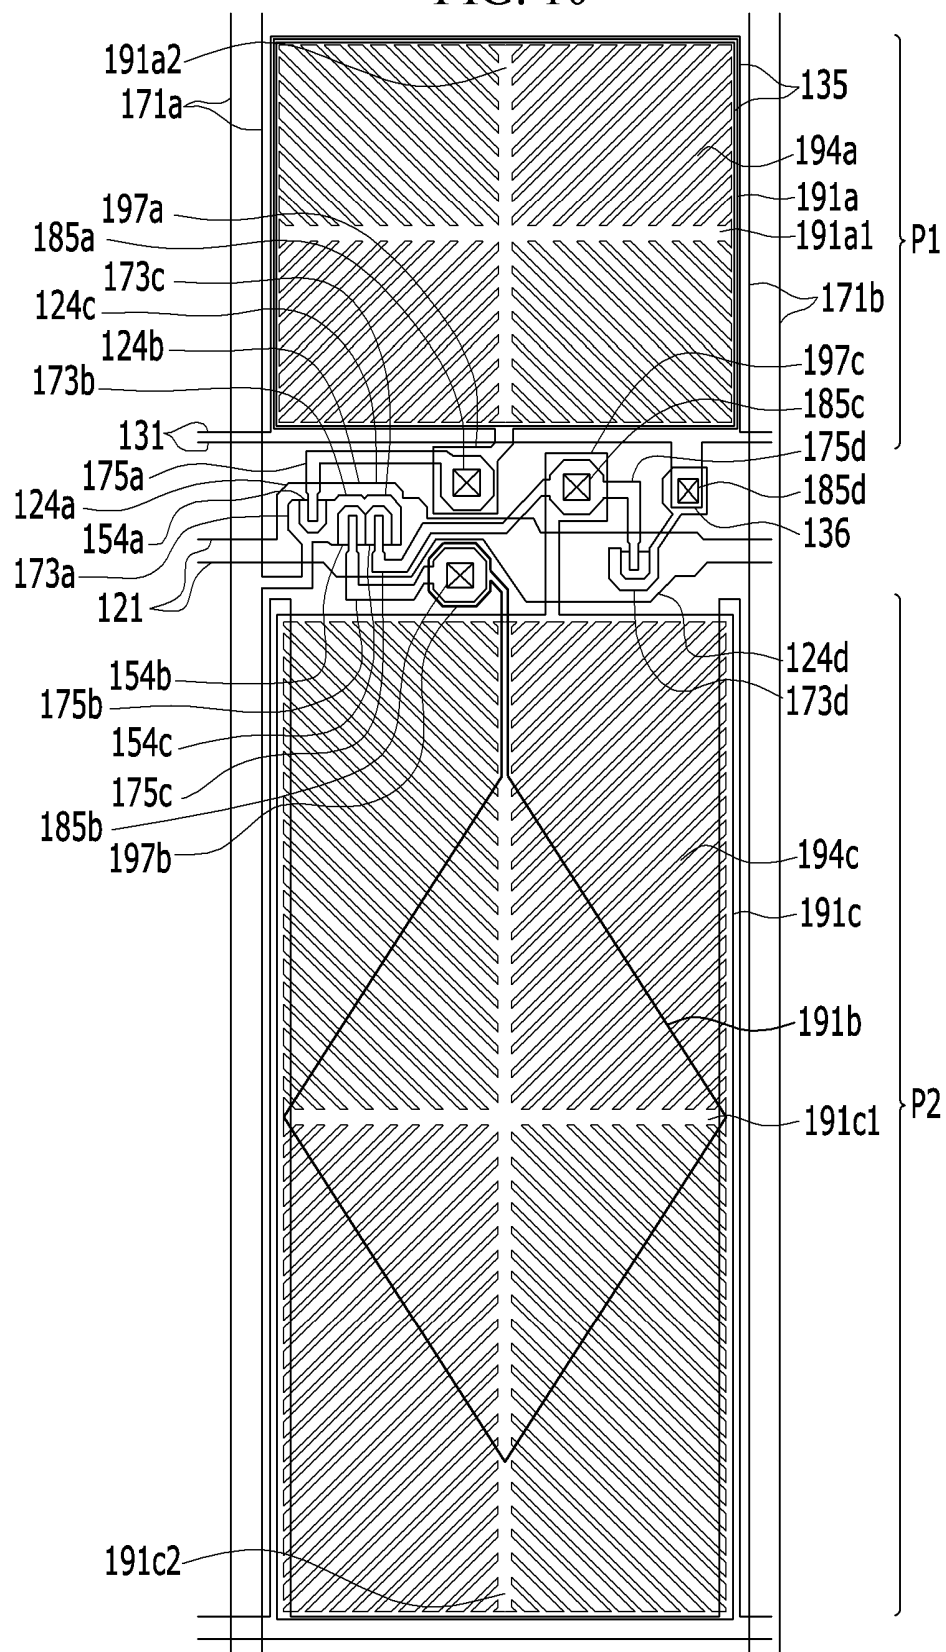


FIG. 11

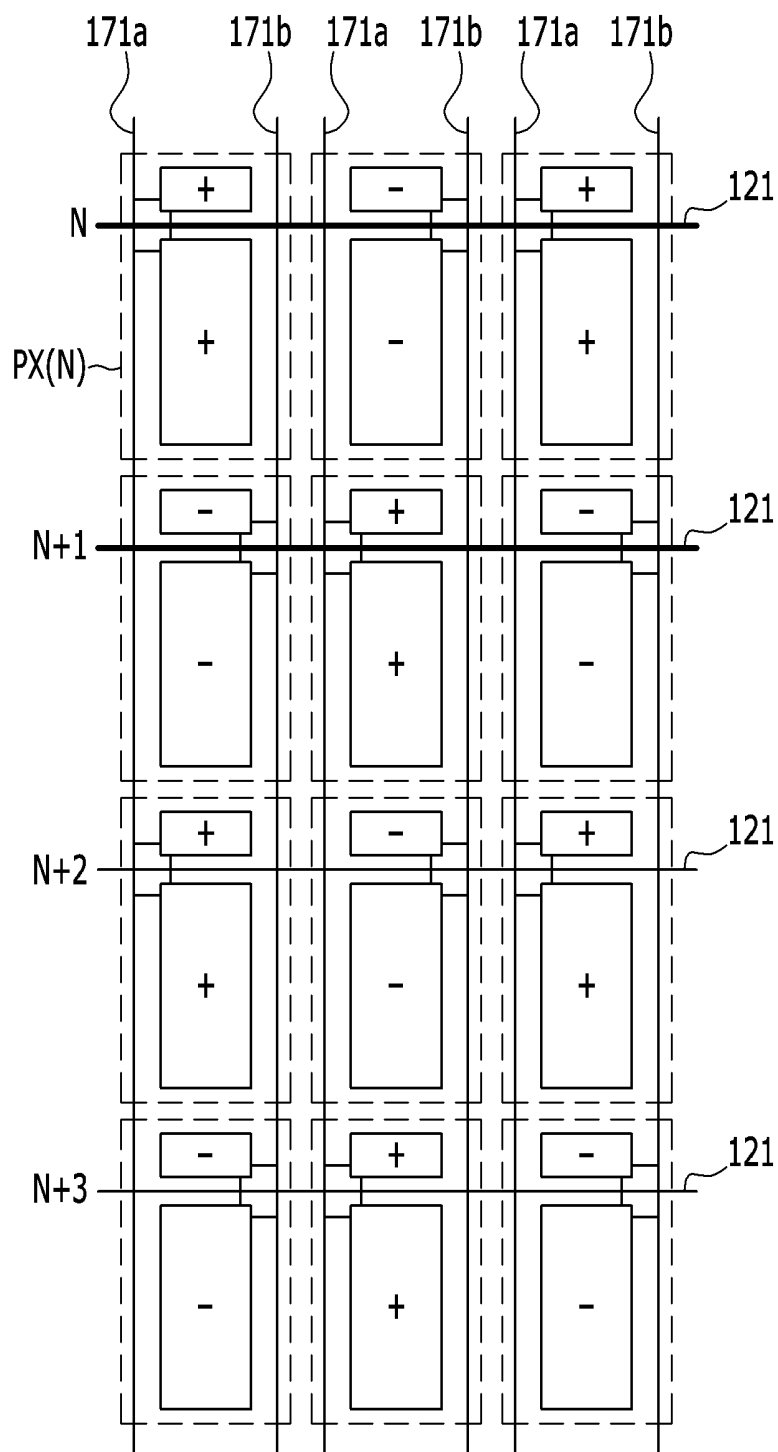


FIG. 12

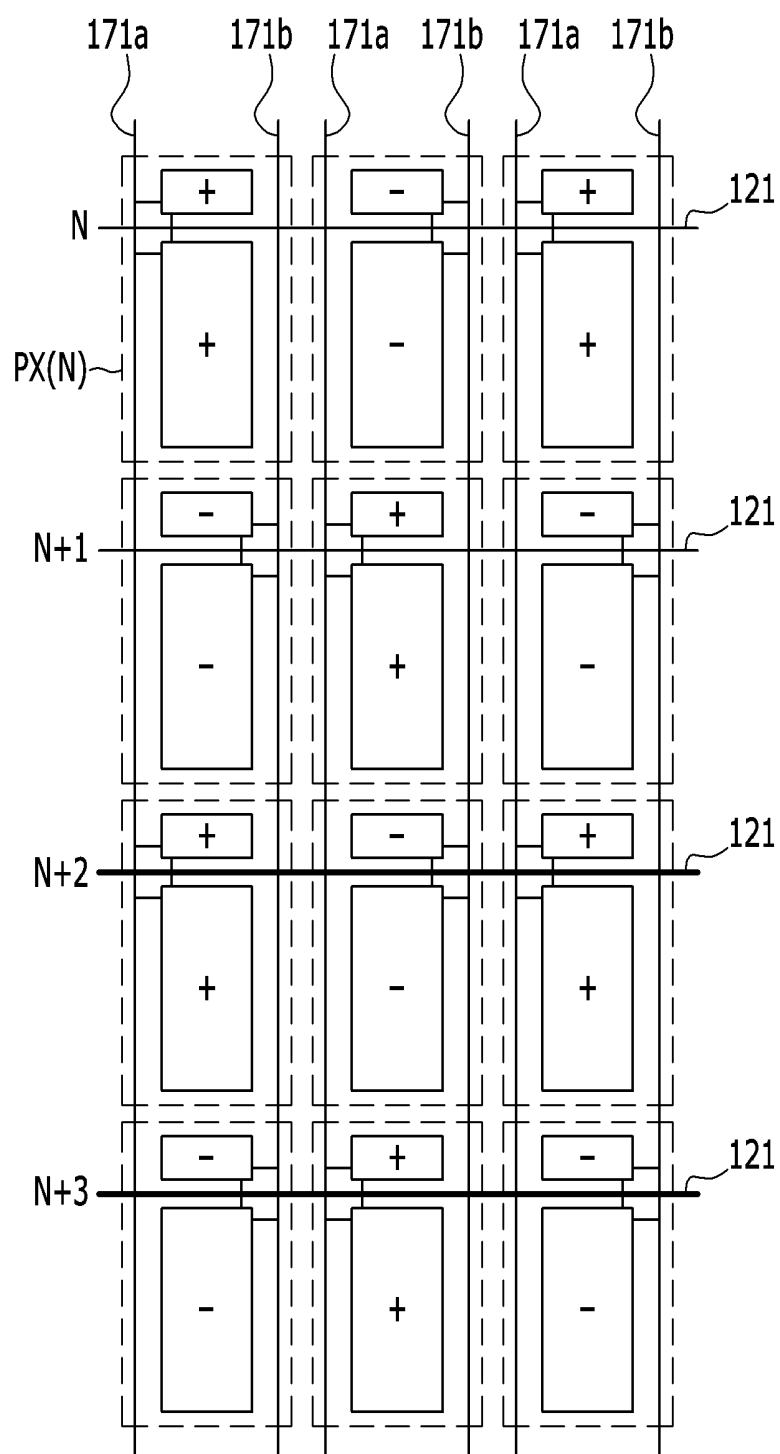


FIG. 13


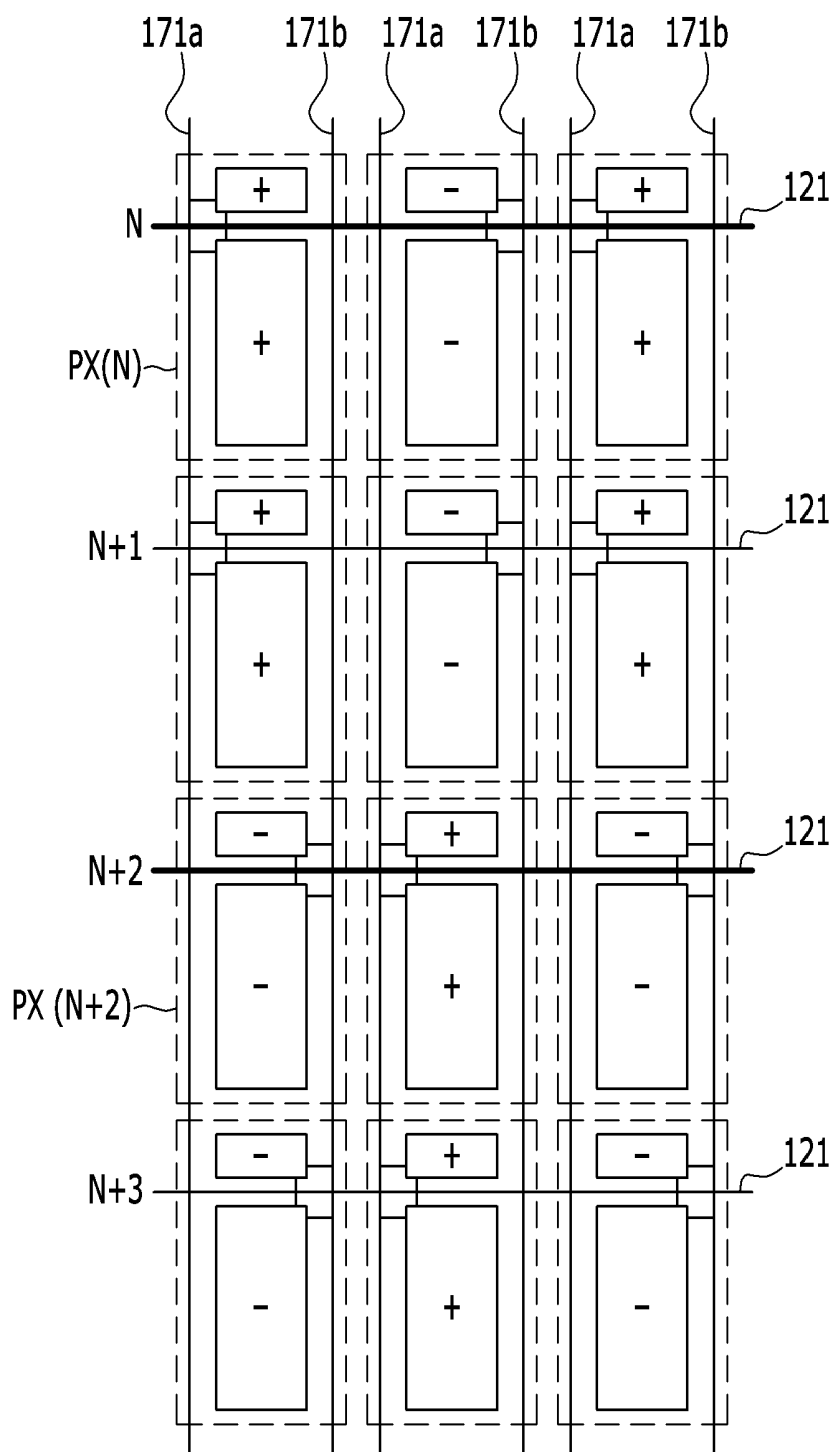


FIG. 14

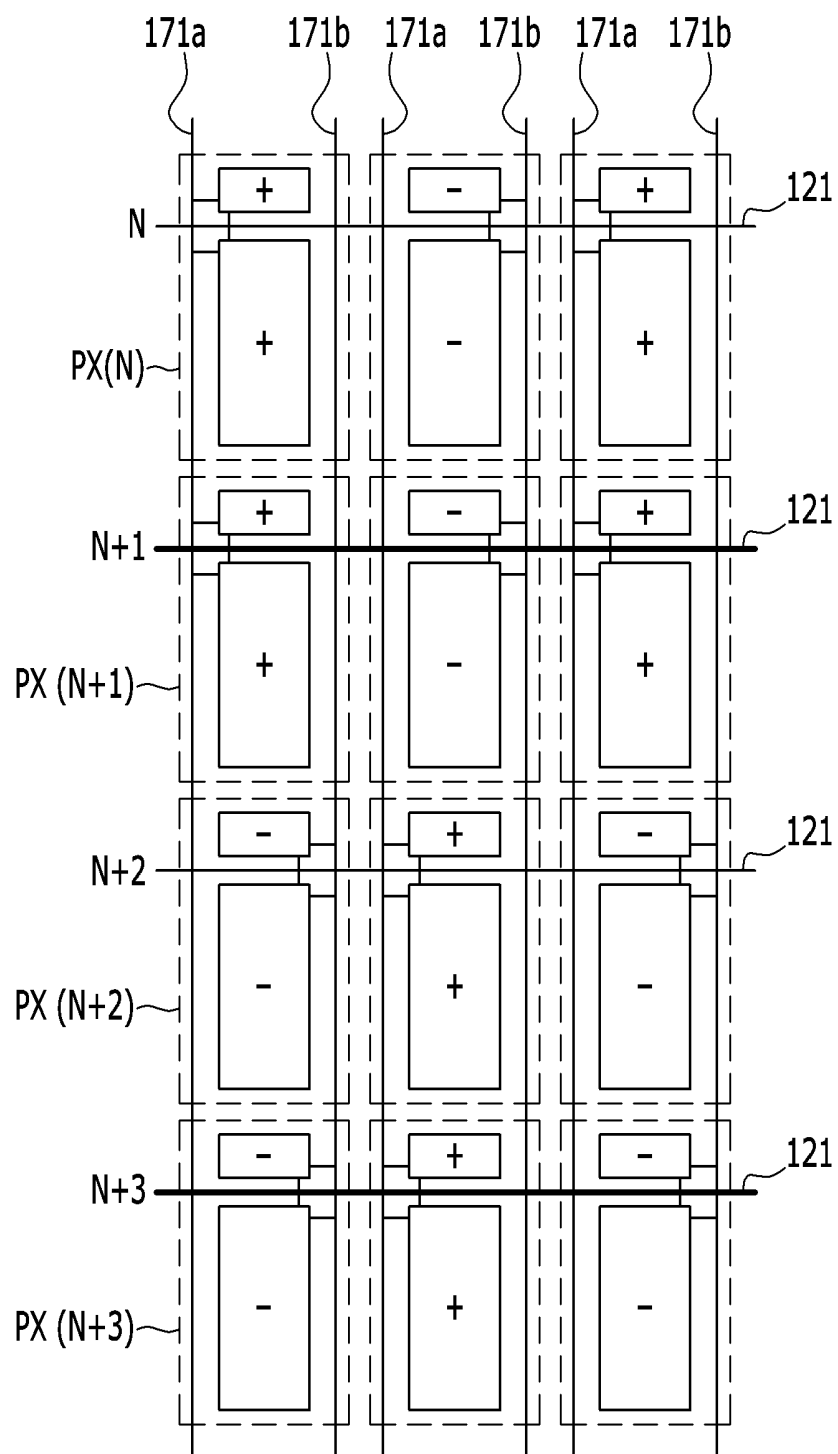

**LIQUID CRYSTAL DISPLAY HAVING
IMPROVED TRANSMITTANCE AND
LUMINANCE CHARACTERISTICS**

**CROSS-REFERENCE TO RELATED
APPLICATION**

[0001] This application claims priority to, and the benefit of, Korean Patent Application No. 10-2014-0003021 filed in the Korean Intellectual Property Office on Jan. 9, 2014, the entire contents of which are incorporated herein by reference.

BACKGROUND

[0002] (a) Field

[0003] Embodiments of the present invention relate generally to a liquid crystal display. More specifically, embodiments of the present invention relate to a liquid crystal display having improved transmittance and luminance characteristics.

[0004] (b) Description of the Related Art

[0005] A liquid crystal display is one popular form of flat panel display device that typically includes two display panels where field generating electrodes such as a pixel electrode and a common electrode are formed, with a liquid crystal layer interposed therebetween.

[0006] The liquid crystal display generates an electric field in the liquid crystal layer by applying voltages to the field generating electrodes, to determine orientations of liquid crystal molecules of the liquid crystal layer and to control polarization of incident light, thereby displaying an image.

[0007] The liquid crystal display includes switching elements each connected to pixel electrodes, and a plurality of signal lines such as data lines and gate lines for applying voltages to the pixel electrodes by controlling the switching elements.

[0008] Among these LCDs, a vertical alignment mode LCD, which arranges major axes of liquid crystal molecules so as to be perpendicular to the display panel when an electric field is not applied, has been widely used due to its high contrast ratio and wide reference viewing angle.

[0009] In order to approximately match side visibility to that of front visibility in the vertical alignment mode LCD, a method of causing a difference in transmittance by dividing one pixel into two sub-pixels and applying different voltages to the two sub-pixels has been suggested.

[0010] However, when dividing one pixel into two subpixels and approximating the side visibility to the front visibility by differentiating the transmittance, the luminance is increased at a low gray or high gray such that gray expression is difficult at the sides, thereby deteriorating display quality.

[0011] The above information disclosed in this Background section is only for enhancement of understanding of the background of the invention and therefore it may contain information that does not form the prior art that is already known in this country to a person of ordinary skill in the art.

SUMMARY

[0012] The present invention provides a liquid crystal display having advantages of expressing an accurate gray in a low gray region and preventing transmittance deterioration while side visibility is close to front visibility.

[0013] Further, the present invention provides a liquid crystal display preventing luminance from being non-uniform by interference between pixels due to a parasitic capacitance.

[0014] A liquid crystal display according to an exemplary embodiment of the present invention includes: a first substrate; a first subpixel electrode disposed on the first substrate and configured to have a first voltage applied thereto; a second subpixel electrode disposed on the first substrate and configured to have a second voltage applied thereto; a third subpixel electrode disposed on the first substrate and configured to have a third voltage applied thereto; an insulating layer between the first subpixel electrode and the second subpixel electrode or between the second subpixel electrode and the third subpixel electrode; and a common electrode disposed on a second substrate and configured to have a common voltage applied thereto. The second subpixel electrode and the third subpixel electrode overlap each other with the insulating layer positioned therebetween, the first subpixel electrode and the third subpixel electrode are disposed on opposing sides of the gate line, and the first voltage and the third voltage are different.

[0015] The first voltage and the second voltage may be the same.

[0016] A difference between the first voltage and the common voltage may be larger than a difference between the third voltage and the common voltage.

[0017] The second subpixel electrode may be disposed under the insulating layer, and the first subpixel electrode and the third subpixel electrode may be disposed on the insulating layer.

[0018] When the first voltage is applied to the first subpixel electrode, a first electric field is formed in a first region in which the first subpixel electrode is disposed; when the second and third voltages are respectively applied to the second and third subpixel electrodes, a second electric field is formed in a second region in which the second and third subpixel electrodes overlap each other; when the third voltage is applied to the third subpixel electrode, a third electric field is formed in a third region in which the third subpixel electrode is disposed but not the second subpixel. The first, second, and third electric fields may respectively have different magnitudes from one another.

[0019] The first subpixel electrode and the second subpixel electrode may be connected to a same input electrode through a first contact hole and a second contact hole.

[0020] The first voltage may be applied to the first subpixel electrode by the input electrode, and the second voltage may be applied to the second subpixel electrode.

[0021] A passivation layer disposed between the first substrate and the second subpixel electrode may be further included, wherein the first contact hole may be formed through the passivation layer and the insulating layer, and the second contact hole may be formed through the passivation layer.

[0022] The third subpixel electrode may be connected to an output electrode through a third contact hole.

[0023] The third voltage may be applied by the output electrode.

[0024] The first subpixel electrode and the third subpixel electrode may each include a plurality of branch electrodes extending in different directions.

[0025] The second subpixel electrode may be at least approximately planar.

[0026] The first subpixel electrode and the third subpixel electrode may each outline a cross-shaped portion including a transverse portion and a longitudinal portion crossing the

transverse portion, and a plurality of branch electrodes may be at least approximately symmetric with respect to the cross-shaped portion.

[0027] The second subpixel electrode may have a shape that is at least approximately symmetric with respect to the cross-shaped portion.

[0028] A plurality of gate lines disposed on the first substrate and configured to have a gate signal applied thereto, as well as a plurality of data lines crossing a plurality of gate lines and configured to have a data signal applied thereto may be further included. The plurality of data lines may be configured to be driven by column inversion, and two gate lines among the plurality of gate lines may be configured to be simultaneously turned on.

[0029] The plurality of gate lines may include an N-th gate line, an (N+1)-th gate line, an (N+2)-th gate line, and an (N+3)-th gate line, and the N-th gate line and the (N+1)-th gate line may be configured to be simultaneously turned on, and the (N+2)-th gate line and the (N+3)-th gate line may be configured to be simultaneously turned on.

[0030] The plurality of gate lines may include a N-th gate line, an (N+1)-th gate line, an (N+2)-th gate line, and an (N+3)-th gate line, and the N-th gate line and the (N+2)-th gate line may be configured to be simultaneously turned on, and the (N+1)-th gate line and the (N+3)-th gate line may be configured to be simultaneously turned on.

[0031] According to an exemplary embodiment of the present invention, by forming an intermediate-magnitude electric field through the overlapping of two subpixel electrodes applied with the different voltages, one pixel area is divided into the three different regions, thereby more smoothly controlling the change of the transmittance. Also, by providing a structure in which the gate line of the previous stage is separated from the pixel electrode of the next stage, the luminance non-uniformity depending on the interference between the pixels by the parasitic capacitance may be reduced or prevented.

BRIEF DESCRIPTION OF THE DRAWINGS

[0032] FIG. 1 is a layout view of a liquid crystal display according to an exemplary embodiment of the present invention.

[0033] FIG. 2 is a cross-sectional view taken along the line II-II of FIG. 1.

[0034] FIG. 3 is a cross-sectional view taken along the line III-III of FIG. 1.

[0035] FIG. 4 is a layout view of a second subpixel electrode in a liquid crystal display according to an exemplary embodiment of the present invention.

[0036] FIG. 5 is a layout view of a first subpixel electrode and a third subpixel electrode in a liquid crystal display according to an exemplary embodiment of the present invention.

[0037] FIG. 6 is a cross-sectional view taken along the line VI-VI of FIG. 1.

[0038] FIG. 7 is a layout view of a pixel area in a liquid crystal display according to an exemplary embodiment of the present invention.

[0039] FIG. 8 is a layout view of a liquid crystal display according to an exemplary embodiment of the present invention.

[0040] FIG. 9 is a layout view of a liquid crystal display according to an exemplary embodiment of the present invention.

[0041] FIG. 10 is a layout view of a liquid crystal display according to an exemplary embodiment of the present invention.

[0042] FIG. 11 to FIG. 14 are schematic diagrams representing a driving method of a liquid crystal display according to an exemplary embodiment of the present invention.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0043] Hereinafter, exemplary embodiments of the present invention will be described in detail with reference to the accompanying drawings. As those skilled in the art would realize, the described embodiments may be modified in various different ways, all without departing from the spirit or scope of the present invention. On the contrary, exemplary embodiments introduced herein are provided to make disclosed contents thorough and complete and sufficiently transfer the spirit of the present invention to those skilled in the art.

[0044] In the drawings, the thickness of layers, films, panels, regions, etc., are exaggerated for clarity. The drawings are thus not to scale. It will be understood that when a layer is referred to as being "on" another layer or substrate, it can be directly on the other layer or substrate, or intervening them may also be present. Like reference numerals designate like elements throughout the specification.

[0045] FIG. 1 is a layout view of a liquid crystal display according to an exemplary embodiment of the present invention. FIG. 2 is a cross-sectional view taken along the line II-II of FIG. 1. FIG. 3 is a cross-sectional view taken along the line III-III of FIG. 1. FIG. 4 is a layout view of a second subpixel electrode in a liquid crystal display according to an exemplary embodiment of the present invention. FIG. 5 is a layout view of a first subpixel electrode and a third subpixel electrode in a liquid crystal display according to an exemplary embodiment of the present invention. FIG. 6 is a cross-sectional view taken along the line VI-VI of FIG. 1. FIG. 7 is a layout view of a pixel area in a liquid crystal display according to an exemplary embodiment of the present invention.

[0046] Referring to FIG. 1 to FIG. 3, the liquid crystal display according to the present exemplary embodiment includes a lower panel 100 and an upper panel 200 facing each other, with a liquid crystal layer 3 interposed between the two display panels 100 and 200.

[0047] First, the lower panel 100 will be described.

[0048] A gate line 121, a reference voltage line 131, and a storage electrode 135 are formed on an insulation substrate 110 made of transparent glass or plastic. The gate line 121 transfers a gate signal and mainly extends in a transverse direction.

[0049] The gate line 121 includes a first gate electrode 124a, a second gate electrode 124b, a third gate electrode 124c, and a fourth gate electrode 124d, and has a wide end (not shown) for connection with other layers or an external driving circuit.

[0050] The reference voltage line 131 may extend generally in parallel to the gate line 121 and has an expansion 136, and the expansion 136 may be connected to a third drain electrode 173d by a fourth contact hole 185d that will be described later.

[0051] The reference voltage line 131 includes the storage electrode 135 enclosing a pixel area.

[0052] A gate insulating layer 140 is formed on the gate line 121, the reference voltage line 131, and the storage electrode 135.

[0053] A first semiconductor 154a, a second semiconductor 154b, a third semiconductor 154c, and a fourth semiconductor 154d that may be made of amorphous silicon or crystalline silicon are disposed on the gate insulating layer 140.

[0054] A plurality of ohmic contacts 163a, 163b, 163c, 163d, 165a, 165b, 165c, and 165d are formed on the first semiconductor 154a, the second semiconductor 154b, the third semiconductor 154c, and the fourth semiconductor 154d. When the semiconductors 154a, 154b, 154c, and 154d are formed with an oxide semiconductor, the ohmic contacts may be omitted.

[0055] Data conductors 171, 173a, 173b, 173c, 173d, 175a, 175b, 175c, and 175d including a first data line 171, a first source electrode 173a, a second source electrode 173b, a third source electrode 173c connected to the first data line 171, a fourth source electrode 173d connected to the expansion 136 of the reference voltage line 131, and a first drain electrode 175a, a second drain electrode 175b, a third drain electrode 175c, and a fourth drain electrode 175d are formed on the ohmic contacts 163a, 163b, 163c, 163d, 165a, 165b, 165c, and 165d and the gate insulating layer 140.

[0056] The data conductors 171, 173a, 173b, 173c, 173d, 175a, 175b, 175c, and 175d and the underlying semiconductor layer and ohmic contact may be simultaneously formed by using one mask.

[0057] The data line 171 includes a wide end (not shown) for connection with other layers or an external driving circuit.

[0058] The second source electrode 173b is connected to the third source electrode 173c.

[0059] The first gate electrode 124a, the first source electrode 173a, and the first drain electrode 175a collectively form a first thin film transistor Qa along with the first semiconductor 154a, and a channel of the thin film transistor is formed in the semiconductor 154a between the first source electrode 173a and the first drain electrode 175a. Similarly, the second gate electrode 124b, the second source electrode 173b, and the second drain electrode 175b collectively form a second thin film transistor Qb along with the second semiconductor 154b, and a channel of the thin film transistor is formed in the semiconductor 154b between the second source electrode 173b and the second drain electrode 175b. Likewise, the third gate electrode 124c, the third source electrode 173c, and the third drain electrode 175c collectively form a third thin film transistor Qc along with the third semiconductor 154c, and a channel of the thin film transistor is formed in the semiconductor 154c between the third source electrode 173c and the third drain electrode 175c.

[0060] A first passivation layer 180a, that may be made of an inorganic insulator such as a silicon nitride or silicon oxide, is formed on the data conductors 171, 173a, 173b, 173c, 173d, 175a, 175b, 175c, and 175d and the exposed portion of the semiconductor layers 154a, 154b, 154c, and 154d.

[0061] An organic layer 230 is disposed on the first passivation layer 180a. The organic layer 230 may act to flatten and may be a color filter. The organic layer 230 used as a color filter may be elongated in a vertical direction along columns of the pixel electrodes 191. Each color filter 230 may display one of three primary colors such as red, green, and blue. However, it is not limited to three primary colors such as red, green, and blue, and may display one of cyan, magenta, yellow, and white-based colors, or any other suitable color.

[0062] An overcoat 80 is disposed on the organic layer 230. The overcoat 80 prevents peeling of the organic layer 230, and also suppresses contamination of a liquid crystal layer 3 by an

organic material of the solvent that inflows from the color filter 230, so that it prevents defects such as afterimages that may occur when an image is driven.

[0063] A second subpixel electrode 191b is disposed over the overcoat 80. With respect to the gate line 121 shown in FIG. 1, when a pixel portion above the gate line 121 is referred to as a first region P1 and a pixel portion below the gate line 121 is referred to as a second region P2, the second subpixel electrode 191b is disposed in the second region P2. The second subpixel electrode 191b will be further described with reference to FIG. 4.

[0064] Referring to FIG. 1 and FIG. 4, the second subpixel electrode 191b includes a portion formed having a planar, rhomboid shape positioned at a center portion of the second region P2, and an upper protrusion 197b overlapping the wide end of the second drain electrode 175b. The second subpixel electrode 191b may be formed of a transparent conductive material such as ITO or IZO. The planar shape is a single unitary and continuous shape without any slits.

[0065] A first passivation layer 180a and the organic layer 230 have a second contact hole 185b exposing a portion of the second drain electrode 175b. The second subpixel electrode 191b is electrically connected to the second drain electrode 175b through the second contact hole 185b such that the data signal applied through the data line 171 may be charged to the second subpixel electrode 191b through the second drain electrode 175b.

[0066] A second passivation layer 180b is disposed on the overcoat 80 and the second subpixel electrode 191b.

[0067] A first subpixel electrode 191a and a third subpixel electrode 191c are disposed on the second passivation layer 180b. Referring to FIG. 5, the first subpixel electrode 191a and the third subpixel electrode 191c will be described.

[0068] Referring to FIG. 1 and FIG. 5, the first subpixel electrode 191a is disposed at the first region P1, and the third subpixel electrode 191c is disposed at the second region P2. The first subpixel electrode 191a and the third subpixel electrode 191c may be formed of a transparent conductive material such as ITO or IZO.

[0069] The first subpixel electrode 191a and the third subpixel electrode 191c are disposed to cover most of the unit pixel area, and to each have a slit structure. The overall shape of each of the first subpixel electrode 191a and the third subpixel electrode 191c is a quadrangle.

[0070] The first subpixel electrode 191a includes a cross-shaped portion made of a transverse portion 191a1 and a longitudinal portion 191a2 crossing the transverse portion 191a1. Also, four subregions are formed by the transverse portion 191a1 and the longitudinal portion 191a2, and each subregion includes a plurality of branch electrodes 194a. The subregions of the first subpixel electrode 191a are symmetric with respect to the cross-shaped portion. A portion where an electrode does not exist between adjacent branch electrodes 194a corresponds to a slit.

[0071] Like the first subpixel electrode 191a, the third subpixel electrode 191c includes a cross-shaped portion made of a transverse portion 191c1 and a longitudinal portion 191c2 crossing the transverse portion 191c1. Also, four subregions are formed by the transverse portion 191c1 and the longitudinal portion 191c2, and each subregion includes a plurality of branch electrodes 194c. The subregions of the third subpixel electrode 191c are symmetric with respect to their cross-

shaped portion. A portion where an electrode does not exist between the adjacent branch electrodes **194c** corresponds to a slit.

[0072] In the present exemplary embodiment, the cross-shaped portions including the transverse portions **191a1** and **191c1** and the longitudinal portions **191a2** and **191c2** correspond to an opening portion where the electrode does not exist, and a plurality of branch electrodes **194a** and **194c** are connected to each other at an edge of the first subpixel electrode **191a** and the third subpixel electrode **191c**. However, the present invention is not limited thereto, and the opening portion and the electrode portion may be exchanged such that the electrodes may be formed at the transverse portions **191a** and **191c1** and the longitudinal portions **191a2** and **191c2**.

[0073] Referring to FIG. 1 and FIG. 6, the third subpixel electrode **191c** overlaps the second subpixel electrode **191b** disposed at the second region P2. The second subpixel electrode **191b** is relatively small compared to the third subpixel electrode **191c**, such that the second region P2 may be divided into a portion where the second subpixel electrode **191b** and the third subpixel electrode **191c** overlap each other and a portion where only the third subpixel electrode **191c** is formed.

[0074] Again referring to FIG. 1 and FIG. 3, the first passivation layer **180a**, the organic layer **230**, and the overcoat **80** have a first contact hole **185a** and a third contact hole **185c** formed therethrough and respectively exposing portions of the first drain electrode **175a** and the third drain electrode **175c**.

[0075] A protrusion **197a** of the first subpixel electrode **191a** is electrically connected to the first drain electrode **175a** through the first contact hole **185a**, such that the data signal applied through the data line **171** may be charged to the first subpixel electrode **191a** through the first drain electrode **175a**.

[0076] A protrusion **197c** of the third subpixel electrode **191c** is electrically connected to the third drain electrode **175c** and the fourth drain electrode **175d** through the third contact hole **185c** such that the data signal applied through the data line **171** may be charged to the third subpixel electrode **191c** through the third drain electrode **175c**. At this time, the third subpixel electrode **191c** is connected to the fourth drain electrode **175d** as well as the third drain electrode **175c** by the signal applied through the reference voltage line **131**, such that the voltage applied to the third subpixel electrode **191c** is actually divided through the fourth thin film transistor connected to the reference voltage line **131**. Accordingly, the voltage applied to the third subpixel electrode **191c** is smaller than the voltage applied to the first subpixel electrode **191a**.

[0077] Next, the upper panel **200** will be described.

[0078] A light blocking member **220** and a common electrode **270** are formed on an insulation substrate **210** made of transparent glass or plastic. The light blocking member **220** is referred to as a black matrix and prevents light leakage.

[0079] However, in the case of the liquid crystal display according to another exemplary embodiment of the present invention, the light blocking member **220** may instead be disposed in the lower panel **100**, while in a case of a liquid crystal display according to another exemplary embodiment, the color filter may be disposed in the upper panel **200**.

[0080] Alignment layers (not shown) may be formed on inner surfaces of the display panels **100** and **200**, and they may be vertical alignment layers.

[0081] Polarizers (not shown) are provided on the outer surfaces of the two display panels **100** and **200**, the transmissive axes of two polarizers are crossed, and it is preferable that one transmissive axis is parallel to the gate line **121**. However, a polarizer may only be disposed at one outer surface of the two display panels **100** and **200**.

[0082] The liquid crystal layer **3** has negative dielectric anisotropy, and liquid crystal molecules of the liquid crystal layer **3** may be aligned so that long axes thereof are perpendicular to the inner surfaces of the two display panels **100** and **200** when no electric field is present. Therefore, incident light does not pass through the crossed polarizers but is blocked in a state when no electric field is applied.

[0083] At least one of the liquid crystal layer **3** and the alignment layer may include a photoreactive material, in detail, a reactive mesogen.

[0084] Next, a driving method of a liquid crystal display according to the present exemplary embodiment will be described.

[0085] If a gate-on signal is applied to the gate line **121**, the gate-on signal is applied to the first gate electrode **124a**, the second gate electrode **124b**, the third gate electrode **124c**, and the fourth gate electrode **124d** such that the first through third thin film transistors are turned on. Accordingly, the data voltage applied to the data line **171** is applied to the first subpixel electrode **191a**, the second subpixel electrode **191b**, and the third subpixel electrode **191c** through the turned-on first thin film transistor, second thin film transistor, and third thin film transistor. At this time, the first subpixel electrode **191a** and the second subpixel electrode **191b** each receive a voltage of the same magnitude. Also, the first subpixel electrode **191a** and the third subpixel electrode **191c** each receive a voltage of the same magnitude. However, the voltage applied to the third subpixel electrode **191c** is divided through the fourth thin film transistor connected to the third thin film transistor in series. Accordingly, the voltage applied to the third subpixel electrode **191c** is smaller than the voltage applied to the first subpixel electrode **191a**.

[0086] Next, the first region P1 and the second region P2 included in one pixel area of the liquid crystal display according to the present exemplary embodiment will be described with reference to FIG. 1 and FIG. 7.

[0087] Referring to FIG. 1 and FIG. 7, one pixel area of the liquid crystal display according to the present exemplary embodiment includes the first region P1 where the first subpixel electrode **191a** is disposed, as well as a second region P2 which has a **2a** region P2a where the second subpixel electrode **191b** and the third subpixel electrode **191c** overlap, and a **2b** region P2b where only the third subpixel electrode **191c** is formed.

[0088] In the first region P1 of one pixel area of the liquid crystal display according to the present exemplary embodiment, the first subpixel electrode **191a** disposed at the lower panel **100** and the common electrode **270** disposed at the upper panel **200** generate an electric field. At this time, the first subpixel electrode **191a** includes a cross-shaped portion and a plurality of branch electrodes **194a** extending in four different directions. The plurality of branch electrodes **194a** may form an angle of about 40 degrees to about 45 degrees with respect to the gate line **121**. Due to the fringe field generated by the edges of the plurality of branch electrodes **194a**, the liquid crystal molecules of the liquid crystal layer **3** disposed at the first region P1 are slanted in four different directions. In detail, a horizontal component of the fringe

field generated by a plurality of branch electrodes **194a** is almost parallel to the sides of the plurality of branch electrodes **194a**, such that the liquid crystal molecules are inclined in directions parallel to the length directions of the plurality of branch electrodes **194a**.

[0089] In the **2a** region **P2a** of the center of the second region **P2** of one pixel area of the liquid crystal display according to the present exemplary embodiment, the liquid crystal molecules of the liquid crystal layer **3** are arranged by the electric field formed between the third subpixel electrode **191c** and the common electrode **270**, along with the electric field formed between the second subpixel electrode **191b** of the lower panel **100** and the common electrode **270** of the upper panel **200**.

[0090] Next, in the **2a** region **P2a** of the center of the second region **P2** of one pixel area of the liquid crystal display according to the present exemplary embodiment, the third subpixel electrode **191c** disposed at the lower panel **100** and the common electrode **270** disposed at the upper panel **200** generate the electric field in the liquid crystal layer **3**.

[0091] As described above, the magnitude of the third voltage applied to the third subpixel electrode **191c** is smaller than the magnitude of the first voltage applied to the first subpixel electrode **191a**.

[0092] Accordingly, the intensity of the electric field applied to the liquid crystal layer disposed at the first region **P1** is strongest, and the intensity of the electric field applied to the liquid crystal layer disposed at the **2b** region **P2b** is smallest. In the **2a** region **R2a**, since an influence of the electric field of the second subpixel electrode **191b** disposed under the third subpixel electrode **191c** exists, the intensity of the electric field applied to the liquid crystal layer **3** disposed at the **2a** region **P2a** is smaller than the intensity of the electric field applied to the liquid crystal layer **3** disposed at the first region **P1** and is larger than the intensity of the electric field applied to the liquid crystal layer disposed at the **2b** region **P2b**.

[0093] Accordingly, in the liquid crystal display according to an exemplary embodiment of the present invention, one pixel area is divided into a first region where the first subpixel electrode receives a relatively high first voltage; a **2a** region where the second subpixel electrode receives a second voltage that is the same as the first voltage, a portion of the third subpixel electrode receives a relatively low third voltage, and the second and third subpixel electrodes overlap each other via the insulating layer; and a **2b** region where the third subpixel electrode receives the relatively low third voltage. Accordingly, the intensities of the electric field applied to the liquid crystal molecules corresponding to the first region, the **2a** region, and the **2b** region are different such that the inclination angles of the liquid crystal molecules are different, thereby realizing different luminance for each region. Thus, by dividing one pixel area into three regions having different luminances, the change of the transmittance according to a gray may be smoother, thereby preventing a sharp change of transmittance according to a gray change in a low gray and a high gray at the side, while approximating the lateral visibility to the front visibility. Thus, gray expression in the low gray and the high gray is improved.

[0094] FIG. 8 is a layout view of a liquid crystal display according to another exemplary embodiment of the present invention.

[0095] The exemplary embodiment described in FIG. 8 is almost the same as the exemplary embodiment described in FIG. 1 to FIG. 7. However, differently from the previous

exemplary embodiment, the second subpixel electrode **191b** has a shape extending generally along the longitudinal portion **191c2** of the third subpixel electrode **191c**. More specifically, the second subpixel electrode **191b** has an elongated rectangular shape similar to that of the third subpixel electrode **191c**.

[0096] FIG. 9 is a layout view of a liquid crystal display according to a further exemplary embodiment of the present invention.

[0097] The exemplary embodiment described in FIG. 9 is almost the same as the exemplary embodiment described in FIG. 8. In particular, the second subpixel electrode **191b** has an elongated rectangular shape. However, the second subpixel electrode **191b** has a thinner width than the second subpixel electrode **191b** described in FIG. 8, and a longer shape in the vertical direction.

[0098] FIG. 10 is a layout view of a liquid crystal display according to yet another exemplary embodiment of the present invention.

[0099] The exemplary embodiment described in FIG. 10 is almost the same as the exemplary embodiment described in FIG. 1. However, as a difference, a first data line **171a** and a second data line **171b** are disposed at right and left sides with respect to one pixel area. The description of FIG. 1 may be applied to the exemplary embodiment of FIG. 10. Hereinafter, in the liquid crystal display according to this further exemplary embodiment of the present invention, by forming two data lines **171a** and **171b** corresponding to one pixel area, a luminance non-uniformity may be prevented while realizing high speed driving. This will be further described below.

[0100] FIG. 11 to FIG. 14 are schematic diagrams of a driving method of a liquid crystal display according to an exemplary embodiment of the present invention. FIG. 11 to FIG. 14 are the views in which unit pixel areas of FIG. 10 are arranged in a matrix shape.

[0101] Referring to FIG. 10 to FIG. 14, unit pixel areas **PX(N)** (**N** is a natural number) according to the present exemplary embodiment are divided based on the gate lines **121**. As described above, again referring to FIG. 10, the unit pixel areas **PX(N)** may include a first region **P1** disposed above the gate line **121** and a second region **P2** disposed below the gate line **121**. In the present exemplary embodiment, two data lines **171a** and **171b** corresponding to one unit pixel area **PX(N)** may be driven with column inversion.

[0102] Referring to FIG. 10 and FIG. 11, the liquid crystal display according to an exemplary embodiment of the present invention simultaneously turns on the **N**-th gate line and the (**N**+1)-th gate line, and charges the pixel electrodes **191a**, **191b**, and **191c** through the data lines **171a** and **171b**. Two gate lines are simultaneously turned on for the charging such that the charging time may be decreased.

[0103] Referring to FIG. 10 and FIG. 12, while the **N**-th gate line and the (**N**+1)-th gate line of the turned on state are turned off, the (**N**+2)-th gate line and the (**N**+3)-th gate line are simultaneously turned on such that the corresponding pixel electrodes **191a**, **191b**, **191c** may be charged.

[0104] Referring to FIG. 10 and FIG. 13, the liquid crystal display according to an exemplary embodiment of the present invention firstly simultaneously turns on the **N**-th gate line and the (**N**+2)-th gate line and charges the pixel electrodes of the **N**-th pixel area **PX(N)** and the pixel electrodes of the (**N**+2)-th pixel area **PX(N+2)**. Two gate lines are simultaneously turned on for the charge such that the charging time may be decreased.

[0105] Referring to FIG. 10 and FIG. 14, while the turned on N-th gate line and the (N+2)-th gate line are turned off, the (N+1)-th gate line and the (N+3)-th gate line are simultaneously turned on such that the pixel electrodes of the (N+1)-th pixel area PX(N+1) and the pixel electrodes of the (N+3)-th pixel area PX(N+3) may be charged. Next, if the (N+1)-th gate line is turned off, the voltage of the charged (N+2)-th pixel area PX(N+2) may be dropped. Accordingly, a conventional (N+2)-th pixel area PX(N+2) may appear excessively bright or excessively dark. However, in the liquid crystal display according to the present exemplary embodiment, since the second region P2 of the (N+1)-th pixel area PX(N+1) is disposed between the (N+1)-th gate line and the (N+2)-th pixel area PX(N+2), the luminance non-uniformity caused by the parasitic capacitance between the (N+1)-th gate line and the pixel electrode of the (N+2)-th pixel area PX(N+2) may be prevented or reduced.

[0106] While this invention has been described in connection with what is presently considered to be practical exemplary embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims. For example, the various features of any embodiments may be mixed and matched in any manner, to form further embodiments contemplated by the invention.

<Description of Symbols>

110, 210	substrate		
121	gate line	131	reference electrode line
140	gate insulating layer	171	data line
180a, 180b	passivation layer	191a, 191b, 191c	pixel electrode
220	light blocking member	230	organic layer
270	common electrode		

What is claimed is:

1. A liquid crystal display comprising:

a first substrate;

a first subpixel electrode disposed on the first substrate and configured to have a first voltage applied thereto;

a second subpixel electrode disposed on the first substrate and configured to have a second voltage applied thereto;

a third subpixel electrode disposed on the first substrate and configured to have a third voltage applied thereto;

an insulating layer between the first subpixel electrode and the second subpixel electrode or between the second subpixel electrode and the third subpixel electrode; and
a common electrode disposed on a second substrate and configured to have a common voltage applied thereto,
wherein the second subpixel electrode and the third subpixel electrode overlap each other with the insulating layer positioned therebetween,

wherein the first subpixel electrode and the third subpixel electrode are disposed on opposing sides of the gate line, and

wherein the first voltage and the third voltage are different.

2. The liquid crystal display of claim 1, wherein the first voltage and the second voltage are the same.

3. The liquid crystal display of claim 2, wherein

a difference between the first voltage and the common voltage is larger than a difference between the third voltage and the common voltage.

4. The liquid crystal display of claim 3, wherein

the second subpixel electrode is disposed under the insulating layer, and the first subpixel electrode and the third subpixel electrode are disposed on the insulating layer.

5. The liquid crystal display of claim 4, wherein:

when the first voltage is applied to the first subpixel electrode, a first electric field is formed in a first region in which the first subpixel electrode is disposed;

when the second and third voltages are respectively applied to the second and third subpixel electrodes, a second electric field is formed in a second region in which the second and third subpixel electrodes overlap each other;

when the third voltage is applied to the third subpixel electrode, a third electric field is formed in a third region in which the third subpixel electrode is disposed but not the second subpixel; and

the first, second, and third electric fields respectively have different magnitudes from one another.

6. The liquid crystal display of claim 2, wherein

the first subpixel electrode and the second subpixel electrode are connected to a same input electrode through a first contact hole and a second contact hole.

7. The liquid crystal display of claim 6, wherein

when applied, the first voltage is applied to the first subpixel electrode by the input electrode, and the second voltage is applied to the second subpixel electrode.

8. The liquid crystal display of claim 7, wherein

the second subpixel electrode is disposed under the insulating layer, and the first subpixel electrode and the third subpixel electrode are disposed on the insulating layer.

9. The liquid crystal display of claim 8, further comprising a passivation layer disposed between the first substrate and the second subpixel electrode, wherein the first contact hole is formed through the passivation layer and the insulating layer, and the second contact hole is formed through the passivation layer.

10. The liquid crystal display of claim 8, wherein

the third subpixel electrode is connected to an output electrode through a third contact hole.

11. The liquid crystal display of claim 10, wherein

when applied, the third voltage is applied by the output electrode.

12. The liquid crystal display of claim 11, wherein

a difference between the first voltage and the common voltage is smaller than a difference between the third voltage and the common voltage.

13. The liquid crystal display of claim 12, wherein:

when the first voltage is applied to the first subpixel electrode, a first electric field is formed in a first region in which the first subpixel electrode is disposed;

when the second and third voltages are respectively applied to the second and third subpixel electrodes, a second electric field is formed in a second region in which the second and third subpixel electrodes overlap each other;

when the third voltage is applied to the third subpixel electrode, a third electric field is formed in a third region in which the third subpixel electrode is disposed but not the second subpixel; and

the first, second, and third electric fields respectively have different magnitudes from one another.

14. The liquid crystal display of claim 1, wherein

the first subpixel electrode and the third subpixel electrode each include a plurality of branch electrodes extending in different directions.

- 15.** The liquid crystal display of claim **14**, wherein the second subpixel electrode is at least approximately planar.
- 16.** The liquid crystal display of claim **15**, wherein the first subpixel electrode and the third subpixel electrode each outline a cross-shaped portion including a transverse portion and a longitudinal portion crossing the transverse portion, and a plurality of branch electrodes are at least approximately symmetric with respect to the cross-shaped portion.
- 17.** The liquid crystal display of claim **16**, wherein the second subpixel electrode has a shape that is at least approximately symmetric with respect to the cross-shaped portion.
- 18.** The liquid crystal display of claim **1**, further comprising:
 a plurality of gate lines disposed on the first substrate and configured to have a gate signal applied thereto; and
 a plurality of data lines crossing the plurality of gate lines and configured to have a data signal applied thereto,
 wherein the plurality of data lines are configured to be driven by column inversion, and two gate lines among the plurality of gate lines are configured to be simultaneously turned on.
- 19.** The liquid crystal display of claim **18**, wherein:
 the plurality of gate lines include an N-th gate line, an (N+1)-th gate line, an (N+2)-th gate line, and an (N+3)-th gate line; and
 the N-th gate line and the (N+1)-th gate line are configured to be simultaneously turned on, and the (N+2)-th gate line and the (N+3)-th gate line are configured to be simultaneously turned on.
- 20.** The liquid crystal display of claim **18**, wherein
 the plurality of gate lines includes an N-th gate line, an (N+1)-th gate line, an (N+2)-th gate line, and an (N+3)-th gate line, and
 the N-th gate line and the (N+2)-th gate line are configured to be simultaneously turned on, and the (N+1)-th gate line and the (N+3)-th gate line are configured to be simultaneously turned on.

* * * * *

专利名称(译)	液晶显示器具有改善的透射率和亮度特性		
公开(公告)号	US20150192812A1	公开(公告)日	2015-07-09
申请号	US14/468187	申请日	2014-08-25
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	HWANG HYUN SIK HWANG IN JAE SHIN DONG HWA		
发明人	HWANG, HYUN SIK HWANG, IN-JAE SHIN, DONG HWA		
IPC分类号	G02F1/133 G02F1/1343		
CPC分类号	G02F1/134309 G02F1/13306 G02F2001/134345		
优先权	1020140003021 2014-01-09 KR		
其他公开文献	US9417487		
外部链接	Espacenet USPTO		

摘要(译)

根据示例性实施例的液晶显示器包括：第一子像素电极，被配置为具有施加到其上的第一电压；第二子像素电极，被配置为施加有第二电压；第三子像素电极，被配置为施加第三电压；第一子像素电极和第二子像素电极之间或第二子像素电极和第三子像素电极之间的绝缘层；配置为施加有公共电压的公共电极，其中第二子像素电极和第三子像素电极彼此重叠，绝缘层位于其间，第一子像素电极和第三子像素电极设置在栅极的相对侧线，第一电压和第三电压不同。

