



US 20150277185A1

(19) **United States**(12) **Patent Application Publication**
NAM et al.(10) **Pub. No.: US 2015/0277185 A1**(43) **Pub. Date: Oct. 1, 2015**(54) **LIQUID CRYSTAL DISPLAY DEVICE**(71) Applicant: **Samsung Display Co., LTD.**,
Yongin-City (KR)(72) Inventors: **Yun-Ha NAM**, Asan-si (KR); **Won-Ju KIM**, Asan-si (KR)(21) Appl. No.: **14/461,690**(22) Filed: **Aug. 18, 2014**(30) **Foreign Application Priority Data**

Mar. 31, 2014 (KR) 10-2014-0037945

Publication Classification(51) **Int. Cl.**
G02F 1/1335 (2006.01)
F21V 8/00 (2006.01)
G02F 1/1333 (2006.01)(52) **U.S. CL.**CPC **G02F 1/133512** (2013.01); **G02F 1/133308**
(2013.01); **G02F 1/133528** (2013.01); **G02F**
1/133504 (2013.01); **G02B 6/005** (2013.01);
G02F 2001/133317 (2013.01); **G02F**
2001/13332 (2013.01); **G02F 2001/133314**
(2013.01); **G02F 2001/133322** (2013.01); **G02F**
2201/50 (2013.01)(57) **ABSTRACT**

A liquid crystal display device includes a backlight assembly including a light source that generates a light and an optical sheet that transmits the light, and a display panel disposed on the backlight assembly. The optical sheet includes a light-transmitting portion and an extending portion that are formed as a unitary single unit, and further includes a side light-blocking portion that is combined with the extending portion. The light-transmitting portion extends in a first direction, and the extending portion extends continuously from an end of the light-transmitting portion in a second direction that is different from the first direction.

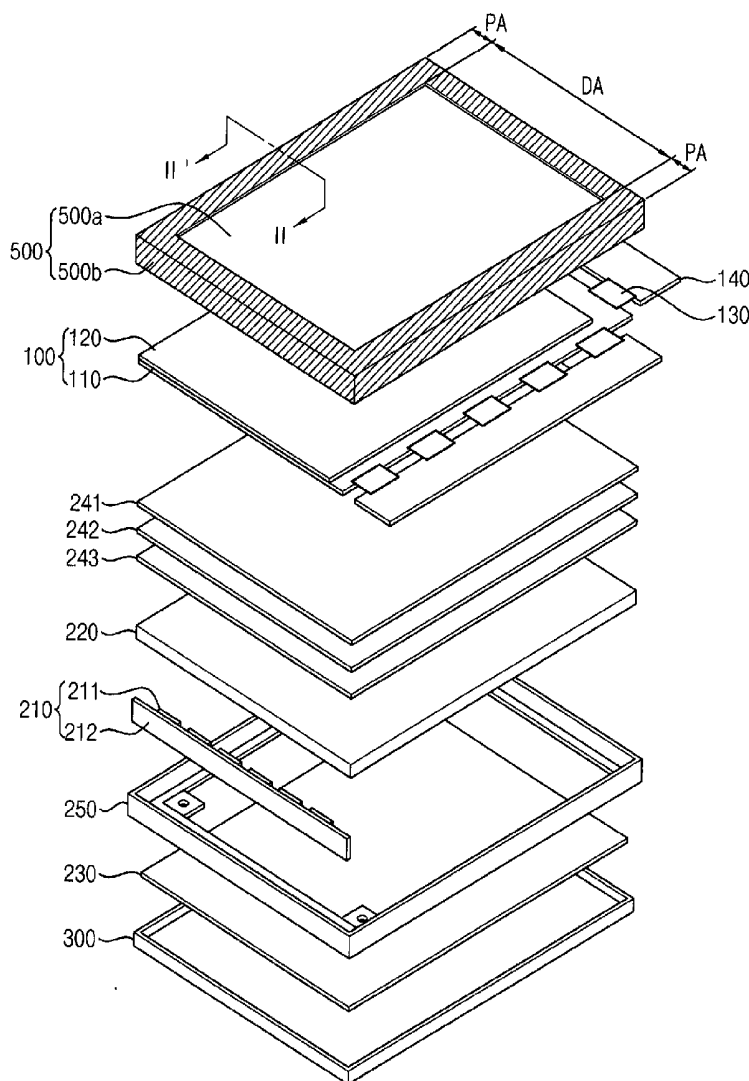


FIG. 1

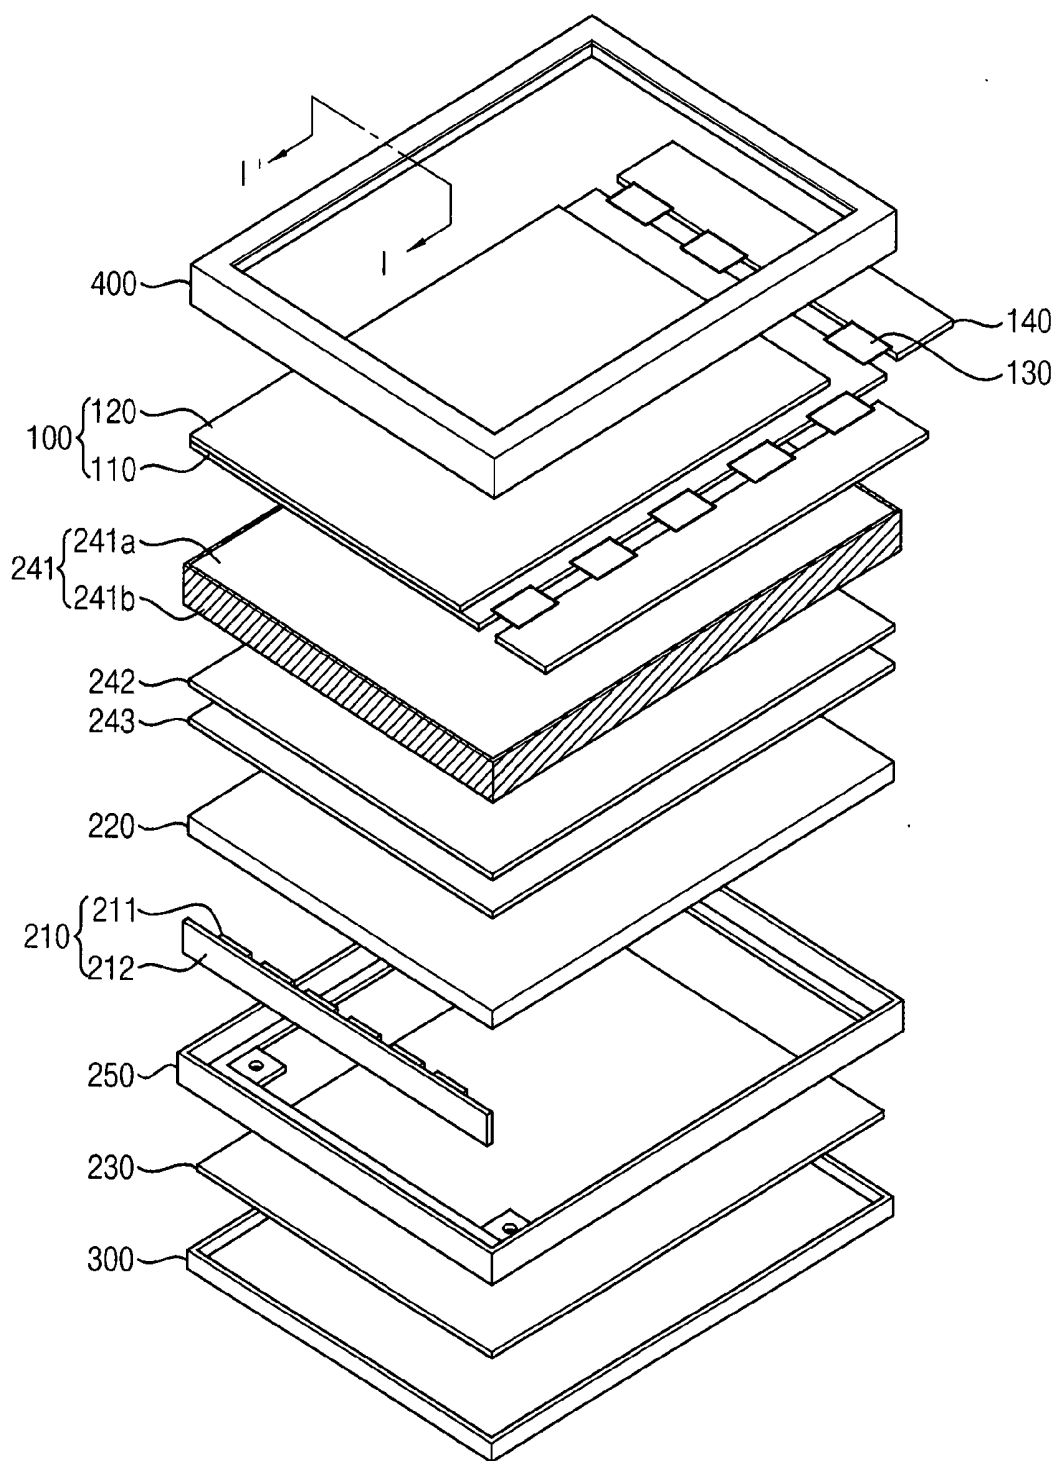


FIG. 2

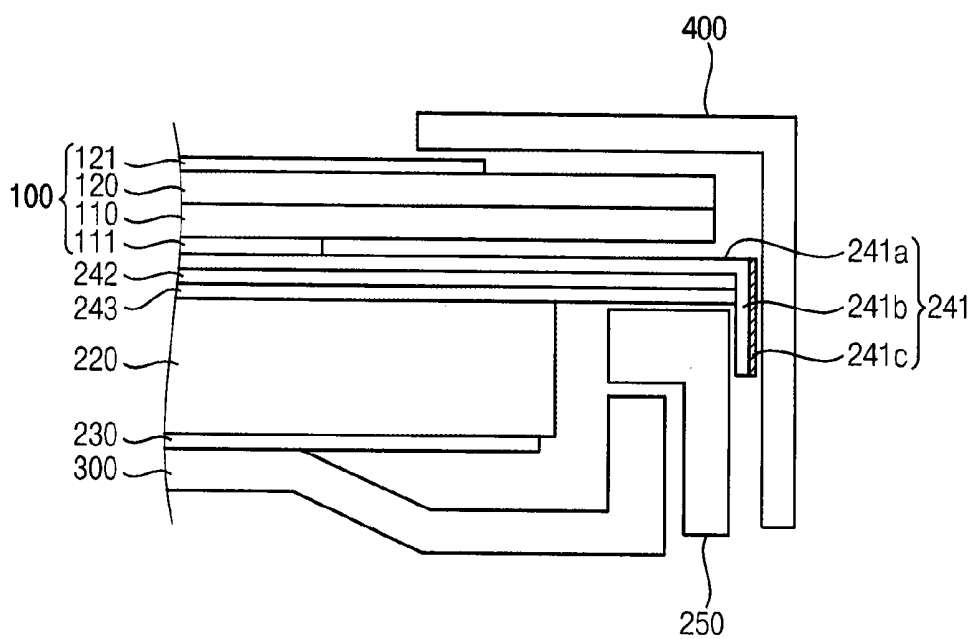


FIG. 3

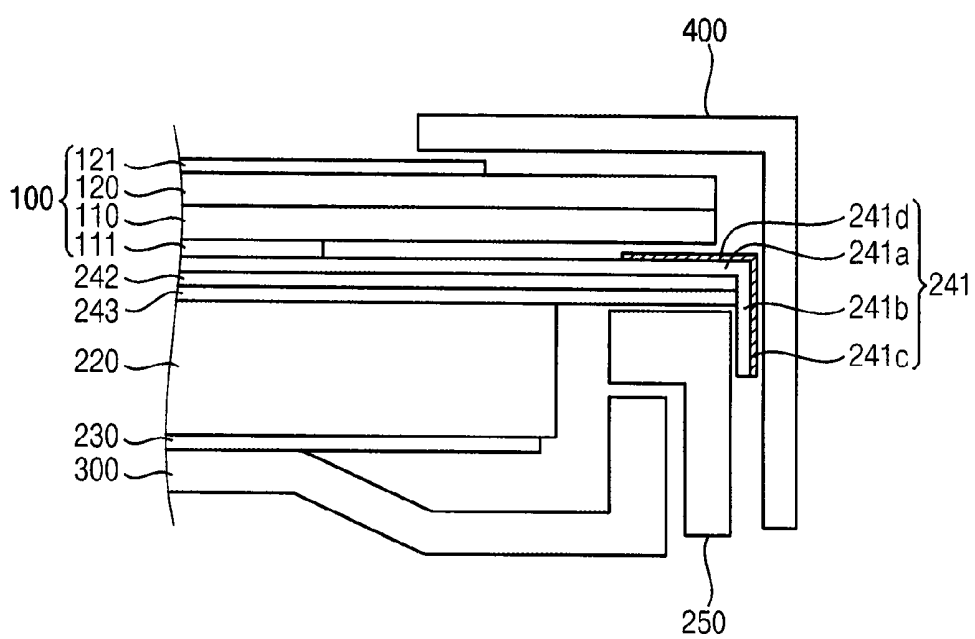


FIG. 4

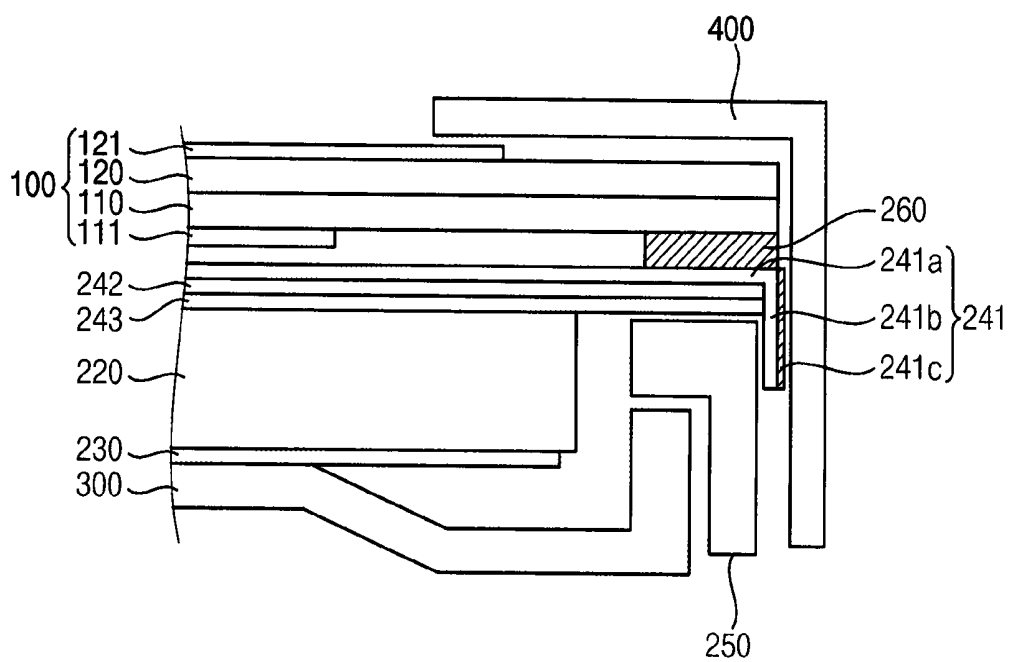


FIG. 5

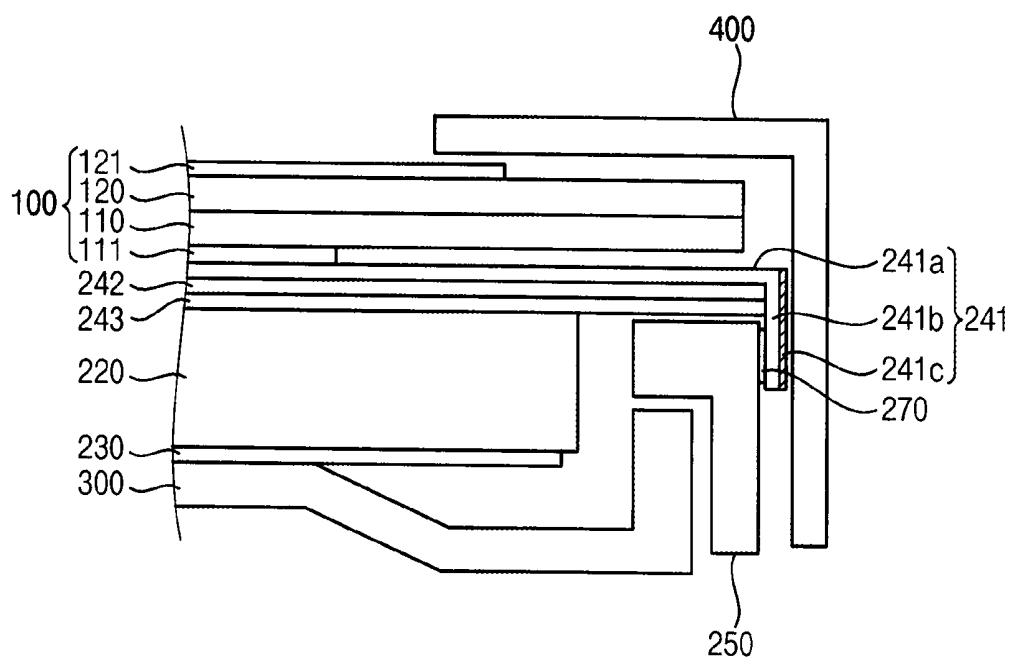


FIG. 6

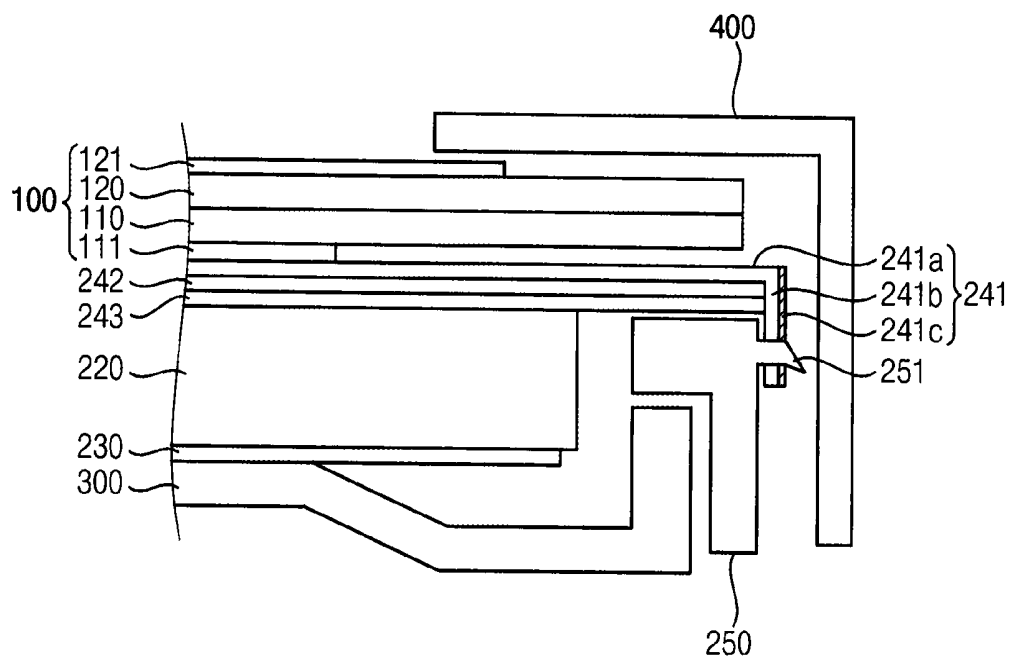


FIG. 7

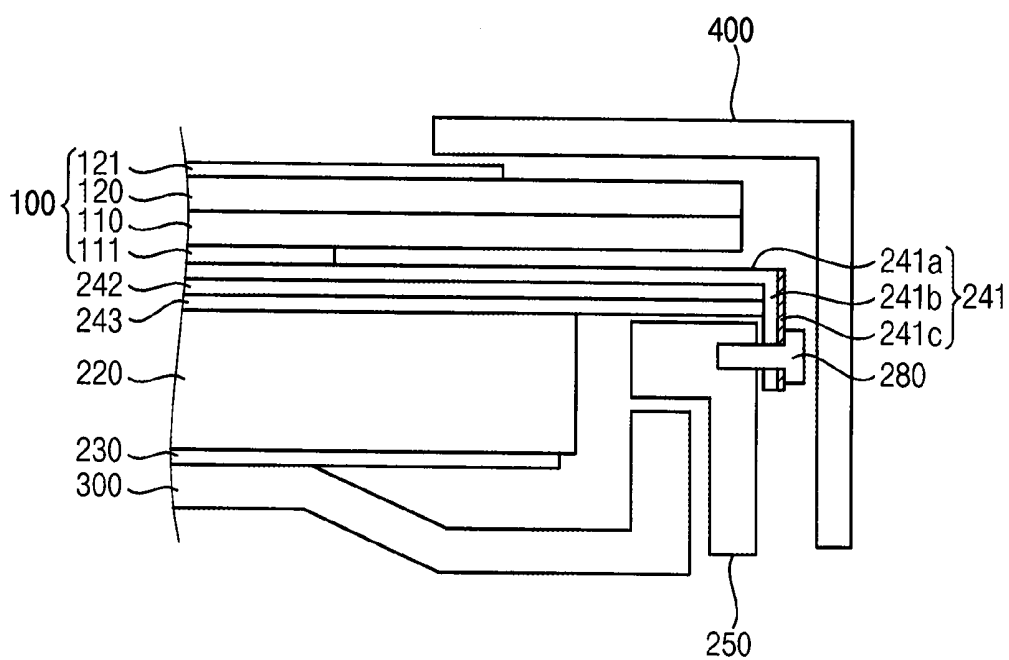


FIG. 8

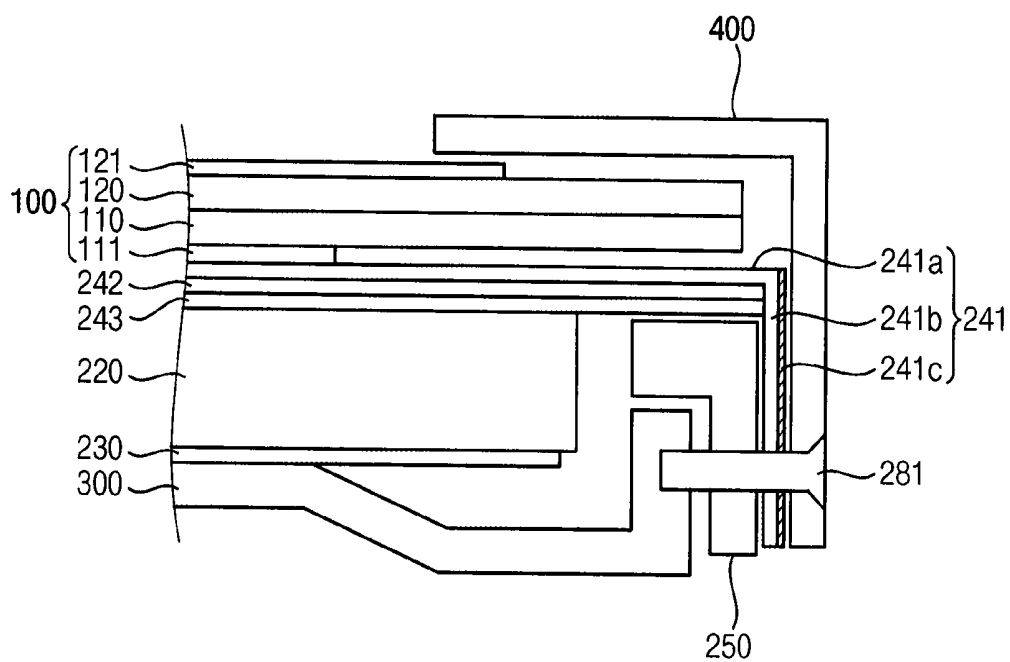


FIG. 9

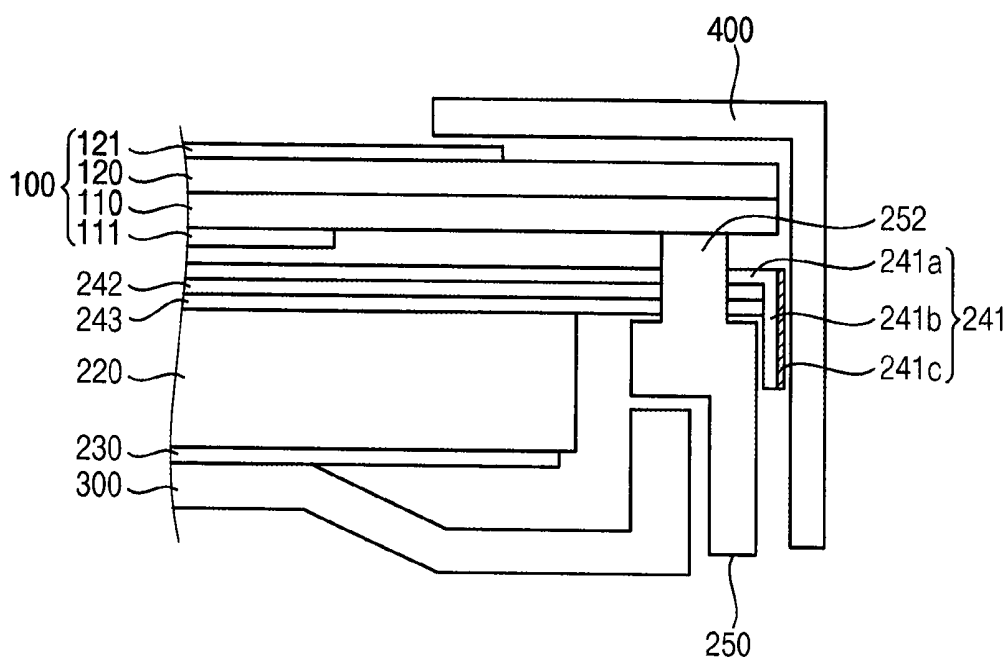


FIG. 10

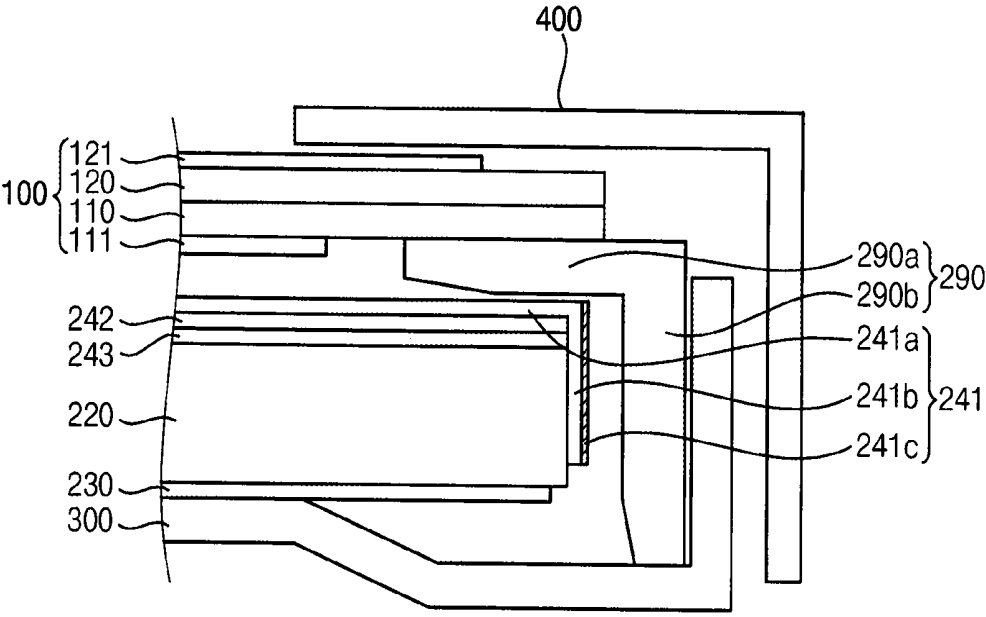
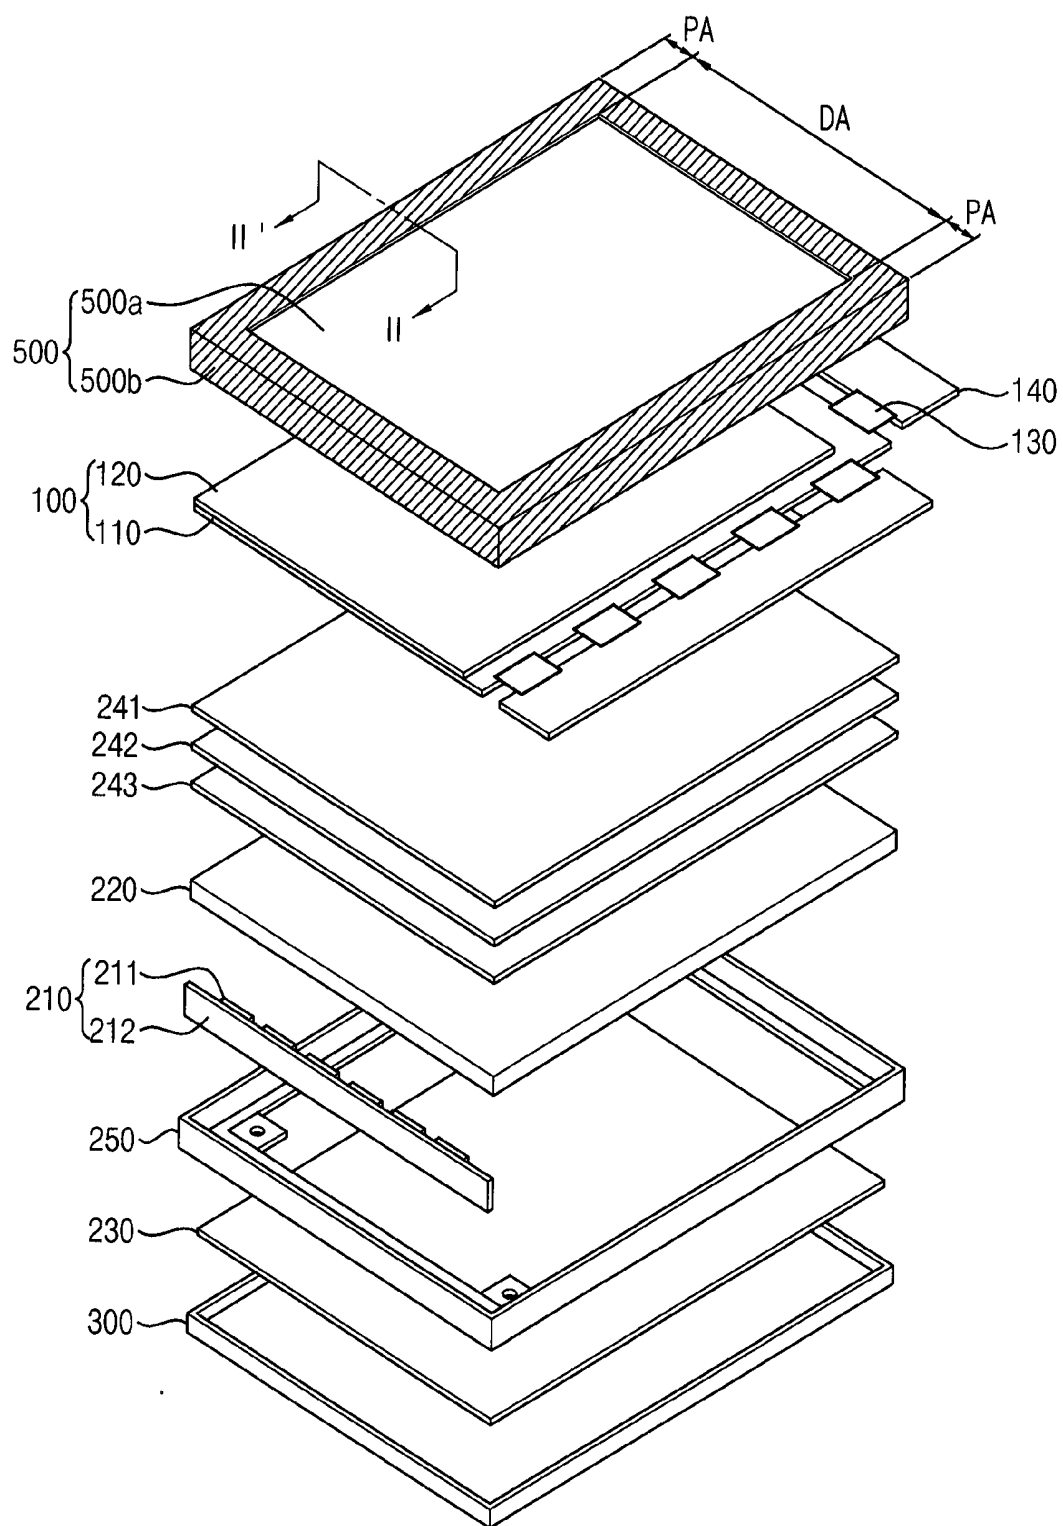


FIG. 11



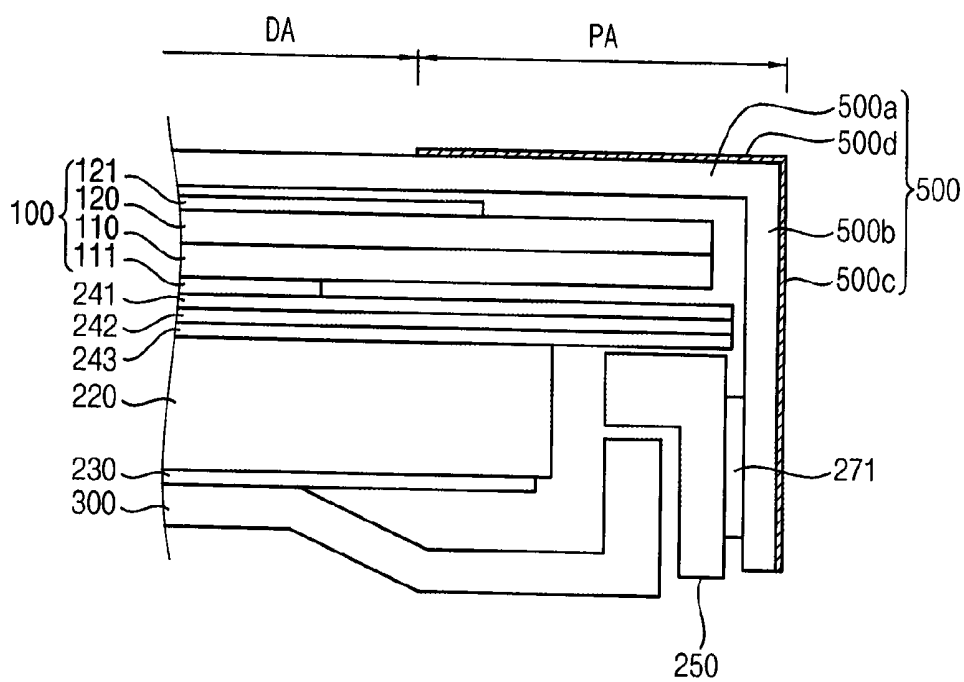


FIG. 14


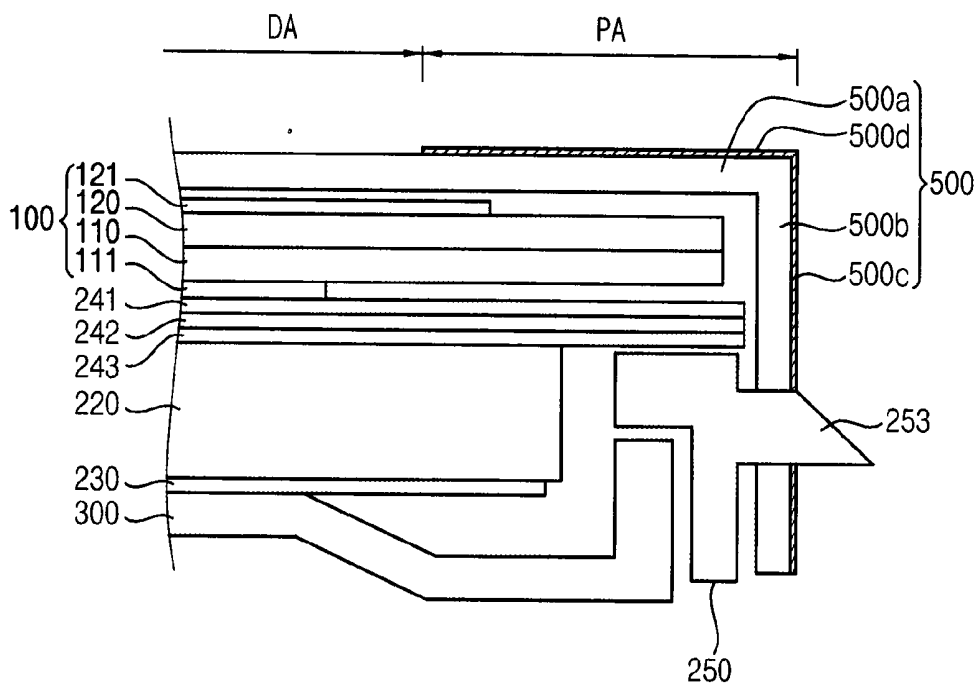


FIG. 15

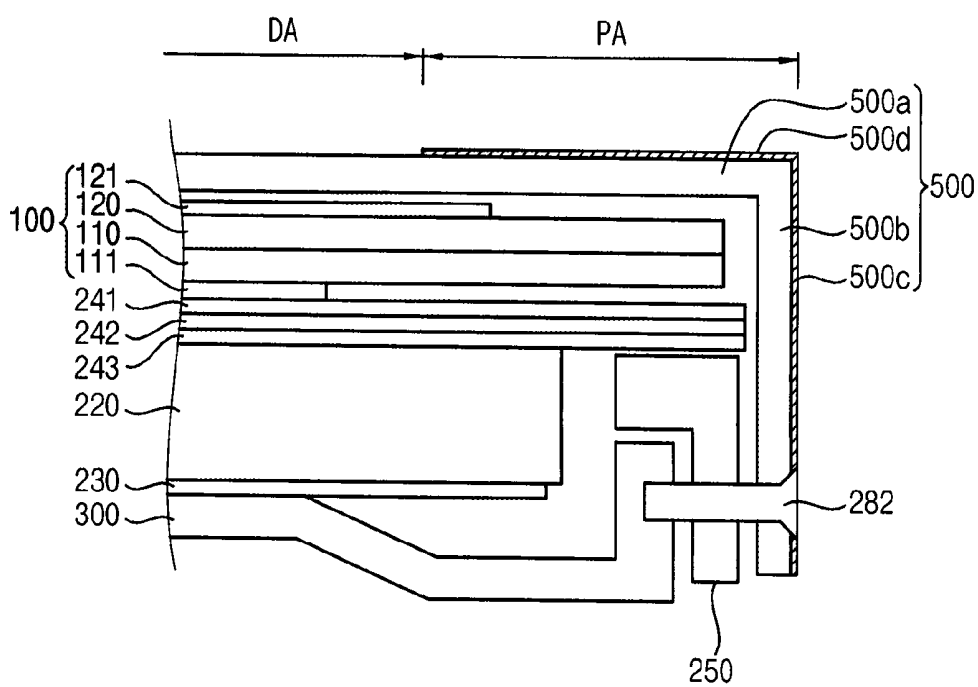

LIQUID CRYSTAL DISPLAY DEVICE

PRIORITY STATEMENT

[0001] This application claims priority under 35 U.S.C. §119 to Korean Patent Application No. 10-2014-0037945, filed on Mar. 31, 2014, and all the benefits accruing therefrom, the content of which is herein incorporated by reference in its entirety.

BACKGROUND

[0002] 1. Field

[0003] The present system and method relate to a liquid crystal display device. More particularly, the present system and method relate to a liquid crystal display device that has improved display quality.

[0004] 2. Description of the Related Art

[0005] Generally, a liquid crystal display device includes a display panel and a backlight assembly that provides light to the display panel. The display panel includes a display area for displaying images, and a peripheral area that includes a driver for driving the display area.

[0006] The backlight assembly includes a light source, a light guide plate for guiding light generated by the light source to the display panel, an optical sheet for adjusting the characteristics of the light exiting from the light guide plate, and a supporting member for supporting the optical sheet.

[0007] For example, the optical sheet may have a planar shape and be disposed parallel to a light-exiting surface of the light guide plate. Light reflected in the optical sheet may leak through a side surface of the optical sheet and thereby deteriorate the display quality of the liquid crystal display device. To prevent the light leakage, a light-blocking tape may be attached to a peripheral area of a top surface of the optical sheet. However, because the optical sheet is generally thin, it provides little surface area for attaching the light-blocking tape. Consequently, when the temperature of the liquid crystal display device increases, the light-blocking tape may easily separate from the optical sheet as the light-blocking tape and the optical sheet expand at different rates. When separation occurs, impurities from the separated light-blocking tape may contaminate the liquid crystal display device.

SUMMARY

[0008] Exemplary embodiments provide a liquid crystal display device that prevents or otherwise reduces leakage light to improve display quality.

[0009] In an embodiment, a liquid crystal display device includes a backlight assembly including a light source that generates light and an optical sheet that transmits the light, and a display panel disposed on the backlight assembly. The optical sheet includes a light-transmitting portion and an extending portion that are formed as a unitary single unit, and further includes a side light-blocking portion that is combined with the extending portion. The light-transmitting portion extends in a first direction. The extending portion extends continuously from an end of the light-transmitting portion in a second direction that is different from the first direction.

[0010] In an embodiment, the second direction is perpendicular to the first direction.

[0011] In an embodiment, the optical sheet further includes a front light-blocking portion that covers a portion of the light-transmitting portion.

[0012] In an embodiment, the side light-blocking portion includes a printed light-blocking layer that contains a black pigment and is printed on at least a surface of the extending portion.

[0013] In an embodiment, the liquid crystal display device further includes a first supporting member that supports the optical sheet, wherein the extending portion of the optical sheet covers at least a portion of a side surface of the first supporting member.

[0014] In an embodiment, the liquid crystal display device further includes an adhesive member that secures the extending portion with the side surface of the supporting member.

[0015] In an embodiment, the extending portion includes a combination hole, and the supporting member includes a protrusion that inserts into the combination hole.

[0016] In an embodiment, the liquid crystal display device further includes a fixing frame that secures the display panel and surrounds a side surface of the backlight assembly, and a combination member that passes through the fixing frame and the extending portion and inserts into the supporting member.

[0017] In an embodiment, the supporting member includes a supporting protrusion that passes through the light-transmitting portion of the optical sheet and supports the display panel.

[0018] In an embodiment, the liquid crystal display device further includes a spacer that is disposed near an edge of the optical sheet to maintain a gap between the optical sheet and the display panel.

[0019] In an embodiment, the optical sheet is a diffusion sheet, a prism sheet, a polarizing sheet or a protective sheet, and the liquid crystal display device further includes at least one additional optical sheet disposed under the optical sheet, and the extending portion of the optical sheet covers a side surface of the additional optical sheet.

[0020] In an embodiment, the liquid crystal display device further includes a supporting member that supports the display panel. The second supporting member includes a sidewall portion that surrounds a side surface of the optical sheet, and a supporting portion that extends from the sidewall portion to be disposed between the display panel and the optical sheet.

[0021] In an embodiment, a liquid crystal display device includes a backlight assembly, a display panel disposed on the backlight assembly and a cover sheet disposed on the display panel. The backlight assembly includes a light source that generates light and an optical sheet that transmits the light. The cover sheet includes a light-transmitting portion and an extending portion that are formed in as a unitary single unit, and further includes a side light-blocking portion that is combined with the extending portion. The light-transmitting portion extends in a first direction. The extending portion extends continuously from an end of the light-transmitting portion in a second direction different from the first direction.

[0022] In an embodiment, the second direction is perpendicular to the first direction.

[0023] In an embodiment, the cover sheet further includes a front light-blocking portion that covers a portion of the light-transmitting portion.

[0024] In an embodiment, the liquid crystal display device further includes a supporting member that supports the optical sheet. The extending portion covers side surfaces of the display panel, the optical sheet and the supporting member.

[0025] In an embodiment, the liquid crystal display device further includes an adhesive member that secures the extending portion with a side surface of the supporting member.

[0026] In an embodiment, the extending portion includes a combination hole, and the supporting member includes a protrusion that inserts into the combination hole.

[0027] In an embodiment, the liquid crystal display device further includes a combination member that passes through the extending portion and inserts into the supporting member.

[0028] In an embodiment, the side light-blocking portion includes a printed light-blocking layer that contains a black pigment and is printed on at least a surface of the extending portion.

[0029] According to the exemplary embodiments, light leakage in a peripheral area of a liquid crystal display device may be blocked to improve display quality. Furthermore, a light-blocking layer included in an optical sheet provides stability against temperature variance. Furthermore, a cover sheet that protects and secures a display panel may be disposed on the display panel to reduce a bezel size of a liquid crystal display device as well as to block light leakage in a peripheral area of the liquid crystal display device.

[0030] A liquid crystal display device according to the exemplary embodiments may be used for various display devices including a monitor, a mobile phone, a television, a navigator, a music player, a lap top, a tablet computer or the like.

BRIEF DESCRIPTION OF THE DRAWINGS

[0031] The accompanying drawings, which are included as part of the present application, illustrate various embodiments and together with the description of the various embodiments given below serve to explain and teach the principles described herein. The figures in the drawings are not necessarily drawn to scale and are only intended to facilitate the description of the various embodiments described herein. The figures do not describe every aspect of the teachings disclosed herein and do not limit the scope of the claims:

[0032] FIG. 1 is a perspective view of a liquid crystal display device according to an exemplary embodiment.

[0033] FIG. 2 is a cross-sectional view taken along the lines I-I' of FIG. 1.

[0034] FIGS. 3 to 10 are cross-sectional views of liquid crystal display devices according to exemplary embodiments.

[0035] FIG. 11 is a perspective view of a liquid crystal display device according to another exemplary embodiment.

[0036] FIG. 12 is a cross-sectional view taken along the lines II-II' of FIG. 11.

[0037] FIGS. 13 to 15 are cross-sectional views of liquid crystal display devices according to exemplary embodiments.

DETAILED DESCRIPTION

[0038] Exemplary embodiments are described more fully hereinafter with reference to the accompanying drawings in which various embodiments are shown.

[0039] FIG. 1 is a perspective view of a liquid crystal display device according to an exemplary embodiment. FIG. 2 is a cross-sectional view taken along the lines I-I' of FIG. 1.

[0040] Referring to FIGS. 1 and 2, a liquid crystal display device includes a display panel 100 that displays an image, and a backlight assembly that provides light to the display panel 100. The liquid crystal display device further includes a

receiving container 300 that receives the backlight assembly by itself or the backlight assembly with the display panel.

[0041] The display panel 100 is disposed on the backlight assembly, and displays an image using light provided by the backlight assembly. The display panel 100 includes a display substrate 110, an opposing substrate 120, a flexible circuit board 130 combined with at least an edge of the display substrate, and a driving circuit board 140 connected to the flexible circuit board 130. The flexible circuit board 130 may include a data driver and a gate driver.

[0042] In another embodiment, the gate driver may be formed in the same process as a thin film transistor array (not shown) that is to be integrated on the display substrate 110.

[0043] The opposing substrate 120 faces the display substrate 110 such that a liquid crystal layer (not shown) is interposed between the display substrate 110 and the opposing substrate 120. FIG. 2 shows that a first polarizing plate 111 and a second polarizing plate 121 are respectively combined with the display substrate 110 and the opposing substrate 120. The first and second polarizing plates 111 and 121 selectively transmit light that have one or more specific polarizing axes. The opposing substrate 120 may include a common electrode (not shown).

[0044] The display panel 100 includes a display area DA and a peripheral area PA that border the display area DA. The display area DA controls the transmittance of light provided by the backlight assembly to display an image.

[0045] Although not shown in the figures, the display panel 100 includes a plurality of pixels arranged in a matrix configuration. Each of the pixels is electrically connected to a gate line and a data line crossing the gate line. Each of the pixels includes a switching element and a pixel electrode. The switching element is electrically connected to the gate line and the data line. The pixel electrode is electrically connected to the switching element. The liquid crystal layer is aligned by an electric field formed by voltages applied to the pixel electrode and the common electrode to control the transmittance of light provided by the backlight assembly. Each pixel may include a color filter that includes a coloring agent. A color filter may have the color red, green, blue, yellow, cyan, magenta or the like. In another embodiment, the color filter may be disposed on the opposing substrate 120.

[0046] The backlight assembly is disposed on and provides light to the display panel 100. The backlight assembly includes a light source unit 210 that generates light, a light guide plate 220 that guides the light generated by the light source unit 210 to the display panel 100, a reflective plate 230 disposed under the light guide plate 220 that reflects light toward the display panel 100, optical sheets (241, 242, 243) disposed on the light guide plate 220 that adjust the characteristics of the light exiting from the light guide plate 220, and a supporting member 250 that is disposed under and supports the optical sheets.

[0047] The light source unit 210 is adjacent to at least a side of the light guide plate 220. The light source unit 210 includes a light source 211 that generates a light and a printed circuit board 212 that applies a signal to the light source 211. The light source 211 may be a light emitting diode. The printed circuit board 212 may have a rectangular shape and extend in a direction that is parallel to the side of the light guide plate 220. A plurality of light sources 211 may be arranged along the length of the printed circuit board 212 and spaced apart

from each other. The light source **211** may generate one or more colors of light, including red, green, blue, yellow, cyan, magenta, white or the like.

[0048] The light guide plate **220** receives light from the light source unit **210** and provides the light to the display panel **100**. Light from the light source **211** enters the light guide plate **220** through at least one side surface of the light guide plate **220** that faces the light source **211**. The light entering the light guide plate **220** spreads throughout the light guide plate **220** by total reflection and exits from the light guide plate **220** toward the display panel **100** through a light-exiting surface (shown as a top surface in FIGS. 1 and 2) of the light guide plate **220**. A bottom surface disposed opposite to the light-exiting surface may include a pattern that adjusts the refraction and/or reflection angle of incident light on the bottom surface. The light guide plate **220** generally has a high light-transmittance to minimize absorption of light. In one embodiment, the light guide plate may include an acrylic resin such as polymethyl methacrylate (PMMA), polycarbonate (PC) resin or the like. In another embodiment, the light guide plate **220** may include glass, silicone resin or the like.

[0049] The reflective plate **230** is disposed under the light guide plate **220** and reflects light that travel to the bottom surface of the light guide plate **220**. The reflective plate **230** reflects the light back toward the display panel **100** through the light guide plate **220** and thereby improves the brightness of the display panel **100**. The reflective plate **230** may include a metal such as silver, a porous plastic material or the like.

[0050] The optical sheet **243** is disposed on the light guide plate **220** and improves the characteristics of the light exiting from the light guide plate **220**. The backlight assembly may include a plurality of optical sheets. For example, FIG. 2 illustrates that the backlight assembly may include a first optical sheet **241**, a second optical sheet **242** disposed under the first optical sheet **241** and a third optical sheet **243** disposed under the second optical sheet **242**. In an embodiment, the first optical sheet **241** may be a diffusion sheet that diffuses light, a prism sheet that condenses light, a polarizing sheet that reflects light having certain polarizations, or a protective sheet that protects the second and third optical sheets **242** and **243**. A base film of the optical sheets may include a plastic material such as polyethylene terephthalate (PET), polycarbonate (PC), polymethyl methacrylate (PMMA), polystyrene (PS) or the like. The optical sheets may further include a functional layer such as a bead layer, a polarizing layer, a prism layer, an anti-scratch layer or the like.

[0051] The second optical sheet **242** and the third optical sheet **243** may function the same or differently as the first optical sheet **241**. For example, if the first optical sheet **241** is a protective sheet, the second optical sheet **242** may be a prism sheet, and the third optical sheet **243** may be a diffusion sheet. The functions and positions of the optical sheets may be varied. For example, the first optical sheet **241** may be a diffusion sheet in another embodiment.

[0052] Although the backlight assembly of the embodiment shown in FIGS. 1 and 2 includes three optical sheets, the number of optical sheets is not limited thereto. For example, the backlight assembly of other embodiments may include two optical sheets or four or more optical sheets. In another embodiment, the backlight assembly may include a single multi-functional optical sheet.

[0053] In an embodiment, the optical sheets may have a planar shape and be disposed parallel to the light-exiting

surface of the light guide plate **220**. The supporting member **250** may include a protrusion portion (not shown) that passes through the optical sheets.

[0054] Referring to FIGS. 1 and 2, the first optical sheet **231** includes a light-transmitting portion **241a** and an extending portion **241b**, which may be formed as a unitary single unit of the same material and continuously connected to each other without an adhesive or the like. The light-transmitting portion **241a** extends in a first direction that may be parallel to the second optical sheet **242** and the third optical sheet **243**. The extending portion **241b** extends continuously from an end of the light-transmitting portion **241a** in a second direction that may intersect the first direction perpendicularly. At least a portion of the light-transmitting portion **241a** may overlap with the display area DA of the display panel **100**. The extending portion **241b** may cover a side surface of a member disposed under the first optical sheet **241**. For example, FIG. 2 illustrates that the extending portion **241b** may extend in the second direction to cover and surround the side surfaces of the second optical sheet **242**, the third optical sheet **243** and the supporting member **250**.

[0055] The light-transmitting portion **241a** and the extending portion **241b** may be formed from the same sheet. For example, a groove or a cutting portion having a dot shape may be formed at a boundary area of the sheet for dividing the light-transmitting portion **241a** and the extending portion **241b**. Thereafter, the sheet may be bent at the boundary area to form the first optical sheet **241** that includes the light-transmitting portion **241a** and the extending portion **241b** which continuously extends from the light-transmitting portion **241a**. In another embodiment, the first optical sheet **241** may be formed from a mold having a corresponding shape.

[0056] The first optical sheet **241** may include a side light-blocking portion **241c** that is combined with the extending portion **241b**. The side light-blocking portion **241c** blocks light from leaking through the side surfaces of the second optical sheet **242** and the third optical sheet **243** and prevents light leakage in the peripheral area of the display panel **100**. The side light-blocking portion **241c** may include a light-blocking material such as a black pigment or the like.

[0057] The side light-blocking portion **241c** may be combined with the extending portion **241b** using various methods. For example, an adhesive tape that includes the side light-blocking portion **241c** may be attached to the extending portion **241b**. Alternatively, the side light-blocking portion **241c** may be printed onto at least a surface of the extending portion **241b** to form a printed light-blocking layer. Because the printed light-blocking layer is directly combined with the extending portion **241b**, combination stability is generally higher than if adhesive tape is used for the combination. Higher combination stability between the side light-blocking portion **241c** and the extending portion **241b** means that separation does not occur or is unlikely to occur at the usual high operating temperatures of the liquid crystal display device. In other words, printing the light-blocking layer directly onto the surface of the extending portion **241b** improves the reliability of the light-blocking layer at high temperatures and prevents contamination due to impurities that would otherwise separate from an adhesive tape.

[0058] In an embodiment, the printed light-blocking layer includes a pattern array that has a repeating shape. For example, the pattern array may have a straight shape, a circular shape, a polygonal shape or the like, and include a plurality of patterns that are spaced apart from each other or

continuously connected to each other. An ink, such as a black pigment, may be screen-coated on the surface of the extending portion **241b** to form the pattern array of the printed light-blocking layer. In other words, the extending portion **241b** may function as a base substrate for printing a light-blocking layer.

[0059] As FIGS. **1** and **2** illustrate, the supporting member **250** is disposed under and supports the optical sheets. The supporting member **250** also guides the position of the light guide plate **220**. The supporting member **250** may be combined with the receiving container **300**. The extending portion **241b** of the first optical sheet **241** may cover and directly face the side surface of the supporting member **250**. In another embodiment, other elements such as a portion of the receiving container **300** may be disposed between the extending portion **241b** and the supporting member **250**.

[0060] FIG. **2** illustrates that the receiving container **300** includes a bottom portion and a sidewall that extends from the bottom portion. The light guide plate **220** and the reflective plate **230** are disposed in the receiving container **300**. The receiving container **300** may be combined with the supporting member **250** through a hook combination or the like. A side surface of the supporting member **250** may face an inner or outer surface of the receiving container **300**.

[0061] The liquid crystal display device may further include a fixing frame **400** disposed on the display panel **100**. The fixing frame **400** may include a first surface that extends in the first direction and an opening that exposes the display area of the display panel **100**. The fixing frame **400** may further include a second surface that extends in the second direction from the first surface and surrounds a side surface of the receiving container **300**. The fixing frame **400** combines with the receiving container **300** to hold and secure the display panel **100**. In another embodiment, the fixing frame **400** may include a plurality of sub-frames that are separable from each other.

[0062] FIGS. **3** to **10** are cross-sectional views of liquid crystal display devices according to exemplary embodiments. It should be noted that although certain elements among the figures are identified using the same reference numerals, differences (as shown in the figures or discussed herein) may exist.

[0063] Referring to FIG. **3**, an extending portion **241b** of a first optical sheet **241** is combined with a side light-blocking portion **241c**, and a transmitting portion **241a** of the first optical sheet **241** is combined with a front light-blocking portion **241d**. The front light-blocking portion **241d** is disposed on and along an edge of the light-transmitting portion **241a**. The front light-blocking portion **241d** may be continuously connected to the side light-blocking portion **241c** or separated from the side light-blocking portion **241c**. Because the first optical sheet **241** further includes the side light-blocking portion **241c**, light leakage through an end of the light-transmitting portion **241a** is prevented.

[0064] Referring to FIG. **4**, a liquid crystal display device further includes a spacer **260** that is disposed between the display panel **100** and the first optical sheet **241** to maintain a gap between the display panel **100** and the first optical sheet **241**. The spacer **260** helps to prevent damage such as fracturing of the display panel **100** and/or the first optical sheet **241**. The spacer **260** may include an elastic material such as rubber, silicone resin or the like. An upper surface and/or a lower

surface of the spacer **260** may include an adhesive layer for combining with the display panel **100** and/or the first optical sheet **241**.

[0065] Referring to FIG. **5**, an extending portion **241b** of a first optical sheet **241** and a supporting member **250** are combined using an adhesive member **270**. For example, the adhesive member **270** adheres to a side surface of the supporting member **250** and the extending portion **241b**. The adhesive member **270** may be an adhesive tape. The adhesive member **270** may stably guide and secure the position of the first optical sheet **241**.

[0066] Referring to FIG. **6**, an extending portion **241b** of a first optical sheet **241** includes a combination hole, and a supporting member **250** includes a protrusion **251** that inserts into the combination hole. For example, the protrusion **251** may protrude from a side surface of the supporting member **250** toward the extending portion **241b**. Because the protrusion **251** is inserted into the combination hole, the first optical sheet **241** may be stably guided and secured.

[0067] Referring to FIG. **7**, a first optical sheet **241** and a supporting member **250** are combined using a combination member **280** that passes through an extending portion **241b** of the first optical sheet **241** and inserts into the supporting member **250**. The combination member **280** may further pass through the supporting member **250**. The combination member **280** may include a screw, a bolt or the like. In another embodiment, the combination member **280** may pass through the extending portion **241b** and the supporting member **250** and insert into a receiving container **300** to combine the first optical sheet **241**, the supporting member **250** and the receiving container **300**.

[0068] Referring to FIG. **8**, a fixing frame **400**, a first optical sheet **241**, a supporting member **250** and a receiving container **300** are combined using a combination member **281**. The combination member **281** passes through the fixing frame **400**, an extending portion **241b**, the first optical sheet **241** and the supporting member **250** and inserts into the receiving container **300**. An end of the combination member **281** may entirely insert into the fixing frame **400** such that the combination member **281** does not protrude from a side surface of the fixing frame **400**. The combination member **281** may further pass through the receiving container **300**.

[0069] Referring to FIG. **9**, a light-transmitting portion **241a** of a first optical sheet **241** includes a hole, and a supporting member **250** includes a supporting protrusion **252** that inserts into the hole. Having the supporting protrusion **252** insert into the hole of the first optical sheet **241** stably guides and secures the horizontal position of the first optical sheet **241**. Furthermore, the supporting protrusion **252** passes through the first optical sheet **241** and contacts a lower surface of the display panel **100** to maintain a gap between the display panel **100** and the first optical sheet **241**, which may prevent damage such as fracturing of the display panel **100** and/or the first optical sheet **241**. The end of the supporting protrusion **252** that contacts the display panel **100** may include an elastic material such as rubber, silicone resin or the like.

[0070] Referring to FIG. **10**, a liquid crystal display device includes a supporting member **290** that supports a display panel **100**. A receiving container **300** includes a bottom portion and a sidewall that extends from the bottom portion. The sidewall of the receiving container **300** covers an outer side surface of the supporting member **290**. A fixing frame **400** covers an outer side surface of the sidewall of the receiving container **300**. Optical sheets **241**, **242**, **243** are disposed on a

light guide plate 220, one above the other, with the optical sheet 243 being closest to the light guide plate 220.

[0071] The supporting member 290 includes a sidewall portion 290b that surrounds a side surface of the optical sheet 241, and a supporting portion 290a that extends from the sidewall portion 290b to be disposed between the display panel 100 and a first optical sheet 241. The sidewall portion 290b of the supporting member 290 may face an extending portion 241b of the first optical sheet 241. Furthermore, the sidewall portion 290b of the supporting member 290 may cover side surfaces of the light guide plate 220 and a reflective plate 230. The supporting member 290 supports the display panel 100 and maintains a gap between the display panel 100 and the first optical sheet 241, which helps to prevent damage such as fracturing of the display panel 100 and the first optical sheet 241. A contact member (not shown) that includes an elastic material such as rubber, silicone resin or the like, may be interposed between a contact surface of the supporting portion 290a and a contact surface of the display panel 100.

[0072] FIG. 11 is a perspective view of a liquid crystal display device according to another exemplary embodiment. FIG. 12 is a cross-sectional view taken along the lines II-II' of FIG. 11.

[0073] Referring to FIGS. 11 and 12, a liquid crystal display device includes a backlight assembly. The backlight assembly includes a light source unit 210 that generates light, a light guide plate 220 that guides the light generated by the light source unit 210 to the display panel 100, a reflective plate 230 disposed under the light guide plate 220 that reflects light toward the display panel 100, optical sheets (241, 242, 243) disposed on the light guide plate 220 that adjust characteristics of the light exiting from the light guide plate 220, and a supporting member 250 that is disposed under and supports the optical sheets. The liquid crystal display device further includes a display panel 100 disposed on the backlight assembly, and a cover sheet 500 disposed on the display panel 100 to cover and secure the display panel 100.

[0074] The display panel 100 includes a display substrate 110, a flexible circuit board 130 combined with at least an edge of the display substrate, and a driving circuit board 140 connected to the flexible circuit board 130. The flexible circuit board 130 may include a data driver and a gate driver. In another embodiment, the gate driver may be formed in the same process as a thin film transistor array (not shown) that is to be integrated on the display substrate 110.

[0075] The cover sheet 500 is disposed on the display panel 100. The cover sheet 500 secures and protects the display panel 100. The cover sheet 500 includes a light-transmitting portion 500a that extends in a first direction, and an extending portion 500b that extends continuously from the light-transmitting portion 500a in a second direction different from the first direction. The first direction may be parallel to the display panel 100. The second direction may be perpendicular to the first direction. At least a portion of the light-transmitting portion 500a overlaps with a display area DA of the display panel 100. The extending portion 500b covers a side surface of a member disposed under the cover sheet 500, for example, the display panel 100. The light-transmitting portion 500a and the extending portion 500b may be formed as a unitary single unit from the same material such that the two portions are directly connected to each other without using an adhesive member or the like.

[0076] The light-transmitting portion 500a and the extending portion 500b may be formed from the same sheet. For

example, a groove or a cutting portion having a dot shape may be formed at a boundary area of the sheet for dividing the light-transmitting portion 500a and the extending portion 500b. Thereafter, the sheet may be bent at the boundary area to form the cover sheet 500 that includes the light-transmitting portion 500a and the extending portion 500b which continuously extends from the light-transmitting portion 500a. In another embodiment, the cover sheet 500 may be formed from a mold having a corresponding shape.

[0077] Examples of a material that may be used for the cover sheet 500 may include polyethylene terephthalate (PET), polycarbonate (PC), polymethyl methacrylate (PMMA), polystyrene (PS) or the like. In another embodiment, the cover sheet 500 may include glass or silicone resin.

[0078] At least a portion of the light-transmitting portion 500a may be transparent to transmit light exiting from the display panel 100. The cover sheet 500 may include a side light-blocking portion 500c that is combined with the extending portion 500b. Furthermore, the cover sheet 500 may further include a front light-blocking portion 500d that is combined with the light-transmitting portion 500a.

[0079] The side light-blocking portion 500c and the front light-blocking portion 500d block light from leaking through an edge of the backlight assembly. Furthermore, the side light-blocking portion 500c and the front light-blocking portion 500d may prevent a peripheral area PA of the display panel 100, the flexible printed circuit board 130 and the driving circuit board 140 from being perceived or exposed. The side light-blocking portion 500c and the front light-blocking portion 500d may include a light-blocking material such as a black pigment. The side light-blocking portion 500c may be formed on an adhesive tape that adheres to the extending portion 500b or as a printed light-blocking layer that is printed directly on the extending portion 500b. The front light-blocking portion 500d may have substantially the same composition as the side light-blocking portion 500c. The front light-blocking portion 500d may be separated from or continuously connected to the side light-blocking portion 500c.

[0080] The liquid crystal display device may further include a protective member (not shown) that is disposed between the flexible circuit board 130 and the cover sheet 500 to protect the flexible circuit board 130, or between the driving circuit board 140 and the cover sheet 500 to protect the driving circuit board 140. The protective member may include an elastic material or an insulation material such as rubber, polymer foam or the like.

[0081] FIGS. 13 to 15 are cross-sectional views of liquid crystal display devices according to exemplary embodiments. Referring to FIG. 13, an extending portion 500b of a cover sheet 500 and a supporting member 250 are combined using an adhesive member 271. For example, the adhesive member 271 adheres to a side surface of the supporting member 250 and the extending portion 241b. The adhesive member 270 may be an adhesive tape. The adhesive member 270 may stably guide and secure the position of the cover sheet 500.

[0082] Referring to FIG. 14, an extending portion 500b of a cover sheet 500 includes a combination hole, and a supporting member 250 includes a protrusion 253 that inserts into the combination hole. For example, the protrusion 253 may protrude from a side surface of the supporting member 250 toward the extending portion 500b. Because the protrusion 253 is inserted into the combination hole, the cover sheet 500 may be stably guided and secured.

[0083] Referring to FIG. 15, a cover sheet 500, a supporting member 250 and a receiving container 300 are combined using a combination member 282. The combination member 282 passes through an extending portion 500b of the cover sheet 500 and the supporting member 250 and inserts into the receiving container 300. An end of the combination member 282 may be entirely inserted into the cover sheet 500 such that the combination member 282 does not protrude from a side surface of the extending portion 500b. The combination member 282 may further pass through the receiving container 300. In another embodiment, the combination member 282 may pass through the extending portion 500b of the cover sheet 500 to insert into the supporting member 250.

[0084] According to the exemplary embodiments, the liquid crystal display device including the cover sheet 500 may protect and secure the display panel 100 and reduce the bezel size of liquid crystal display device.

[0085] The backlight assemblies of the above-discussed embodiments have an edge-type structure wherein a light source unit is disposed under an edge of a display panel. However, the present system and method are not limited to an edge-type structure and are applicable to various types of structures such as a direct-type, a corner-type, a center-type or the like. It should be understood that the foregoing discussion is illustrative and does not limit the present system and method to the specific exemplary embodiments disclosed.

What is claimed is:

1. A liquid crystal display device comprising:
 - a backlight assembly including a light source that generates a light and an optical sheet that transmits the light; and
 - a display panel disposed on the backlight assembly, wherein the optical sheet includes a light-transmitting portion and an extending portion that are formed as a unitary single unit, and further includes a side light-blocking portion that is combined with the extending portion, and wherein the light-transmitting portion extends in a first direction and the extending portion extends continuously from an end of the light-transmitting portion in a second direction that is different from the first direction.
2. The liquid crystal display device of claim 1, wherein the second direction is perpendicular to the first direction.
3. The liquid crystal display device of claim 1, wherein the optical sheet further includes a front light-blocking portion that covers a portion of the light-transmitting portion.
4. The liquid crystal display device of claim 1, wherein the side light-blocking portion includes a printed light-blocking layer that contains a black pigment and is printed on at least a surface of the extending portion.
5. The liquid crystal display device of claim 1, further comprising a supporting member that supports the optical sheet, wherein the extending portion of the optical sheet covers at least a portion of a side surface of the supporting member.
6. The liquid crystal display device of claim 5, further comprising an adhesive member that secures the extending portion with the side surface of the supporting member.
7. The liquid crystal display device of claim 5, wherein the extending portion includes a combination hole, and the supporting member includes a protrusion that inserts into the combination hole.
8. The liquid crystal display device of claim 5, further comprising:

- a fixing frame that secures the display panel and surrounds a side surface of the backlight assembly; and
- a combination member that passes through the fixing frame and the extending portion to insert into the supporting member.

9. The liquid crystal display device of claim 5, wherein the supporting member includes a supporting protrusion that passes through the light-transmitting portion of the optical sheet and supports the display panel.

10. The liquid crystal display device of claim 1, further comprising a spacer disposed near an edge of the optical sheet to maintain a gap between the optical sheet and the display panel.

11. The liquid crystal display device of claim 1, wherein the optical sheet is a diffusion sheet, a prism sheet, a polarizing sheet or a protective sheet, and the liquid crystal display device further includes at least one additional optical sheet disposed under the optical sheet, and the extending portion of the optical sheet covers a side surface of the additional optical sheet.

12. The liquid crystal display device of claim 1, further comprising a supporting member that supports the display panel, wherein the supporting member includes a sidewall portion that surrounds a side surface of the optical sheet and a supporting portion that extends from the sidewall portion to be disposed between the display panel and the optical sheet.

13. A liquid crystal display device comprising:

- a backlight assembly including a light source that generates a light, and an optical sheet that transmits the light;
- a display panel disposed on the backlight assembly; and
- a cover sheet disposed on the display panel, wherein the cover sheet includes a light-transmitting portion and an extending portion that are formed as a unitary single unit, and further including a side light-blocking portion that is combined with the extending portion, and

- wherein the light-transmitting portion extends in a first direction, and the extending portion extends continuously from an end of the light-transmitting portion in a second direction that is different from the first direction.

14. The liquid crystal display device of claim 13, wherein the second direction is perpendicular to the first direction.

15. The liquid crystal display device of claim 13, wherein the cover sheet further includes a front light-blocking portion that covers a portion of the light-transmitting portion.

16. The liquid crystal display device of claim 13, further comprising a supporting member that supports the optical sheet, wherein the extending portion covers side surfaces of the display panel, the optical sheet and the supporting member.

17. The liquid crystal display device of claim 16, further comprising an adhesive member that secures the extending portion with a side surface of the supporting member.

18. The liquid crystal display device of claim 16, wherein the extending portion includes a combination hole, and the supporting member includes a protrusion that inserts into the combination hole.

19. The liquid crystal display device of claim 16, further comprising a combination member that passes through the extending portion and inserts into the supporting member.

20. The liquid crystal display device of claim 13, wherein the side light-blocking portion includes a printed light-blocking layer that contains a black pigment and is printed on at least a surface of the extending portion.

专利名称(译)	液晶显示装置		
公开(公告)号	US20150277185A1	公开(公告)日	2015-10-01
申请号	US14/461690	申请日	2014-08-18
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	NAM YUN HA KIM WON JU		
发明人	NAM, YUN-HA KIM, WON-JU		
IPC分类号	G02F1/1335 F21V8/00 G02F1/1333		
CPC分类号	G02F1/133512 G02F1/133308 G02F1/133528 G02F1/133504 G02F2201/50 G02F2001/133317 G02F2001/13332 G02F2001/133314 G02F2001/133322 G02B6/005 G02B6/0088 G02B6/122		
优先权	1020140037945 2014-03-31 KR		
其他公开文献	US9632350		
外部链接	Espacenet USPTO		

摘要(译)

一种液晶显示装置，包括：背光组件，包括产生光的光源；以及传输光的光学片；以及显示面板，设置在所述背光组件上。光学片包括形成成为整体单个单元的透光部分和延伸部分，并且还包括与延伸部分结合的侧光阻挡部分。透光部分沿第一方向延伸，并且延伸部分从透光部分的端部沿不同于第一方向的第二方向连续延伸。

