



US 20150055071A1

(19) **United States**(12) **Patent Application Publication**
Hyodo et al.(10) **Pub. No.: US 2015/0055071 A1**(43) **Pub. Date: Feb. 26, 2015**(54) **LIQUID CRYSTAL DISPLAY DEVICE****Publication Classification**(71) Applicant: **Japan Display Inc.**, Tokyo (JP)(51) **Int. Cl.****G02F 1/1339** (2006.01)**G02F 1/1368** (2006.01)**G02F 1/1341** (2006.01)(72) Inventors: **Yosuke Hyodo**, Chiba (JP); **Koichi Igeta**, Chiba (JP); **Toshiki Kaneko**, Chiba (JP); **Noboru Kunimatsu**, Chiba (JP); **Hidehiro Sonoda**, Mobarra (JP)(52) **U.S. Cl.**CPC **G02F 1/13394** (2013.01); **G02F 1/1341** (2013.01); **G02F 1/1339** (2013.01); **G02F 1/1368** (2013.01); **G02F 2001/13415** (2013.01); **G02F 2001/13398** (2013.01)USPC **349/123**(21) Appl. No.: **14/532,591**(22) Filed: **Nov. 4, 2014**

(57)

ABSTRACT**Related U.S. Application Data**

(63) Continuation of application No. 14/278,795, filed on May 15, 2014, now Pat. No. 8,885,136, which is a continuation of application No. 13/489,478, filed on Jun. 6, 2012, now Pat. No. 8,736,804.

Foreign Application Priority Data

(30) Jun. 9, 2011 (JP) 2011-128815

A display device includes a first substrate, a second substrate and liquid crystals therebetween, the first substrate having a flat portion, an alignment film, and a concavo-convex pedestal formed in a pixel region, wherein the concavo-convex pedestal having at least two convex portions and recessed portions, and the at least two convex portions of the concavo-convex pedestal are at a position lower than a position of the flat portion. A thickness of the alignment film on the convex portions is less than a thickness of the alignment film on the recessed portions, and a second substrate has a columnar spacer which contacts the at least two convex portions of the concavo-convex pedestal.

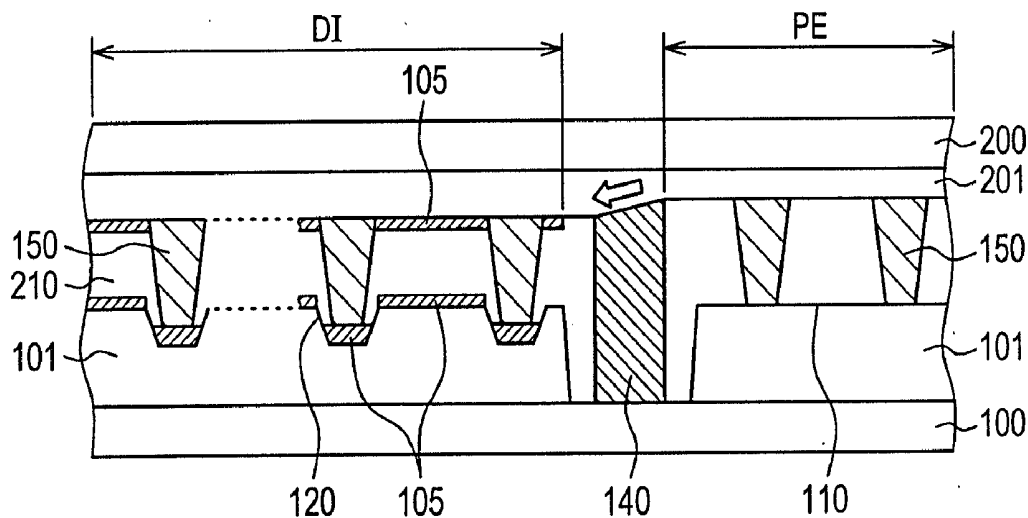


FIG. 1

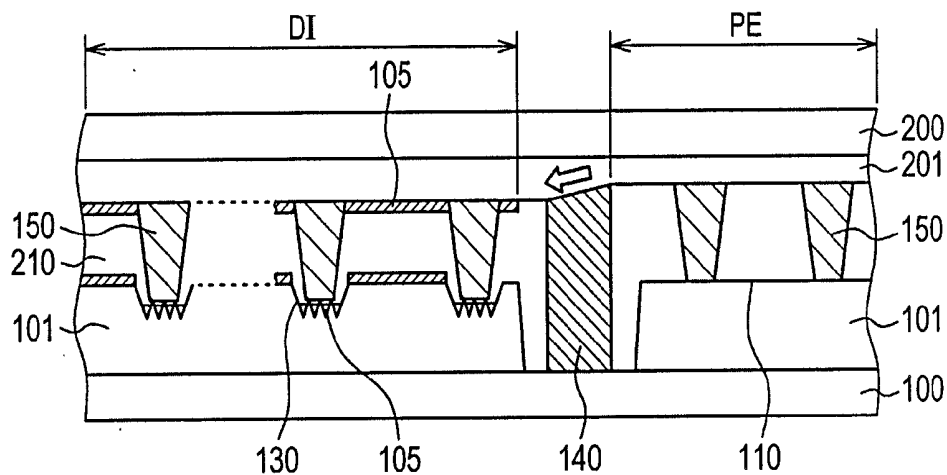


FIG. 2

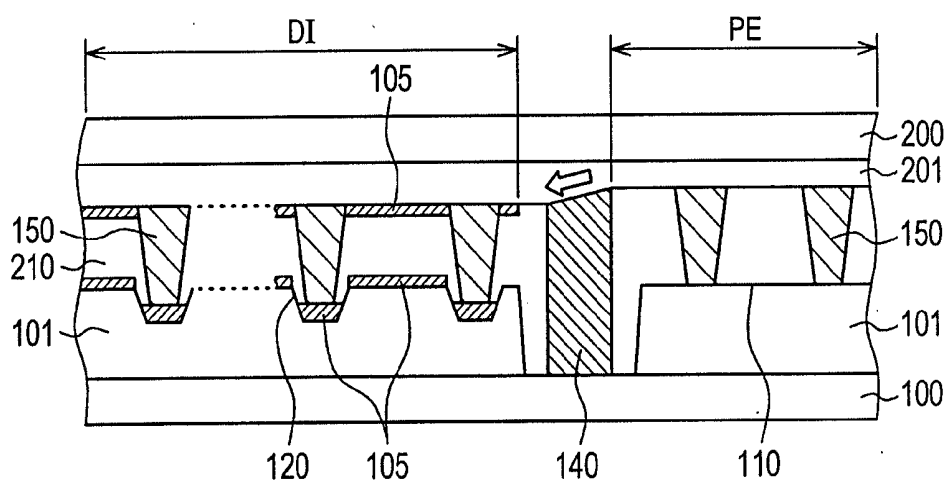


FIG. 3

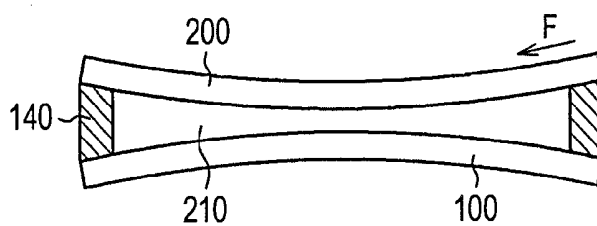


FIG. 4

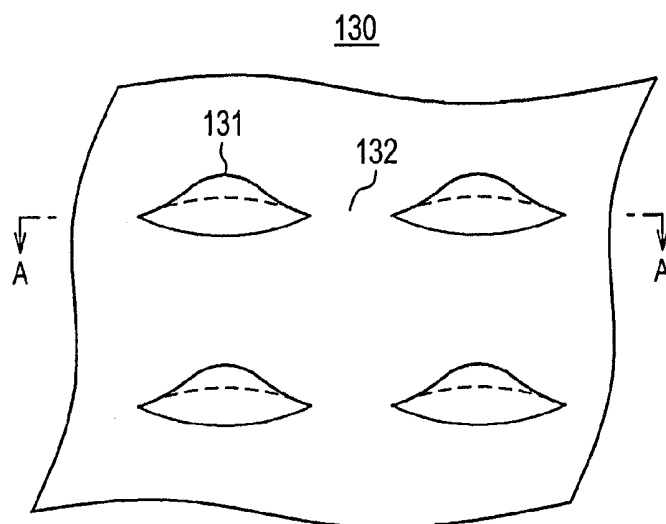


FIG. 5

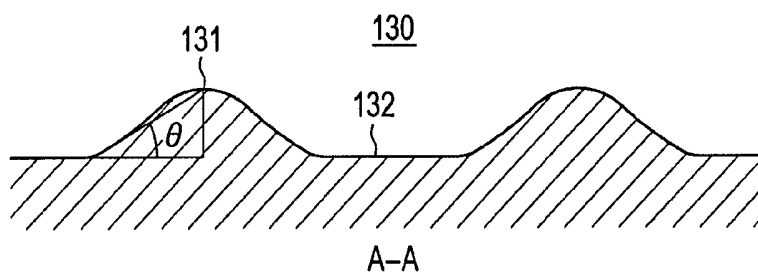


FIG. 6

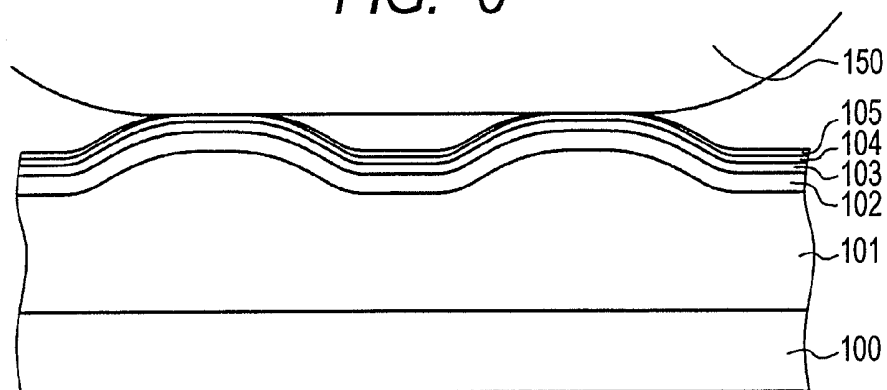


FIG. 7


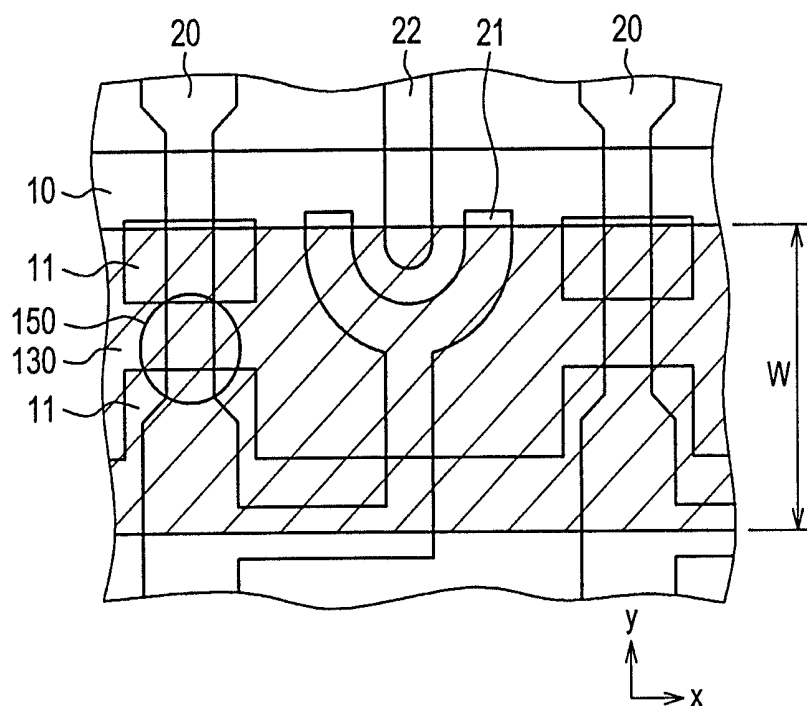


FIG. 8

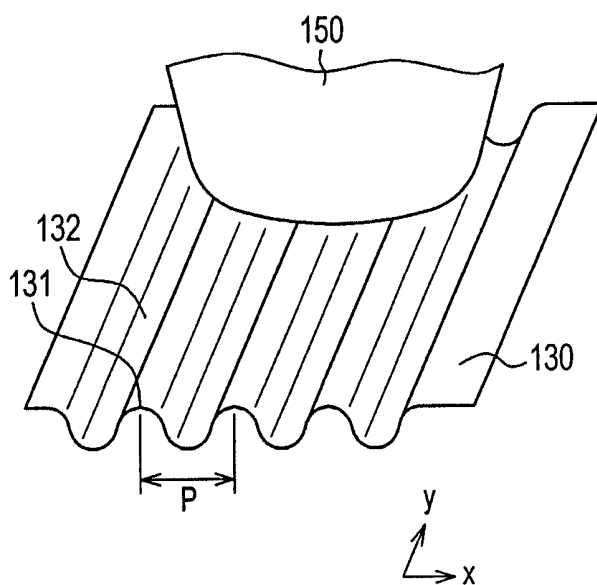

LIQUID CRYSTAL DISPLAY DEVICE

CROSS REFERENCE TO RELATED APPLICATION

[0001] This application is a continuation of U.S. application Ser. No. 14/278,795, filed May 15, 2014, which is a continuation of U.S. application Ser. No. 13/489,478, filed on Jun. 6, 2012, now U.S. Pat. No. 8,736,804, the contents of which are incorporated herein by reference.

CLAIM OF PRIORITY

[0002] The present application claims priority from Japanese Patent Application JP 2011-128815 filed on Jun. 9, 2011, the content of which is hereby incorporated by reference into this application.

BACKGROUND OF THE INVENTION

[0003] 1. Field of the Invention

[0004] The present invention relates to a liquid crystal display device. The invention more particularly relates to a liquid crystal display device configured to take a countermeasure against light spots attributable to shavings of an alignment film.

[0005] 2. Description of the Related Art

[0006] Liquid crystal display devices include a TFT substrate having pixel electrodes, thin film transistors (TFT), etc. formed in a matrix; a counter substrate disposed in facing relation to the TFT substrate and having color filters, etc. formed at positions corresponding to the pixel electrodes of the TFT substrate; and liquid crystals put between the TFT substrate and the counter substrate. Images are formed by controlling the light transmittance of liquid crystal molecules of each pixel.

[0007] In a liquid crystal display device, an alignment film is formed at the boundary surface of the counter substrate and a liquid crystal layer of the TFT substrate and liquid crystal molecules are subjected to initial alignment by applying a rubbing process or an optical alignment process to the alignment film. Then, an amount of light transmitted through the liquid crystal layer is controlled by twisting or rotating the liquid crystal molecules from the initial alignment by an electric field.

[0008] On the other hand, for controlling the thickness of the liquid crystal layer, it is necessary to form a spacer between the counter substrate and the TFT substrate. While beads, etc. were conventionally dispersed as a spacer in the liquid crystal layer, columnar spacers have been formed on the counter substrate to control a gap between the TFT substrate and the counter substrate by the columnar spacers in recent years in order to control the gap (liquid crystal layer) more exactly.

[0009] On the other hand, an additional problem occurs by using the columnar spacer. For example, JP-A-2005-242297 describes that a frictional force is decreased when the columnar spacer is displaced in a case of pressing the counter substrate from the outside so that the columnar spacer can easily return to the initial place when the external pressure is removed. For this purpose, JP-A-2005-242297 discloses that a pedestal having an area smaller than that at the top end of the columnar spacer is formed as a pedestal which is formed on the TFT substrate.

[0010] Further, a problem of generating shavings of the alignment film also occurs when the columnar spacer dis-

places laterally. Other documents concerning scraping of the alignment film or columnar spacers include JP-A-2007-328247, JP-A-2008-170690, JP-A-2009-58618, JP-A-2009-282262, JP-A-2010-8616, and JP-A-Hei 5-107545. It is to be noted that JP-A-2005-242297 corresponds to U.S. Pat. No. 7,502,090, JP-A-2009-58618 corresponds to USP 2009/0059155, and JP-A-2009-282262 corresponds to USP 2011/0080548.

SUMMARY OF THE INVENTION

[0011] Generally, the columnar spacers are disposed to the counter substrate. On the other hand, the pedestals are disposed to the TFT substrate at positions provided in facing relation to the columnar spacers. The pedestal means herein not only those having a protruding portion formed on the side of the TFT substrate but also those planarized or concaved at a portion provided in facing relation to the columnar spacer. That is, the pedestal means herein the structure on the side of the TFT substrate provided in facing relation to the columnar spacer.

[0012] In the liquid crystal display device, an alignment film is formed on the surface of the counter substrate and the TFT substrate in contact with the liquid crystal layer. Since the columnar spacer has a relatively large height, the alignment film is less formed at the top end of the columnar spacer in the counter substrate. On the other hand, since the height of the pedestal of the TFT substrate is lower than that of the columnar spacer, the alignment film is formed also on the surface of the pedestal. When the columnar spacer is in contact with the surface of the pedestal on which the alignment film is formed, the alignment film at the surface of the pedestal is scraped off.

[0013] That is, when the liquid crystal display device undergoes temperature cycles, etc. and the TFT substrate and the counter substrate expand or shrink at different ratios or when the counter substrate undergoes a pressure from the outside, the columnar spacer displaces laterally. At this time, the alignment film on the pedestal is scraped off. When scraped off shavings of the alignment film intrude into the liquid crystal layer, light spots are generated to degrade the image quality.

[0014] The present invention intends to suppress the generation of the light spots by providing a countermeasure for the scraped off shavings of the alignment film caused by the columnar spacer.

[0015] The present invention intends to overcome the problem described above and provides a liquid crystal display device comprising:

[0016] a TFT substrate having an organic passivation film;

[0017] a counter substrate, the counter substrate being adhered to the TFT substrate by a sealant formed at a periphery thereof;

[0018] liquid crystals put inside of the liquid crystal display device;

[0019] a columnar spacer formed on the counter substrate, the columnar spacer defining a distance between the TFT substrate and the counter substrate; and

[0020] a concavo-convex pedestal formed in a pixel region of the TFT substrate, the concavo-convex pedestal being provided in facing relation to the columnar spacer;

[0021] wherein the concavo-convex pedestal is formed with a convex portion and a concave portion at a bottom of the concavo-convex pedestal, and the height of the top end of the convex portion is lower than that of the planar portion,

[0022] wherein the thickness of the alignment film present on the convex portion is smaller than the thickness of the alignment film present on the concave portion,

[0023] wherein the top end of the columnar spacer is in contact with two or more convex portions formed on the bottom of the concavo-convex pedestal, and

[0024] wherein the area at the bottom of the concavo-convex pedestal is larger than the area at the top end of the columnar spacer.

[0025] According to the invention, in the liquid crystal display device having the columnar spacer and using the optical alignment film, since scraping of the alignment film caused by the columnar spacer can be prevented, production yield of the liquid crystal display device can be improved. Further, since scraping of the alignment film, which is caused by the lateral displacement of the columnar spacer attributable to the temperature cycles after shipping or the pressure from the outside to the counter substrate, can be prevented, generation of failure in the market can be prevented.

[0026] In a liquid crystal display device of a liquid crystal injection type using a dropping method, the number of columnar spacers is small and a stress between the columnar spacer and the pedestal per one set is large. According to the invention, since the alignment film is not present or the film thickness is smaller than that in other portions in the pedestal in contact with the columnar spacer, generation of the scraping of alignment film can be prevented. Thus, generation of light spots can be prevented.

BRIEF DESCRIPTION OF THE DRAWINGS

[0027] FIG. 1 is a cross sectional view of a liquid crystal display device of the invention.

[0028] FIG. 2 is a cross sectional view of a liquid crystal display device of a comparative embodiment to the invention.

[0029] FIG. 3 is a cross sectional view of a liquid crystal display device showing a state where a TFT substrate and a counter substrate are deformed inwardly into a convex shape.

[0030] FIG. 4 is a perspective view showing an example of a convex portion formed at the bottom of a concavo-convex pedestal.

[0031] FIG. 5 is a schematic cross sectional view for defining the angle of inclination of the convex portion formed at the bottom of the concavo-convex pedestal.

[0032] FIG. 6 is a cross sectional view showing a state where the convex portion formed at the bottom of the concavo-convex pedestal and the columnar spacer are in contact to each other.

[0033] FIG. 7 is a plan view showing a region where the concavo-convex pedestal is formed.

[0034] FIG. 8 is a perspective view showing a shape at the bottom of the concavo-convex pedestal according to an Embodiment 2.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0035] FIG. 1 is a cross sectional view of a liquid crystal display device according to the invention. FIG. 2 is a schematic cross sectional view of a liquid crystal display device as a comparative embodiment. First description is to be made with reference to FIG. 2.

[0036] In FIG. 2, an organic passivation film 101 is formed over a TFT substrate 100. Since the organic passivation layer 101 also has a function as a planarizing film, it is formed to a

large thickness of about 1.5 to 2 μm . In FIG. 2, while interconnects, electrodes, semiconductor films, a gate insulating film, an inorganic passivation film, etc. are formed actually between the TFT substrate 100 formed of glass and the organic passivation film 101, the layers are not illustrated since FIG. 2 is a schematic view.

[0037] The organic passivation film 101 per se is formed of a photosensitive resin and can be patterned without using a photoresist. A hole or a concave portion is formed on the organic passivation film 101 by using exposure or half exposure. The organic passivation film 101 is removed from a portion of forming a sealant 140 for bonding the TFT substrate 100 and the counter substrate 200. Further, a concave pedestal 120 is formed on the TFT substrate 100 at a portion provided in facing relation to the columnar spacer 150 formed on the counter substrate 200. The concave pedestal 120 is concaved at a portion of the TFT substrate 100 in contact with the columnar spacer 150 and is lowered compared with other portions.

[0038] The concave pedestal 120 is formed as described above in order to keep the TFT substrate 100 or the counter substrate 200 to an inwardly convexed shape in a usual state. For example, in the structure as shown in FIG. 3, when temperature increases and the TFT substrate 100 or the counter substrate 200 expands thermally, the stress caused by the thermal expansion exerts in the direction as shown by F in FIG. 3 and this is not a direction of causing a gap between the TFT substrate 100 and the counter substrate 200. Accordingly, even when the TFT substrate 100 or the counter substrate 200 thermally expands, bubbles are not generated in the liquid crystal layer.

[0039] Referring again to FIG. 2, since the concave pedestal 120 is formed in a pixel region DI in the inside of the sealant 140 in FIG. 2 and the planar pedestal 110 is formed at the outside PE of the sealant 140, the gap between the TFT substrate 100 and the counter substrate 200 is decreased in the pixel region DI and the liquid crystal display device has a shape as shown in FIG. 3.

[0040] While a counter electrode, an interlayer insulating film, a pixel electrode, etc. are formed usually over the organic passivation film 101 of the TFT substrate 100, since FIG. 2 is a schematic view, the layers are not illustrated. Accordingly, in FIG. 2, the alignment film 105 is formed over the organic passivation film 101. Since the alignment film 105 is liquid at the instance it is coated, it accumulates at a large thickness in the lower portion by the leveling effect.

[0041] That is, the alignment film 105 is formed at a relatively large thickness also on the concave pedestal 120 shown in FIG. 2. The alignment film 105 is not coated to a portion where the sealant 140 is formed. Since the adhesion between the sealant 140 and the substrate is lowered when the alignment film 105 is present at the sealant 140, deposition of the alignment film 105 to the sealant 140 is prevented by using a stopper or the like.

[0042] In FIG. 2, an overcoat film 201 is formed on the side of the counter substrate 200, and the columnar spacer 150 is formed over the overcoat film 201. While color filters and black matrixes are generally formed between the overcoat film 201 and the counter substrate 200, since FIG. 2 is a schematic view, they are not illustrated. The alignment film 105 is formed over the overcoat film 201. In FIG. 2, the alignment film 105 is not formed at the top end of the columnar spacer 150. This is because the columnar spacer 150 has a relatively large height and the alignment film 105, which is

liquid during coating, is less deposited at the top end. Also on the side of the counter substrate **200**, the alignment film **105** is not formed on the sealant **140** by the same reason as that for the TFT substrate **100**.

[0043] In FIG. 2, while the columnar spacer **150** of the counter substrate is disposed in facing relation to the portion of the concave pedestal **120** of the TFT substrate **100**, the alignment film **105** is present on the concave pedestal **120**. Therefore, when the columnar spacer **150** causes lateral displacement, etc., the alignment film **105** is scraped off to generate scraped off shavings of the alignment film and cause light spots. In the invention shown by the following embodiments, scraping of the alignment film **105** can be prevented in the liquid crystal display device having the concave pedestal **120** in the pixel region DI.

Embodiment 1

[0044] FIG. 1 is a cross sectional view of a liquid crystal display device according to the invention. The basic configuration of FIG. 1 is identical with that in FIG. 2. That is, a concave pedestal is formed on the organic passivation film **101** in the pixel region so that the TFT substrate **100** and the counter substrate **200** are convexed inward as shown in FIG. 3 to make the gap between the TFT substrate **100** and the counter substrate **200** smaller in the pixel portion than in the periphery.

[0045] FIG. 1 is different from FIG. 2 in that a concavo-convex portion is formed at the bottom of the concave pedestal for preventing scraping of the alignment film by the columnar spacer **150**. The pedestal in FIG. 1 is hereinafter referred to as a concavo-convex pedestal **130**. That is, in the concavo-convex pedestal **130**, the concavo-convex portion is formed at the bottom of the concave pedestal **120** formed on the organic passivation film **101**.

[0046] In FIG. 1, while a convex portion **131** and a concave portion **132** are formed at the bottom of the concavo-convex pedestal **130**, the columnar spacer **150** formed on the counter substrate **200** is in contact only with the convex portion (corresponding to the portion **131** in FIG. 4 to be described later) of the concavo-convex pedestal **130**.

[0047] In order to make the cross sectional shape of the liquid crystal display device into the shape as shown in FIG. 3, the height of the convex portion **131** at the bottom of the concavo-convex pedestal **130** is lower than the height of the planar pedestal **110** at the outside of the sealant **140**. Alternatively, the height of the convex portion **131** at the bottom of the concavo-convex pedestal **130** is lower than that of the planar portion between adjacent concavo-convex pedestals **130** and **130**.

[0048] The alignment film **105** is not present on the convex portion **131** due to the leveling effect or, even if it is present, the thickness is made extremely smaller than that of the concave pedestal portion in FIG. 2. Accordingly, even when lateral displacement is caused to the columnar spacer **150**, the alignment film **105** is not scraped off. On the other hand, while the alignment film **105** is present on the concave portion **132** of the concavo-convex pedestal **130**, the columnar spacer **150** is not in contact with the concave portion **132** of the concavo-convex pedestal **130** in the configuration of the present invention.

[0049] FIG. 4 is a schematic view for the shape of the bottom of the concavo-convex pedestal **130**, which is a perspective view of the convex portion **131** as a protrusion having a circular bottom. The concave portion **132** is present

between adjacent convex portions **131** and **131**. While more convex portions **131** are usually formed at the bottom of the concavo-convex pedestal **130**, FIG. 4 shows a portion of the bottom.

[0050] FIG. 5 is a cross sectional view along line A-A in FIG. 4 which shows the definition for the angle of inclination θ of the convex portion **131** formed at the bottom of the concavo-convex pedestal **130**. In FIG. 5, the angle of inclination θ means an angle between the planar concave portion **132** and a line connecting the apex of the concave portion **131** and a beginning portion of a planar concave portion **132**. When it is uncertain whether the concave portion **132** is planar or not, a line connecting two concave portions **132** on the both sides of the convex portion **131** may be defined as a flat line.

[0051] The convex portion **131** is formed by using half exposure. That is, the concavo-convex portion is formed at the bottom of the concavo-convex pedestal **130** by decreasing the exposure amount for the convex portion **131** and increasing the exposure amount for the concave portion **132**. In such a forming method, it is difficult to form a large angle of inclination θ as shown in FIG. 5. On the other hand, when θ is excessively small, it is difficult to form sufficient concavo-convex portion in order not to form the alignment film **105** on the concave portion **131**.

[0052] As the condition for the angle in order not to form the alignment film **105** to the convex portion by the process for forming the concavo-convex portion and due to the leveling effect of the concavo-convex portion, θ is desirably 3 degrees or more and 45 degrees or less in FIG. 5 according to the experiment.

[0053] When θ is smaller than 3 degrees, the effect of decreasing the thickness of the alignment film **105** on the concave portion **131** was not obtained. As the effect of the invention, a predetermined effect can be obtained not only in the case where the alignment film **105** is eliminated completely at the convex portion **131** but also in the case where the thickness of the alignment film **105** at the concave portion **131** is decreased to less than that in the concave portion. The value for the θ is more preferably 6 degrees or more and 25 degrees or less.

[0054] FIG. 6 is a cross sectional view showing the state where the columnar spacer **150** is in contact with the concavo-convex pedestal **130** at the bottom of the concavo-convex pedestal. In the TFT substrate **100** in FIG. 6, layers below the organic passivation film **101** are not illustrated. The organic passivation film **101** is formed at a thickness of 1.5 μm . The concavo-convex portion is formed on the organic passivation film **101** and an interlayer insulating film **102** formed of SiN is formed over the organic passivation film **101**.

[0055] A metal layer **103** inherent to the pedestal portion is formed of a metal over the interlayer insulating film **102**. The metal layer **103** is formed of MoCr. It is to be noted that the metal layer **103** is disposed for adjusting the height of the portion in contact with the columnar spacer **150**, which is not essential depending on the place. An ITO (Indium-Tin-Oxide) film **104** is formed on a thickness of 77 μm over the metal layer **103** by sputtering. The ITO film **104** is formed simultaneously with sputtering for the pixel electrode. While the alignment film **105** is formed over the ITO film **104**, the alignment film **105** is deposited such that the thickness is 80 μm for the planar portion between adjacent concavo-convex pedestals **130** and **130** in FIG. 1.

[0056] In this case, at the bottom of the concavo-convex pedestal **130** shown in FIG. 6, the alignment film **105** is not

present on the convex portion 131 and the alignment film 105 is present only on the concave portion 132. As shown in FIG. 6, the top end of the columnar spacer 150 is in contact only with the convex portions 131 at the bottom of the concavo-convex pedestal 130. Since the alignment film 105 is not present on the convex portions 131 in contact with the columnar spacer 150, if the columnar spacer 150 should cause lateral displacement, etc., the alignment film 105 is not scraped off.

[0057] What is important in FIG. 6 is that the top end of the columnar spacer 150 is in contact with at least two convex portions 131 formed at the bottom of the concavo-convex pedestal 130. If the top end of the columnar spacer 150 is in contact only with one convex portion 131, since the columnar spacer 150 is tilted and a portion thereof is in contact with the concave portion 132 where the alignment film 105 is formed at a large thickness, the alignment film 105 tends to be scraped off.

[0058] In FIG. 6, while the top end of the columnar spacer 150 is in contact with two convex portions 131, it is more preferably in contact with three or more convex portions 131. This is because the columnar spacer 150 can be in contact only with the convex portions 131 more stably. The alignment film 105 is not present at the top end of the convex portion 131 in FIG. 6. However, the undesired effect of scraping of the alignment film can be mitigated also in a case where the alignment film 105 is not eliminated completely but formed at a small thickness.

[0059] FIG. 7 is a plan view showing an example of a place where the concavo-convex pedestal 130 is formed. In FIG. 7, video signal lines 20 are extended in a vertical direction (y direction) and are arranged in the lateral direction (x direction). Scanning lines 10 are extended in the lateral direction and arranged at a predetermined pitch in the vertical direction (y direction). The scanning line 10 is used also as a gate electrode of the TFT and is formed in a large width. However, for decreasing the capacitance between the scanning line 10 and the video signal line 20, a recess 11 is formed at a region intersecting the video signal line 20 so as to decrease the area.

[0060] The drain electrode 21 of the TFT is coupled to the video signal line 20 and formed in a horseshoe shape at a portion provided in facing relation to the source electrode 22 so as to surround one side of the source electrode 22. The source electrode 22 is coupled to a pixel electrode not shown. A semiconductor layer not shown is formed below the drain electrode 21 and the source electrode 22.

[0061] In FIG. 7, the concavo-convex pedestal 130 is extended with a predetermined width W in the lateral direction. In FIG. 7, while only one concavo-convex pedestal 130 in a lateral stripe shape is formed in the lateral direction, it is arranged actually at a predetermined pitch in the vertical direction. The bottom of the concavo-convex pedestal 130 is lower than the planarized portion where the concavo-convex pedestal 130 is not formed. Further, a convex portion 131 and a concave portion 132 which are not shown are formed at the bottom of the concavo-convex pedestal 130.

[0062] In FIG. 7, the columnar spacer 150 is disposed at the intersection between the video signal line 20 and the scanning line 10. In FIG. 7, the area of the concavo-convex pedestal 130 is larger than the area at the top end of the columnar spacer 150. Accordingly, even when the columnar spacer 150 should displace laterally, the columnar spacer 150 can move only over the convex portion 131 of the concavo-convex pedestal 130.

[0063] In FIG. 7, the convex portion 131 of the concavo-convex pedestal 130 may be formed over the entire surface of the bottom of the concavo-convex pedestal 130 or may be formed only at a portion of the area where the columnar spacer 150 may possibly displace laterally. Since the concavo-convex portion at the bottom of the concavo-convex pedestal 130 is formed by half exposure, formation of the concavo-convex portion has no significant difference in view of the process whether it is formed over the entire surface or only at a portion of the bottom of the concavo-convex pedestal 130.

[0064] In FIG. 7, the pedestal 130 is extended continuously in the lateral direction in a width W but it may be formed in an island shape only at the periphery of the columnar spacer 150. However, the continuous concavo-convex pedestal 130 as shown in FIG. 7 can ensure the degree of freedom for the arrangement of the columnar spacer 150 if this may be permitted in view of the structure.

Embodiment 2

[0065] FIG. 8 is a perspective view showing the shape of the bottom of the concavo-convex pedestal 130 according to a second embodiment of the invention. In FIG. 8, a concavo-convex portion at the bottom of the concavo-convex pedestal 130 is formed only in one direction (x direction). That is, in FIG. 8, concavo-convex portions are formed continuously at a predetermined pitch P in the lateral direction (x direction) and ridges of the convex portions 131 are formed in the vertical direction (y direction). Also in the shape of FIG. 8, the alignment film 105 is not present on the convex portion 131, and the alignment film 105 is formed at a large thickness in the concave portion 132.

[0066] In FIG. 8, while the columnar spacer 150 is in contact with the convex portions 131, since the alignment film 105 is not present on the convex portions 131, the alignment film 105 is not scraped off even when the columnar spacer 150 should displace laterally. For preventing the columnar spacer 150 from tilting and being in contact with the concave portion 132 where the alignment film 105 is formed at a large thickness, it is necessary that the columnar spacer 150 is in contact with at least two convex portions 131 in FIG. 8.

[0067] That is, in FIG. 8, it is necessary that the diameter at the top end of the columnar spacer 150 has such a width enough to be in contact with at least two convex portions 131 in the x direction. Preferably, the diameter at the top end of the columnar spacer 150 is such that the top end is in contact with three or more convex portions 131 in the x direction.

[0068] The angle of inclination θ in the cross sectional shape of the convex portion 131 in FIG. 8 is identical with the case of the convex portion 131 having the circular cross section. That is, the cross section in the x direction in FIG. 7 corresponds to the cross section of FIG. 5. That is, also in this embodiment, as the condition considering that the alignment film 105 is not formed on the convex portion 131 by the concavo-convex portion forming process and due to the leveling effect of the concavo-convex portion, θ in FIG. 5 is preferably 3 degrees or more and 45 degrees or less.

[0069] When θ is smaller than 3 degrees, the effect of decreasing the thickness of the alignment film 105 on the convex portion 131 could not be obtained. As the effect of the invention, a predetermined effect can be obtained not only in a case where the alignment film 105 is eliminated completely from the convex portion 131 but also in a case where the thickness of the alignment film 105 on the convex portion 131

is decreased to less than that on the concave portion 132. The value of θ is, more preferably, 6 degrees or more and 25 degrees or less.

[0070] In FIG. 8, the extending direction of the convex portion 131 at the bottom of the concavo-convex pedestal 130 or the extending direction of a ridge 131 is in the y direction, that is, the direction of the width W in FIG. 7. However, the extending direction of the ridge 131 in FIG. 8 is not restricted to the y direction but may also be in the x direction. In this case, laterally long ridges 131 are formed at the bottom of the concavo-convex pedestal 130 extending in the lateral direction shown in FIG. 7, and the ridges 131 are formed at a predetermined pitch in the vertical direction.

[0071] Further, the ridge 131 formed at the bottom of the concavo-convex pedestal 131 may have a predetermined angle not only in the x direction or the y direction but also in the x direction and the y direction. It is important that the top end of the columnar spacer 150 is in contact with two or more ridges 131, more preferably, in contact with three or more ridges 131 irrespective of the direction of the ridge 131. In this case, it is necessary that the top end of the columnar spacer 150 is in contact with two or more and, preferably, three or more ridges in the direction orthogonal to the extending direction of the ridge.

[0072] Incidentally, the method of injecting liquid crystals in the liquid crystal display device includes a method of injecting liquid crystals through an injection hole while evacuating the inside of the liquid crystal display device (vacuum injection method), and a method of forming a sealant at a periphery of the counter substrate and dropping the liquid crystals to the inside (dropping method: One Drop Fill (ODF)). Of the methods, it is necessary for the dropping method to accurately control the amount of the liquid crystals to be dropped. When a large number of the columnar spacers 150 are formed on the counter substrate 200, control for the dropping amount of liquid crystals is difficult, and control for the gap between the TFT substrate 100 and the counter substrate 200 is difficult due to variation of the size between the columnar spacers 150.

[0073] Accordingly, in the dropping method, the number of the columnar spacers 150 is smaller than that in the case of the vacuum injection method. Then, when the liquid crystal display device undergoes heat cycles, or a pressure applied from the outside, etc., the stress and strain exerting per one columnar spacer 150 are increased. That is, the amount of lateral displacement of the columnar spacer 150 is increased. That is, in the case of the dropping method, there is a higher possibility of causing scraping of the alignment film.

[0074] Accordingly, the effect can be improved particularly effectively when the invention is applied to a liquid crystal display device of a type in which the liquid crystal is injected by the dropping method.

What is claimed is:

1. A display device comprising:

a first substrate, a second substrate and liquid crystals therebetween;

the first substrate including a flat portion, an alignment film, and a concavo-convex pedestal formed in a pixel region;

the concavo-convex pedestal having at least two convex portions and recessed portions;

the at least two convex portions of the concavo-convex pedestal are at a position lower than a position of the flat portion;

a thickness of the alignment film on the convex portions is less than a thickness of the alignment film on the recessed portions; and

a second substrate has a columnar spacer which contacts the at least two convex portions of the concavo-convex pedestal.

2. A display device according to claim 1,

wherein the concavo-convex pedestal has at least three convex portions; and

wherein a top end of the columnar spacer is in contact with the at least three convex portions of the concavo-convex pedestal.

3. A display device according to claim 1, wherein an angle of inclination at the inclined portion in the cross sectional shape of the convex portion is at least 3 degrees and no greater than 45 degrees or less.

4. A display device according to claim 1, wherein the angle of inclination at the inclined portion in the cross sectional shape of the convex portion is at least 6 degrees more and no greater than 25 degrees.

5. A display device according to claim 1, wherein a distance between the first substrate and the second substrate is smaller in the pixel region than a distance between the first and second substrates at an outside area of a sealant which seals the first and second substrates together.

6. A display device according to claim 1, wherein the liquid crystals are filled by a dropping method.

7. A display device according to claim 1, the alignment film is not formed on the convex portions of the concavo-convex pedestal.

8. A display device according to claim 1,

wherein the convex portions of the concavo-convex portion are ridges extending in a predetermined direction.

9. A display device according to claim 8,

wherein the concavo-convex pedestal has at least three convex portions;

wherein a top end of the columnar spacer is in contact with the at least three convex portions of the concavo-convex pedestal.

10. A display device according to claim 8, wherein an angle of the inclination at the inclined portion in the cross sectional shape of the convex portion is at least 3 degrees and no greater than 45 degrees or less.

11. A display device according to claim 8, wherein the angle of the inclination at the inclined portion in the cross sectional shape of the convex portion is at least 6 degrees and no greater than 25 degrees.

12. A display device according to claim 8, wherein a distance between the first substrate and the second substrate is smaller in the pixel region than a distance between the first and second substrates at an outside area of a sealant which seals the first and second substrates together.

13. A display device according to claim 8, wherein the liquid crystal is filled by a dropping method.

14. A display device according to claim 8, the alignment film is not formed on the convex portions of the concavo-convex pedestal.

* * * * *

专利名称(译)	液晶显示装置		
公开(公告)号	US20150055071A1	公开(公告)日	2015-02-26
申请号	US14/532591	申请日	2014-11-04
[标]申请(专利权)人(译)	株式会社日本显示器		
申请(专利权)人(译)	日本展示INC.		
当前申请(专利权)人(译)	日本展示INC.		
[标]发明人	HYODO YOSUKE IGETA KOICHI KANEKO TOSHIKI KUNIMATSU NOBORU SONODA HIDEHIRO		
发明人	HYODO, YOSUKE IGETA, KOICHI KANEKO, TOSHIKI KUNIMATSU, NOBORU SONODA, HIDEHIRO		
IPC分类号	G02F1/1339 G02F1/1368 G02F1/1341		
CPC分类号	G02F1/13394 G02F1/1341 G02F2001/13398 G02F1/1368 G02F2001/13415 G02F1/1339 G02F1/133371 G02F1/13378 G02F2201/50		
优先权	2011128815 2011-06-09 JP		
其他公开文献	US9182634		
外部链接	Espacenet USPTO		

摘要(译)

一种显示装置，包括第一基板，第二基板和其间的液晶，所述第一基板具有平坦部分，取向膜和形成在像素区域中的凹凸基座，其中所述凹凸基座具有至少两个凸起部分和凹陷部分，以及凹凸基座的至少两个凸起部分位于比平坦部分的位置低的位置。凸部上的取向膜的厚度小于凹部上的取向膜的厚度，第二基板具有与凹凸台的至少两个凸部接触的柱状间隔物。

A display device includes a first substrate, a second substrate and liquid crystals therebetween, the first substrate having a flat portion, an alignment film, and a concavo-convex pedestal formed in a pixel region, wherein the concavo-convex pedestal having at least two convex portions and recessed portions, and the at least two convex portions of the concavo-convex pedestal are at a position lower than a position of the flat portion. A thickness of the alignment film on the convex portions is less than a thickness of the alignment film on the recessed portions, and a second substrate has a columnar spacer which contacts the at least two convex portions of the concavo-convex pedestal.