



US 20180341147A1

(19) **United States**(12) **Patent Application Publication**
SUGITANI et al.(10) **Pub. No.: US 2018/0341147 A1**(43) **Pub. Date: Nov. 29, 2018**(54) **DISPLAY DEVICE AND METHOD OF
MANUFACTURING THE SAME**(52) **U.S. CL.**CPC .. **G02F 1/133516** (2013.01); **G02F 1/133536**
(2013.01); **G02F 1/13439** (2013.01); **G02F**
2001/133357 (2013.01); **G02F 2001/133548**
(2013.01); **G02F 1/133512** (2013.01); **G02F**
2001/133519 (2013.01)(71) Applicant: **Samsung Display Co. Ltd.**, Yongin-si
(KR)(72) Inventors: **Koichi SUGITANI**, Hwaseong-si (KR);
Hoon KANG, Suwon-si (KR); **Hye In**
KIM, Hwaseong-si (KR); **Yong Hoon**
YANG, Hwaseong-si (KR); **Joo Young**
YOON, Suwon-si (KR); **Eui Suk**
JUNG, Seoul (KR)

(57)

ABSTRACT

A display device includes a first pixel region (FPR), a second pixel region (SPR), a color conversion pattern (CCP), a first overcoat layer (FOL), a barrier layer (BL), a second overcoat layer (SOL), a liquid crystal layer (LCL), and a switching element (SE). The FPR is configured to display a first color (FC). The SPR is adjacent the FPR, and is configured to display a second color (SC) of a shorter peak wavelength than the FC. The CCP is disposed in the FPR, and is configured to: convert a color of incident light into the FC; and output converted light of the FC. The FOL is disposed on the CCP. The BL is of an inorganic material, and is disposed on the FOL. The SOL is of an organic material, and is disposed on the BL. The LCL is disposed on the SOL. The SE is disposed on the LCL.

(21) Appl. No.: **15/867,607**(22) Filed: **Jan. 10, 2018**(30) **Foreign Application Priority Data**

May 23, 2017 (KR) 10-2017-0063512

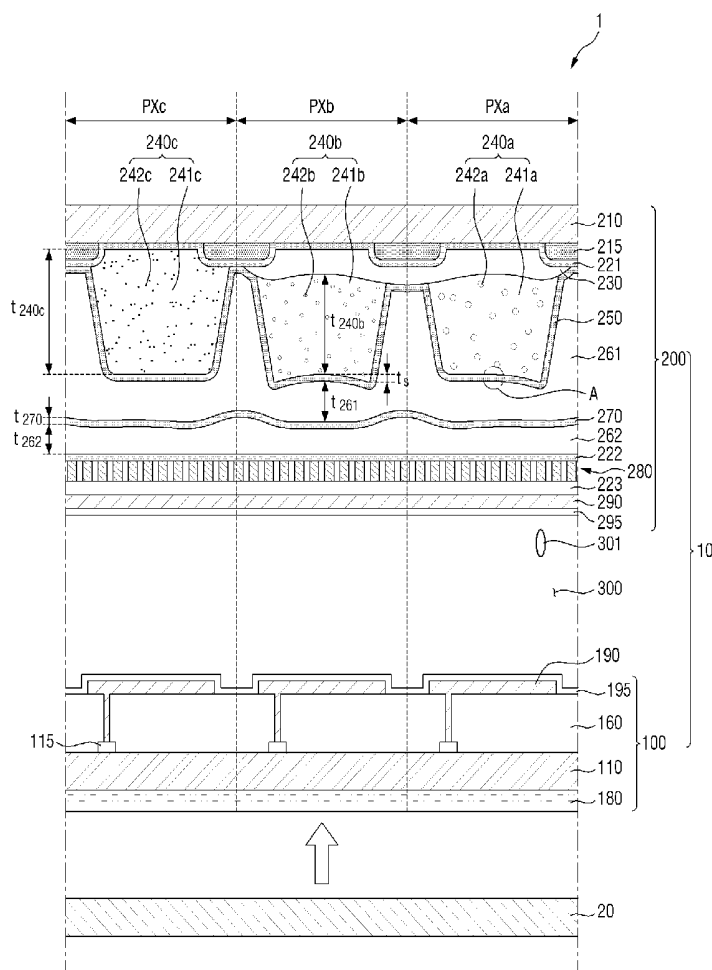
Publication Classification(51) **Int. Cl.****G02F 1/1335** (2006.01)**G02F 1/1343** (2006.01)

FIG. 1

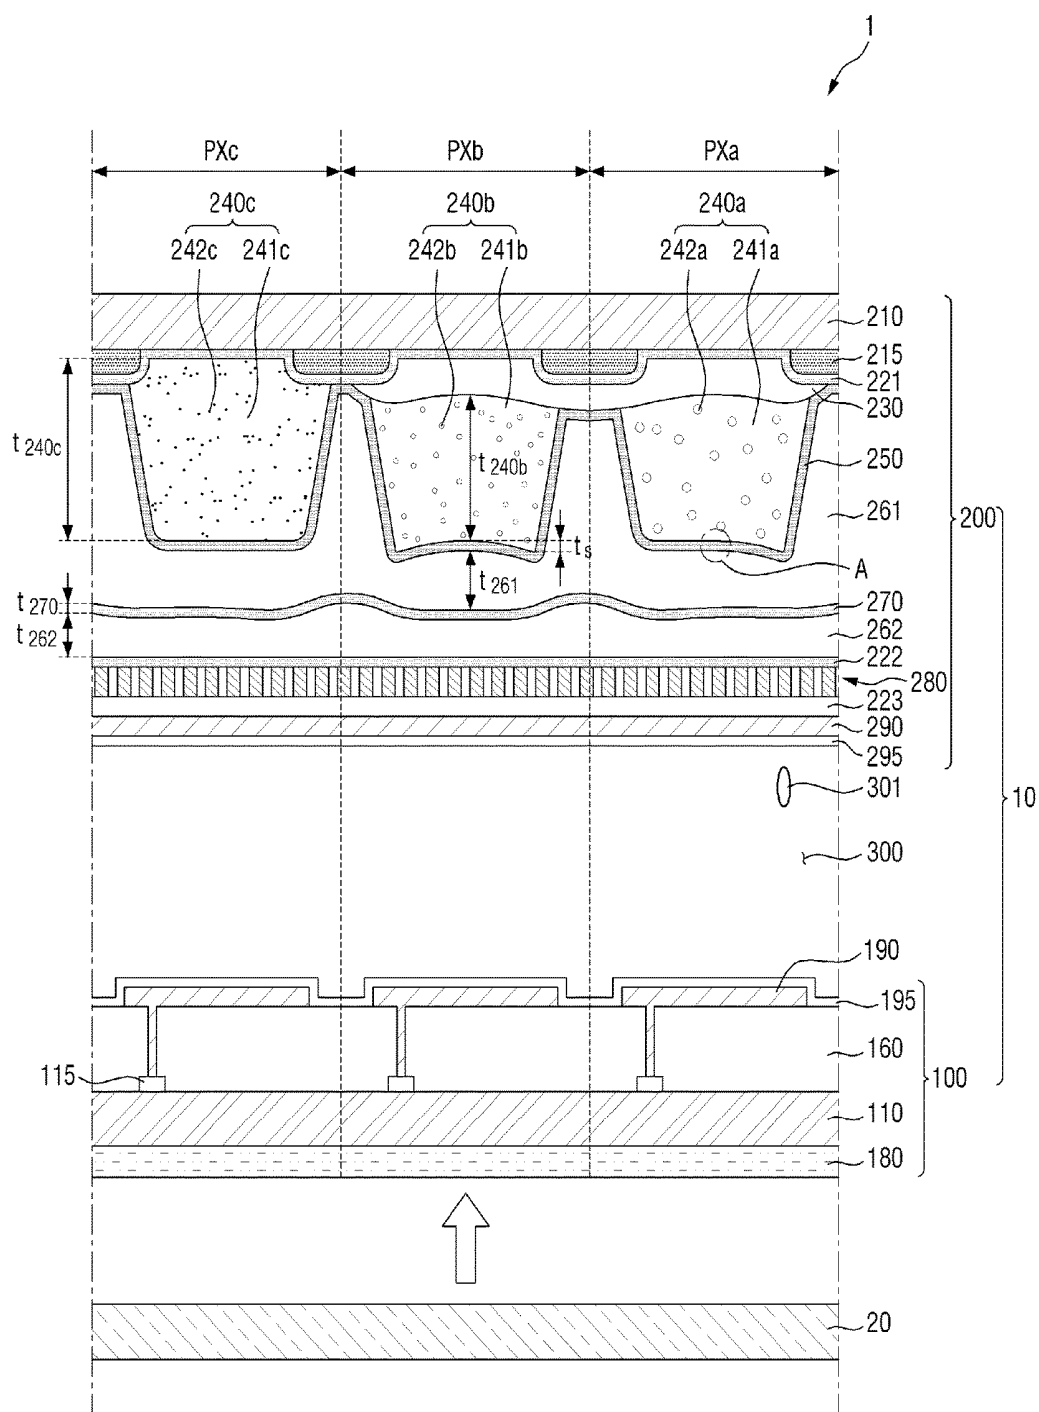


FIG. 2

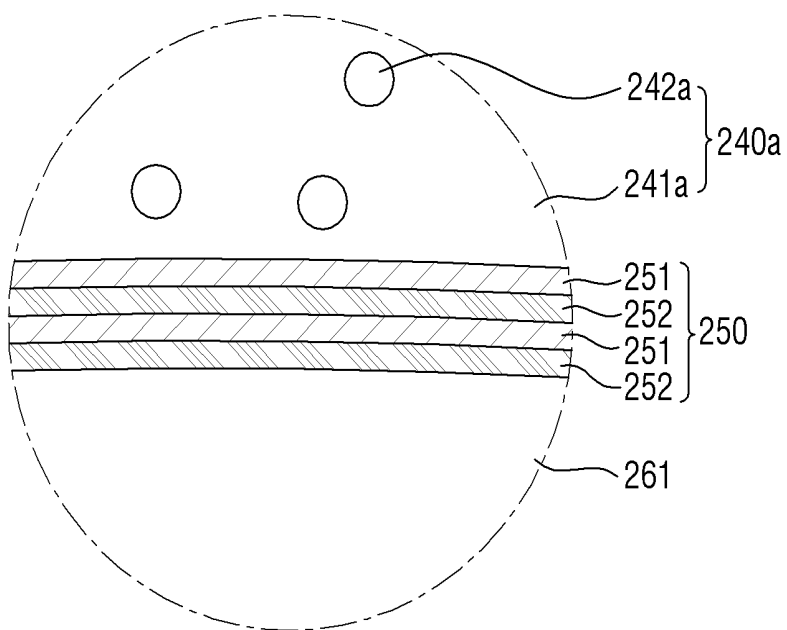


FIG. 3

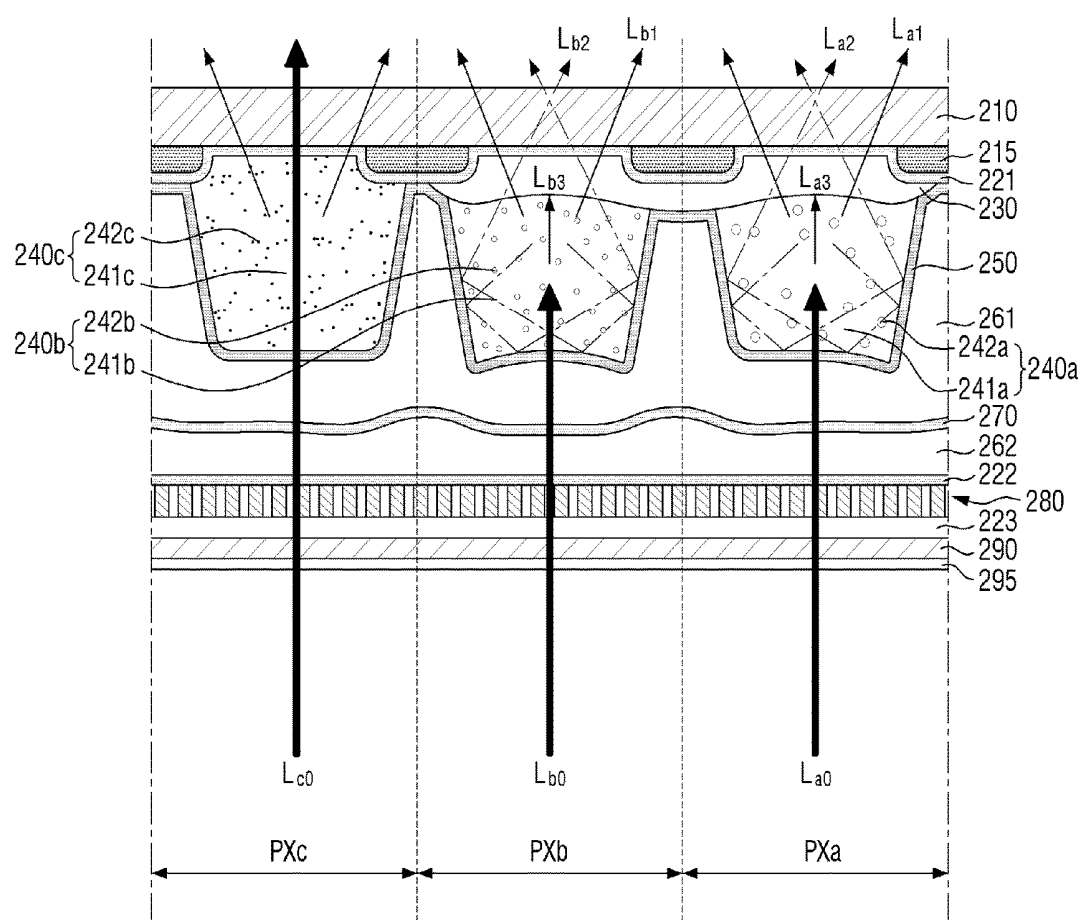


FIG. 4

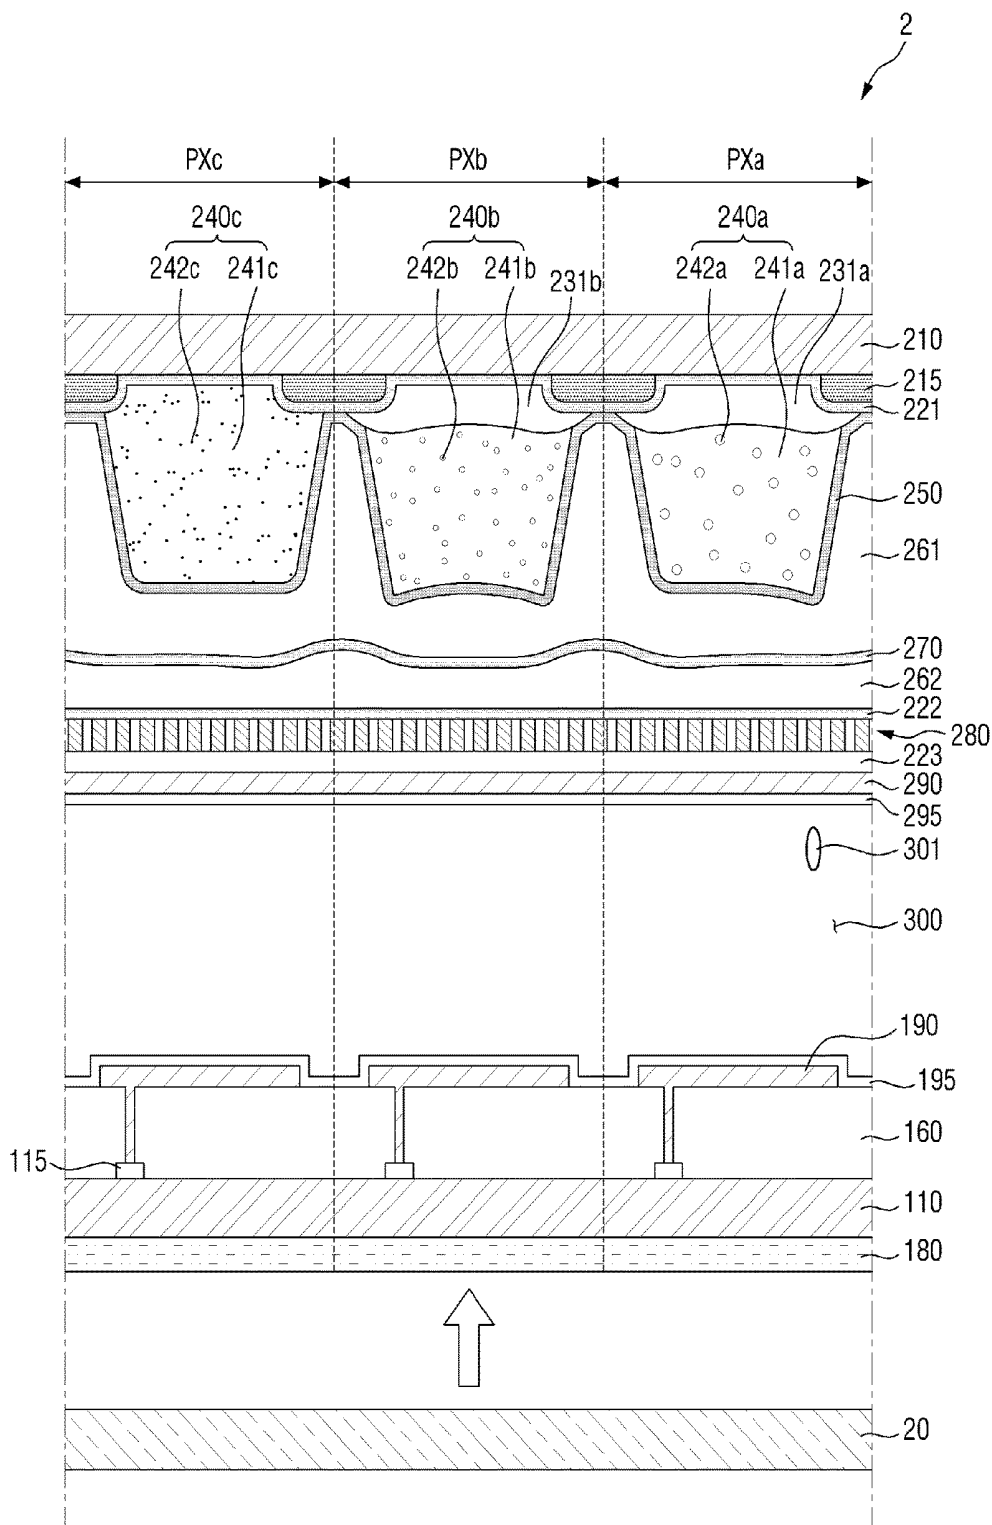


FIG. 5

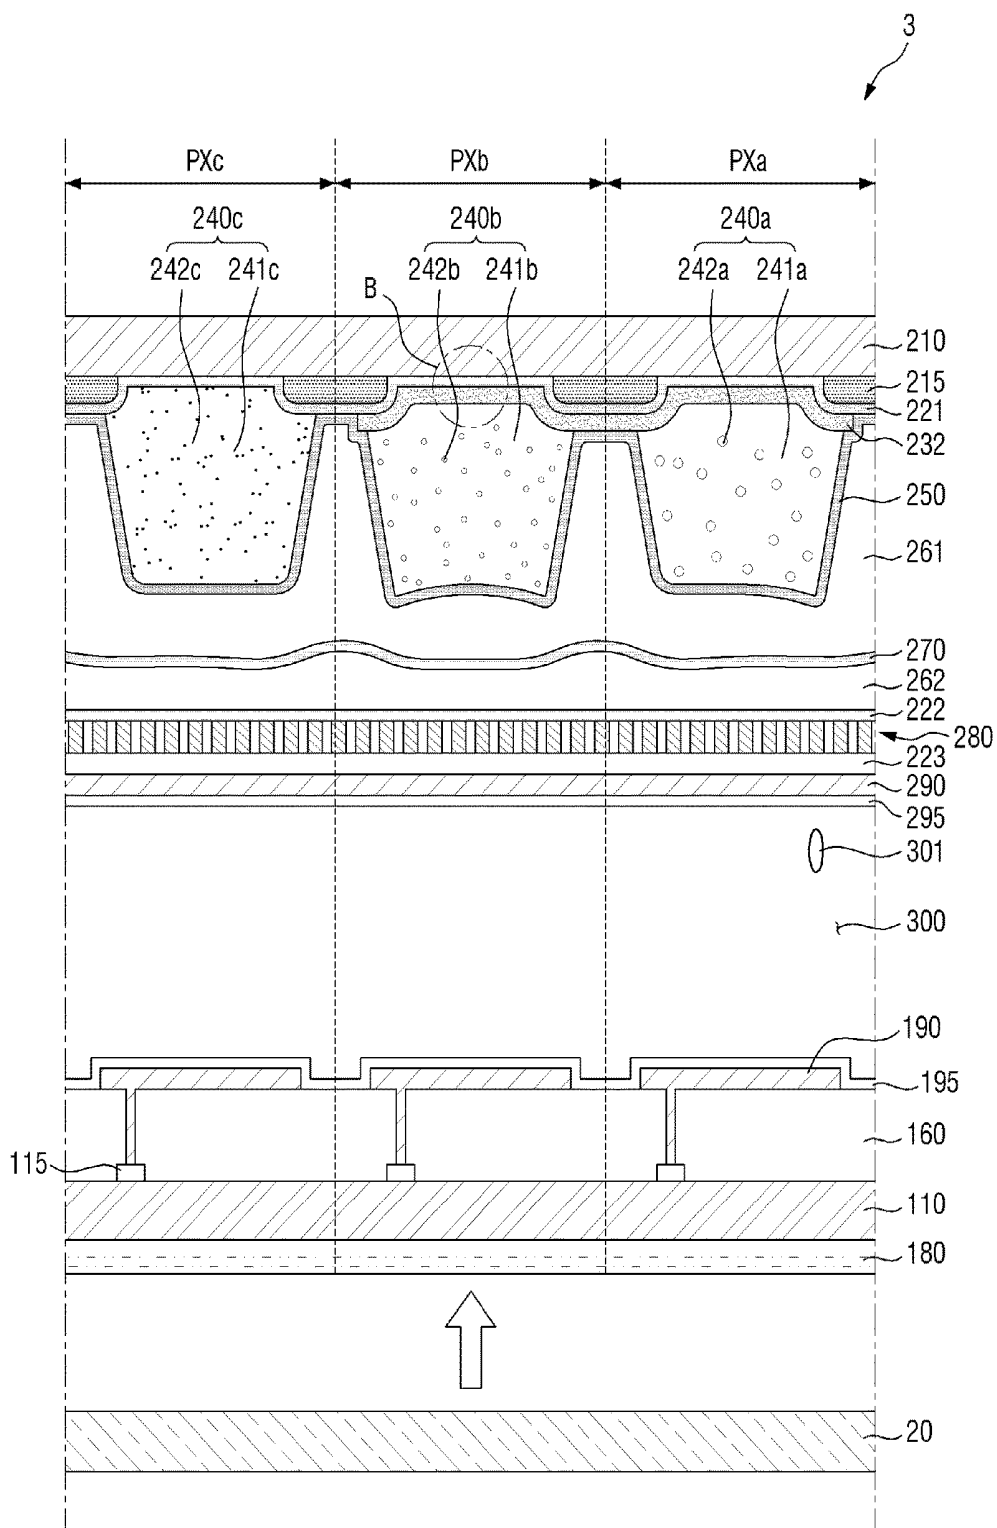


FIG. 6

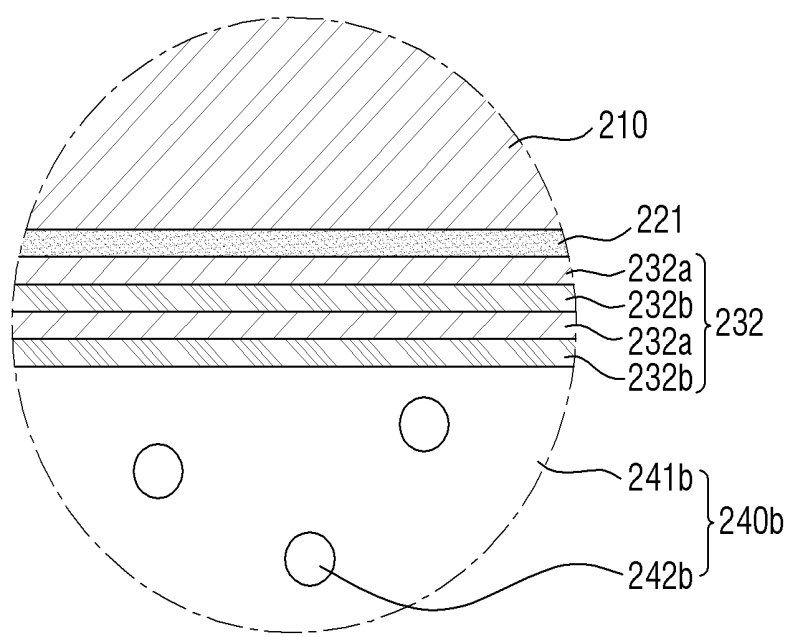


FIG. 7

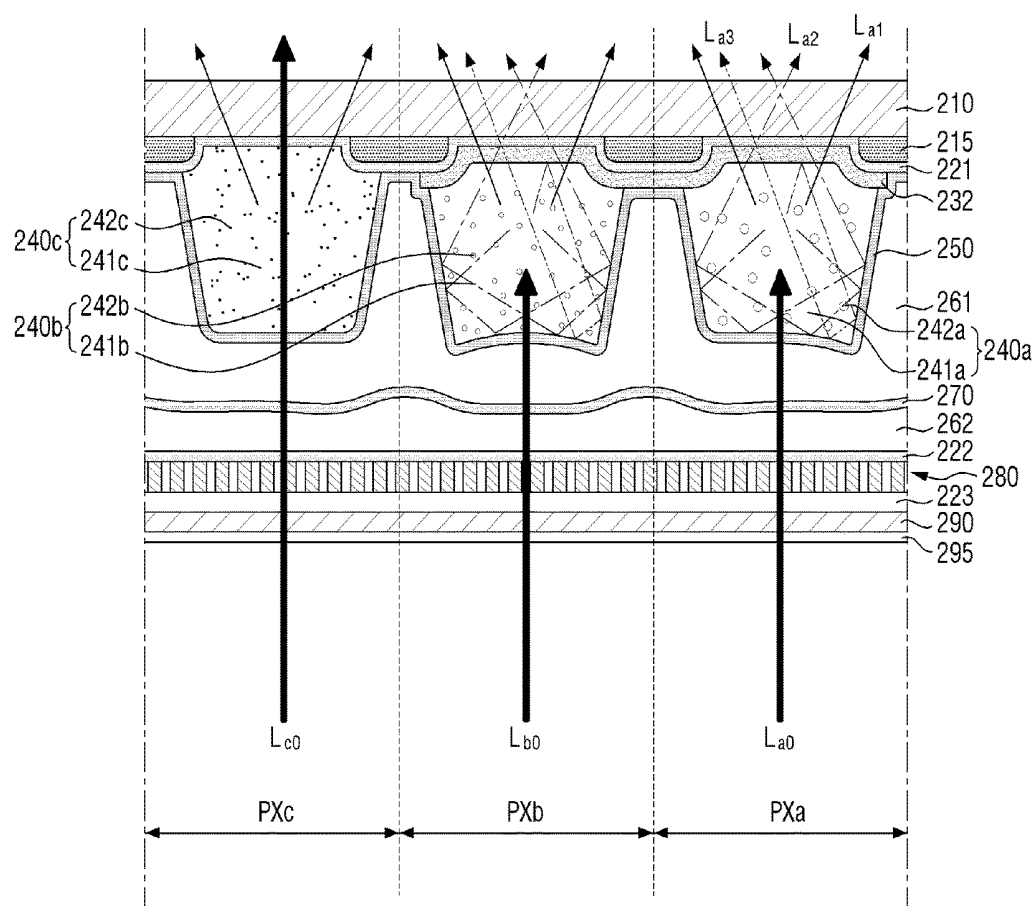


FIG. 8

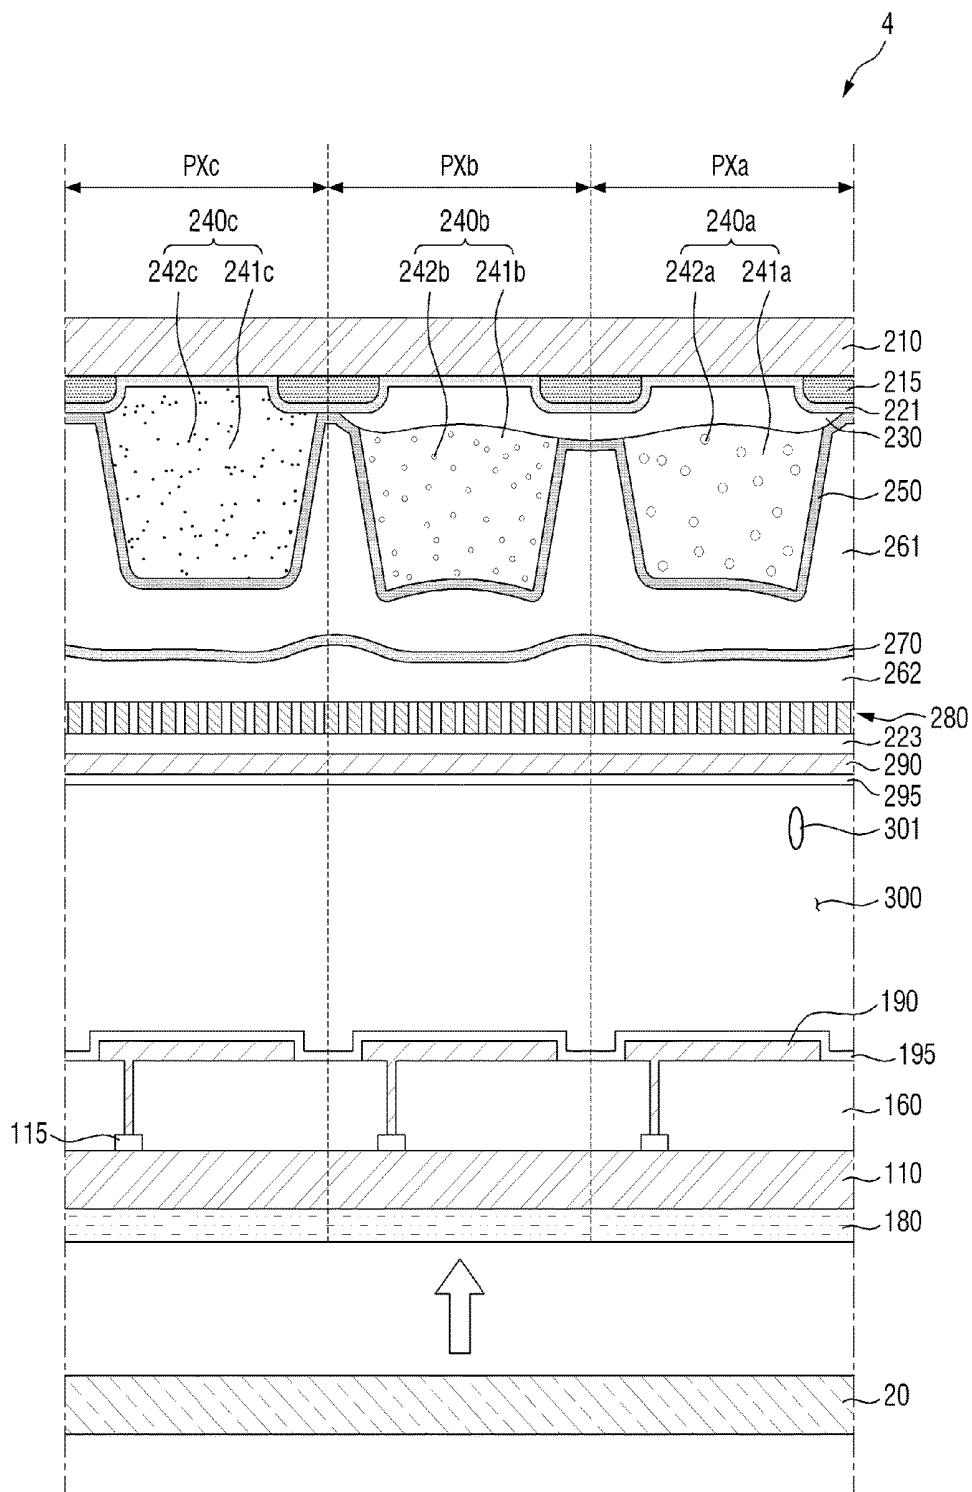


FIG. 9

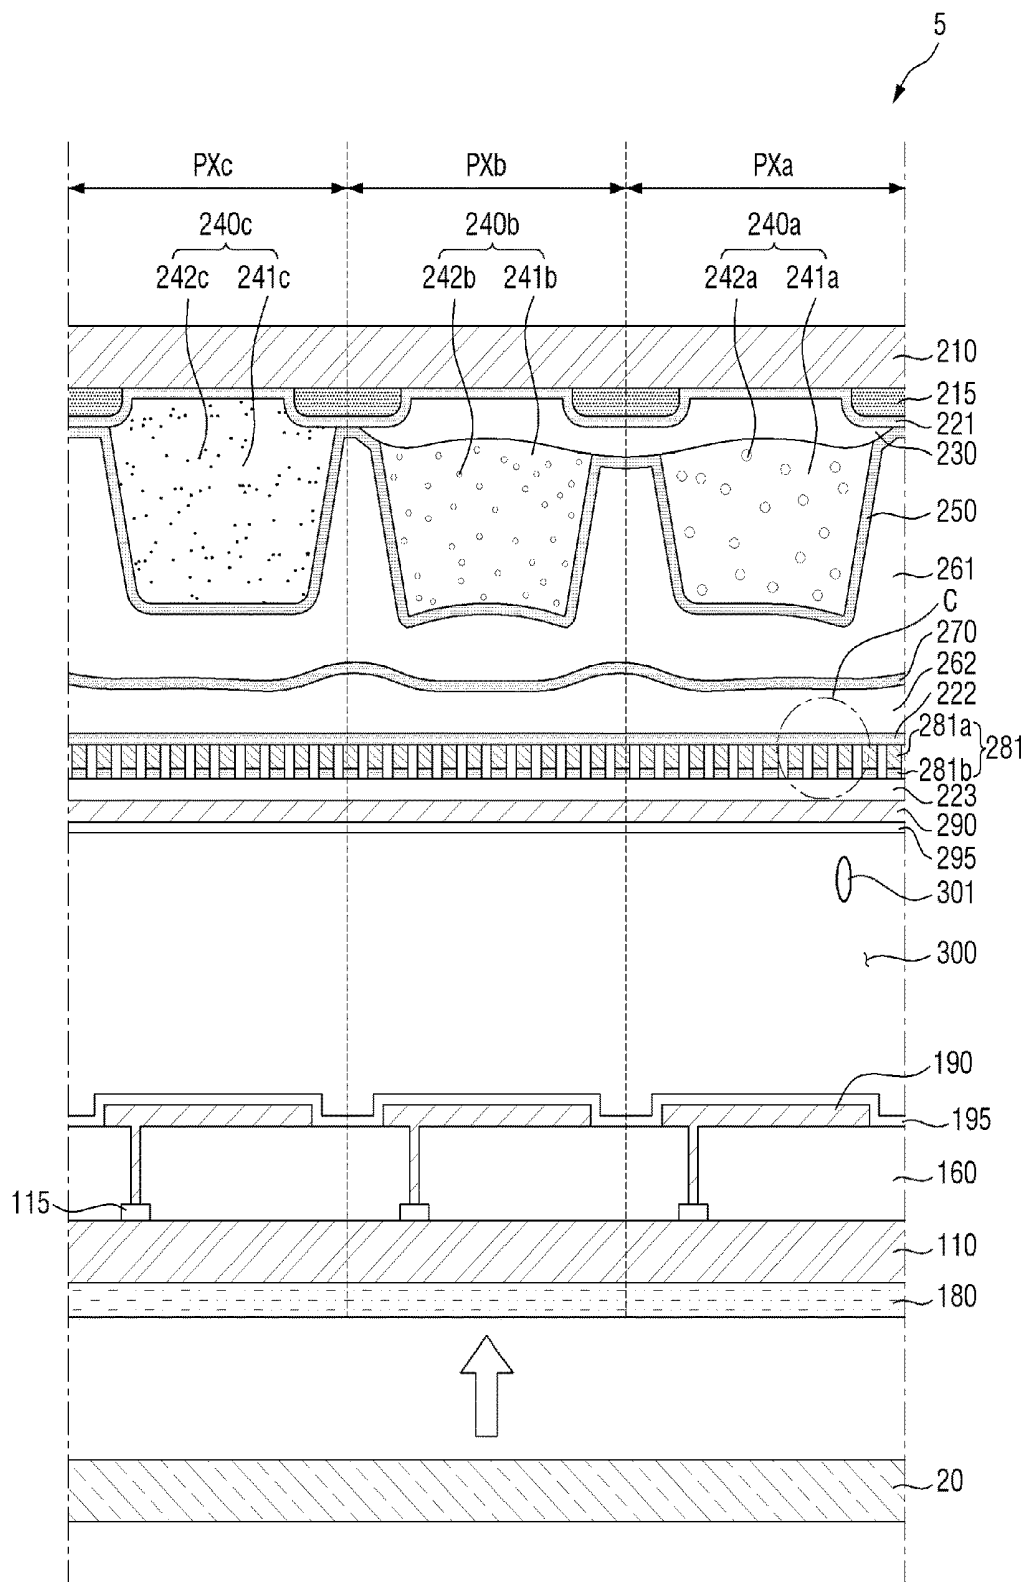


FIG. 10

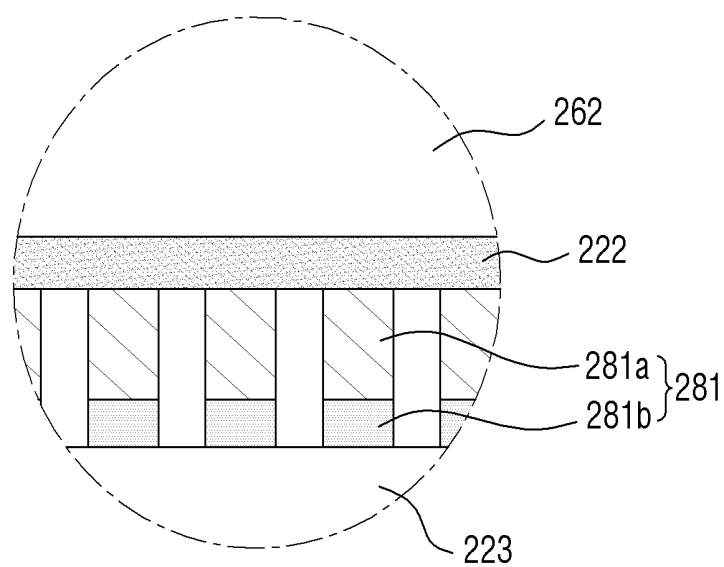


FIG. 11

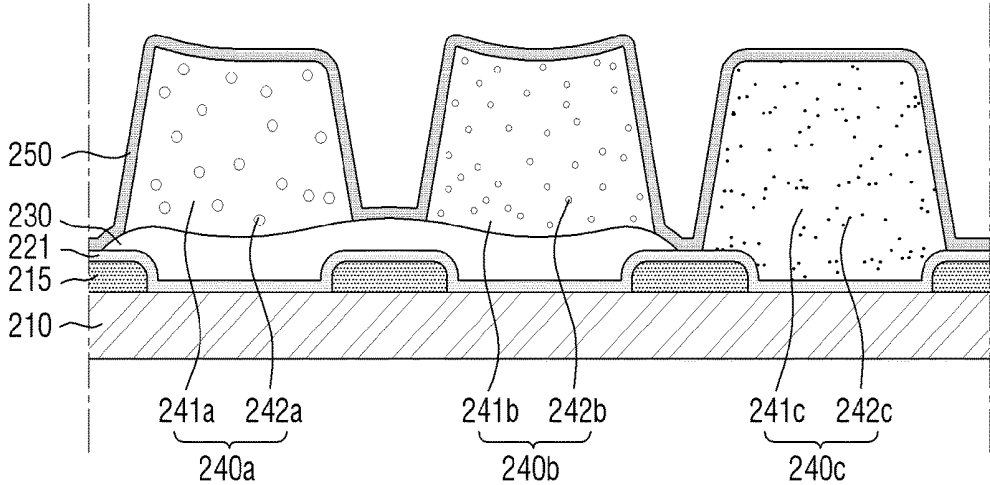


FIG. 12

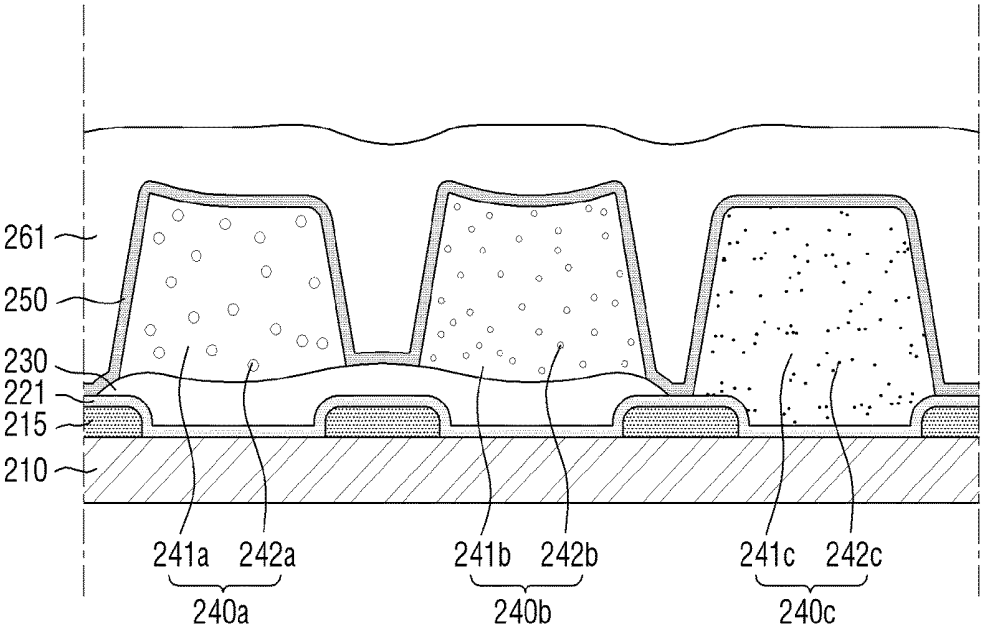


FIG. 13

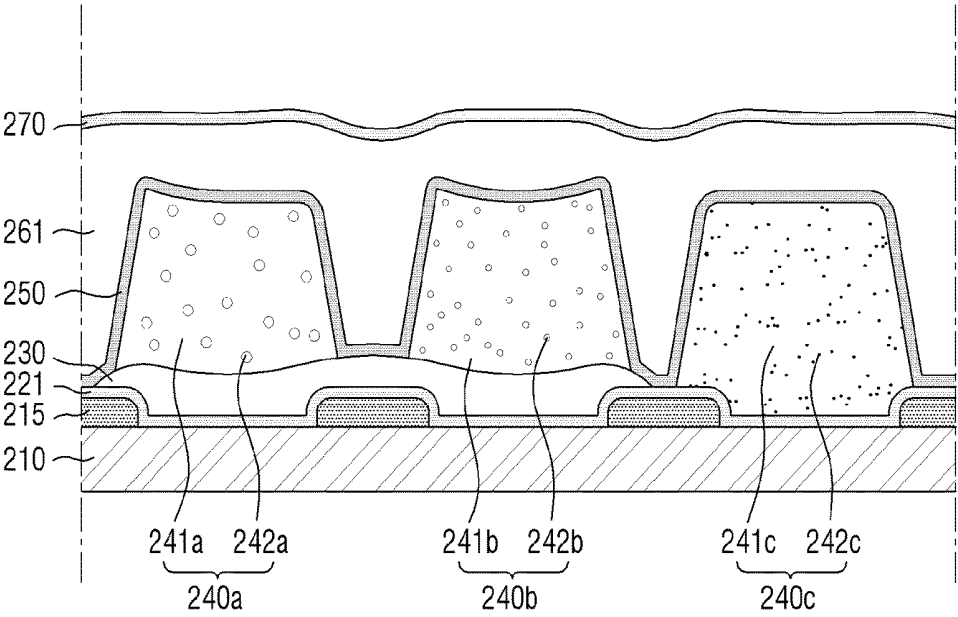


FIG. 14

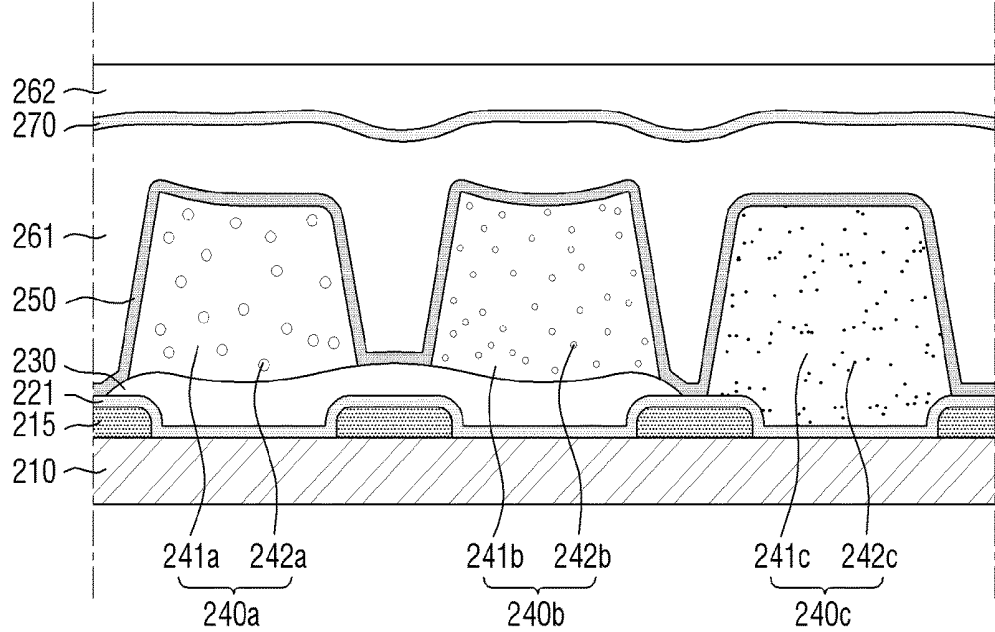


FIG. 15

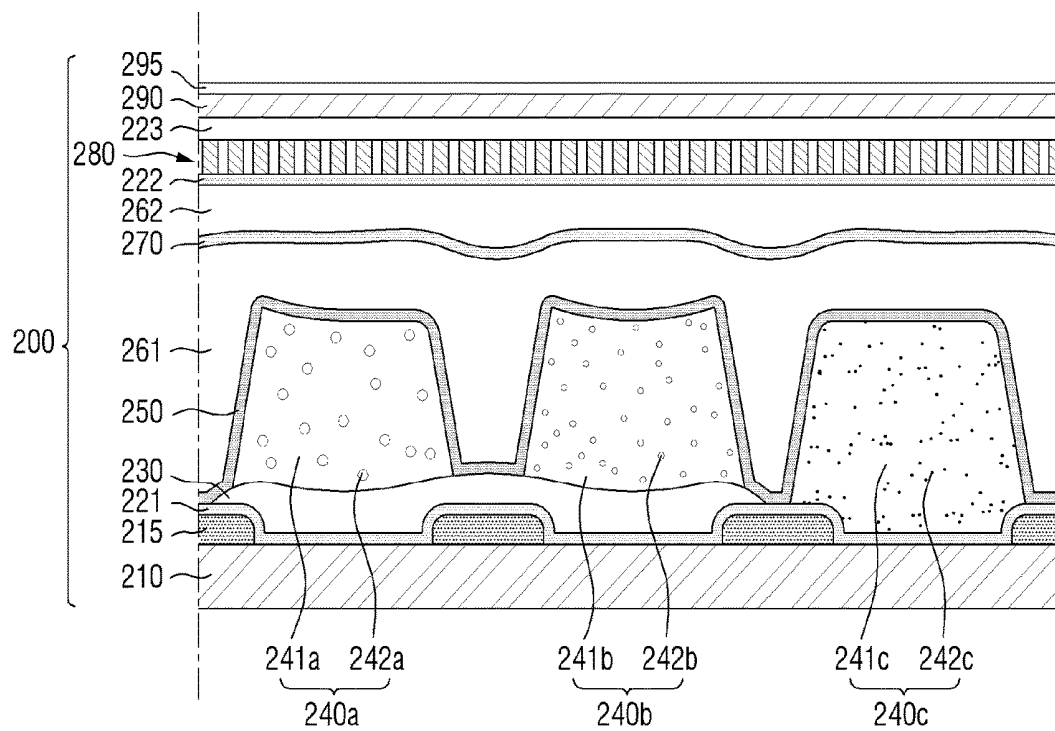


FIG. 16

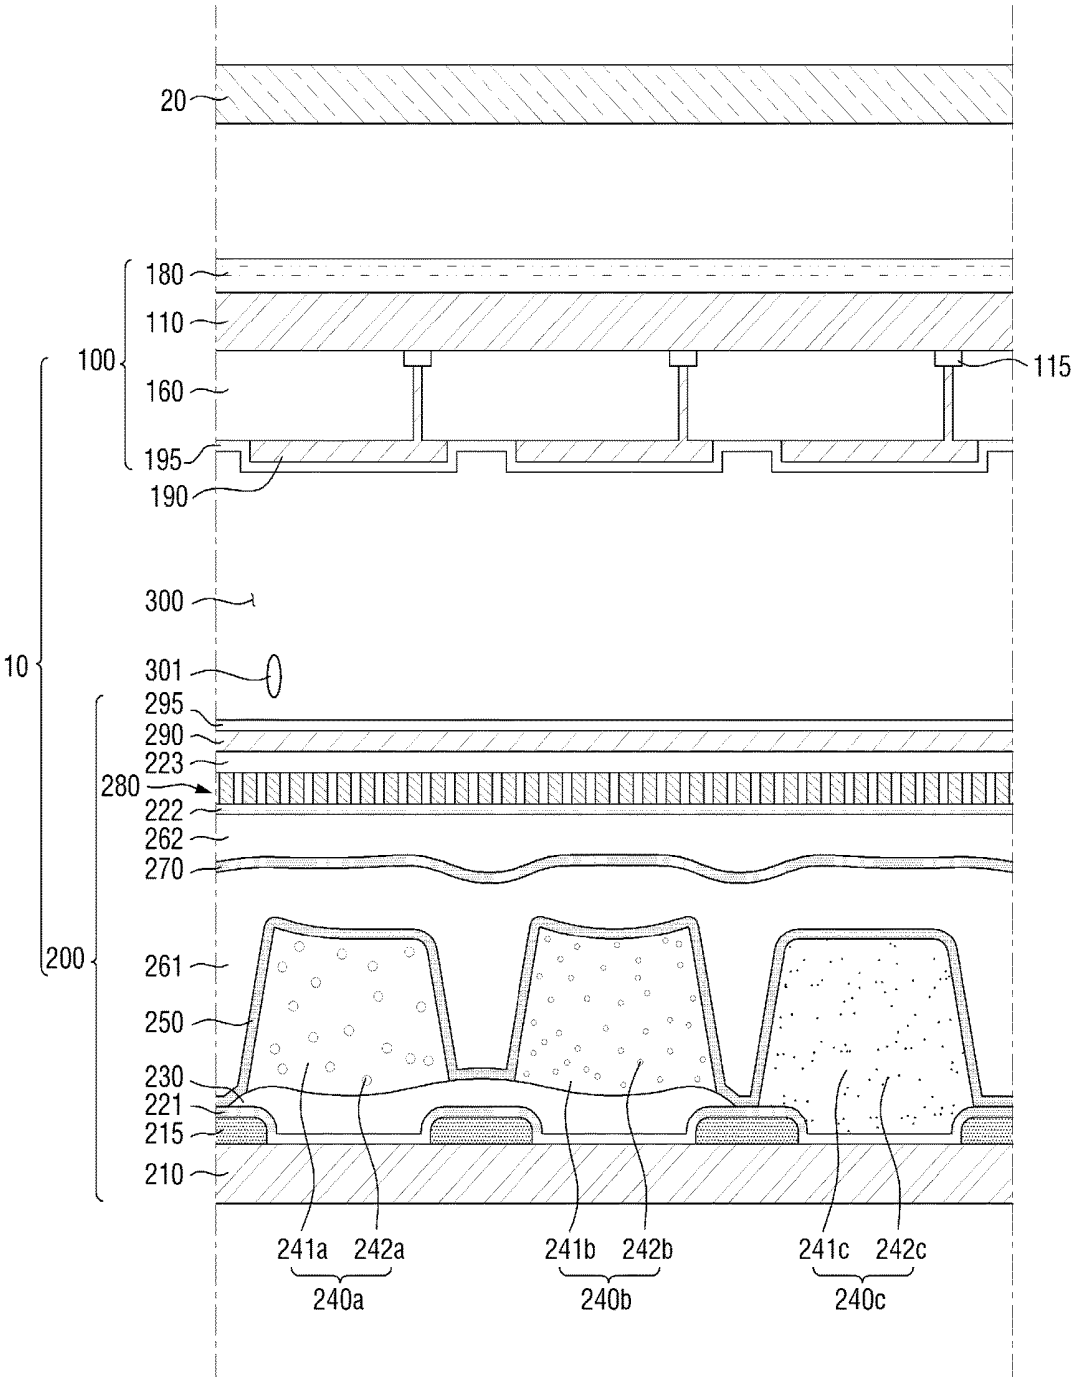


FIG. 17


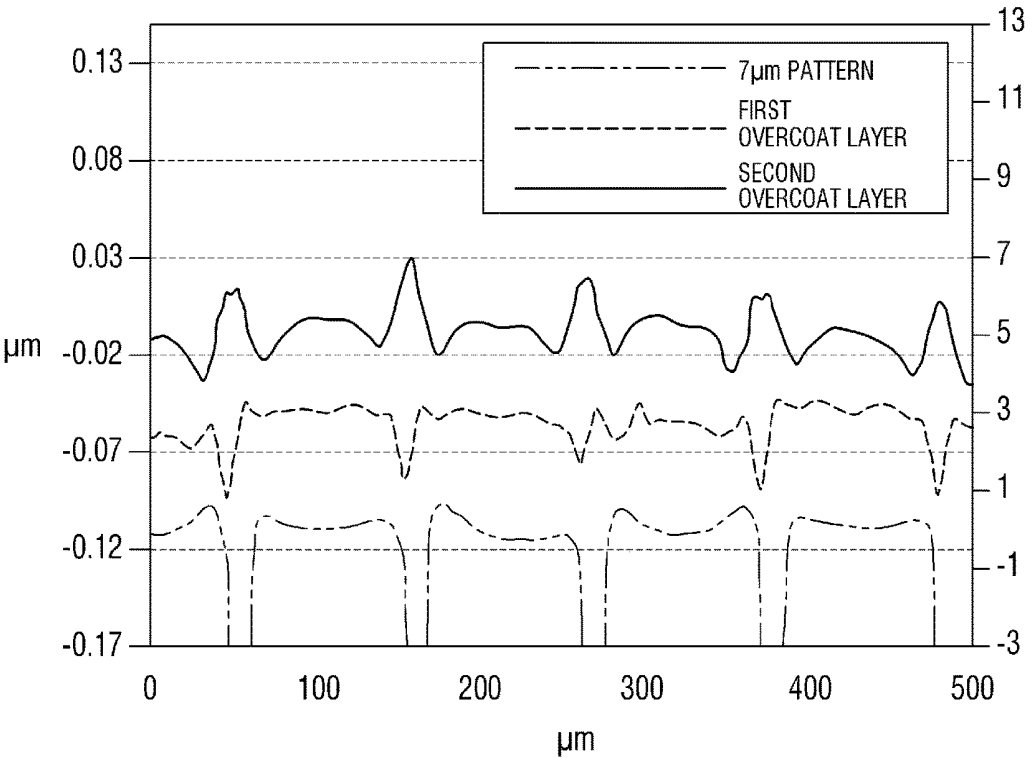


FIG. 18

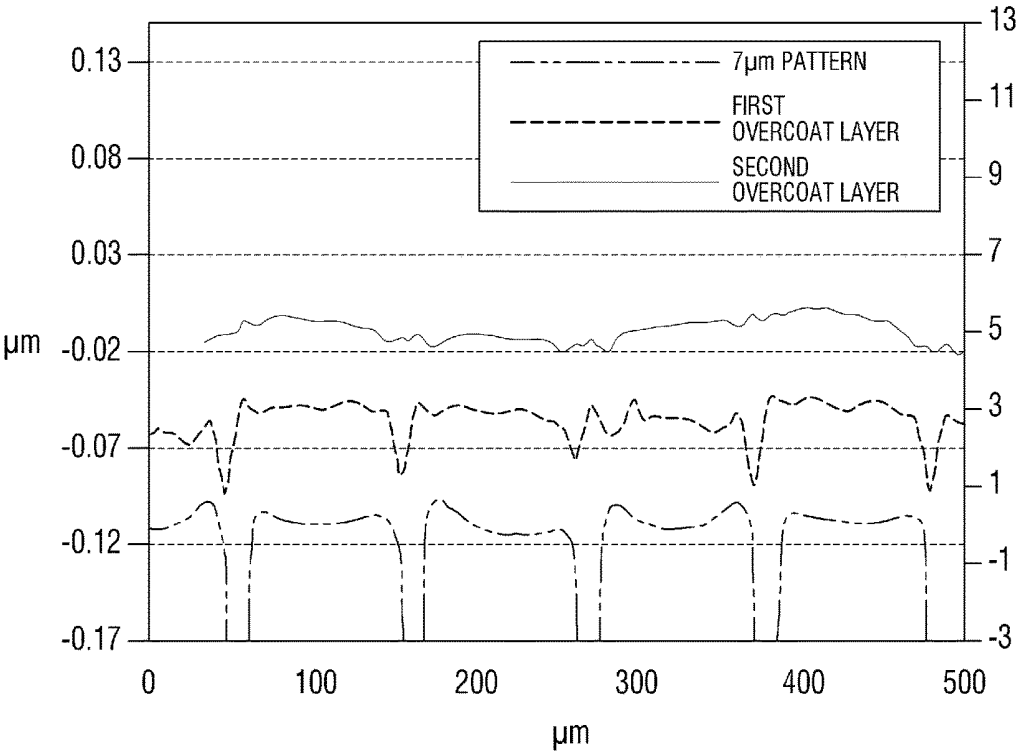

DISPLAY DEVICE AND METHOD OF MANUFACTURING THE SAME

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims priority from and the benefit of Korean Patent Application No. 10-2017-0063512, filed May 23, 2017, which is hereby incorporated by reference for all purposes as if fully set forth herein.

BACKGROUND

Field

[0002] The disclosure generally relates to a display device and a method of manufacturing the same.

Discussion

[0003] With the development of multimedia, the importance of display devices is increasing. Accordingly, various types of display devices, such as liquid crystal displays (LCDs) and organic light emitting diode displays (OLEDs) are being developed. An LCD typically includes a display panel that may include a pair of panels having field generating electrodes, such as pixel electrodes and a common electrode, and a liquid crystal layer interposed between the two panels and a light source unit that can provide light to the display panel. The LCD arranges liquid crystals by applying voltages to the field generating electrodes and controls the amount of light that passes through the liquid crystal layer in each pixel to display an image.

[0004] As one method for allowing each pixel to uniquely display, for instance, a primary color, a method of placing a color conversion pattern for each pixel in a light path from a light source to a viewer can be utilized. For example, a color filter can realize a primary color by absorbing a specific wavelength band of incident light and transmitting only another specific wavelength band. There is a need, however, for methods and techniques that further improve the color purity of a display device.

[0005] The above information disclosed in this section is only for enhancement of an understanding of the background of the inventive concepts, and, therefore, it may contain information that does not form prior art already known to a person of ordinary skill in the art.

SUMMARY

[0006] A color conversion pattern can convert the color of incident light and emit light having a color different from that of the incident light. However, if the thickness of the color conversion pattern is increased so that the color conversion pattern can have a sufficient degree of color conversion efficiency, a step formed by the color conversion pattern may become excessively large. If the step formed by the color conversion pattern is large, a component disposed on the color conversion pattern, for example, a component having electro-optical functions may not be accurately positioned at a desired position. This can lead to degradation of display quality.

[0007] Some exemplary embodiments are capable of providing a display device having improved display quality by including a planarization layer with an improved degree of planarization.

[0008] Some exemplary embodiments are capable of providing a method of manufacturing a display device with an improved degree of planarization of a planarization layer.

[0009] Additional aspects will be set forth in the detailed description which follows, and, in part, will be apparent from the disclosure, or may be learned by practice of the inventive concepts.

[0010] According to some exemplary embodiments, a display device includes a first pixel region, a second pixel region, a color conversion pattern, a first overcoat layer, a barrier layer, a second overcoat layer, a liquid crystal layer, and a switching element. The first pixel region is configured to display a first color. The second pixel region is adjacent to the first pixel region, and is configured to display a second color of a shorter peak wavelength than the first color. The color conversion pattern is disposed in the first pixel region, and is configured to:

[0011] convert a color of incident light into the first color; and output converted light of the first color. The first overcoat layer is disposed on the color conversion pattern. The barrier layer is of an inorganic material, and is disposed on the first overcoat layer. The second overcoat layer is of an organic material, and is disposed on the barrier layer. The liquid crystal layer is disposed on the second overcoat layer. The switching element is disposed on the liquid crystal layer.

[0012] According to some exemplary embodiments, a display device includes a first panel, a second panel, a liquid crystal layer, a first polarizer, a second polarizer, a first organic layer, an inorganic layer, a second organic layer, a first wavelength band filter, a second wavelength band filter, and a light source. The first panel includes: a first substrate configured to transmit light of a first color in a first region; and a color conversion pattern disposed on the first substrate. The second panel faces the first panel. The second panel includes: a second substrate; and a switching element on the second substrate. The liquid crystal layer is between the first panel and the second panel. The first polarizer is between the first panel and the second panel. The second polarizer is between the first panel and the second panel. The first organic layer is between the first panel and the second panel. The inorganic layer is between the first panel and the second panel. The second organic layer is between the first panel and the second panel. The first wavelength band filter is between the first panel and the second panel. The second wavelength band filter is between the first panel and the second panel. The light source is configured to provide second light of a second color. A peak wavelength of the second color is shorter than a peak wavelength of the first color. In the first region, propagation of at least some of the second light includes a path sequentially through the first polarizer, the liquid crystal layer, the second polarizer, the first organic layer, the inorganic layer, the second organic layer, the first wavelength band filter, the color conversion pattern, and the second wavelength band filter such that the first color is output. The first wavelength band filter is configured to: reflect light of a wavelength band including the peak wavelength of the first color; and transmit light of a wavelength band including the peak wavelength of the second color. The color conversion pattern is configured to: convert a color of incident light into the first color; and output converted light of the first color. The second wavelength band filter is configured to: transmit light of a wavelength band including the peak wavelength of the first

color; and absorb or reflect light of a wavelength band including the peak wavelength of the second color.

[0013] According to some exemplary embodiments, a method of manufacturing a display device includes: forming a color conversion pattern on a substrate, the color conversion pattern including a wavelength shift material; forming a first overcoat layer on the color conversion pattern; forming a barrier layer on the first overcoat layer; forming a second overcoat layer on the barrier layer; and forming a liquid crystal layer on the second overcoat layer. Forming the first overcoat layer includes: applying a first overcoat composition on the color conversion pattern; and curing the first overcoat composition at a temperature greater than 0° C. and less than or equal to 180° C. Forming the barrier layer includes depositing a barrier layer forming material on the first overcoat layer at a temperature greater than 0° C. and less than or equal to 200° C. Forming the second overcoat layer includes: applying a second overcoat composition on the barrier layer; and curing the second overcoat composition at a temperature greater than 0° C. and less than or equal to 180° C.

[0014] According to various exemplary embodiments, a display device includes a planarization layer having a superior degree of planarization. Therefore, despite a step formed by the thickness of a color conversion pattern, a component having electro-optical functions can be accurately placed. This can improve the display quality of the display device.

[0015] According to various exemplary embodiments, a method of manufacturing a display device enables the display device to be formed having improved display quality.

[0016] The foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the claimed subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] The accompanying drawings, which are included to provide a further understanding of the inventive concepts, and are incorporated in and constitute a part of this specification, illustrate exemplary embodiments of the inventive concepts, and, together with the description, serve to explain principles of the inventive concepts.

[0018] FIG. 1 is a cross-sectional view of pixels of a display device according to some exemplary embodiments.

[0019] FIG. 2 is an enlarged view of area A in FIG. 1 according to some exemplary embodiments.

[0020] FIG. 3 illustrates light s in the display device of FIG. 1 according to some exemplary embodiments.

[0021] FIG. 4 is a cross-sectional view of pixels of a display device according to some exemplary embodiments.

[0022] FIG. 5 is a cross-sectional view of pixels of a display device according to some exemplary embodiments.

[0023] FIG. 6 is an enlarged cross-sectional view of area B in FIG. 5 according to some exemplary embodiments.

[0024] FIG. 7 illustrates light s in the display device of FIG. 5 according to some exemplary embodiments.

[0025] FIG. 8 is a cross-sectional view of pixels of a display device according to some exemplary embodiments.

[0026] FIG. 9 is a cross-sectional view of pixels of a display device according to some exemplary embodiments.

[0027] FIG. 10 is an enlarged view of area 9 according to some exemplary embodiments.

[0028] FIGS. 11, 12, 13, 14, 15, and 16 are cross-sectional views of a display device at various stages of manufacture according to some exemplary embodiments.

[0029] FIGS. 17 and 18 illustrate surface height profiles of a first overcoat layer and a second overcoat layer measured in accordance with various experimental examples.

DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

[0030] In the following description, for the purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of various exemplary embodiments. It is apparent, however, that various exemplary embodiments may be practiced without these specific details or with one or more equivalent arrangements. In other instances, well-known structures and devices are shown in block diagram form in order to avoid unnecessarily obscuring various exemplary embodiments. Further, various exemplary embodiments may be different, but do not have to be exclusive. For example, specific shapes, configurations, and characteristics of an exemplary embodiment may be implemented in another exemplary embodiment without departing from the spirit and the scope of the disclosure.

[0031] Unless otherwise specified, the illustrated exemplary embodiments are to be understood as providing exemplary features of varying detail of some exemplary embodiments. Therefore, unless otherwise specified, the features, components, modules, layers, films, panels, regions, aspects, etc. (hereinafter individually or collectively referred to as “elements”), of the various illustrations may be otherwise combined, separated, interchanged, and/or rearranged without departing from the spirit and the scope of the disclosure.

[0032] The use of cross-hatching and/or shading in the accompanying drawings is generally provided to clarify boundaries between adjacent elements. As such, neither the presence nor the absence of cross-hatching or shading conveys or indicates any preference or requirement for particular materials, material properties, dimensions, proportions, commonalities between illustrated elements, and/or any other characteristic, attribute, property, etc., of the elements, unless specified. Further, in the accompanying drawings, the size and relative sizes of elements may be exaggerated for clarity and/or descriptive purposes. When an exemplary embodiment may be implemented differently, a specific process order may be performed differently from the described order. For example, two consecutively described processes may be performed substantially at the same time or performed in an order opposite to the described order. Also, like reference numerals denote like elements.

[0033] When an element is referred to as being “on,” “connected to,” or “coupled to” another element, it may be directly on, connected to, or coupled to the other element or intervening elements may be present. When, however, an element is referred to as being “directly on,” “directly connected to,” or “directly coupled to” another element, there are no intervening elements present. To this end, the term “connected” may refer to physical, electrical, and/or fluid connection. For the purposes of this disclosure, “at least one of X, Y, and Z” and “at least one selected from the group consisting of X, Y, and Z” may be construed as X only, Y only, Z only, or any combination of two or more of X, Y, and Z, such as, for instance, XYZ, XYY, YZ, and ZZ. As used herein, the term “and/or” includes any and all combinations of one or more of the associated listed items.

[0034] Although the terms “first,” “second,” “third,” etc. may be used herein to describe various elements, these elements should not be limited by these terms. These terms are used to distinguish one element from another element. Thus, a first element discussed below could be termed a second element without departing from the teachings of the disclosure.

[0035] Spatially relative terms, such as “beneath,” “below,” “under,” “lower,” “above,” “upper,” “over,” and the like, may be used herein for descriptive purposes, and, thereby, to describe one element’s relationship to another element(s) as illustrated in the drawings. Spatially relative terms are intended to encompass different orientations of an apparatus in use, operation, and/or manufacture in addition to the orientation depicted in the drawings. For example, if the apparatus in the drawings is turned over, elements described as “below” or “beneath” other elements or features would then be oriented “above” the other elements or features. Thus, the exemplary term “below” can encompass both an orientation of above and below. Furthermore, the apparatus may be otherwise oriented (e.g., rotated 90 degrees or at other orientations), and, as such, the spatially relative descriptors used herein interpreted accordingly.

[0036] The terminology used herein is for the purpose of describing particular embodiments and is not intended to be limiting. As used herein, the singular forms, “a,” “an,” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. Moreover, the terms “comprises,” “comprising,” “includes,” and/or “including,” when used in this specification, specify the presence of stated features, integers, steps, operations, elements, components, and/or groups thereof, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof. It is also noted that, as used herein, the terms “substantially,” “about,” and other similar terms, are used as terms of approximation and not as terms of degree, and, as such, are utilized to account for inherent deviations in measured, calculated, and/or provided values that would be recognized by one of ordinary skill in the art.

[0037] Various exemplary embodiments are described herein with reference to sectional and/or exploded illustrations that are schematic illustrations of idealized exemplary embodiments and/or intermediate structures. As such, variations from the shapes of the illustrations as a result, for example, of manufacturing techniques and/or tolerances, are to be expected. Thus, exemplary embodiments disclosed herein should not be construed as limited to the particular illustrated shapes of regions, but are to include deviations in shapes that result from, for instance, manufacturing. In this manner, regions illustrated in the drawings are schematic in nature and shapes of these regions may not illustrate the actual shapes of regions of a device, and, as such, are not intended to be limiting.

[0038] Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this disclosure is a part. Terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and will not be interpreted in an idealized or overly formal sense, unless expressly so defined herein.

[0039] FIG. 1 is a cross-sectional view of pixels of a display device according to some exemplary embodiments. FIG. 2 is an enlarged view of area A in FIG. 1 according to some exemplary embodiments.

[0040] Referring to FIGS. 1 and 2, a display device 1 includes a display panel 10 and a light source unit (or light source) 20 that provides light to the display panel 10.

[0041] The display panel 10 may include a lower panel 100, an upper panel 200 facing the lower panel 100, and a liquid crystal layer 300 interposed between the lower panel 100 and the upper panel 200. The liquid crystal layer 300 may be sealed by the lower panel 100, the upper panel 200, and a sealing member (not illustrated) that bonds the lower panel 100 and the upper panel 200 together.

[0042] A plurality of pixels (e.g., pixels PXa, PXb, and PXC) arranged in a substantially matrix form when seen from above (e.g., in a plan view) may be defined in the display panel 10. As used herein, “pixels” refer to single regions in which a display area is divided for color display when seen from above, and one pixel is a minimum unit capable of displaying a color independently of other pixels. For instance, each of the pixels may uniquely display one of the primary colors to implement a color display. For example, the pixels may include a first pixel PXa which displays a first color, a second pixel PXb which displays a second color having a shorter peak wavelength than the first color, and a third pixel PXC which displays a third color having a shorter peak wavelength than the second color. The first pixel PXa, the second pixel PXb, and the third pixel PXC arranged adjacent to each other may be repeated as a basic unit. Hereinafter, a case where the first color is red, the second color is green, and the third color is blue will be described as an example.

[0043] The light source unit 20 may be disposed under the display panel 10 and emit light having a specific wavelength (or range of wavelengths) toward the display panel 10. The light source unit 20 may include a light source (not shown) that directly emits light and a light guide plate (not illustrated) that guides the light received from the light source toward the display panel 10. The material of the light guide plate is not particularly limited. For example, the light guide plate may be made of a glass material, a quartz material, a plastic material, such as polyethylene terephthalate, polycarbonate, etc., and/or the like.

[0044] The light source may be a light emitting diode (LED), an organic light emitting diode (OLED), etc. In some exemplary embodiments, the light source may emit light having a peak wavelength that is shorter than that of each of the first color and the second color. In some exemplary embodiments, the light source may emit light of the third color. The third color may be blue with a peak wavelength in a range of about 430 nanometers (nm) to about 470 nm. That is, the light source unit 20 may provide light of the third color to the display panel 10. In some exemplary embodiments, the light source may emit light having a peak wavelength in an ultraviolet band, and the light source unit 20 may provide the ultraviolet light to the display panel 10.

[0045] Although not illustrated, one or more optical sheets may be disposed between the display panel 10 and the light source unit 20. The optical sheets may include one or more of a prism sheet, a diffusion sheet, a (reflective) polarizing sheet, a lenticular lens sheet, and a micro-lens sheet. The optical sheets can improve display quality of the display device 1 by modulating the optical characteristics (e.g.,

condensing, diffusing, scattering, polarization, etc., characteristics) of light provided from the light source unit **20** and travelling toward the display panel **10**.

[0046] Next, components of the display panel **10** will be described in more detail.

[0047] The lower panel **100** may include a first insulating substrate **110**, a plurality of switching elements **115** disposed on the first insulating substrate **110**, and a plurality of pixel electrodes **190** respectively disposed on the switching elements **115**. The lower panel **100** may further include a first polarizer **180**.

[0048] The first insulating substrate **110** may be a transparent insulating substrate. For example, the first insulating substrate **110** may be a substrate made of a glass material, a quartz material, a translucent plastic material, etc. In some exemplary embodiments, the first insulating substrate **110** may be flexible, and the display device **1** may be a curved display device.

[0049] The switching elements **115** may be disposed on the first insulating substrate **110**. The switching elements **115** may be disposed in the first through third pixels PXa through PXc to transmit or block driving signals to the pixel electrodes **190**, respectively. In some exemplary embodiments, each of the switching elements **115** may be a thin-film transistor including a gate electrode (not illustrated), an active layer (not shown) disposed on the gate electrode, and a source electrode (not shown) and a drain electrode (not illustrated) disposed on the active layer to be separated from each other. The gate electrode, which is a control terminal, may be connected to a gate line (not illustrated) to receive a gate driving signal. The source electrode, which is an input terminal, may be connected to a data line (not illustrated) to receive a data driving signal. The drain electrode, which is an output terminal, may be electrically connected to each of the pixel electrodes **190**. The active layer may be made of amorphous silicon or polycrystalline silicon or may be made of an oxide semiconductor. The active layer may serve as a channel of each of the switching elements **115**, and the channel may be turned on or off according to a voltage applied to the gate electrode.

[0050] An intermediate layer **160** may be disposed on the switching elements **115**. The intermediate layer **160** may electrically insulate components disposed on the intermediate layer **160** from components disposed under the intermediate layer **160**, and may planarize steps of a plurality of components stacked on the first insulating substrate **110**. The intermediate layer **160** may include one or more layers. For example, the intermediate layer **160** may be a stacked structure of a layer made of an organic material and a layer made of an inorganic material. Examples of the inorganic material that forms the intermediate layer **160** may include silicon nitride (SiN_x), silicon oxide (SiO_x), silicon nitride oxide (SiN_xO_y , where $x>y$), and silicon oxynitride (SiO_xN_y , where $x>y$). Although not illustrated, a wiring layer including the gate line and the data line may be disposed between the first insulating substrate **110** and the intermediate layer **160**.

[0051] The pixel electrodes **190** may be disposed on the intermediate layer **160**. Each of the pixel electrodes **190** may form an electric field in the liquid crystal layer **300** together with a common electrode **290**, which will be described later, thereby controlling the alignment direction of liquid crystals **301** in a corresponding pixel. The pixel electrodes **190** may be electrically connected to the output terminals of the

switching elements **115** through contact holes formed in the intermediate layer **160**, respectively. The pixel electrodes **190** may be disposed in the pixels PXa through PXc, respectively. Thus, independent voltages can be applied to the pixel electrodes **190** through the switching elements **115**. Each of the pixel electrodes **190** may be a transparent electrode made of a transparent conductive material. Examples of the material that forms the transparent electrode include indium tin oxide (ITO) and indium zinc oxide (IZO). Although not illustrated, each of the pixel electrodes **190** may have a plurality of micro-slits.

[0052] A first liquid crystal alignment layer **195** may be disposed on the pixel electrodes **190**. The first liquid crystal alignment layer **195** can induce an initial alignment of the liquid crystals **301** in the adjacent liquid crystal layer **300**. As used herein, "initial alignment of liquid crystals" denotes alignment of liquid crystals in a state where no electric field has been formed in the liquid crystal layer **300**. The first liquid crystal alignment layer **195** may be made of a polymer organic material having an imide group in a repeating unit of a main chain.

[0053] The first polarizer **180** may be disposed between the liquid crystal layer **300** and the light source unit **20**. The first polarizer **180** may be an absorptive polarizer or a reflective polarizer. For example, the absorptive polarizer may give polarity to transmitted light by absorbing a polarization component parallel to an absorption axis and transmitting a polarization component parallel to a transmission axis. In FIG. 1 and the like, a case where the first polarizer **180** is located on a surface of the first insulating substrate **110** on the side of the light source unit **20** is illustrated as an example. However, the first polarizer **180** can also be disposed between the first insulating substrate **110** and the liquid crystal layer **300**.

[0054] The liquid crystal layer **300** includes a plurality of initially aligned liquid crystals **301**. The liquid crystals **301** may have negative dielectric anisotropy and may be vertically aligned in an initial alignment state. The liquid crystals **301** may have a determined pretilt angle in the initial alignment state. The initial alignment of the liquid crystals **301** can be induced by the first liquid crystal alignment layer **195** and a second liquid crystal alignment layer **295**. When an electric field is formed between the pixel electrodes **190** and the common electrode **290**, the liquid crystals **301** may be tilted or rotated in a specific direction to change the polarization state of light transmitted through the liquid crystal layer **300**. In some exemplary embodiments, the liquid crystals **301** may have positive dielectric anisotropy and may be horizontally aligned in the initial alignment state.

[0055] The upper panel **200** may include a second insulating substrate **210**, color conversion patterns **240a** and **240b** disposed on the second insulating substrate **210**, a second polarizer **280** disposed on the color conversion patterns **240a** and **240b**, and the common electrode **290** disposed on the second polarizer **280**.

[0056] Like the first insulating substrate **110**, the second insulating substrate **210** may be a transparent insulating substrate. A light shielding member **215** may be disposed on the second insulating substrate **210**. The light shielding member **215** may be disposed at boundaries between adjacent pixels in a substantially quadrilateral grid shape when seen from above. The light shielding member **215** can prevent (or reduce) a color mixture defect between neigh-

boring pixels by blocking transmission of light. The light shielding member **215** is not particularly limited as long as it can block transmission of light. For example, the light shielding member **215** may be made of a black matrix or an opaque metal material. On a light path extending from the light source unit **20** to a viewer (not illustrated) located with respect to an upper side of the second insulating substrate **210**, the light shielding member **215** may be disposed closer to the viewer side to minimize the color mixture defect.

[0057] A first protective layer **221** may be disposed on the light shielding member **215**. The first protective layer **221** may be integrally formed without distinction between the pixels PXa through PXc to cover the entire (or substantially entire) surface of the second insulating substrate **210**. For example, the first protective layer **221** can be in contact with the light shielding member **215**, a first wavelength band filter **230**, and a light transmitting pattern **240c**. The first protective layer **221** may be made of an inorganic insulating material, such as silicon nitride or silicon oxide. The first protective layer **221** can prevent (or reduce) the light shielding member **215** from being damaged or corroded during a process of manufacturing the upper panel **200**. In some exemplary embodiments, the first protective layer **221** may be omitted, and the first wavelength band filter **230** and the light transmitting pattern **240c** may be disposed directly on the second insulating substrate **210** and the light shielding member **215**.

[0058] The first wavelength band filter **230** may be disposed on the first protective layer **221**. The first wavelength band filter **230** is a wavelength-selective optical filter that transmits only part of a wavelength band of transmitted light by transmitting light of a specific wavelength band and blocking light of another specific wavelength band.

[0059] In some exemplary embodiments, the first wavelength band filter **230** may transmit light having a peak wavelength longer than the peak wavelength of the third color provided by the light source unit **20** and absorb light of the third color. For example, the first wavelength band filter **230** may be a color filter that transmits light in a wavelength band including the peak wavelength of the first color and/or the peak wavelength of the second color, and absorbs light in a wavelength band including the peak wavelength of the third color. The first color may be red having a peak wavelength in the range of about 610 nm to about 650 nm, and the second color may be green having a peak wavelength in the range of about 530 nm to about 570 nm. As a non-limiting example, the first wavelength band filter **230** may include a base resin and a colorant or dye that is dissolved in the base resin and absorbs light in a wavelength band including the peak wavelength of the third color.

[0060] The first wavelength band filter **230** may be made of an organic material having photosensitivity. The first wavelength band filter **230** may be disposed directly on the first protective layer **221** and may be integrally formed over the first pixel PXa and the second pixel PXb. However, the first wavelength band filter **230** may not be disposed in the third pixel PXc. An average thickness of the first wavelength band filter **230** may be about 0.5 micrometers (μm) to about 2 μm , e.g., about 0.5 μm to about 1.5 μm . When the thickness of the first wavelength band filter **230** is 0.5 μm or more, the first wavelength band filter **230** can fully absorb light of a specific wavelength band. When the thickness of the first wavelength band filter **230** is 2 μm or less, a step formed by the first wavelength band filter **230** can be minimized. In

addition, a distance between the color conversion patterns **240a** and **240b**, which will be described later, and the light shielding member **215** can be minimized, thereby suppressing the color mixture defect.

[0061] Light of the third color provided from the light source unit **20** and incident on the color conversion patterns **240a** and **240b** may be transmitted through the color conversion patterns **240a** and **240b** without being color-converted by the color conversion patterns **240a** and **240b**, but may be absorbed by the first wavelength band filter **230**. Thus, the purity of colors displayed by the first pixel PXa and the second pixel PXb can be improved, and the display quality of the display device **1** can be improved.

[0062] The color conversion patterns **240a** and **240b** may be disposed on the first wavelength band filter **230**. Each of the color conversion patterns **240a** and **240b** can convert the color of transmitted light into a color different from that of incident light. That is, light may be converted into light of a specific wavelength band as it passes through each of the color conversion patterns **240a** and **240b**. In some exemplary embodiments, each of the color conversion patterns **240a** and **240b** may include a material, that is, a wavelength shift material **242a** or **242b**, that converts or shifts the peak wavelength of incident light to a specific peak wavelength.

[0063] In some exemplary embodiments, each of the color conversion patterns **240a** and **240b** may be a color filter that transmits only part of a wavelength band of transmitted light by transmitting light of a specific wavelength band of incident light and absorbing light of another specific wavelength band.

[0064] The color conversion patterns **240a** and **240b** include a first color conversion pattern **240a** and a second color conversion pattern **240b**. The first color conversion pattern **240a** overlaps the first wavelength band filter **230** and is disposed in the first pixel PXa, and the second color conversion pattern **240b** overlaps the first wavelength band filter **230** and is disposed in the second pixel PXb. Light that passes through the first color conversion pattern **240a** may represent the first color, and light that passes through the second color conversion pattern **240b** may represent the second color. In a cross-sectional view taken along the arrangement direction of the first pixel PXa, the second pixel PXb and the third pixel PXc constituting a basic unit, at least one edge portion of each of the first color conversion pattern **240a** and/or the second color conversion pattern **240b** may be higher than a central portion of the first color conversion pattern **240a** and/or the second color conversion pattern **240b**.

[0065] In some exemplary embodiments, the first color conversion pattern **240a** may be disposed directly on the first wavelength band filter **230**. The first color conversion pattern **240a** may include a first base resin **241a** and a first wavelength shift material **242a** that is dispersed in the first base resin **241a** and shifts the peak wavelength of incident light to the peak wavelength of the first color. In addition, the second color conversion pattern **240b** may be disposed directly on the first wavelength band filter **230**. The second color conversion pattern **240b** may include a second base resin **241b** and a second wavelength shift material **242b** that is dispersed in the second base resin **241b** and shifts the peak wavelength of incident light to the peak wavelength of the second color. The first base resin **241a** and the second base resin **241b** are not particularly limited as long as they are transparent light-transmitting resins. For example, the first

base resin **241a** and the second base resin **241b** may be made of an organic material, such as an epoxy resin, an acrylic resin, etc.

[0066] The first wavelength shift material **242a** may be a material that shifts the peak wavelength of incident light to the peak wavelength of the first color and then emits the light. The second wavelength shift material **242b** may be a material that shifts the peak wavelength of incident light to the peak wavelength of the second color and then emits the light. Examples of the wavelength shift material may include at least one of a quantum dot, a quantum rod, and a fluorescent material. For example, the quantum dot may emit light of a specific color when an electron transitions from a conduction band to a valence band. The quantum dot material may have a core-shell structure. The core may be a semiconductor nanocrystalline material. For example, the core of the quantum dot may include, but is not limited to, silicon (Si) nanocrystals, group II-VI compound nanocrystals, and group III-V compound nanocrystals. As a non-limiting example, each of the first wavelength shift material **242a** and the second wavelength shift material **242b** may include a core made of any one of cadmium selenide (CdSe), cadmium telluride (CdTe), cadmium sulfide (CdS) and indium phosphide (InP), and an outer shell made of zinc sulfide (ZnS).

[0067] The size (e.g., grain size) of the first wavelength shift material **242a** may be greater than that of the second wavelength shift material **242b**. In a non-limiting example, the size of the first wavelength shift material **242a** may be about 55 angstroms (Å) to about 65 Å, and the size of the second wavelength shift material **242b** may be about 40 Å to about 50 Å. Light emitted from the first wavelength shift material **242a** and light emitted from the second wavelength shift material **242b** may be radiated in various directions regardless of an incident angle of incident light and may contribute to the improvement of lateral visibility of the first color and the second color represented by the display device **1**. Light emitted from the first color conversion pattern **240a** and the second color conversion pattern **240b** toward the viewer side may be depolarized to become unpolarized light. As used herein, “unpolarized light” refers to light that is not composed only of polarization components in a specific direction. That is, light that is not polarized only in a specific direction. In other words, light that is composed of random polarization components. An example of unpolarized light is natural light.

[0068] Both of the first color conversion pattern **240a** and the second color conversion pattern **240b** adjacent to the first color conversion pattern **240a** may overlap a portion of the light shielding member **215**. The first color conversion pattern **240a** and the second color conversion pattern **240b** may be separated from each other on the light shielding member **215**. In addition, a side surface of the first color conversion pattern **240a** may be separated from an adjacent side surface of the second color conversion pattern **240b** that faces the side surface of the first color conversion pattern **240a**. Since the first color conversion pattern **240a** and the second color conversion pattern **240b** are physically separated from each other, it is possible to prevent (or reduce) light emitted from the first wavelength shift material **242a** from travelling into the second color conversion pattern **240b** and representing the first color in the second pixel PXb.

[0069] The light transmitting pattern **240c** may be disposed on the first protective layer **221** in the third pixel PXc. The light transmitting pattern **240c** can substantially transmit light without converting the color of the light. That is, light that passes through the light transmitting pattern **240c** can represent the third color. The light transmitting pattern **240c** may not overlap the first wavelength band filter **230**. The light transmitting pattern **240c** may include a third base resin **241c** and light scattering particles **242c** dispersed in the third base resin **241c**.

[0070] The third base resin **241c** may be a transparent light-transmitting resin. The first base resin **241a**, the second base resin **241b**, and the third base resin **241c** may be made of the same or different materials. The light scattering particles **242c** may be particles having a refractive index different from that of the third base resin **241c**. The light scattering particles **242c** are not particularly limited as long as they can scatter incident light. For example, the light scattering particles **242c** may be metal oxide particles or organic particles. Examples of the metal oxide may include titanium oxide (TiO₂), zirconium oxide (ZrO₂), aluminum oxide (Al₂O₃), indium oxide (In₂O₃), zinc oxide (ZnO), and tin oxide (SnO₂). Examples of the organic material may include acrylic resin and urethane resin. The light scattering particles **242c** scatter light of the third color emitted from the light source unit **20** and transmitting through the light transmitting pattern **240c** in various directions regardless of the incident angle without converting the wavelength of the light, thereby improving the lateral visibility of the third color represented by the display device **1**. Light emitted from the light transmitting pattern **240c** toward the viewer side may be depolarized to become unpolarized. In some exemplary embodiments, the light emitting pattern **240c** may be omitted.

[0071] Both of the light transmitting pattern **240c** and the second color conversion pattern **240b** adjacent to the light transmitting pattern **240c** may overlap a portion of the light shielding member **215**. The light transmitting pattern **240c** and the second color conversion pattern **240b** may be separated from each other on the light shielding member **215**. In addition, a side surface of the light transmitting pattern **240c** may be separated from an adjacent side surface of the second color conversion pattern **240b** that faces the side surface of the light transmitting pattern **240c**. Since the light transmitting pattern **240c** and the second color conversion pattern **240b** are physically separated from each other, it is possible to prevent (or reduce) light emitted from the second wavelength shift material **242b** from travelling into the light transmitting pattern **240c** and representing the third color in the third pixel PXc.

[0072] In some exemplary embodiments, a maximum thickness t_{240c} of the light transmitting pattern **240c** may be greater than a maximum thickness of each of the color conversion patterns **240a** and **240b**, for example, a maximum thickness t_{240b} of the second color conversion pattern **240b**. The maximum thickness t_{240c} of the light transmitting pattern **240c** denotes a maximum vertical distance from a bottom surface of the light transmitting pattern **240c** to the top of the light transmitting pattern **240c**, and the maximum thickness t_{240b} of the second color conversion pattern **240b** denotes a maximum vertical distance from a bottom surface of the second color conversion pattern **240b** to the top surface of the central portion of the second color conversion pattern **240b**. For example, the maximum thickness t_{240c} of

the light transmitting pattern **240c** may be about 7 μm to about 8 μm , and the maximum thickness t_{240b} of the second color conversion pattern **240b** may be about 6 μm to about 7 μm .

[0073] In some exemplary embodiments in which at least one edge portion of the second color conversion pattern **240b** is higher than the central portion in a cross-sectional view taken along the arrangement direction of the first pixel PXa, the second pixel PXb, and the third pixel PXc constituting a basic unit, a step formed by the central portion and the edge portion, that is, a tapered step t_s , may be about 0.3 μm or less, but greater than 0 μm .

[0074] A second wavelength band filter **250** may be disposed on the first color conversion pattern **240a**, the second color conversion pattern **240b**, and the light transmitting pattern **240c**. The second wavelength band filter **250** is a wavelength-selective optical filter that transmits only part of a wavelength band of transmitted light by transmitting light of a specific wavelength band and blocking light of another specific wavelength band.

[0075] In some exemplary embodiments, the second wavelength band filter **250** may reflect light having a peak wavelength longer than the peak wavelength of the third color provided by the light source unit **20** and transmit light of the third color. For example, the second wavelength band filter **250** may be a wavelength-selective transmission/reflection layer that reflects light of a wavelength band including the peak wavelength of the first color and the peak wavelength of the second color and transmits light of a wavelength band including the peak wavelength of the third color.

[0076] The second wavelength band filter **250** may include one or more layers made of an inorganic material. For example, the second wavelength band filter **250** may include a plurality of low refraction layers **251** and a plurality of high refraction layers **252** stacked alternately. As used herein, “low refraction layer” refers to a layer having a relatively low refractive index as compared with an adjacent layer, and “high refraction layer” refers to a layer having a relatively high refractive index as compared with an adjacent layer. The transmission wavelength band and the reflection wavelength band of the second wavelength band filter **250** can be controlled by, but is not limited to, the materials of the low refraction layers **251** and the high refraction layers **252**, respective thicknesses of the low refraction layers **251** and the high refraction layers **252**, a difference between the thicknesses, respective refractive indices of the low refraction layers **251** and the high refraction layers **252**, a difference between the refractive indices.

[0077] In some exemplary embodiments, the second wavelength band filter **250** may include a silicon nitride (SiN_x) layer and a silicon oxide (SiO_x) layer stacked alternately with each other. In some exemplary embodiments, the low refraction layers **251** may be made of an oxide of silicon, such as silicon oxide (SiO_x), and the high refraction layers **252** may be made of metal oxide, such as titanium oxide (TiO_x), tantalum oxide (TaO_x), hafnium oxide (HfO_x) or zirconium oxide (ZrO_x). In FIG. 2, a case where the second wavelength band filter **250** includes two low refraction layers **251** and two high refraction layers **252** is illustrated as an example; however, exemplary embodiments are not limited to this case. The second wavelength band filter **250** may be disposed directly on the first color conversion pattern **240a**, the second color conversion pattern **240b**, and

the light transmitting pattern **240c** without distinction between the pixels PXa through PXc. The second wavelength band filter **250** may be formed to a substantially constant thickness along outer surfaces of the first color conversion pattern **240a**, the second color conversion pattern **240b** and the light transmission pattern **240c**. An average thickness of the second wavelength band filter **250** may be about 0.5 μm to about 2 μm , e.g., about 1 μm .

[0078] Of light emitted in various directions from the first wavelength shift material **242a** and the second wavelength shift material **242b**, light emitted toward the second wavelength band filter **250** may be reflected by the second wavelength band filter **250** toward the second insulating substrate **210**, that is, toward the viewer side, so that the reflected light can contribute to the color display. This can increase light utilization efficiency and enable the display device **1** to display a clearer (or more pure) color. In addition, of light provided by the light source unit **20**, the second wavelength band filter **250** may transmit light having the peak wavelength of the third color while blocking light having a peak wavelength longer than that of the third color. As such, the color purity of the light provided by the light source unit **20** can be further improved.

[0079] A first overcoat layer **261** may be disposed on the second wavelength band filter **250**. The first overcoat layer **261** may be a planarization layer that minimizes (or reduces) steps of a plurality of components stacked on the second insulating substrate **210**. In some exemplary embodiments, the first overcoat layer **261** may be disposed directly on the second wavelength band filter **250** without distinction between the pixels PXa through PXc. The first overcoat layer **261** may be made of an organic material having planarization characteristics. For example, the first overcoat layer **261** may be made of a thermosetting resin. Examples of the organic material that forms the first overcoat layer **261** may include cardo resin, polyimide resin, acrylic resin, siloxane resin, and silsesquioxane resin.

[0080] A barrier layer **270** made of an inorganic material may be disposed on the first overcoat layer **261**. The barrier layer **270** may include one or more layers made of an insulating inorganic material. Examples of the inorganic material that forms the barrier layer **270** may include silicon nitride, silicon oxide, silicon nitride oxide, and silicon oxynitride. In some exemplary embodiments, the barrier layer **270** may be disposed directly on the first overcoat layer **261** without distinction between the pixels PXa through PXc. In addition, the barrier layer **270** may be in contact with the entire surface of the first overcoat layer **261** in one pixel (e.g., the first pixel PXa) without a portion separated from the first overcoat layer **261**. An interface between the first overcoat layer **261** and the barrier layer **270** may have grooves. The grooves may be irregular. The barrier layer **270** may be formed to a substantially constant thickness along a surface (e.g., a lower surface in the drawings) of the first overcoat layer **261**. An average thickness t_{270} of the barrier layer **270** may be about 0.05 μm to about 0.2 μm , e.g., about 0.1 μm .

[0081] The barrier layer **270** can prevent (or reduce) outgassing of a gas generated inside the first overcoat layer **261** and the diffusion of a residual solvent in the first overcoat layer **261** during a process of curing a second overcoat layer **262**, which will be described later. In this manner, the degree of planarization of the second overcoat layer **280** can be maximized or at increased. In addition,

since components having electro-optical functions, the second polarizer **280**, and the common electrode **290** can be accurately placed at desired positions on the second overcoat layer **262**, the display quality of the display device **1** can be improved.

[0082] The second overcoat layer **262** may be disposed on the barrier layer **270**. The second overcoat layer **262** may be a planarization layer that planarizes steps of a plurality of components stacked on the second insulating substrate **210**. In some exemplary embodiments, the second overcoat layer **262** may be disposed directly on the barrier layer **270** without distinction between the pixels PXa through PXc. In addition, the second overcoat layer **262** may be in contact with the entire (or substantially entire) surface of the barrier layer **270** in one pixel (e.g., the first pixel PXa) without a portion separated from the barrier layer **270**. The second overcoat layer **262** may be made of an organic material having planarization characteristics. For example, the second overcoat layer **262** may be made of a thermosetting resin or a photocurable resin. Examples of the organic material that forms the second overcoat layer **262** may include cardo resin, polyimide resin, acrylic resin, siloxane resin, and silsesquioxane resin.

[0083] In some exemplary embodiments, the second overcoat layer **262** may be made of an organic material different from that of the first overcoat layer **261**. In this case, the first overcoat layer **261** and the second overcoat layer **262** can have sufficient planarization characteristics, and reflow of the first overcoat layer **261** and the second overcoat layer **262** after being cured can be minimized (or reduced). That is, overcoat layers including the first overcoat layer **261** and the second overcoat layer **262** may be given a complex function having both a planarization characteristic and a reflow suppression characteristic. In addition, if the second overcoat layer **262** is made of photocurable resin, it is possible to reduce the stress generated at the interface between the first overcoat layer **261** and the barrier layer **270** during the process of curing the second overcoat layer **262**.

[0084] A thickness t_{262} of the second overcoat layer **262**, for example, a maximum thickness of the second overcoat layer **262**, may be smaller than a minimum thickness t_{261} of the first overcoat layer **261**. The minimum thickness t_{261} of the first overcoat layer **261** refers to a shortest vertical distance from the top surface (bottom surface in the drawings) of the central portion of the first color conversion pattern **240a** or the second color conversion pattern **240b** to a surface of the first overcoat layer **261**. For example, the minimum thickness t_{261} of the first overcoat layer **261** may be about 3 μm . In addition, the maximum thickness t_{262} of the second overcoat layer **262** may be about 1.5 μm or about 1 μm . If the minimum thickness t_{261} of the first overcoat layer **261** is 3 μm or more and the maximum thickness t_{262} of the second overcoat layer **262** is 1.5 μm or less, stress generated between the first overcoat layer **261** and the second overcoat layer **262** can be reduced, and an excellent degree of planarization can be ensured. In addition, the thickness t_{262} of the second overcoat layer **262**, for example, a minimum thickness of the second overcoat layer **262** may be greater than the thickness of the barrier layer **270**, for example, a maximum thickness of the barrier layer **270**. The maximum thickness of the barrier layer **270** may be about 0.2 μm .

[0085] A second protective layer **222** may be disposed on the second overcoat layer **262**. The second protective layer

222 may be disposed directly on the second overcoat layer **262** without distinction between the pixels PXa through PXc. The second protective layer **222** may be made of an insulating inorganic material, such as silicon nitride or silicon oxide. The second protective layer **222** can prevent (or reduce) the second overcoat layer **262** from being damaged in a process of forming the second polarizer **280** to be described later. In addition, the second protective layer **222** can improve the reliability of the display device **1** by improving the adhesion of the second polarizer **280** and preventing (or reducing) damage or corrosion of the second polarizer **280** due to penetration of air or moisture. In some exemplary embodiments, the second protective layer **222** may be omitted.

[0086] The second polarizer **280** may be disposed on the second protective layer **222**. The second polarizer **280** may perform an optical shutter function together with the first polarizer **180** and the liquid crystal layer **300** to control an amount of light that transmits through each of the pixels PXa through PXc. In some exemplary embodiments, the second polarizer **280** may be a reflective polarizer including a wire grid pattern disposed directly on the second protective layer **222**. The wire grid pattern refers to a plurality of linear patterns extending parallel to each other and separated from each other. The reflective polarizer may give polarity to transmitted light by reflecting a polarization component parallel to the reflection axis and transmitting a polarization component parallel to the transmission axis. The reflection axis may be in a direction substantially parallel to the extending direction of the wire grid pattern, and the transmission axis may be in a direction intersecting the extending direction of the wire grid pattern.

[0087] The wire grid pattern of the second polarizer **280** may be made of a conductive material. Examples of the conductive material that can form the wire grid pattern may include aluminum (Al), silver (Ag), gold (Au), copper (Cu), titanium (Ti), molybdenum (Mo), nickel (Ni), and alloys of these materials. In some exemplary embodiments, the wire grid pattern may be a stacked structure of a plurality of wire grid pattern layers made of a conductive material.

[0088] A capping layer **223** may be disposed on the second polarizer **280**. The capping layer **223** may be disposed directly on the second polarizer **280** to cover and protect the second polarizer **280**. The capping layer **223** can prevent (or reduce) the second polarizer **280** from being damaged or corroded by penetration of air or moisture, and can planarize an upper surface (a lower surface in the drawings) of the second polarizer **280**. The capping layer **223** may be made of an inorganic insulating material, such as silicon nitride or silicon oxide.

[0089] The common electrode **290** may be disposed on the capping layer **223**. The common electrode **290** may be integrally formed without distinction between the pixels PXa through PXc, and a common voltage may be applied to the common electrode **290**. In some exemplary embodiments, the common electrode **290** may be disposed directly on the capping layer **223** and may be a transparent electrode. The second liquid crystal alignment layer **295** may be disposed on the common electrode **290**. The second liquid crystal alignment layer **295** can induce an initial alignment of the liquid crystals **301** in the adjacent liquid crystal layer **300**. The second liquid crystal alignment layer **295** may

include a polymer organic material that is the same as or different from that of the first liquid crystal alignment layer 195.

[0090] Hereinafter, a process in which the display device 1 realizes a color display will be described in detail with reference to FIG. 3. FIG. 3 illustrate light paths in the display device of FIG. 1 according to some exemplary embodiments.

[0091] Referring to FIGS. 1 through 3, the light source unit 20 may provide light of the third color to the display panel 10. In some exemplary embodiments, the light source unit 20 may provide blue light having a peak wavelength in the range of about 430 nm to about 470 nm to the display panel 10.

[0092] Of the light provided from the light source unit 20, at least part of light traveling in a direction substantially perpendicular to the surface of the first insulating substrate 110 or the second insulating substrate 210 may be incident on the first pixel PXa of the display panel 10. As used herein, "light traveling in the direction perpendicular to the surface of the insulating substrate" denotes straight light passing through the display panel 10. When the display panel 10 is a curved display panel, the "light traveling in the direction perpendicular to the surface of the insulating substrate" denotes light passing through a certain point on the surface of the insulating substrate and traveling in a normal direction to the certain point.

[0093] Light L_{a0} incident on the first pixel PXa may sequentially pass through the first polarizer 180, the first insulating substrate 110, the liquid crystal layer 300, the capping layer 223, the second polarizer 280, the second protective layer 222 made of an inorganic material, the second overcoat layer 262 made of an organic material, the barrier layer 270 made of an inorganic material, the first overcoat layer 261 made of an organic material, the second wavelength band filter 250 including one or more layers made of an inorganic material, the first color conversion pattern 240a including the first wavelength shift material 242a, the first wavelength band filter 230 made of an organic material, the first protective layer 221 made of an inorganic material, and the second insulating substrate 210.

[0094] The light L_{a0} provided from the light source unit 20 and incident on the first pixel PXa may maintain the third color after passing through the first polarizer 180, the first insulating substrate 110, the liquid crystal layer 300, the capping layer 223, the second polarizer 280, the second protective layer 222, the second overcoat layer 262, the barrier layer 270, the first overcoat layer 261, and the second wavelength band filter 250.

[0095] The peak wavelength of the light that passes through the second wavelength band filter 250 (i.e., the peak wavelength of the third color) may be shifted to the peak wavelength of the first color by the first wavelength shift material 242a of the first color conversion pattern 240a. Then, the light whose wavelength has been converted may be emitted in various directions.

[0096] Of the light emitted from the first wavelength shift material 242a, light L_{a1} emitted toward the second insulating substrate 210 (toward an upper side in the drawing) may pass through the first wavelength band filter 230 as it is and contribute to the display of the first color by the first pixel PXa. For example, the first color may be red having a peak wavelength in the range of about 610 nm to about 650 nm. In addition, of the light emitted from the first wavelength

shift material 242a, light L_{a2} emitted toward the second wavelength band filter 250 (toward a lower side in the drawing) may be reflected toward the second insulating substrate 210, that is, toward the viewer side by the second wavelength band filter 250, which reflects light of a wavelength band including the peak wavelength of the first color. The reflected light L_{a2} may contribute to the display of the first color by the first pixel PXa.

[0097] Furthermore, of the light L_{a0} provided from the light source unit 20 and incident on the first pixel PXa, light L_{a3} of the third color that passes through the first base resin 241a without being color-converted by the first wavelength shift material 242a of the first color conversion pattern 240a may be absorbed by the first wavelength band filter 230 that absorbs light of a wavelength band including the peak wavelength of the third color. Thus, the light L_{a3} of the third color may not be visible in the first pixel PXa.

[0098] Likewise, of the light provided from the light source unit 20, at least part of light traveling in the direction substantially perpendicular to the surface of the first insulating substrate 110 or the second insulating substrate 210 may be incident on the second pixel PXb of the display panel 10. Light L_{b0} incident on the second pixel PXb may sequentially pass through the first polarizer 180, the first insulating substrate 110, the liquid crystal layer 300, the capping layer 223, the second polarizer 280, the second protective layer 222, the second overcoat layer 262, the barrier layer 270, the first overcoat layer 261, the second wavelength band filter 250, the second color conversion pattern 240b including the second wavelength shift material 242b, the first wavelength band filter 230, the first protective layer 221, and the second insulation substrate 210.

[0099] Specifically, the light L_{b0} provided from the light source unit 20 and incident on the second pixel PXb may maintain the third color after passing through the first polarizer 180, the first insulating substrate 110, the liquid crystal layer 300, the capping layer 223, the second polarizer 280, the second protective layer 222, the second overcoat layer 262, the barrier layer 270, the first overcoat layer 261, and the second wavelength band filter 250.

[0100] The peak wavelength of the light that passes through the second wavelength band filter 250 may be shifted to the peak wavelength of the second color by the second wavelength shift material 242b of the second color conversion pattern 240b. Then, the light whose wavelength has been converted may be emitted in various directions. Light L_{b1} and light L_{b2} emitted by the second wavelength shift material 242b may pass through the first wavelength band filter 230 as they are and contribute to the display of the second color by the second pixel PXb. For example, the second color may be green having a peak wavelength in the range of about 530 nm to about 650 nm. In addition, of the light L_{b0} provided from the light source unit 20 and incident on the second pixel PXb, light L_{b3} of the third color that passes through the second base resin 241b without being color-converted by the second wavelength shift material 242b of the second color conversion pattern 240b may be absorbed by the first wavelength band filter 230. Thus, the light L_{b3} of the third color may not be visible in the second pixel PXb.

[0101] Of the light provided from the light source unit 20, at least part of light traveling in the direction substantially perpendicular to the surface of the first insulating substrate 110 or the second insulating substrate 210 may be incident

on the third pixel PXc of the display panel 10. Light L_{co} incident on the third pixel PXc may sequentially pass through the first polarizer 180, the first insulating substrate 110, the liquid crystal layer 300, the capping layer 223, the second polarizer 280, the second protective layer 222, the second overcoat layer 262, the barrier layer 270, the first overcoat layer 261, the second wavelength band filter 250, the light transmitting pattern 240c, the first protective layer 221, and the second insulating substrate 210.

[0102] Specifically, the light L_{co} provided from the light source unit 20 and incident on the third pixel PXc may pass through the light transmitting pattern 240c without substantial color conversion and contribute to the display of the third color by the third pixel PXc. In addition, the light scattering particles 242c of the light transmitting pattern 240c can further improve lateral visibility by scattering light transmitted through the light transmitting pattern 240c.

[0103] Hereinafter, display devices according to various exemplary embodiments will be described. To avoid obscuring exemplary embodiments described herein, a description of components identical (or substantially identical) to those previously described in association with the display device 1 will be omitted.

[0104] FIG. 4 is a cross-sectional view of pixels of a display device according to some exemplary embodiments.

[0105] Referring to FIG. 4, the display device 2 is different from the display device 1 in that a first wavelength band filter includes a (1-1)th wavelength band filter 231a and a (1-2)th wavelength band filter 231b. The (1-1)th wavelength band filter 231a is disposed in the first pixel PXa and the (1-2)th wavelength band filter 231b is disposed in the second pixel PXb.

[0106] Each of the (1-1)th wavelength band filter 231a and the (1-2)th wavelength band filter 231b may be a wavelength-selective optical filter that transmits only part of a wavelength band of transmitted light by transmitting light of a specific wavelength band and blocking light of another specific wavelength band. The (1-1)th wavelength band filter 231a and the (1-2)th wavelength band filter 231b may all be made of an organic material.

[0107] In some exemplary embodiments, the (1-1)th wavelength band filter 231a may be a color filter that transmits light of a wavelength band including a peak wavelength of a first color and absorbs light of a wavelength band including a peak wavelength of a second color and a peak wavelength of a third color. In addition, the (1-2)th wavelength band filter 231b may be a color filter that transmits light of a wavelength band including the peak wavelength of the second color and absorbs light of a wavelength band including the peak wavelength of the first color and the peak wavelength of the third color. The first color may be red having a peak wavelength in the range of about 610 nm to about 650 nm, and the second color may be green having a peak wavelength in the range of about 530 nm to about 570 nm.

[0108] The (1-1)th wavelength band filter 231a and the (1-2)th wavelength band filter 231b may be separated (or spaced apart) from each other. In addition, a first color conversion pattern 240a may be disposed on the (1-1)th wavelength band filter 231a, and a second color conversion pattern 240b may be disposed on the (1-2)th wavelength band filter 231b. The (1-1)th wavelength band filter 231a may not overlap the second color conversion pattern 240b or the light transmitting pattern 240c. The (1-2)th wavelength

band filter 231b may not overlap the first color conversion pattern 240a or the light transmitting pattern 240c.

[0109] FIG. 5 is a cross-sectional view of pixels of a display device according to some exemplary embodiments. FIG. 6 is an enlarged cross-sectional view of area B in FIG. 5 according to some exemplary embodiments. FIG. 7 illustrates light paths in the display device of FIG. 5 according to some exemplary embodiments.

[0110] Referring to FIGS. 5 through 7, the display device 3 is different from the display device 1 in that a first wavelength band filter 232 includes one or more layers made of an inorganic material.

[0111] In some exemplary embodiments, the first wavelength band filter 232 is a wavelength-selective optical filter that transmits only part of a wavelength band of transmitted light by transmitting light of a specific wavelength band and blocking light of another specific wavelength band.

[0112] In some exemplary embodiments, the first wavelength band filter 232 may transmit light having a peak wavelength longer than a peak wavelength of a third color provided by the light source unit 20 and reflect light of the third color. For example, the first wavelength band filter 232 may be a wavelength-selective transmission/reflection layer that transmits light of a wavelength band including a peak wavelength of a first color and a peak wavelength of a second color, and reflects light of a wavelength band including the peak wavelength of the third color.

[0113] The first wavelength band filter 232 may include one or more layers made of an inorganic material. For example, the first wavelength band filter 232 may include a plurality of low refraction layers 232a and a plurality of high refraction layers 232b stacked alternately. The transmission wavelength band and the reflection wavelength band of the first wavelength band filter 232 can be controlled by, but not limited to, the materials of the low refraction layers 232a and the high refraction layers 232b, respective thicknesses of the low refraction layers 232a and the high refraction layers 232b, a difference between the thicknesses of the low refraction layers 232a and the high refraction layers 232b, the respective refractive indices of the low refraction layers 232a and the high refraction layers 232b, and a difference between the refractive indices of the low refraction layers 232a and the high refraction layers 232b.

[0114] In some exemplary embodiments, the first wavelength band filter 232 may include a silicon nitride (SiN_x) layer and a silicon oxide (SiO_x) layer stacked alternately with each other. In some exemplary embodiments, the low refraction layers 232a may be made of an oxide of silicon, such as silicon oxide (SiO_x), and the high refraction layers 232b may be made of metal oxide, such as titanium oxide (TiO_x), tantalum oxide (TaO_x), hafnium oxide (HfO_x), or zirconium oxide (ZrO_x). The first wavelength band filter 232 may be disposed directly on a first protective layer 221 and integrally formed over a first pixel PXa and a second pixel PXb. However, the first wavelength band filter 232 may not be disposed in a third pixel PXc. The first wavelength band filter 232 may be formed to a substantially constant thickness along a surface of the first protective layer 221.

[0115] Of light provided from the light source unit 20, at least part of light traveling in a direction substantially perpendicular to a surface of the first insulating substrate 110 or the second insulating substrate 210 may be incident on the first pixel PXa or the second pixel PXb.

[0116] For example, light L_{a0} incident on the first pixel PXa may sequentially pass through a first polarizer 180, the first insulating substrate 110, a liquid crystal layer 300, a capping layer 223, a second polarizer 280, a second protective layer 222 made of an inorganic material, a second overcoat layer 262 made of an organic material, a barrier layer 270 made of an inorganic material, a first overcoat layer 261 made of an organic material, a second wavelength band filter 250 including one or more layers made of an inorganic material, a first color conversion pattern 240a including a first wavelength shift material 242a, the first wavelength band filter 232 including one or more layers made of an inorganic material, the first protective layer 221 made of an inorganic material, and the second insulating substrate 210. In this manner, the peak wavelength (i.e., the peak wavelength of the third color) of the light L_{a0} provided from the light source unit 20 and incident on the first pixel PXa may be shifted to the peak wavelength of the first color by the first wavelength shift material 242a of the first color conversion pattern 240a. Then, the light L_{a0} whose wavelength has been converted may be emitted in various directions. Light L_{a1} and light L_{a2} emitted by the first wavelength shift material 242a may pass through the first wavelength band filter 232 as they are and contribute to the display of the first color by the first pixel PXa.

[0117] In addition, of the light L_{a0} provided from the light source unit 20 and incident on the first pixel PXa, light L_{a3} of the third color that passes through a first base resin 241a without being color-converted by the first wavelength shift material 242a of the first color conversion pattern 240a may be reflected by the first wavelength band filter 232 toward the first insulating substrate 110 (toward a lower side in the drawings). As the light L_{a3} of the third color reflected by the first wavelength band filter 232 travels toward the first insulating substrate 110, the peak wavelength of the reflected light L_{a3} may be shifted to the peak wavelength of the first color by the first wavelength shift material 242a. Then, the light L_{a3} whose wavelength has been shifted may be emitted from the first wavelength shift material 242a. The light L_{a3} emitted from the first wavelength shift material 242a may be reflected toward the second insulating substrate 210, that is, toward the viewer side by the second wavelength band filter 250, which reflects light of a wavelength band including the peak wavelength of the first color. The reflected light L_{a3} may contribute to the display of the first color by the first pixel PXa.

[0118] FIG. 8 is a cross-sectional view of pixels of a display device according to some exemplary embodiments.

[0119] Referring to FIG. 8, the display device 4 is different from the display device 1 in that a second protective layer is omitted. In this manner, a second polarizer 280 may be disposed directly on a second overcoat layer 262. In some exemplary embodiments, the second polarizer 280 may be a reflective polarizer including a wire grid pattern disposed directly on the second overcoat layer 262.

[0120] FIG. 9 is a cross-sectional view of pixels of a display device according to some exemplary embodiments. FIG. 10 is an enlarged view of area C in 9 according to some exemplary embodiments.

[0121] Referring to FIGS. 9 and 10, the display device 5 is different from the display device 1 in that a wire grid pattern of a second polarizer 281 includes a first wire grid

pattern layer 281a made of a conductive material and a second wire grid pattern layer 281b made of an insulating material.

[0122] In some exemplary embodiments, the first wire grid pattern layer 281a may be disposed directly on a second protective layer 222. Examples of the conductive material that can form the first wire grid pattern layer 281a may include aluminum (Al), silver (Ag), gold (Au), copper (Cu), titanium (Ti), molybdenum (Ni), and alloys of these materials. In some exemplary embodiments, the first wire grid pattern layer 281a may be a stacked structure of a plurality of pattern layers made of a conductive material.

[0123] In addition, the second wire grid pattern layer 281b may be disposed directly on the first wire grid pattern layer 281a. The second wire grid pattern layer 281b may have a pattern shape corresponding to that of the first wire grid pattern layer 281a. A height of the second wire grid pattern layer 281b may be, but is not limited to, smaller than that of the first wire grid pattern layer 281a. Examples of the insulating material that can form the second wire grid pattern layer 281b may include silicon nitride and silicon oxide. In some exemplary embodiments, the second wire grid pattern layer 281b may be a stacked structure of a plurality of pattern layers made of an insulating material.

[0124] A capping layer 223 may be disposed on the second wire grid pattern layer 281b. The capping layer 223 may be disposed directly on the second polarizer 281, e.g., on the second wire grid pattern layer 281b made of an insulating material to cover and protect the second polarizer 281.

[0125] FIGS. 11, 12, 13, 14, 15, and 16 are cross-sectional views of a display device at various stages of manufacture according to some exemplary embodiments. Accordingly, a method of manufacturing a display device will be described in association with FIGS. 11 to 16.

[0126] Referring to FIG. 11, a first wavelength band filter 230, color conversion patterns 240a and 240b, a light transmitting pattern 240c, and a second wavelength band filter 250 are formed on a second insulating substrate 210 including a light shielding member 215 and a first protective layer 221 formed thereon.

[0127] The first wavelength band filter 230 may be patterned to be disposed only in certain pixels by exposing and developing a photosensitive organic material. In some exemplary embodiments in which the first wavelength band filter 230 includes one or more layers made of an inorganic material, the first wavelength band filter 230 may be formed by depositing an inorganic material using a method such as chemical vapor deposition.

[0128] Then, the light transmitting pattern 240c, the first color conversion pattern 240a, and the second color conversion pattern 240b are formed. The light transmitting pattern 240c may be patterned by exposing and developing a photosensitive organic material including light scattering particles 242c. In addition, each of the first color conversion pattern 240a and the second color conversion pattern 240b may be patterned by exposing and developing a photosensitive organic material including a wavelength shift material 242a or 242b. However, exemplary embodiments are not limited to the above method. In some exemplary embodiments in which the first color conversion pattern 240a and/or the second color conversion pattern 240b are color filters, the first color conversion pattern 240a and/or the second color conversion pattern 240b may be patterned by exposing and developing a photosensitive organic material in which a

colorant or dye is dispersed and dissolved. A maximum thickness of each of the first color conversion pattern **240a** and the second color conversion pattern **240b** may be about 6 μm to about 7 μm , and a maximum thickness of the light transmitting pattern **240c** may be about 7 μm to about 8 μm .

[0129] Next, the second wavelength band filter **250** is formed on the first color conversion pattern **240a**, the second color conversion pattern **240b**, and the light transmitting pattern **240c**. The second wavelength band filter **250** may be formed by depositing an inorganic material using a method such as chemical vapor deposition. When the second wavelength band filter **250** includes a plurality of layers, the transmission wavelength band and the reflection wavelength band of the second wavelength band filter **250** may be controlled by, but not limited to, the material, refractive index, and deposition thickness of each layer.

[0130] Referring to FIG. 12, a first overcoat layer **261** is formed on the second wavelength band filter **250**. The forming of the first overcoat layer **261** may include applying a first overcoat composition and curing the first overcoat composition. The first overcoat composition may include an organic material, for example, a thermosetting resin material. In some exemplary embodiments, the curing of the first overcoat composition may include curing the first overcoat composition at a temperature of about 180° C. or less for about 20 minutes to about 35 minutes, e.g., about 30 minutes. If the first overcoat composition is cured at a temperature of 180° C. or less, the denaturation or damage of the wavelength shift materials **242a** and **242b** in the first color conversion pattern **240a** and the second color conversion pattern **240b** can be prevented or at least reduced.

[0131] Next, referring to FIG. 13, a barrier layer **270** is formed on the first overcoat layer **261**. The forming of the barrier layer **270** may include depositing a barrier layer forming material directly on the first overcoat layer **261** using a method such as chemical vapor deposition. In some exemplary embodiments, the barrier layer forming material may include one or more of silicon, nitrogen, and oxygen, and the barrier layer **270** may include one or more layers made of an insulating inorganic material. In addition, the depositing of the barrier layer forming material on the first overcoat layer **261** may include depositing the barrier layer forming material at a temperature of about 200° C. or less. If the barrier layer **270** is deposited at a temperature of 200° C. or less, the denaturation or damage of the wavelength shift materials **242a** and **242b** can be prevented or at least reduced. In addition, since the reflow of the first overcoat layer **261** can be suppressed, a high degree of planarization can be maintained.

[0132] Referring to FIG. 14, a second overcoat layer **262** is formed on the barrier layer **270**. The forming of the second overcoat layer **262** may include applying a second overcoat composition and curing the second overcoat composition. The second overcoat composition may include an organic material, such as a thermosetting resin material or a photocurable resin material.

[0133] In some exemplary embodiments, the second overcoat composition may include a thermosetting resin material, and the curing of the second overcoat composition may include curing the second overcoat composition at a temperature of about 180° C. or less for about 20 minutes to about 35 minutes, e.g., about 30 minutes. If the second overcoat composition is cured at a temperature of 180° C. or less, the denaturation or damage of the wavelength shift

materials **242a** and **242b** can be prevented or at least reduced. In addition, since the stress at an interface between the first overcoat layer **261** and the barrier layer **270** can be minimized, a superior degree of planarization can be maintained.

[0134] In some exemplary embodiments, the second overcoat composition may include a photocurable resin material, and the curing of the second overcoat composition may include curing the second overcoat composition by irradiating light to the second overcoat composition. If the second overcoat composition is made of a photocurable resin material and photocured, the stress at the interface between the first overcoat layer **261** and the barrier layer **270** can be minimized or at least reduced. In addition, overcoat layers including the first overcoat layer **261** and the second overcoat layer **262** can be given a complex function having both a planarization characteristic and a reflow suppression characteristic.

[0135] Referring to FIG. 15, a second protective layer **222**, a second polarizer **280**, a capping layer **223**, a common electrode **290**, and a second liquid crystal alignment layer **295** are formed on the second overcoat layer **262** to prepare an upper panel **200**. Since each of the aforementioned components has been previously described with reference to FIG. 1 and the like, a detailed description of these components will be omitted to avoid obscuring exemplary embodiments.

[0136] Referring to FIG. 16, a lower panel **100** including a first insulating substrate **110**, switching elements **115**, pixel electrodes **190**, a first liquid crystal alignment layer **195**, an intermediate layer **160**, and a first polarizer **180** is prepared. Then, a liquid crystal layer **300** is interposed between the lower panel **100** and the upper panel **200**. As a result, a display panel **10** is prepared.

[0137] The liquid crystal layer **300** may be interposed between the lower panel **100** and the upper panel **200** by bonding the lower panel **100** and the upper panel **200** together using a sealing member (not illustrated) and then injecting a liquid crystal composition containing liquid crystals **301** between the lower panel **100** and the upper panel **200**. Alternatively, the liquid crystal layer **300** may be interposed between the lower panel **100** and the upper panel **200** by dropping the liquid crystal composition containing the liquid crystals **301** onto the lower panel **100** or the upper panel **200** and then bonding the lower panel **100** and the upper panel **200** together. Then, a light source unit **20** may be placed on the display panel **10** to provide light to the display panel **10**.

[0138] According to various exemplary embodiments, a method of manufacturing a display device can realize a high degree of planarization by placing the first overcoat layer **261** and the second overcoat layer **262** on the first color conversion pattern **240a**, the second color conversion pattern **240b**, and the light transmitting pattern **240c** that form a relatively high step.

[0139] In addition, when the first overcoat layer **261** and the second overcoat layer **262** are sequentially cured, if the second overcoat layer **262** is cured at a low temperature of about 180° C. or less in order to prevent the denaturation or damage of the wavelength shift materials **242a** and **242b**, the surface profile of the second overcoat layer **262** may be affected by the outgassing of a gas generated in the first overcoat layer **261** and/or the diffusion of a residual solvent in the first overcoat layer **261**. However, according to

various exemplary embodiments, a display device may be formed such that the surface of the second overcoat layer 262 has a more superior degree of planarization by forming the first overcoat layer 261 and forming the second overcoat layer 262 after forming the barrier layer 270 directly on the first overcoat layer 261.

[0140] Hereinafter, effects of various exemplary embodiments will be described in more detail with reference to experimental examples.

EXAMPLE 1

[0141] Patterns were formed to a thickness of about 7 μm (a thickness of a top portion) on a glass substrate using a photosensitive organic material. An average width of the patterns was about 100 μm , and an average distance between adjacent patterns was about 5 μm . Then, an acrylic resin composition was coated on the patterns and then cured at 180° C. to form a first overcoat layer. A silicon nitride film (a barrier layer) having a thickness of 0.1 μm was formed on a surface of the first overcoat layer using a chemical vapor deposition method. An acrylic resin composition was coated on the silicon nitride film and then cured at 180° C. to form a second overcoat layer. An average thickness of the cured second overcoat layer was about 1 μm . The surface height profiles of the patterns, the first overcoat layer, and the second overcoat layer formed on the glass substrate were measured using an interferometer, and the results are illustrated in FIG. 17.

COMPARATIVE EXAMPLE

[0142] Patterns were formed to a thickness of about 7 μm (a thickness of a top portion) on a glass substrate using a photosensitive organic material. An average width of the patterns was about 100 μm , and an average distance between adjacent patterns was about 5 μm . Then, an acrylic resin composition was coated on the patterns and then cured at 180° C. to form a first overcoat layer. An acrylic resin composition was coated on the first overcoat layer and then cured at 180° C. to form a second overcoat layer. An average thickness of the cured second overcoat layer was about 1 μm . The surface height profiles of the patterns, the first overcoat layer, and the second overcoat layer formed on the glass substrate were measured using an interferometer, and the results are illustrated in FIG. 18.

[0143] FIG. 17 illustrates the results of measuring the height profile of a substrate manufactured according to the Example 1, and FIG. 18 illustrates the results of measuring the height profile of a substrate manufactured according to the Comparative Example.

[0144] Referring to FIG. 17, when upper portions of patterns having a thickness of 7 μm are planarized using a first overcoat layer, a barrier layer and a second overcoat layer according to Example 1, an average step of the surface of the first overcoat layer that primarily planarizes the upper portions of the 7 μm -thick patterns is about 80 μm to about 100 μm , but an average step of the surface of the second overcoat layer is about 30 μm or less. That is, it can be understood that the barrier layer and the second overcoat layer disposed on the first overcoat layer have a secondary planarizing effect.

[0145] Referring to FIG. 18, when upper portions of patterns having a thickness of 7 μm are planarized using a first overcoat layer and a second overcoat layer according to

the Comparative Example, an average step of the surface of the first overcoat layer that primarily planarizes the upper portions of the 7 μm -thick patterns is about 80 μm to about 100 μm , which is similar to Example 1. However, an average step of the surface of the second overcoat layer is about 70 μm . That is, it can be understood that the second overcoat layer disposed on the first overcoat layer hardly performs a planarization function. In particular, the surface of the second overcoat layer rises at a position corresponding to a valley formed between adjacent 7 μm -thick patterns. In other words, it can be understood from the above experimental examples that the planarization characteristics of the surface of the second overcoat layer can be maximized (or at least increased) when the barrier layer made of an inorganic material is interposed between the first overcoat layer and the second overcoat layer.

[0146] Although certain exemplary embodiments and implementations have been described herein, other embodiments and modifications will be apparent from this description. Accordingly, the inventive concepts are not limited to such embodiments, but rather to the broader scope of the presented claims and various obvious modifications and equivalent arrangements.

What is claimed is:

1. A display device comprising:

a first pixel region configured to display a first color;
a second pixel region configured to display a second color of a shorter peak wavelength than the first color, the second pixel region being adjacent to the first pixel region;

a color conversion pattern configured to:

convert a color of incident light into the first color; and
output converted light of the first color, the color conversion pattern being disposed in the first pixel region;

a first overcoat layer disposed on the color conversion pattern;

a barrier layer disposed on the first overcoat layer;

a second overcoat layer disposed on the barrier layer;

a liquid crystal layer disposed on the second overcoat layer; and

a switching element disposed on the liquid crystal layer, wherein:

the barrier layer is made of an inorganic material; and
the second overcoat layer is made of an organic material.

2. The display device of claim 1, wherein:

the first overcoat layer is made of an organic material; and
the barrier layer is made of an insulating inorganic material.

3. The display device of claim 2, wherein:

entire surfaces of the first overcoat layer and the barrier layer are in contact with each other in the first pixel region; and

the entire surfaces of the barrier layer and the second overcoat layer are in contact with each other in the first pixel region.

4. The display device of claim 3, further comprising:

a reflective polarizer disposed between the second overcoat layer and the liquid crystal layer; and

a light source configured to provide light of the second color towards the liquid crystal layer.

5. The display device of claim 4, further comprising:
 - a first protective layer disposed between the second overcoat layer and the reflective polarizer, the first protective layer being in contact with the second overcoat layer and the reflective polarizer, the first protective layer being made of an insulating inorganic material;
 - a capping layer disposed between the reflective polarizer and the liquid crystal layer, the capping layer being disposed directly on the reflective polarizer to cover the reflective polarizer;
 - a transparent electrode disposed between the capping layer and the liquid crystal layer, the transparent electrode being disposed directly on the capping layer; and
 - a liquid crystal alignment layer disposed between the transparent electrode and the liquid crystal layer, the liquid crystal alignment layer being disposed directly on the transparent electrode.
6. The display device of claim 5, wherein the reflective polarizer comprises:
 - a first wire grid pattern layer disposed directly on the first protective layer, the first wire grid pattern layer being made of a conductive material; and
 - a second wire grid pattern layer disposed directly on the first wire grid pattern layer, a shape of the second wire grid pattern layer corresponding to that of the first wire grid pattern layer, the second wire grid pattern layer being made of an insulating material.
7. The display device of claim 4, wherein:
 - an interface between the first overcoat layer and the barrier layer comprises irregular grooves; and
 - a thickness of the barrier layer is constant along a surface of the first overcoat layer.
8. The display device of claim 7, wherein:
 - a minimum thickness of the first overcoat layer is greater than a maximum thickness of the second overcoat layer; and
 - a minimum thickness of the second overcoat layer is greater than a maximum thickness of the barrier layer.
9. The display device of claim 7, wherein the first overcoat layer and the second overcoat layer are made of different organic materials.
10. The display device of claim 4, further comprising:
 - a first wavelength band filter disposed between the color conversion pattern and the first overcoat layer, the first wavelength band filter being in contact with the color conversion pattern and the first overcoat layer, wherein the first wavelength band filter is configured to:
 - transmit light of a wavelength band comprising the peak wavelength of the second color; and
 - reflect light of a wavelength band comprising the peak wavelength of the first color.
11. The display device of claim 10, wherein:
 - the first wavelength band filter comprises a plurality of first refraction layers and a plurality of second refraction layers stacked alternately; and
 - an index of refraction of each of the plurality of first refraction layers is lower than an index of refraction of each of the plurality of second refraction layers.
12. The display device of claim 11, wherein a thickness of the first wavelength band filter is substantially constant along an outer surface of the color conversion pattern.
13. The display device of claim 10, further comprising:
 - a light transmitting pattern disposed in the second pixel region, the light transmitting pattern being spaced apart from the first wavelength band filter in a direction normal to the incident light.
14. The display device of claim 13, wherein the color conversion pattern is spaced apart from the light transmitting pattern in the direction normal to the incident light.
15. The display device of claim 14, wherein:
 - the color conversion pattern comprises:
 - a first base resin; and
 - a wavelength shift material dispersed in the first base resin, the wavelength shift material being configured to shift a peak wavelength of the incident light to the peak wavelength of the first color;
 - the light transmitting pattern comprises:
 - a second base resin; and
 - light scattering particles dispersed in the second base resin;
 - a maximum thickness of the light transmitting pattern is greater than a maximum thickness of the color conversion pattern.
16. The display device of claim 13, further comprising:
 - a substrate; and
 - a second wavelength band filter disposed between the substrate and the color conversion pattern, the second wavelength band filter being in contact with the color conversion pattern, wherein the second wavelength band filter is configured to:
 - transmit light of a wavelength band comprising the peak wavelength of the first color; and
 - reflect or absorb light of a wavelength band comprising the peak wavelength of the second color, and
 wherein the second wavelength band filter is spaced apart from the light transmitting pattern in the direction normal to the incident light.
17. The display device of claim 16, further comprising:
 - a third pixel region configured to display a third color of a longer peak wavelength than the second color and different from the first color, the third pixel region being adjacent to the first pixel region, wherein the second wavelength band filter integrally extends in the first pixel region and the third pixel region.
18. The display device of claim 16, further comprising:
 - a light shielding member disposed between the substrate and the second wavelength band filter, the light shielding member overlapping each of the color conversion pattern and the light transmitting pattern; and
 - a second protective layer disposed between the light shielding member and the second wavelength band filter, the second protective layer being disposed between the light shielding member and the light transmitting pattern, wherein:
 - the second protective layer is in contact with the light shielding member, the second wavelength band filter, and the light transmitting pattern;
 - the second protective layer is made of an insulating inorganic material; and
 - the color conversion pattern is spaced apart from the light transmitting pattern in the direction normal to the incident light.

19. A display device comprising:

a first panel comprising:

a first substrate configured to transmit light of a first color in a first region; and

a color conversion pattern disposed on the first substrate;

a second panel facing the first panel, the second panel comprising:

a second substrate; and

a switching element on the second substrate;

a liquid crystal layer between the first panel and the second panel;

a first polarizer between the first panel and the second panel;

a second polarizer between the first panel and the second panel;

a first organic layer between the first panel and the second panel;

an inorganic layer between the first panel and the second panel;

a second organic layer between the first panel and the second panel;

a first wavelength band filter between the first panel and the second panel;

is a second wavelength band filter between the first panel and the second panel; and

a light source configured to provide second light of a second color, a peak wavelength of the second color being shorter than a peak wavelength of the first color,

wherein, in the first region, propagation of at least some of the second light comprises a path sequentially through the first polarizer, the liquid crystal layer, the second polarizer, the first organic layer, the inorganic layer, the second organic layer, the first wavelength band filter, the color conversion pattern, and the second wavelength band filter such that the first color is output, wherein the first wavelength band filter is configured to: reflect light of a wavelength band comprising the peak wavelength of the first color; and

transmit light of a wavelength band comprising the peak wavelength of the second color,

wherein the color conversion pattern is configured to:

convert a color of incident light into the first color; and output converted light of the first color, and

wherein the second wavelength band filter is configured to:

transmit light of a wavelength band comprising the peak wavelength of the first color; and

absorb or reflect light of a wavelength band comprising the peak wavelength of the second color.

20. A method of manufacturing a display device, the method comprising:

forming a color conversion pattern on a substrate, the color conversion pattern comprising a wavelength shift material;

forming a first overcoat layer on the color conversion pattern;

forming a barrier layer on the first overcoat layer;

forming a second overcoat layer on the barrier layer; and forming a liquid crystal layer on the second overcoat layer,

wherein forming the first overcoat layer comprises:

applying a first overcoat composition on the color conversion pattern; and

curing the first overcoat composition at a temperature greater than 0° C. and less than or equal to 180° C.,

wherein forming the barrier layer comprises depositing a barrier layer forming material on the first overcoat layer at a temperature greater than 0° C. and less than or equal to 200° C., and

wherein forming the second overcoat layer comprises:

is applying a second overcoat composition on the barrier layer; and

curing the second overcoat composition at a temperature greater than 0° C. and less than or equal to 180° C.

* * * * *

专利名称(译)	显示装置及其制造方法		
公开(公告)号	US20180341147A1	公开(公告)日	2018-11-29
申请号	US15/867607	申请日	2018-01-10
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	SAMSUNG DISPLAY CO.LTD.		
当前申请(专利权)人(译)	SAMSUNG DISPLAY CO.LTD.		
[标]发明人	SUGITANI KOICHI KANG HOON KIM HYE IN YANG YONG HOON YOON JOO YOUNG JUNG EUI SUK		
发明人	SUGITANI, KOICHI KANG, HOON KIM, HYE IN YANG, YONG HOON YOON, JOO YOUNG JUNG, EUI SUK		
IPC分类号	G02F1/1335 G02F1/1343		
CPC分类号	G02F1/133516 G02F1/133536 G02F1/13439 G02F2001/133519 G02F2001/133548 G02F1/133512 G02F2001/133357 G02F1/133617		
优先权	1020170063512 2017-05-23 KR		
外部链接	Espacenet USPTO		

摘要(译)

显示装置包括第一像素区域 (FPR) , 第二像素区域 (SPR) , 颜色转换图案 (CCP) , 第一外涂层 (FOL) , 阻挡层 (BL) , 第二外涂层 (SOL) , 液晶层 (LCL) 和开关元件 (SE) 。 FPR配置为显示第一颜色 (FC) 。 SPR与FPR相邻, 并且被配置为显示比FC更短的峰值波长的第二颜色 (SC) 。 CCP被置于FPR中, 并被配置为: 将入射光的颜色转换为FC;并输出FC的转换光。 FOL配置在CCP上。 BL是无机材料, 并且设置在FOL上。 SOL是有机材料, 并且布置在BL上。 LCL设置在SOL上。 SE位于LCL上。

