





US 20130021239A1

(19) **United States**(12) **Patent Application Publication**
KOYAMA et al.(10) **Pub. No.: US 2013/0021239 A1**(43) **Pub. Date: Jan. 24, 2013**(54) **DISPLAY DEVICE****Publication Classification**(75) Inventors: **Jun KOYAMA**, Sagamihara (JP);
Hiroyuki MIYAKE, Atsugi (JP);
Hideaki SHISHIDO, Atsugi (JP); **Seiko**
INOUE, Isehara (JP); **Kouhei**
TOYOTAKA, Atsugi (JP); **Koji**
KUSUNOKI, Kawasaki (JP); **Hikaru**
HARADA, Isehara (JP); **Makoto**
KANEYASU, Hadano (JP)(51) **Int. Cl.**
G09G 3/36 (2006.01)
G06F 3/038 (2006.01)
G06F 3/01 (2006.01)
(52) **U.S. Cl.** **345/156; 345/87**(73) Assignee: **SEMICONDUCTOR ENERGY**
LABORATORY CO., LTD., Atsugi-shi
(JP)(21) Appl. No.: **13/545,768**(22) Filed: **Jul. 10, 2012**(30) **Foreign Application Priority Data**

Jul. 19, 2011 (JP) 2011-157990

(57) **ABSTRACT**

A display device includes a display panel including a plurality of pixels, a shutter panel including a driver circuit, a liquid crystal, and light-transmitting electrodes provided in a striped manner, and a positional data detector configured to detect a positional data of a viewer. The shutter panel is provided over a display surface side of the display panel, a width of one of the light-transmitting electrodes in the shutter panel is smaller than that of one of the plurality of pixels, and the driver circuit in the shutter panel is configured to selectively output signals for forming a parallax barrier to the light-transmitting electrodes. The parallax barrier is capable of changing its shape in accordance with the detected positional data.

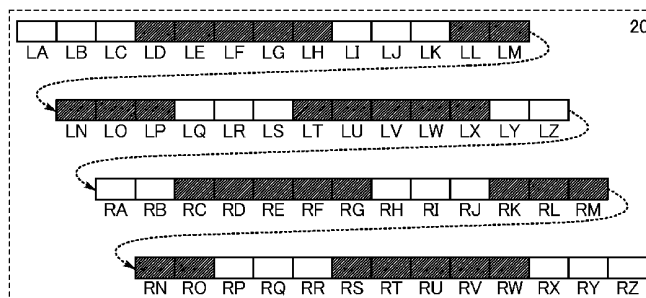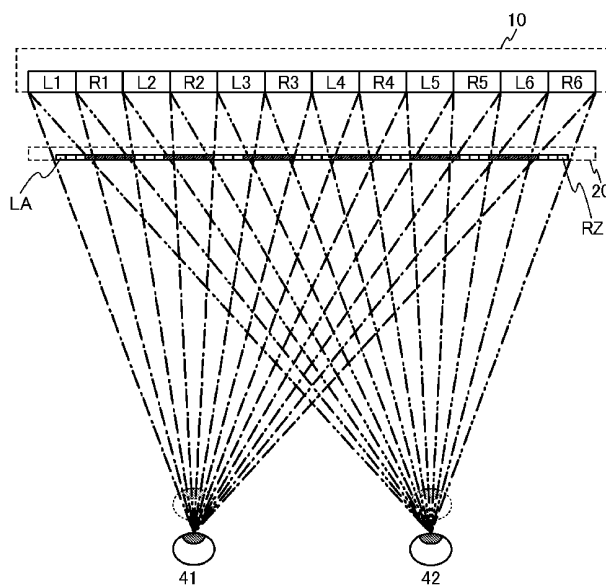

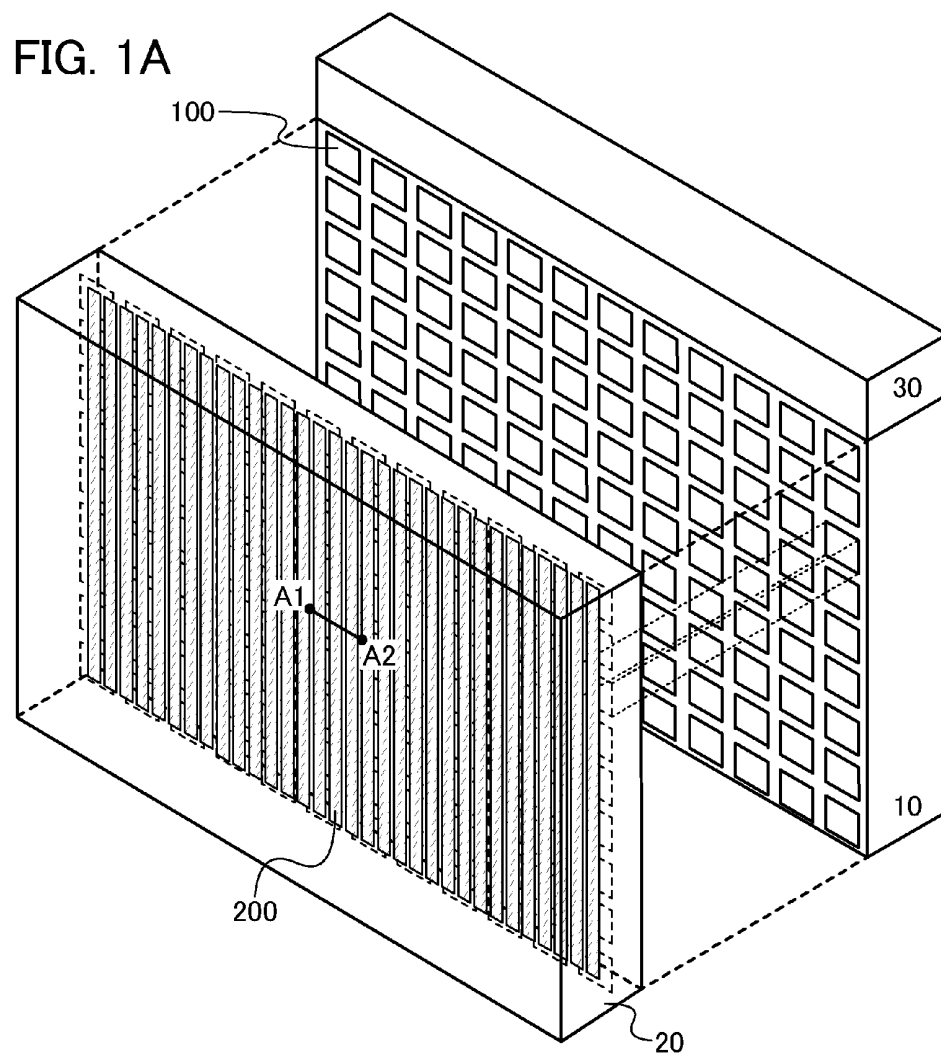


FIG. 1B

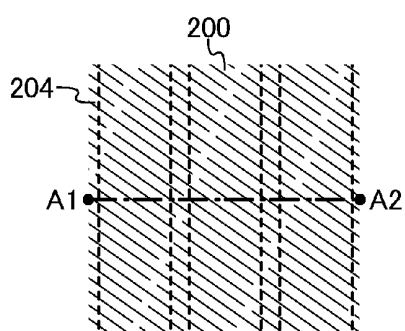


FIG. 1C

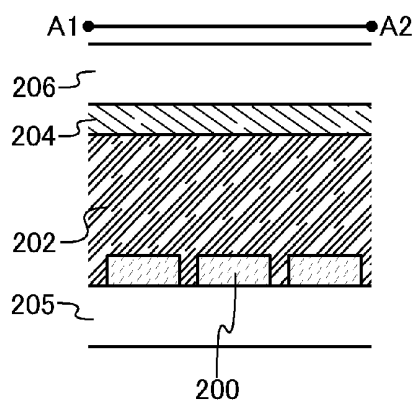


FIG. 2A

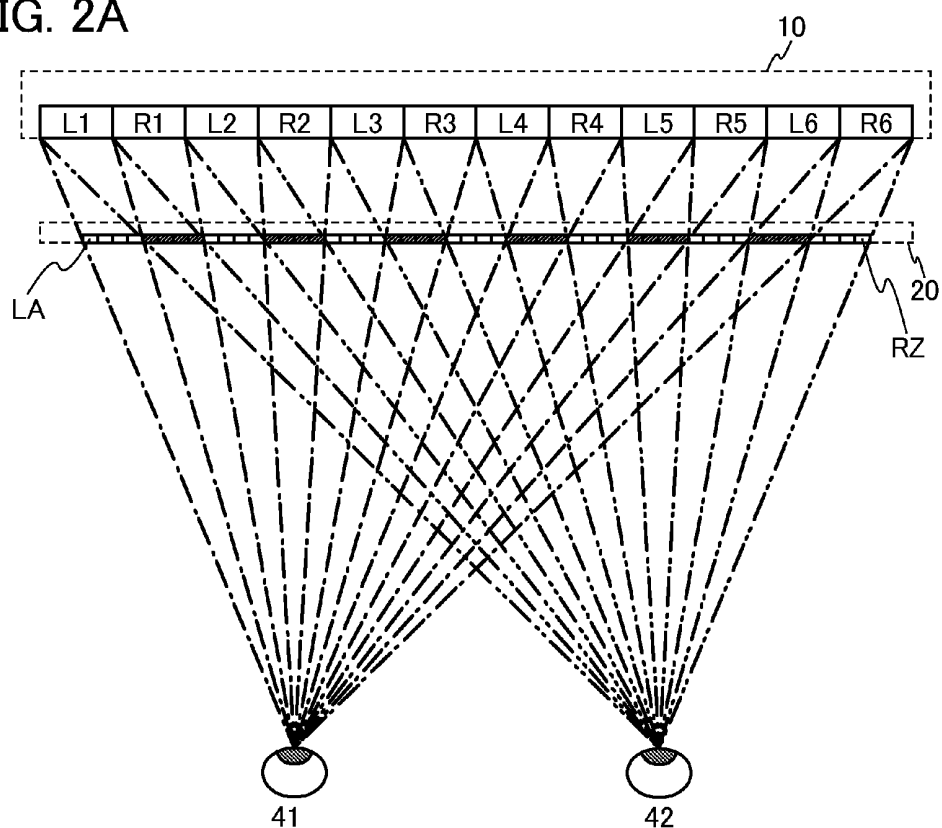


FIG. 2B

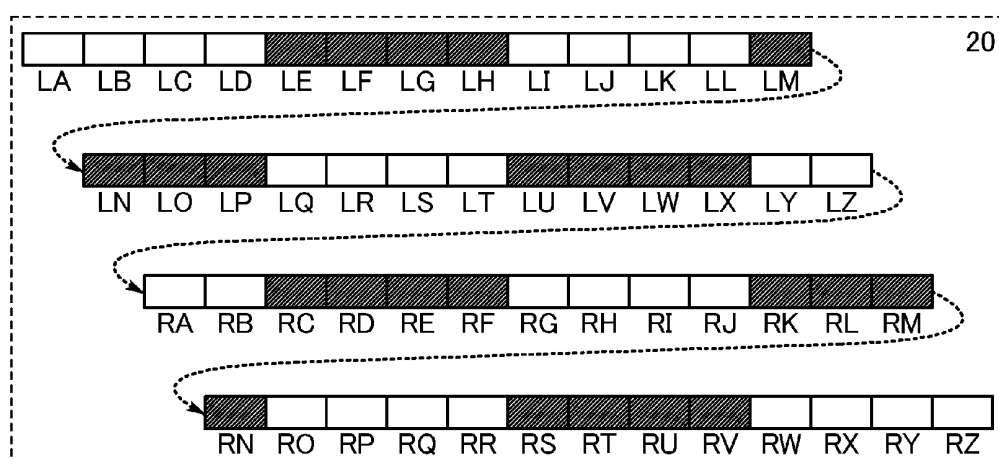


FIG. 3A

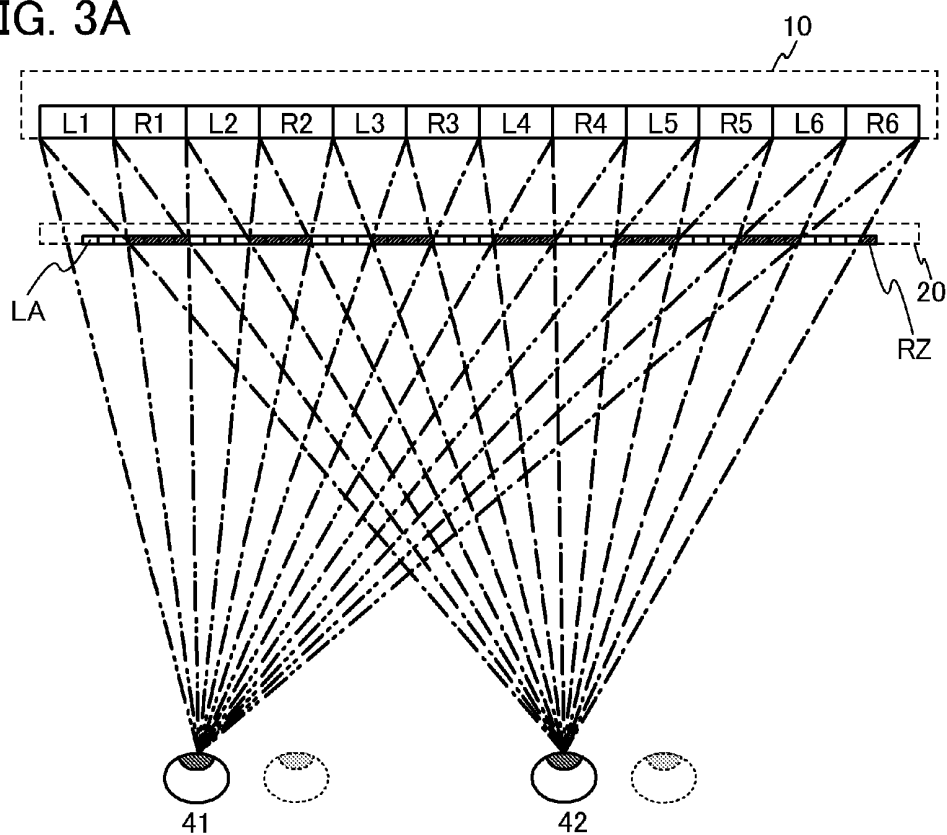


FIG. 3B

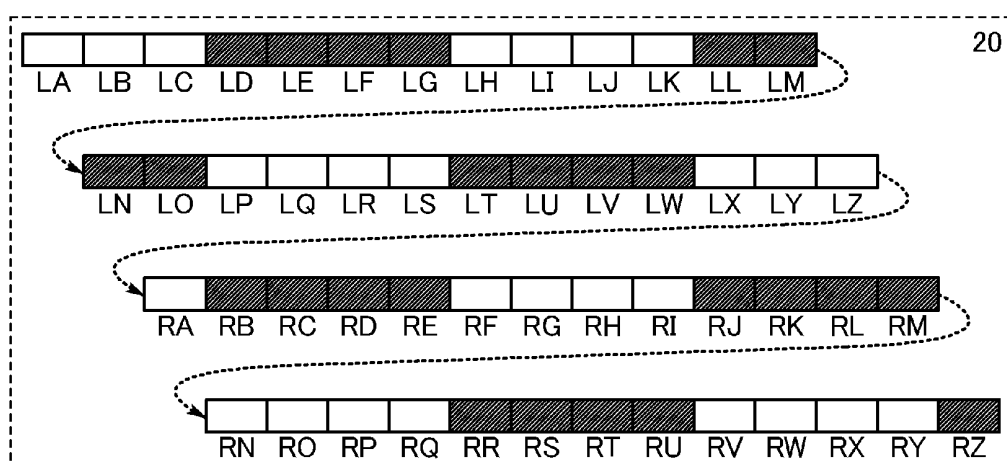


FIG. 4A

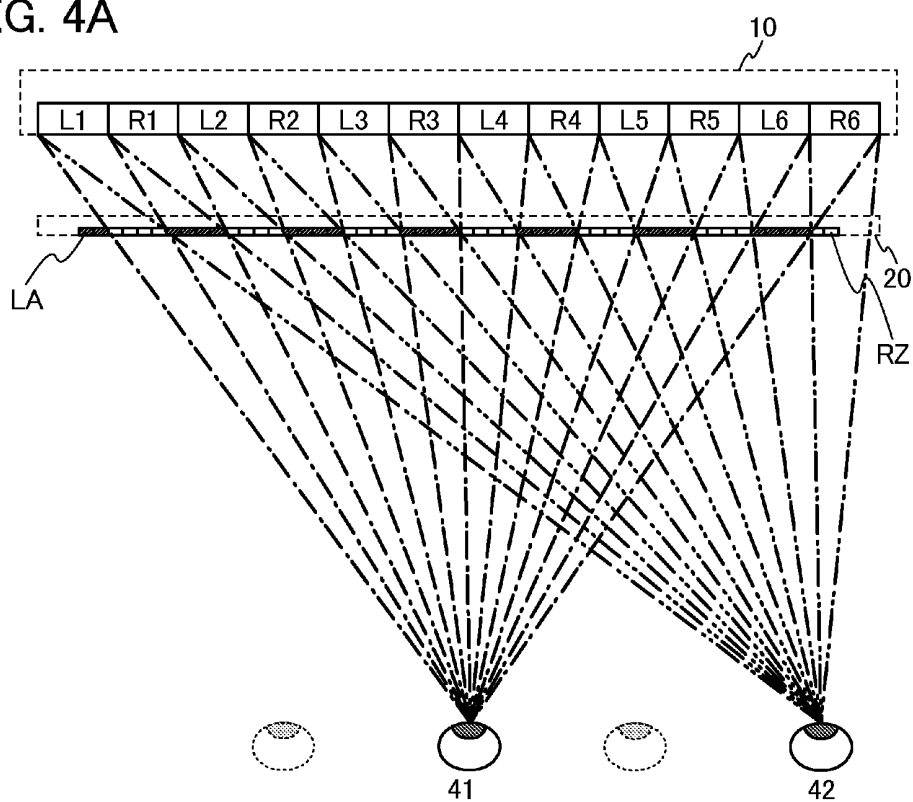


FIG. 4B

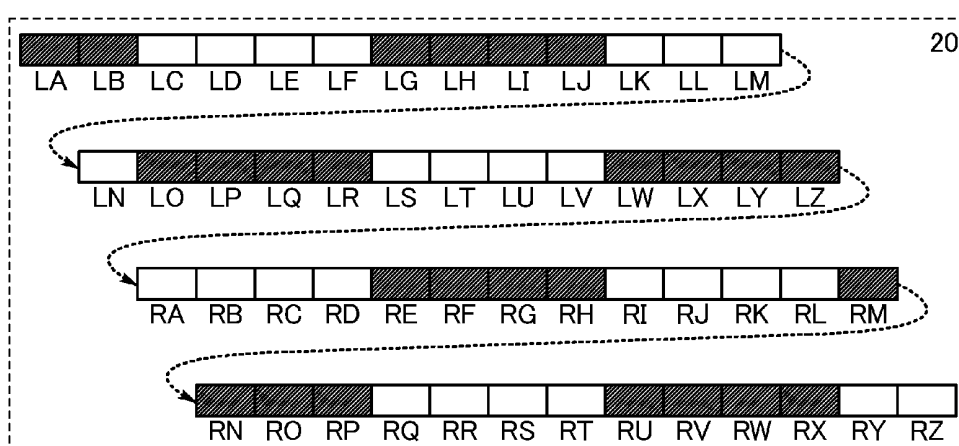


FIG. 5A

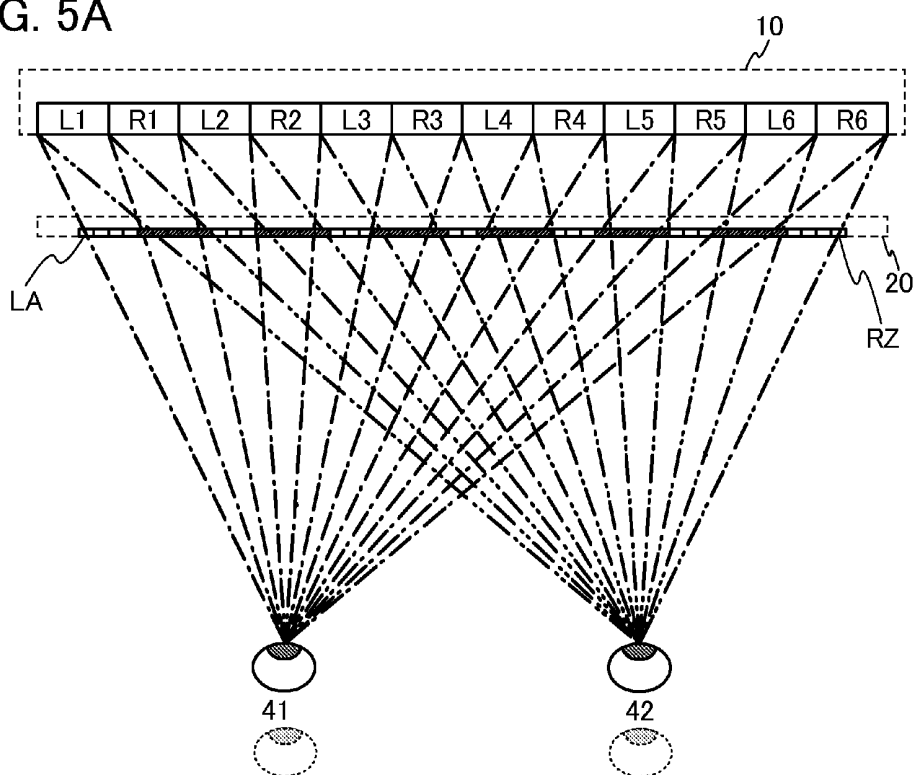
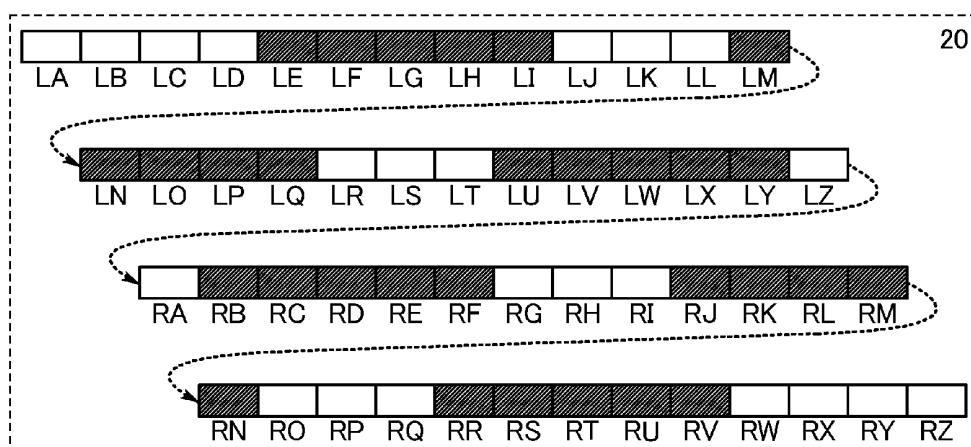


FIG. 5B



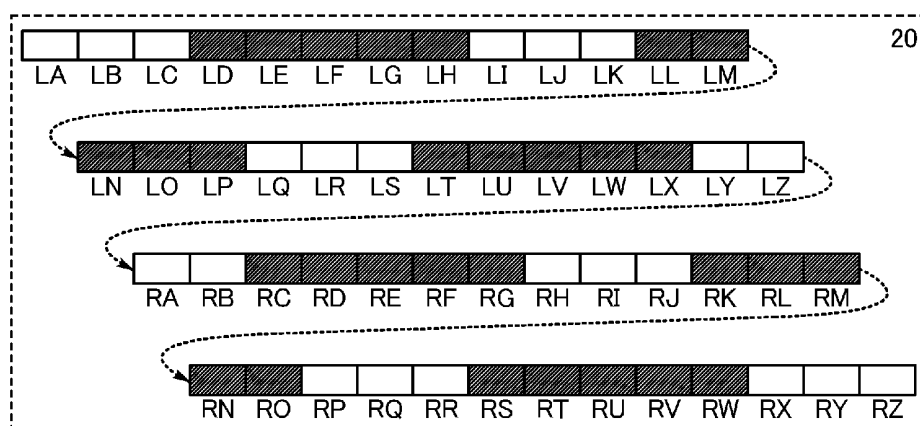


FIG. 7A

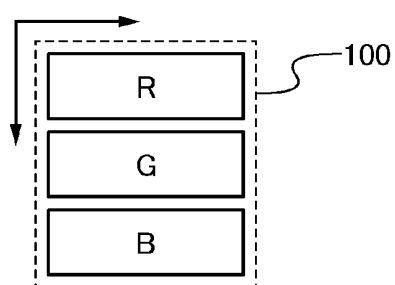


FIG. 7B

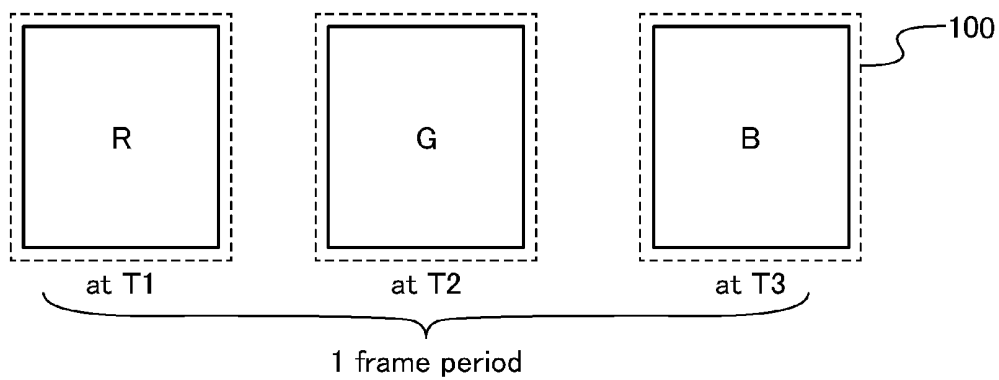


FIG. 8

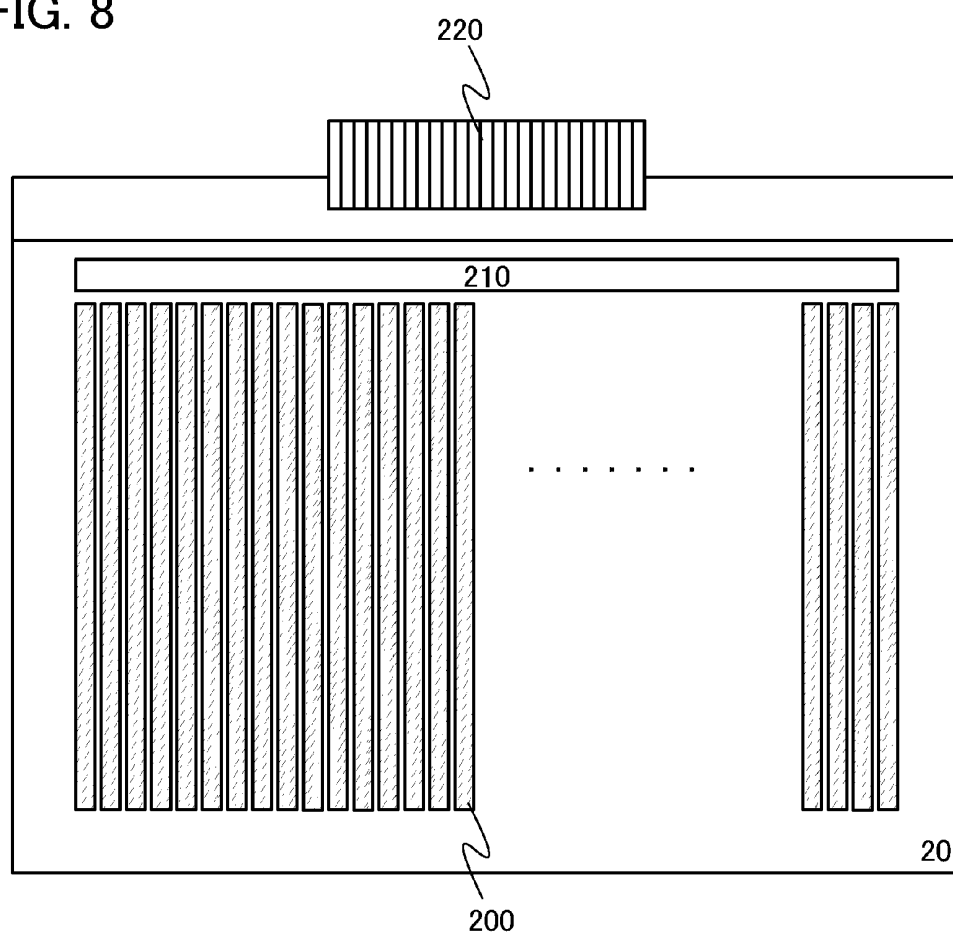


FIG. 9A

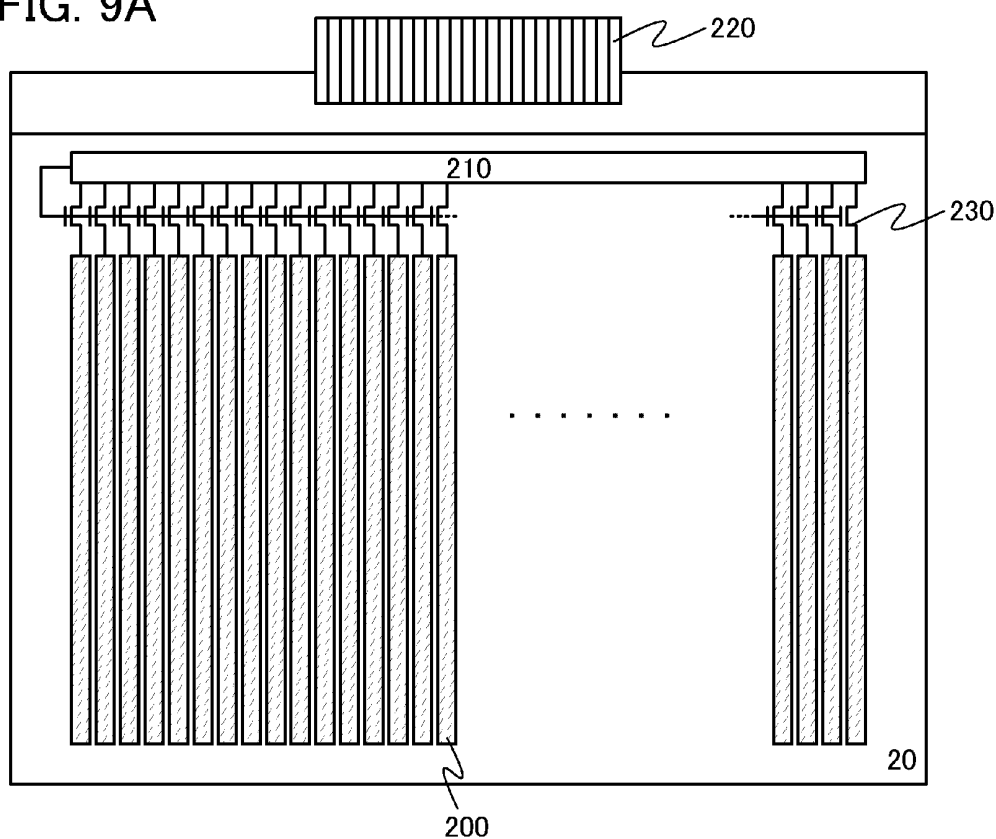


FIG. 9B

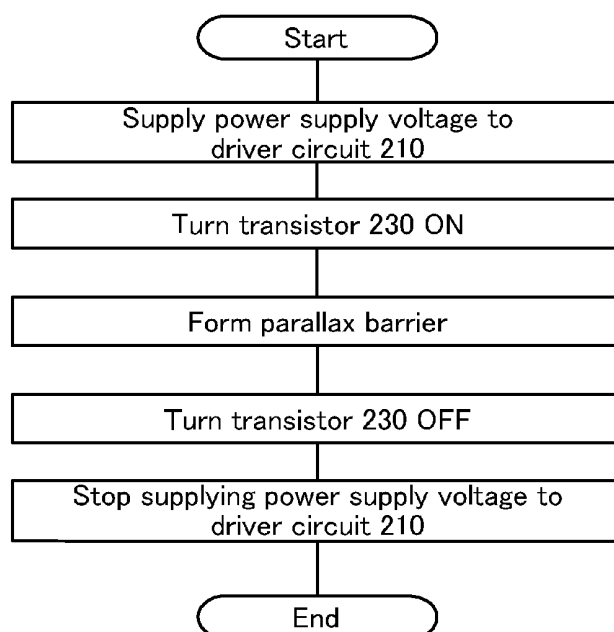
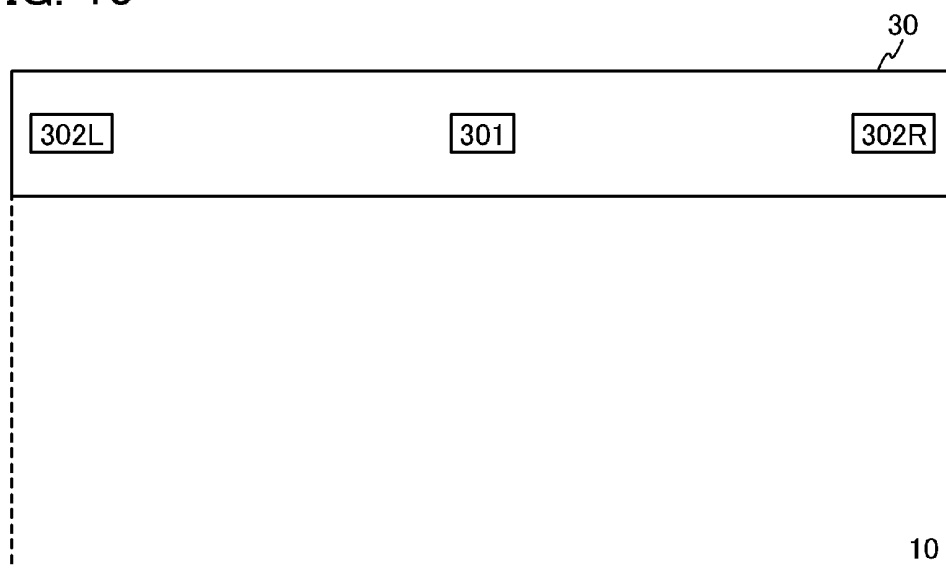


FIG. 10



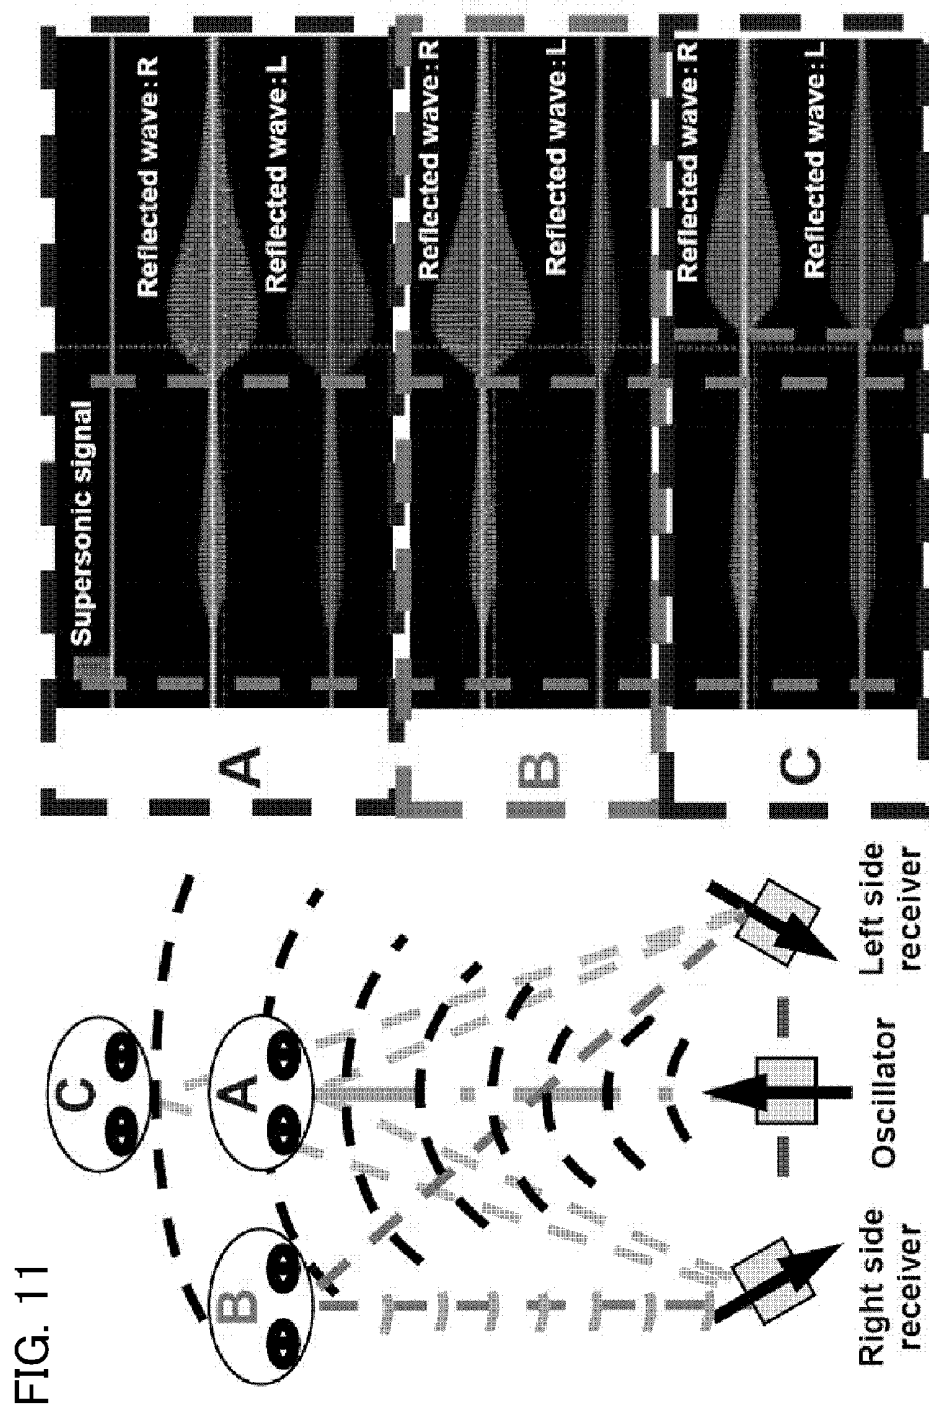


FIG. 12A


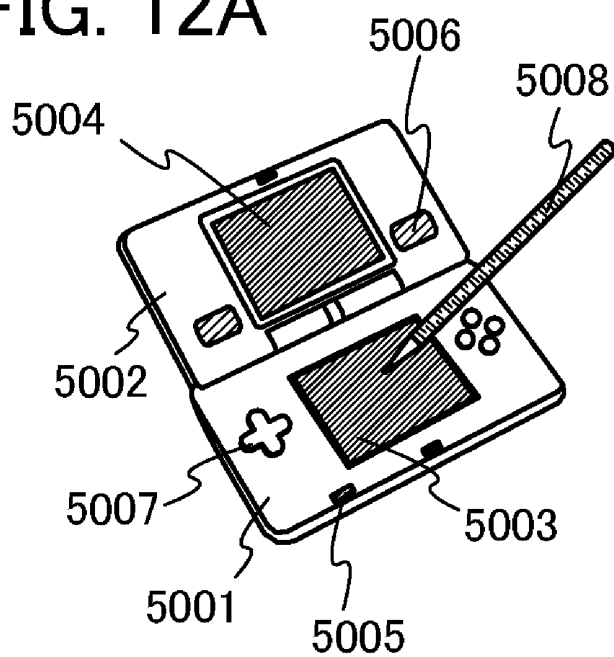


FIG. 12B

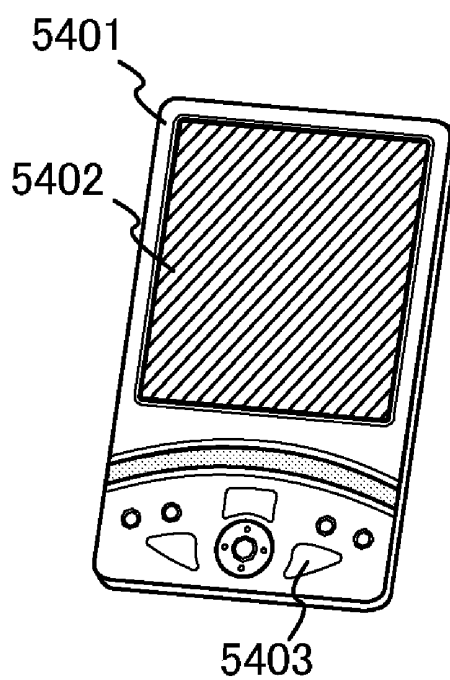

DISPLAY DEVICE

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] The present invention relates to a display device. In particular, the present invention relates to a display device capable of displaying a three-dimensional (3D) image.

[0003] 2. Description of the Related Art

[0004] Display devices are widely used, ranging from large display devices such as television devices to small display devices such as mobile phones. The display device includes a display portion in which a plurality of pixels are provided in matrix. An image is formed on the display portion in such a manner that each of the pixels displays a predetermined color. In recent years, display devices capable of displaying 3D images have been developed.

[0005] An example of a display method for displaying 3D images is a method (hereinafter also referred to as a stereoscopic method) which has a period in which display for a left eye is performed on a display portion and a period in which display for a right eye is performed on the display portion. In this method, a viewer wears glasses with which the display for the left eye is perceived only by the left eye and the display for the right eye is perceived only by the right eye. Another example of a display method for displaying 3D images is a method (hereinafter also referred to as an autostereoscopic method) which uses pixels for a left eye and pixels for a right eye in a display portion and utilizes a structure (a parallax barrier or the like) with which the display for the left eye is perceived only by the left eye and the display for the right eye is perceived only by the right eye.

[0006] It is not necessary to prepare glasses to see 3D images in the case of autostereoscopic display, which offers high convenience. Note that when two-dimensional (2D) images are displayed with a display device for autostereoscopic 3D display, the resolution of the 2D images is low because of a structure unique to an autostereoscopic method (a parallax barrier or the like).

[0007] Patent Document 1 discloses a display device in which the resolution of 2D images can be prevented from being decreased in the case of the display device for 3D images with the use of an autostereoscopic method. Specifically, the display device disclosed in Patent Document 1 forms a parallax barrier with the use of liquid crystal whose alignment state is controlled by a voltage applied thereto. With this structure, it is possible to determine whether or not a parallax barrier is used in the display device.

[0008] That is, the display device can display 3D images when the parallax barrier is used and can display 2D images when the parallax barrier is not used.

[0009] [Reference]

[0010] [Patent Document 1] Japanese Published Patent Application No. 2005-258013

SUMMARY OF THE INVENTION

[0011] When 3D images are displayed with the use of a parallax barrier, a problem of crosstalk is prone to become obvious. Here, the crosstalk means that a pixel for a left eye is perceived by a right eye or a pixel for the right eye is perceived by the left eye.

[0012] In view of the above problems, an object of one embodiment of the present invention is to prevent crosstalk from occurring in a display device displaying 3D images.

[0013] A display device according to one embodiment of the present invention has a means for detecting positional data of a viewer and forms a parallax barrier on the basis of the positional data.

[0014] Specifically, according to one embodiment of the present invention, a display device includes a display panel configured to perform display with the use of a plurality of pixels arranged in matrix, a shutter panel configured to form a parallax barrier by controlling a voltage applied to liquid crystal in accordance with a signal input to each of light-transmitting electrodes provided in a striped manner, and a positional data detecting means for detecting positional data of a viewer. The shutter panel is provided on a display surface side of the display panel. The light-transmitting electrode is provided to be parallel or substantially parallel with a column of the plurality of pixels arranged in matrix. A width of the light-transmitting electrode is smaller than each width (length in a row direction) of the plurality of pixels arranged in matrix. A signal input to the plurality of light-transmitting electrodes is determined on the basis of the positional data when a plurality of pixels in a column for display for a left eye, which is included in the plurality of pixels arranged in matrix, performs the display for the left eye and the plurality of pixels in a column for display for a right eye, which is included in the plurality of pixels arranged in matrix and is not provided in the column for display for a left eye, performs the display for the right eye.

[0015] A display device according to one embodiment of the present invention can form a parallax barrier on the basis of positional data. Therefore, crosstalk can be prevented from occurring.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] FIG. 1A illustrates an example of the structure of a display device and FIGS. 1B and 1C are a plan view and a cross-sectional view illustrating an example of the structure of a shutter panel.

[0017] FIG. 2A illustrates an example of a method for driving a display device and FIG. 2B illustrates an example of a method for driving a shutter panel.

[0018] FIG. 3A illustrates an example of a method for driving a display device and FIG. 3B illustrates an example of a method for driving a shutter panel.

[0019] FIG. 4A illustrates an example of a method for driving a display device and FIG. 4B illustrates an example of a method for driving a shutter panel.

[0020] FIG. 5A illustrates an example of a method for driving a display device and FIG. 5B illustrates an example of a method for driving a shutter panel.

[0021] FIG. 6A illustrates an example of a method for driving a display device and FIG. 6B illustrates an example of a method for driving a shutter panel.

[0022] FIGS. 7A and 7B illustrate a specific example of a pixel.

[0023] FIG. 8 illustrates a specific example of a pixel.

[0024] FIG. 9A illustrates a specific example of a shutter panel and FIG. 9B illustrates an example of driving of the shutter panel.

[0025] FIG. 10 illustrates a specific example of a positional data detecting means.

[0026] FIG. 11 illustrates an example of detecting position of a viewer with the use of a positional data detecting means.

[0027] FIGS. 12A and 12B each illustrate a specific example of an electronic device.

DETAILED DESCRIPTION OF THE INVENTION

[0028] Embodiments of the present invention will be described below in detail. Note that the present invention is not limited to the following description, and a variety of changes can be made without departing from the spirit and scope of the present invention. Therefore, the invention should not be construed as being limited to the following description.

[0029] <Structural Example of Display Device>

[0030] FIG. 1A illustrates a structural example of a display device according to one embodiment of the present invention. The display device illustrated in FIG. 1A includes a display panel 10 for displaying an image, a shutter panel 20 forming a parallax barrier, and a positional data detecting means 30 for detecting positional data of a viewer. Note that the display panel 10 displays an image with the use of a plurality of pixels 100 arranged in matrix. The shutter panel 20 is provided on the side of the display surface of the display panel 10. Light-transmitting electrodes 200 are provided to be parallel or substantially parallel with the columns of the plurality of pixels 100 arranged in matrix. The width of the light-transmitting electrode 200 is smaller than each width (length in a row direction) of the plurality of pixels 100 arranged in matrix.

[0031] Note that the display panel 10 illustrated in FIG. 1A can be a display panel in which a voltage applied to liquid crystal is controlled so that a predetermined color is displayed in the pixel 100 (what is called a liquid crystal panel), a display panel in which a predetermined color is displayed with the use of organic electroluminescence (also referred to as organic EL) in the pixel 100 (what is called an organic EL panel), or the like. Further, the positional data detecting means 30 illustrated in FIG. 1A can be a detecting means utilizing an ultrasonic wave as a detecting medium (what is called an ultrasonic sensor), a detecting means utilizing an infrared ray as a detecting medium (what is called an infrared sensor), or the like.

[0032] FIGS. 1B and 1C illustrate a structural example of the shutter panel 20 included in the display device illustrated in FIG. 1A. Specifically, FIG. 1B is a plan view illustrating a structural example of the shutter panel 20 including a region of a cross section taken along line A1-A2 in FIG. 1A, and FIG. 1C is a cross-sectional view illustrating a structural example of the shutter panel 20 taken along line A1-A2 in FIG. 1A. The shutter panel 20 illustrated in FIGS. 1B and 1C includes a substrate 205 and a substrate 206 which are provided to face each other; the plurality of light-transmitting electrodes 200 which are provided over a surface of the substrate 205 facing the substrate 206; an electrode 204 which is provided over a surface of the substrate 206 facing the substrate 205; and liquid crystal 202 which is provided between the plurality of light-transmitting electrodes 200 and the electrode 204. Note that the substrate 205, the substrate 206, and the electrode 204 have a light-transmitting property.

[0033] The shutter panel 20 illustrated in FIGS. 1A to 1C forms a parallax barrier in such a manner that a voltage applied to the liquid crystal 202 is controlled in accordance with a signal input to the plurality of light-transmitting electrodes 200. Specifically, the alignment of the liquid crystal between each of the plurality of light-transmitting electrodes 200 and the electrode 204 is controlled in accordance with a signal input to each of the plurality of light-transmitting electrodes 200.

[0034] Here, the shutter panel 20 is a panel (also referred to as a normally white panel) in which the lower a voltage applied to the liquid crystal becomes, the higher light transmittance becomes. The signal is a signal for blocking light passing through the whole of or substantially whole of a region in which the light-transmitting electrode 200 is provided (a light-block signal) or a signal for transmitting light through the whole of or substantially whole of the region (a light transmission signal). Further, a signal input to the plurality of light-transmitting electrodes 200 can be individually controlled.

[0035] The display device illustrated in FIGS. 1A to 1C can display 2D images in such a manner that display for both eyes is performed in all of the plurality of pixels 100 and light transmission signals are input to all of the light-transmitting electrodes 200. The display device illustrated in FIGS. 1A to 1C can also display 3D images in such a manner that display for a left eye is performed in part of the plurality of pixels 100, display for a right eye is performed in the other part of the plurality of pixels 100, light transmission signals are input to part of the plurality of light-transmitting electrodes 200, and light-block signals are input to the other part of the plurality of light-transmitting electrodes 200.

[0036] <Example of Method for Driving Display Device 1 (Eyes at Reference Point)>

[0037] FIGS. 2A and 2B are schematic views illustrating an example of a method for driving the display device illustrated in FIGS. 1A to 1C. Specifically, FIG. 2A is a schematic cross-sectional view of the plurality of pixels 100 arranged in matrix in the display device illustrated in FIGS. 1A to 1C, taken along a row direction. FIG. 2B is a magnified view of the shutter panel 20 illustrated in FIG. 2A. Note that FIGS. 2A and 2B illustrate an example of a driving method in the case where the display device recognizes, on the basis of positional data detected by the positional data detecting means 30, that a viewer is at a reference point.

[0038] Note that in the display panel 10 illustrated in FIG. 2A, L1 to L6 each represent the pixel 100 performing display for a left eye and R1 to R6 each represent the pixel 100 performing display for a right eye. Further, each of LA to LZ in the shutter panel 20 illustrated in FIGS. 2A and 2B is a region which exists on the left side of the shutter panel 20 seen from the viewer and can be in a light-transmitting state or a light-blocking state. Each of RA to RZ in the shutter panel 20 illustrated in FIGS. 2A and 2B is a region which exists on the right side of the shutter panel 20 seen from the viewer and can be in a light-transmitting state or a light-blocking state (reference symbols except for LA and RZ are not shown in FIG. 2A). In the regions LA to LZ and RA to RZ, a white region is in a light-transmitting state (a light transmission signal is input to the light-transmitting electrode 200 in the region) and a diagonally shaded region is in a light-blocking state (a light-block signal is input to the light-transmitting electrode 200 in the region). Further, FIG. 2A also illustrates a left eye 41 and a right eye 42 of the viewer.

[0039] In an example of a driving method illustrated in FIGS. 2A and 2B, assuming that the columns are counted from the leftmost column of the display panel 10 seen from the viewer, display for the left eye is performed in the pixels L1 to L6 provided in odd-numbered columns and display for the right eye is performed in the pixels R1 to R6 provided in even-numbered columns. Further, in the example of the driving method illustrated in FIGS. 2A and 2B, the regions LA to LD, LI to LL, LQ to LT, LY to RB, RG to RJ, RO to RR, and

RW to RZ in the shutter panel 20 are in a light-transmitting state and the regions LE to LH, LM to LP, LU to LX, RC to RF, RK to RN, and RS to RV in the shutter panel 20 are in a light-blocking state. This structure prevents the right eye 42 from perceiving the pixels for display for the left eye and prevents the left eye 41 from perceiving the pixels for display for the right eye.

[0040] Specifically, the regions LE to LH are in a light-blocking state, so that the left eye 41 and the right eye 42 are prevented from perceiving the pixel R1 and the pixel L1, respectively. The regions LM to LP are in a light-blocking state, so that the left eye 41 and the right eye 42 are prevented from perceiving the pixel R2 and the pixel L2, respectively. The regions LU to LX are in a light-blocking state, so that the left eye 41 and the right eye 42 are prevented from perceiving the pixel R3 and the pixel L3, respectively. The regions RC to RF are in a light-blocking state, so that the left eye 41 and the right eye 42 are prevented from perceiving the pixel R4 and the pixel L4, respectively. The regions RK to RN are in a light-blocking state, so that the left eye 41 and the right eye 42 are prevented from perceiving the pixel R5 and the pixel L5, respectively. The regions RS to RV are in a light-blocking state, so that the left eye 41 and the right eye 42 are prevented from perceiving the pixel R6 and the pixel L6, respectively.

[0041] <Example of Method for Driving Display Device 2 (Locations of Eyes Moved to Left from Reference Point)>

[0042] FIGS. 3A and 3B are schematic views illustrating an example of a method for driving the display device illustrated in FIGS. 1A to 1C. Note that the example of the driving method illustrated in FIGS. 3A and 3B is different from the example of the driving method illustrated in FIGS. 2A and 2B in the locations of eyes (a left eye and a right eye illustrated in FIG. 2A) with a dotted line shows the locations of the eyes in FIG. 2A). Specifically, FIGS. 3A and 3B illustrate an example of a driving method in the case where the display device recognizes, on the basis of positional data detected by the positional data detecting means 30, that the viewer has moved from the reference point to the left side.

[0043] The reference symbols (L1 to L6 and the like) and the like in FIGS. 3A and 3B each indicate the same components as the reference symbols and the like in FIGS. 2A and 2B.

[0044] In the example of the driving method illustrated in FIGS. 3A and 3B, the display panel 10 performs the same display as the display panel 10 illustrated in FIG. 2A. Further, in the example of the driving method illustrated in FIGS. 3A and 3B, the regions LA to LC, LH to LK, LP to LS, LX to RA, RF to RI, RN to RQ, and RV to RY in the shutter panel 20 are in a light-transmitting state and the regions LD to LG, LL to LO, LT to LW, RB to RE, RJ to RM, RR to RU, and RZ in the shutter panel 20 are in a light-blocking state. The shutter panel 20 in the example of the driving method illustrated in FIGS. 3A and 3B is different from that in FIGS. 2A and 2B in that the regions LD, LL, LT, RB, RJ, RR, and RZ are in a light-blocking state and the regions LH, LP, LX, RF, RN, and RV are in a light-transmitting state. In short, in the example of the driving method illustrated in FIGS. 3A and 3B, the regions in a light-blocking state are moved to the left side by one region in comparison with the case of FIG. 2A. This structure prevents the right eye 42 from perceiving the pixels for display for the left eye and prevents the left eye 41 from the pixels for display for the right eye.

[0045] Specifically, the regions LD to LG are in a light-blocking state, so that the left eye 41 and the right eye 42 are

prevented from perceiving the pixel R1 and the pixel L1, respectively. The regions LL to LO are in a light-blocking state, so that the left eye 41 and the right eye 42 are prevented from perceiving the pixel R2 and the pixel L2, respectively. The regions LT to LW are in a light-blocking state, so that the left eye 41 and the right eye 42 are prevented from perceiving the pixel R3 and the pixel L3, respectively. The regions RB to RE are in a light-blocking state, so that the left eye 41 and the right eye 42 are prevented from perceiving the pixel R4 and the pixel L4, respectively. The regions RJ to RM are in a light-blocking state, so that the left eye 41 and the right eye 42 are prevented from perceiving the pixel R5 and the pixel L5, respectively. The regions RR to RU are in a light-blocking state, so that the left eye 41 and the right eye 42 are prevented from perceiving the pixel R6 and the pixel L6, respectively.

[0046] <Example of Method for Driving Display Device 3 (Locations of Eyes Moved to Right from Reference Point)>

[0047] FIGS. 4A and 4B are schematic views illustrating an example of a method for driving the display device illustrated in FIGS. 1A to 1C. Note that the example of the driving method illustrated in FIGS. 4A and 4B is different from the examples of the driving method illustrated in FIGS. 2A and 2B and FIGS. 3A and 3B in the locations of eyes (a left eye and a right eye illustrated in FIG. 4A with a dotted line shows the locations of the eyes in FIG. 2A). Specifically, FIGS. 4A and 4B illustrate an example of a driving method in the case where the display device recognizes, on the basis of positional data detected by the positional data detecting means 30, that the viewer has moved from the reference point to the right side. Note that the difference in the locations of the eyes between the example of the driving method illustrated in FIGS. 4A and 4B and the example of the driving method illustrated in FIGS. 2A and 2B is larger than the difference in the locations of the eyes between the example of the driving method illustrated in FIGS. 3A and 3B and the example of the driving method illustrated in FIGS. 2A and 2B.

[0048] The reference symbols (L1 to L6 and the like) and the like in FIGS. 4A and 4B each indicate the same components as the reference symbols and the like in FIGS. 2A and 2B.

[0049] In the example of the driving method illustrated in FIGS. 4A and 4B, the display panel 10 performs the same display as the display panel 10 illustrated in FIG. 2A. Further, in the example of the driving method illustrated in FIGS. 4A and 4B, the regions LC to LF, LK to LN, LS to LV, RA to RD, RI to RL, RQ to RT, RY, and RZ in the shutter panel 20 are in a light-transmitting state and the regions LA, LB, LG to LJ, LO to LR, LW to LZ, RE to RH, RM to RP, and RU to RX in the shutter panel 20 are in a light-blocking state. The shutter panel 20 in the example of the driving method illustrated in FIGS. 4A and 4B is different from that in FIGS. 2A and 2B in that the regions LA, LB, LI, LJ, LQ, LR, LY, LZ, RG, RH, RO, RP, RW, and RX are in a light-blocking state and the regions LE, LF, LM, LN, LU, LV, RC, RD, RK, RL, RS, and RT are in a light-transmitting state. In short, the example of the driving method illustrated in FIGS. 4A and 4B, the regions in a light-blocking state are moved to the right side by two regions in comparison with the case of FIGS. 2A and 2B. This structure prevents the right eye 42 from perceiving the pixels for display for the left eye and prevents the left eye 41 from the pixels for display for the right eye.

[0050] Specifically, the regions LG to LJ are in a light-blocking state, so that the left eye 41 and the right eye 42 are prevented from perceiving the pixel R1 and the pixel L1,

respectively. The regions LO to LR are in a light-blocking state, so that the left eye **41** and the right eye **42** are prevented from perceiving the pixel **R2** and the pixel **L2**, respectively. The regions LW to LZ are in a light-blocking state, so that the left eye **41** and the right eye **42** are prevented from perceiving the pixel **R3** and the pixel **L3**, respectively. The regions RE to RH are in a light-blocking state, so that the left eye **41** and the right eye **42** are prevented from perceiving the pixel **R4** and the pixel **L4**, respectively. The regions RM to RP are in a light-blocking state, so that the left eye **41** and the right eye **42** are prevented from perceiving the pixel **R5** and the pixel **L5**, respectively. The regions RU to RX are in a light-blocking state, so that the left eye **41** and the right eye **42** are prevented from perceiving the pixel **R6** and the pixel **L6**, respectively.

[0051] <Example of Method for Driving Display Device 4 (Locations of Eyes Moved Closer to Display Panel from Reference Point)>

[0052] FIGS. **5A** and **5B** are schematic views illustrating an example of a method for driving the display device illustrated in FIGS. **1A** to **1C**. Note that the example of the driving method illustrated in FIGS. **5A** and **5B** is different from the examples of the driving method illustrated in FIGS. **2A** and **2B**, FIGS. **3A** and **3B**, and FIGS. **4A** and **4B** in the locations of eyes (a left eye and a right eye illustrated in FIG. **5A** with a dotted line shows the locations of the eyes in FIG. **2A**). Specifically, FIGS. **5A** and **5B** illustrate an example of a driving method in the case where the display device recognizes on the basis of positional data detected by the positional data detecting means **30** that the viewer is closer to the display panel than the reference point.

[0053] The reference symbols (**L1** to **L6** and the like) and the like in FIGS. **5A** and **5B** each indicate the same components as the reference symbols and the like in FIGS. **2A** and **2B**.

[0054] In the example of the driving method illustrated in FIGS. **5A** and **5B**, the display panel **10** performs the same display as the display panel **10** illustrated in FIG. **2A**. Further, in the example of the driving method illustrated in FIGS. **5A** and **5B**, the regions in a light-blocking state in the shutter panel **20** illustrated in FIGS. **2A** and **2B** are the regions in a light-blocking state. In addition, in the example of the driving method illustrated in FIGS. **5A** and **5B**, the regions **LI**, **LQ**, **LY**, **RB**, **RJ**, and **RR** in the shutter panel **20** become a light-blocking state. In short, in the example of the driving method illustrated in FIGS. **5A** and **5B**, seen from the viewer, the light-blocking region on the left side of the shutter panel **20** is extended by one region to the right side, and additionally, seen from the viewer, the light-blocking region on the right side of the shutter panel **20** is extended by one region to the left side, in comparison with the case of FIG. **2A**. This structure prevents the right eye **42** from perceiving the pixels for display for the left eye and prevents the left eye **41** from the pixels for display for the right eye.

[0055] Specifically, the regions **LE** to **LI** are in a light-blocking state, so that the left eye **41** and the right eye **42** are prevented from perceiving the pixel **R1** and the pixel **L1**, respectively. The regions **LM** to **LQ** are in a light-blocking state, so that the left eye **41** and the right eye **42** are prevented from perceiving the pixel **R2** and the pixel **L2**, respectively. The regions **LU** to **LY** are in a light-blocking state, so that the left eye **41** and the right eye **42** are prevented from perceiving the pixel **R3** and the pixel **L3**, respectively. The regions **RB** to **RF** are in a light-blocking state, so that the left eye **41** and the right eye **42** are prevented from perceiving the pixel **R4** and

the pixel **L4**, respectively. The regions **RJ** to **RN** are in a light-blocking state, so that the left eye **41** and the right eye **42** are prevented from perceiving the pixel **R5** and the pixel **L5**, respectively. The regions **RR** to **RV** are in a light-blocking state, so that the left eye **41** and the right eye **42** are prevented from perceiving the pixel **R6** and the pixel **L6**, respectively.

[0056] <Example of Method for Driving Display Device 5 (Locations of Eyes Moved Further from Reference Point)>

[0057] FIGS. **6A** and **6B** are schematic views illustrating an example of a method for driving the display device illustrated in FIGS. **1A** to **1C**. Note that the example of the driving method illustrated in FIGS. **6A** and **6B** is different from the examples of the driving method illustrated in FIGS. **2A** and **2B**, FIGS. **3A** and **3B**, FIGS. **4A** and **4B**, and FIGS. **5A** and **5B** in the locations of eyes (a left eye and a right eye illustrated in FIG. **6A** with a dotted line shows the locations of the eyes in FIG. **2A**). Specifically, FIGS. **6A** and **6B** illustrate an example of a driving method in the case where the display device recognizes on the basis of positional data detected by the positional data detecting means **30** that the viewer is further from the display panel than the reference point.

[0058] The reference symbols (**L1** to **L6** and the like) and the like in FIGS. **6A** and **6B** each indicate the same components as the reference symbols and the like in FIGS. **2A** and **2B**.

[0059] In the example of the driving method illustrated in FIGS. **6A** and **6B**, the display panel **10** performs the same display as the display panel **10** illustrated in FIG. **2A**. Further, in the example of the driving method illustrated in FIGS. **6A** and **6B**, the regions in a light-blocking state in the shutter panel **20** illustrated in FIGS. **2A** and **2B** are the regions in a light-blocking state. In addition, in the example of the driving method illustrated in FIGS. **6A** and **6B**, the regions **LD**, **LL**, **LT**, **RG**, **RO**, and **RW** in the shutter panel **20** become a light-blocking state. In short, in the example of the driving method illustrated in FIGS. **6A** and **6B**, seen from the viewer, the light-blocking region on the left side of the shutter panel **20** is extended by one region to the left side, and additionally, seen from the viewer, the light-blocking region on the right side of the shutter panel **20** is extended by one region to the right side, in comparison with the case of FIG. **2A**. This structure prevents the right eye **42** from perceiving the pixels for display for the left eye and prevents the left eye **41** from the pixels for display for the right eye.

[0060] Specifically, the regions **LD** to **LH** are in a light-blocking state, so that the left eye **41** and the right eye **42** are prevented from perceiving the pixel **R1** and the pixel **L1**, respectively. The regions **LL** to **LP** are in a light-blocking state, so that the left eye **41** and the right eye **42** are prevented from perceiving the pixel **R2** and the pixel **L2**, respectively. The regions **LT** to **LX** are in a light-blocking state, so that the left eye **41** and the right eye **42** are prevented from perceiving the pixel **R3** and the pixel **L3**, respectively. The regions **RC** to **RG** are in a light-blocking state, so that the left eye **41** and the right eye **42** are prevented from perceiving the pixel **R4** and the pixel **L4**, respectively. The regions **RK** to **RO** are in a light-blocking state, so that the left eye **41** and the right eye **42** are prevented from perceiving the pixel **R5** and the pixel **L5**, respectively. The regions **RS** to **RW** are in a light-blocking state, so that the left eye **41** and the right eye **42** are prevented from perceiving the pixel **R6** and the pixel **L6**, respectively.

[0061] <Display Device Disclosed in This Specification>

[0062] The display device disclosed in this specification includes a means for detecting positional data of the viewer.

Further, a parallax barrier can be formed on the basis of the positional data (see FIGS. 2A and 2B, FIGS. 3A and 3B, FIGS. 4A and 4B, FIGS. 5A and 5B, and FIGS. 6A and 6B). Accordingly, crosstalk perceived by the viewer can be prevented.

[0063] <Specific Example of Display Panel>

[0064] In the above display device, a striped parallax barrier is formed to be parallel or substantially parallel with the columns of the plurality of pixels **100** arranged in matrix. Accordingly, in the above display device, depending on the locations of the eyes of the viewer, it is possible that the right eye (left eye) of the viewer cannot perceive part of the right region or the left region of the pixel **100** performing display for the right eye (left eye). Therefore, the above display device is preferably designed so that the viewer perceives display of a predetermined color even when part of the pixel **100** is not perceived.

[0065] FIGS. 7A and 7B illustrate a specific example of the pixel **100** in which the viewer perceives display of a predetermined color even when the right eye (left eye) of the viewer does not perceive part of the right region or the left region of the pixel **100**.

[0066] Specifically, the pixel **100** illustrated in FIG. 7A includes a subpixel displaying red (denoted by “R” in the drawings), a subpixel displaying green (denoted by “G” in the drawings), and a subpixel displaying blue (in the drawings, denoted by “B” in the drawings). The subpixels are arranged in a column direction. Further, in the pixel **100** illustrated in FIG. 7A, the colors displayed by these subpixels are adjusted, whereby a predetermined color can be displayed. Note that the subpixel displaying red can be formed in such a manner that a color filter which absorbs the wavelength of the visible light region except for the wavelength of red light is provided for the subpixel or that an element emitting red light is provided for the subpixel, for example. The subpixel displaying green and the subpixel displaying blue can be formed in a similar manner. In the pixel **100** illustrated in FIG. 7A, the viewer can perceive display of the subpixels even when part of the right region or the left region of the pixel **100** is not perceived. Accordingly, the viewer can perceive display of color in the pixel **100**.

[0067] In an operation of the pixel **100** illustrated in FIG. 7B, there are a period T1 for displaying red, a period T2 for displaying green, and a period T3 for displaying blue. The pixel **100** illustrated in FIG. 7B can display a predetermined color by sequentially displaying colors in these periods (what is called a field sequential method). Note that the periods T1 to T3 illustrated in FIG. 7B are included in one frame period. In the pixel **100** illustrated in FIG. 7A, the viewer can perceive display of the pixel **100** in the periods (T1 to T3) even when part of the right region or part of the left region of the pixel **100** is not perceived. Accordingly, the viewer can perceive display of color in the pixel **100**.

[0068] <Specific Example of Shutter Panel>

[0069] FIG. 8 illustrates a specific example of the shutter panel **20** included in the above display device. The shutter panel **20** illustrated in FIG. 8 includes the plurality of light-transmitting electrodes **200**, a driver circuit **210** which outputs a signal to each of the plurality of light-transmitting electrodes **200**, and a flexible printed wiring board **220** from which an external signal is input to the driver circuit **210**. Note that the driver circuit **210** includes many semiconductor elements (transistors and the like). The semiconductor elements

and the plurality of light-transmitting electrodes **200** can be formed over one substrate by a photolithography method or the like.

[0070] FIG. 9A illustrates a specific example of a shutter panel **20** which is different from the shutter panel **20** illustrated in FIG. 8. Specifically, the shutter panel **20** illustrated in FIG. 9A is different from the shutter panel **20** illustrated in FIG. 8 in that a plurality of transistors **230** for controlling electrical connection between the driver circuit **210** and the plurality of light-transmitting electrodes **200** are provided. Note that the switching of the transistor **230** is controlled by the driver circuit **210**. Further, the transistor **230** can be formed together with the semiconductor elements, which are included in the driver circuit **210**, and the plurality of light-transmitting electrodes **200**, over one substrate by a photolithography method or the like.

[0071] As the transistor **230** illustrated in FIG. 9A, it is possible to use, for example, a thin film transistor whose channel is formed in a semiconductor layer containing an element that belongs to Group 14 of the periodic table (such as silicon or germanium) as its main component or a semiconductor layer containing an oxide that exhibits semiconductor properties (such an oxide is also referred to as an oxide semiconductor, and such a semiconductor layer is also referred to as an oxide semiconductor layer).

[0072] Note that an oxide semiconductor has a wide band gap and low intrinsic carrier density. Therefore, the off-state current of a thin film transistor whose channel is formed in an oxide semiconductor layer can be extremely low.

[0073] Here, the shutter panel **20** needs to be regularly or irregularly driven when a parallax barrier is formed or when the pattern of a parallax barrier is changed. In other words, a period during which the shutter panel **20** needs to operate is much shorter than a period during which the pattern of a parallax barrier formed in the shutter panel **20** is maintained. For that reason, in the period during which the pattern of the parallax barrier formed in the shutter panel **20** is maintained, it is preferable to stop supply of the power supply voltage to the driver circuit that outputs signals to the plurality of electrodes included in the shutter panel **20** because power consumption can be reduced. Note that when supply of the power supply voltage to the driver circuit is stopped, the potentials of the plurality of light-transmitting electrodes might vary and the probability that the pattern of the parallax barrier is not maintained is increased.

[0074] In contrast, with the structure in which a transistor whose channel is formed in an oxide semiconductor layer is used as the transistor **230** in the shutter panel **20** illustrated in FIG. 9A, variations in the potentials of the plurality of electrodes can be reduced even when supply of the power supply voltage to the driver circuit is stopped. Specifically, the display device with this structure can perform operations shown in FIG. 9B. As illustrated in FIG. 9B, in the display device with this structure, the power supply voltage can be supplied to the driver circuit only in a period including before and after a period when a parallax barrier is formed or when the pattern of a parallax barrier is changed, and supply of the power supply voltage to the driver circuit can be stopped in the other periods. In the case where a period during which the pattern of a parallax barrier is maintained is long, the power supply voltage can be supplied to the driver circuit regularly or specially and signals for forming a parallax barrier of the same pattern can be output to the plurality of electrodes.

[0075] <Specific Example of Positional Data Detecting Means>

[0076] FIG. 10 illustrates a specific example of the positional data detecting means 30 included in the display device. The positional data detecting means 30 illustrated in FIG. 10 includes an ultrasonic wave transmitter 301 and ultrasonic wave receivers 302L and 302R. The ultrasonic wave transmitter 301 is provided above the top center of the display panel 10. The ultrasonic wave receivers 302L and 302R are provided above the top ends of the display panel 10. The positional data detecting means 30 illustrated in FIG. 10 can transmit an ultrasonic wave from the ultrasonic wave transmitter 301. In addition, the ultrasonic wave receivers 302L and 302R can receive the ultrasonic wave reflected by the viewer. The above display device can detect the positional data of the viewer with the use of the received ultrasonic wave.

[0077] FIG. 11 shows detection of positional data of the viewer by the positional data detecting means 30 illustrated in FIG. 10, in detail. In FIG. 11, A, B, and C are positions of the viewer. Specifically, A is the case where the viewer is at the reference point, B is the case where the viewer is on the right side of A and the distance between the viewer and the display device is similar in comparison with A, and C is the case where the viewer is at the point further than A.

[0078] Here, in the case where the viewer is at A or C, the amplitude of the ultrasonic wave (denoted by “reflected wave: R” in the drawing) received by the ultrasonic wave receiver provided on the right side of the display device (denoted by “reception:R” in the drawing) becomes equivalent to the amplitude of the ultrasonic wave (denoted by “reflected wave: L” in the drawing) received by the ultrasonic wave receiver provided on the left side of the display device (denoted by “reception:L” in the drawing). Accordingly, the display device can recognize with the use of the detected ultrasonic wave that the viewer is on a straight line where the reference point and the center of the display device are.

[0079] Further, in the case where the viewer is at B, the amplitude of the ultrasonic wave received by the ultrasonic wave receiver provided on the right side of the display device is larger than the amplitude of the ultrasonic wave received by the ultrasonic wave receiver provided on the left side of the display device. Accordingly, the display device can recognize with the use of the detected ultrasonic wave that the viewer is in front of the right side of the display device.

[0080] Further, the case where the viewer is at A and the case where the viewer is at C are different in amplitude of ultrasonic waves received by the ultrasonic wave receivers provided on the right side and the left side. Therefore, the distance between the viewer and the display device can be recognized with the use of the detected ultrasonic wave.

[0081] As described above, the positional data detecting means 30 illustrated in FIG. 10 and FIG. 11 can recognize the angle formed by the display device and the locations of the eyes of the viewer and the distance between the display device and the viewer. That is, positional data of the viewer can be detected. Further, in the above display device, a parallax barrier of the shutter panel 20 can be formed on the basis of the positional data.

EXAMPLE

[0082] As a display device according to one embodiment of the present invention, a mobile phone, a portable game machine, a portable information terminal, an electronic book

reader, a video camera, a digital still camera, and the like can be given. Hereinafter, specific examples of such electronic devices will be described with reference to FIGS. 12A and 12B.

[0083] FIG. 12A illustrates a portable game console including a housing 5001, a housing 5002, a display portion 5003, a display portion 5004, a microphone 5005, speakers 5006, operation keys 5007, a stylus 5008, and the like. The display device according to one embodiment of the present invention can be used for the display portion 5003 or the display portion 5004. By using the display device according to one embodiment of the present invention for the display portion 5003 or the display portion 5004, it is possible to provide a highly convenient portable game console capable of displaying 3D images. Although the portable game console in FIG. 12A has the two display portions 5003 and 5004, the number of display portions included in a portable game console is not limited thereto.

[0084] FIG. 12B illustrates a personal digital assistant including a housing 5401, a display portion 5402, operation keys 5403, and the like. The display device according to one embodiment of the present invention can be used for the display portion 5402. By using the display device according to one embodiment of the present invention for the display portion 5402, it is possible to provide a highly convenient personal digital assistant capable of displaying 3D images.

[0085] This application is based on Japanese Patent Application serial no. 2011-157990 filed with Japan Patent Office on Jul. 19, 2011, the entire contents of which are hereby incorporated by reference.

What is claimed is:

1. A display device comprising:

a display panel including a plurality of pixels;
a shutter panel including a driver circuit, a liquid crystal, and light-transmitting electrodes provided in a striped manner;

a positional data detector configured to detect a positional data of a viewer,

wherein the shutter panel is provided over a display surface side of the display panel,

wherein a width of one of the light-transmitting electrodes is smaller than that of one of the plurality of pixels,

wherein the driver circuit is configured to selectively output signals for forming a parallax barrier to the light-transmitting electrodes, and

wherein the parallax barrier is capable of changing its shape in accordance with the detected positional data.

2. The display device according to claim 1,

wherein the plurality of pixels includes first pixels in a first column and second pixels in a second column,

wherein the first pixels is configured to perform a first display for a left eye of the viewer, and

wherein the second pixels is configured to perform a second display for a right eye of the viewer.

3. The display device according to claim 1, wherein the positional data detector utilizes an ultrasonic wave as a detecting medium.

4. The display device according to claim 1,

wherein the shutter panel further comprises transistors each including an oxide semiconductor layer served as a channel, and

wherein one of the transistors is located between the driver circuit and one of the light-transmitting electrodes.

5. The display device according to claim 1,
wherein the shutter panel further comprises an electrode,
and
wherein the liquid crystal is interposed between the light-
transmitting electrodes and the electrode.

6. A display device comprising:
a display panel including a plurality of pixels arranged in
matrix, the plurality of pixels including first pixels and
second pixels;
a shutter panel including a liquid crystal and light-trans-
mitting electrodes provided in a striped manner; and
a positional data detector configured to detect a positional
data of a viewer,
wherein the shutter panel is provided over a display surface
side of the display panel,
wherein the light-transmitting electrodes are provided to
be parallel or substantially parallel with a column of the
plurality of pixels arranged in matrix,
wherein a width of one of the light-transmitting electrodes
is smaller than that of one of the plurality of pixels,
wherein the shutter panel is configured to form a parallax
barrier; and

wherein a shape of the parallax barrier is determined on the
basis of the detected positional data when the first pixels
in a first column perform a first display for a left eye of
the viewer and the second pixels in a second column
perform a second display for a right eye of the viewer.

7. The display device according to claim 6, wherein the
positional data detector utilizes an ultrasonic wave as a
detecting medium.

8. The display device according to claim 6,
wherein the shutter panel further comprises a driver circuit
configured to selectively output signals for forming the
parallax barrier to the light-transmitting electrodes

9. The display device according to claim 8,
wherein the shutter panel further comprises transistors
each including an oxide semiconductor layer served as a
channel, and

wherein one of the transistors is located between the driver
circuit and one of the light-transmitting electrodes.

10. The display device according to claim 6,
wherein the shutter panel further comprises an electrode,
and

wherein the liquid crystal is interposed between the light-
transmitting electrodes and the electrode.

* * * * *

专利名称(译)	显示设备		
公开(公告)号	US20130021239A1	公开(公告)日	2013-01-24
申请号	US13/545768	申请日	2012-07-10
[标]申请(专利权)人(译)	小山JUN MIYAKE HIROYUKI SHISHIDO英明 井上SEIKO 丰高KOUHEI 楠KOJI HARADA HIKARU 仓敷MAKOTO		
申请(专利权)人(译)	小山, JUN 三宅博之 SHISHIDO, 英明 井上, SEIKO 丰高, KOUHEI 楠, KOJI 原田ル KANEYASU, MAKOTO		
当前申请(专利权)人(译)	半导体能源研究所有限公司.		
[标]发明人	KOYAMA JUN MIYAKE HIROYUKI SHISHIDO HIDEAKI INOUE SEIKO TOYOTAKA KOUHEI KUSUNOKI KOJI HARADA HIKARU KANEYASU MAKOTO		
发明人	KOYAMA, JUN MIYAKE, HIROYUKI SHISHIDO, HIDEAKI INOUE, SEIKO TOYOTAKA, KOUHEI KUSUNOKI, KOJI HARADA, HIKARU KANEYASU, MAKOTO		
IPC分类号	G09G3/36 G06F3/038 G06F3/01		
CPC分类号	G09G3/36 H04N13/315 H04N13/324 H04N13/356 H04N13/373 H04N13/376 G02B30/00 G02F1/13		
优先权	2011157990 2011-07-19 JP		
其他公开文献	US9451246		
外部链接	Espacenet USPTO		
摘要(译)			

一种显示装置，包括：显示面板，包括多个像素;快门面板，包括驱动电路;液晶;以及以条纹方式设置的透光电极;位置数据检测器，被配置为检测观看者的位置数据。快门面板设置在显示面板的显示表面侧上，快门面板中的一个透光电极的宽度小于多个像素中的一个的宽度，并且快门面板中的驱动电路是被配置为选择性地输出信号以形成对透光电极的视差屏障。视差屏障能够根据检测到的位置数据改变其形状。

