

(19)



(11)

EP 2 980 854 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
26.12.2018 Bulletin 2018/52

(51) Int Cl.:
H01L 27/32^(2006.01) G06F 1/16^(2006.01)

(21) Application number: **15179428.6**

(22) Date of filing: **31.07.2015**

(54) ORGANIC LIGHT EMITTING DIODE DISPLAY DEVICE

ORGANISCHE LICHEMITTIERENDE DIODENANZEIGEVORRICHTUNG

AFFICHAGE À DIODES ÉLECTROLUMINESCENTES ORGANIQUES

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **31.07.2014 KR 20140098514**

(43) Date of publication of application:
03.02.2016 Bulletin 2016/05

(73) Proprietor: **LG Display Co., Ltd.
Yeongdeungpo-gu
Seoul
150-721 (KR)**

(72) Inventors:
• **Jung, Dae Sung
413-012 Gyeonggi-do (KR)**

• **Yun, Yeong Hyeok
413-758 Gyeonggi-do (KR)**
• **Kim, Mi So
140-895 Seoul (KR)**
• **Lee, Seong Rim
413-811 Gyeonggi-do (KR)**

(74) Representative: **Morrall, Jonathan Ian McLachlan
Kilburn & Strode LLP
Lacon London
84 Theobalds Road
London WC1X 8NL (GB)**

(56) References cited:
**US-A1- 2006 279 499 US-A1- 2008 266 210
US-A1- 2009 102 758 US-A1- 2009 102 824**

EP 2 980 854 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to a display device, and more particularly, to a display device having a circular display portion.

Discussion of the Related Art

[0002] Generally, display devices have been widely used as display screens of various products such as televisions, notebook computers and monitors as well as portable electronic devices such as mobile communication terminals, electronic diaries, electronic books, portable multimedia players (PMPs), navigation systems, ultra mobile PCs (UMPCs), mobile phones, smart phones, tablet PCs (personal computers) and watch phones.

[0003] Of the display devices, a liquid crystal display device, an organic light emitting display device and an Electrophoretic display device may be manufactured at slim sizes, whereby studies for developing these display devices as flexible display devices have been made.

[0004] A flexible display device based on an organic light emitting diode displays a desired picture image by controlling a current, which flows from a pixel power line to the organic light emitting diode, in accordance with a data signal. Such a flexible display device based on an organic light emitting diode has a rectangular type display portion on a plane due to an arrangement structure of a signal line, an arrangement structure of a pixel driving power line, and an arrangement structure of a driving circuit.

[0005] Recently, as importance in appearance and design of the display device has been considered and attention of consumers to wearable devices such as a watch phone has been increased, studies and developments of a display device having a circular display portion not a rectangular display portion have been made.

[0006] Meanwhile, in the display device having a circular display portion based on an organic light emitting diode, the organic light emitting diode of each of a plurality of pixels arranged in the circular display portion emits light through a current corresponding to a data signal supplied from pixel power lines

[0007] However, resistance deviation between the pixel power lines occurs due to a difference in lengths of the pixel power lines connected to the respective pixels, and a pixel driving power source applied to each pixel is varied per pixel due to the resistance deviation, whereby a problem occurs in that luminance deviation per area occurs in the circular display portion.

[0008] The aforementioned display device having a circular display portion based on an organic light emitting diode is owned for derivation of the present invention by the inventor of this application or is technical information

obtained by a process for derivation of the present invention, and is not regarded as the prior art necessarily disclosed to a general public prior to application of the present invention.

5 [0009] US 2008/0266210 A1 discloses a display apparatus having a non-rectangular shape.

[0010] US 2006/0279499 A1 discloses an organic light emitting device including an array of scan lines, data lines and power supply lines having a connecting section.

10

SUMMARY OF THE INVENTION

[0011] Accordingly, the present invention is directed to a display device that substantially obviates one or more problems due to limitations and disadvantages of the related art.

15 [0012] An organic light emitting diode (OLED) display device includes a substrate including a circular arc portion and a driving circuit connecting portion connected to the top of the circular arc portion. The circular arc portion is substantially circular around a center point. A display area is formed in the circular arc portion. The display area has a circular shape centered around the center point. A driving power supply line is formed in the circular arc portion and configured to provide a driving voltage for OLED pixels of the OLED display device. The driving power supply line formed to at least partially surround the display area. A number of power lines electrically connect the driving power supply line to the OLED pixels.

20 25 30 [0013] An advantage of the present invention is to provide a display device that may minimize luminance deviation per area of a circular display portion.

35 [0014] Another advantage of the present invention is to provide a display device having a thin bezel width while having a circular display portion.

40 [0015] Additional advantages and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the invention may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

45 [0016] It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

55

[0017] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this applica-

tion, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention. In the drawings:

FIG. 1 is a plane view briefly illustrating a display device according to one embodiment of the present invention;

FIG. 2 is a view illustrating pixels and dummy pixels formed in a circular display portion shown in FIG. 1; FIG. 3 is an enlarged view of a portion "A" shown in FIG. 1;

FIG. 4 is a cross-sectional view taken along line I-I' shown in FIG. 1;

FIG. 5 is another enlarged view of a portion "A" shown in FIG. 1; and

FIG. 6 is a view illustrating a modified example a display device according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0018] Reference will now be made in detail to the exemplary embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

[0019] Terms disclosed in this specification should be understood as follows.

[0020] The term of a singular expression should be understood to include a multiple expression as well as the singular expression if there is no specific definition in the context. The terms such as "the first" and "the second" are used only to differentiate one element from other elements. Thus, a scope of claims is not limited by these terms. Also, it should be understood that the term such as "include" or "have" does not preclude existence or possibility of one or more features, numbers, steps, operations, elements, parts or their combinations. It should be understood that the term "at least one" includes all combinations related with any one item. For example, "at least one among a first element, a second element and a third element" may include all combinations of two or more elements selected from the first, second and third elements as well as each element of the first, second and third elements. Also, if it is mentioned that a first element is positioned "on or above" a second element, it should be understood that the first and second elements may be brought into contact with each other, or a third element may be interposed between the first and second elements.

[0021] Hereinafter, a display device according to the preferred embodiment of the present invention will be described in detail with reference to the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts. Also, in the following description of the present invention, if detailed description of elements or functions known in respect of the present invention is

determined to make the subject matter of the present invention unnecessarily obscure, the detailed description will be omitted.

[0022] FIG. 1 is a plane view briefly illustrating a display device according to one embodiment of the present invention, FIG. 2 is a view illustrating pixels and dummy pixels formed in a circular display portion shown in FIG. 1, FIG. 3 is an enlarged view of a portion "A" shown in FIG. 1, and FIG. 4 is a cross-sectional view taken along line I-I' shown in FIG. 1.

[0023] Referring to FIGS. 1 to 4, the display device according to one embodiment of the present invention includes a substrate 110, a circular display portion 120, a driving circuit portion 130, a driving power supply line 150, and a cathode power supply line 160.

[0024] The substrate 110 may include a circular arc portion 111 and a driving circuit connecting portion 113, and its example may include a flexible substrate, for example, a plastic substrate.

[0025] The circular arc portion 111 is formed in a shape of a circular arc having the same first radius based on a center portion of the circular display portion 120.

[0026] The driving circuit connecting portion 113 is projected (or extended) from one side (for example, upper side) of the circular arc portion 111 to have a certain size. The driving circuit connecting portion 113 may include the driving circuit portion 130 connected with the circular display portion 120, various link lines, and a driving pad portion 113a. The driving circuit connecting portion 113 is connected with a display driving portion (not shown) of the display device through the driving pad portion 113a. The driving pad portion 113a may include a plurality of data pads to which image data for displaying images on the circular display portion 120 are supplied from the display driving portion, a plurality of power pads to which a power source required for driving of a pixel is supplied, and a plurality of control signal pads to which a control signal is supplied.

[0027] The substrate 110 may further include a touch circuit connecting portion 115. The touch circuit connecting portion 115 is projected (or extended) from the other side of the circular arc portion 111 to have a certain size. The touch circuit connecting portion 115 may include a touch driving line of a touch panel (not shown) arranged on the circular display portion 120, a routing line connected to a touch sensing line, and a touch pad portion 115a. This touch circuit connecting portion 115 is connected with a touch driving portion (not shown) of the display device through the touch pad portion 115a. The touch pad portion 115a may include a plurality of driving line pads connected to the touch driving line, and a plurality of sensing line pads connected to the touch sensing line.

[0028] The substrate 110 may be attached onto a support substrate 100. That is, the support substrate 100 is formed in the same shape as that of the substrate 110, and maintains the substrate 110 made of a flexible material in a plane state. In this case, if the substrate 110 is made of a non-flexible material, it is preferable that the

support substrate 100 is omitted for slimming of the display device.

[0029] The circular display portion 120 is formed on the circular arc portion 111 of the substrate 110 in a shape of a circle. That is, the circular display portion 120 may be formed in a shape of a circle having a second radius smaller than the radius of the circular arc portion 111, based on the center portion. At this time, the circular arc portion 111 and the circular display portion 120 are substantially formed in a shape of a concentric circle, whereby a bezel width BW of the display device, which is defined between an outer sidewall of the substrate 110 and the circular display portion 120, may be reduced.

[0030] The circular display portion 120 includes a display area 121 comprised of a plurality of pixels P formed on the substrate 110, and a dummy pixel area 123 surrounding the display area 121, a plurality of pixel power lines, and a plurality of bridge lines BL.

[0031] The display area 121 includes a plurality of pixels P arranged in a matrix arrangement to display images. As an example, the matrix of pixels may be arranged in row-column manner. An outer circumference portion of the display area 121 may be formed in a shape of a stair due to the arrangement structure of the pixels P based on a curvature of the circular display portion 120. That is, since rectangular pixels are arranged along a circumference of the display area 121 to form the circular display portion 120, the outer circumference portion of the display area 121 is substantially formed in a shape of a stair not a circle due to the rectangular pixels. However, if the display area 121 has resolution more than a certain level, since the outer circumference portion of the display area 121 is perceived in a shape of a circle, the outer circumference portion of the display area 121 formed in a fine stair shape by pixel arrangement should be understood as a circle shape. In this case, since the circumference of the display area 121 is substantially formed in a shape of a concentric circle with the circular arc portion 111, curvatures of the display area 121 and the circular arc portion 111 are matched with each other, whereby esthetic design of the display device according to the present invention may be improved, and increase of a bezel width, which is caused as the curvatures of the display area 121 and the circular arc portion 111 are not matched with each other, may be avoided.

[0032] Each of the plurality of pixels P is formed in a pixel area defined by a plurality of scan lines SL, a plurality of pixel power lines PL and a plurality of data lines DL, which are formed on the circular display portion 120 at certain intervals. In this case, the plurality of pixel power lines PL and the plurality of data lines DL are formed at certain intervals to cross the plurality of scan lines SL.

[0033] Each of the plurality of pixels P may include a pixel circuit (PC) and an organic light emitting diode (OLED).

[0034] The pixel circuit PC is connected to its adjacent scan line SL, data line DL and pixel power line PL, and controls a current flowing in the organic light emitting di-

ode OLED in accordance with a data signal from the data line DL in response to a scan pulse from the scan line SL. The pixel circuit PC according to one embodiment may include a switching transistor Tsw, a driving transistor Tdr, and a capacitor Cst.

[0035] The switching transistor Tsw includes a gate electrode connected to the scan line SL, a first electrode connected to the data line, and a second electrode connected to a gate terminal N1 of the driving transistor Tdr. In this case, the first and second electrodes of the switching transistor Tsw may be source electrode or drain electrode in accordance with a direction of the current. The switching transistor Tsw is switched in accordance with the scan pulse supplied to the scan line SL, and supplies the data signal, which is supplied to the data line DL, to the driving transistor Tdr.

[0036] The driving transistor Tdr is turned on in accordance with a voltage of the capacitor Cst to control the amount of the current flowing from the driving power line PL toward the organic light emitting diode OLED. To this end, the driving transistor Tdr includes a gate electrode connected to the second electrode N1 of the switching transistor Tsw, a source electrode connected to the pixel power line PL, and a drain electrode to be connected to the organic light emitting diode OLED. The driving transistor Tdr is switched in accordance with the data signal supplied from the switching transistor Tsw and controls the data current flowing from the pixel power line PL toward the organic light emitting diode OLED.

[0037] The capacitor Cst is connected between a gate terminal N1 and a source terminal of the driving transistor Tdr to store a voltage corresponding to the data signal supplied to the gate terminal of the driving transistor Tdr, and turns on the driving transistor Tdr by the stored voltage.

[0038] The organic light emitting diode OLED may include an anode electrode (or pixel electrode) connected to the source terminal of the driving transistor Tdr, an organic light emitting layer formed between the anode electrode and a cathode electrode layer CE. The organic light emitting diode OLED displays a predetermined image by emitting light in accordance with the data current flowing from the pixel power line PL to the cathode electrode layer CE in accordance with switching of the driving transistor Tdr.

[0039] The cathode electrode layer CE is formed to cover the circular display portion 120 and commonly connected to the organic light emitting layer of the organic light emitting diode OLED formed in each pixel.

[0040] The dummy pixel area 123 includes a plurality of dummy pixels DP formed along the circumference of the display area 121 to surround the pixels P formed at the outmost of the display area 121. That is, the dummy pixels DP are formed to adjoin the outmost pixel P of each horizontal line of the display area 121. At this time, the number of the dummy pixels DP may be formed in each horizontal line equally or differently in accordance with the curvature of the display area 121. The plurality

of dummy pixels DP serves as an anti-static circuit, which prevents external static electricity from being transferred to the pixels P of the display area 121, without displaying images unlike the pixels P formed in the display area 121.

[0041] The plurality of pixel power lines PL are formed at certain intervals in parallel with the data lines DL, and apply the pixel driving power source to the second electrode of the driving transistor Tdr of each pixel P. For example, each of the pixel power lines PL may be shared by two adjacent pixels P. In this case, a pair of pixels adjacent to each other along a longitudinal direction of the scan line SL. Therefore, according to the present invention, the number of pixel power lines PL and the number of power link lines, which will be described later, may be reduced. As a result, the interval between the pixels P may be reduced as much as an area reserved by the reduced pixel power lines PL and thus the width of the driving circuit connecting portion 113 may be reduced, and the formation area of the power link lines may be reduced, whereby the bezel width of the display device may be reduced.

[0042] Each of the plurality of bridge lines BL is formed in the dummy pixel area 123, so as to be connected to its adjacent pixel power line PL. That is, the plurality of pixel power lines PL include a plurality of power line groups having two adjacent pixel power lines PL, and each of the plurality of bridge lines BL is formed in the plurality of power line groups along the outer circumference portion of the display area 121 one to one, thereby electrically connecting two pixel power lines PL included in each power line group with each other. Each of the plurality of bridge lines BL is formed on a layer different from the pixel power lines PL without being electrically connected with the data lines DL while crossing a pair of pixel power lines PL desired by each bridge line to connect them with each other, thereby connecting the pair of pixel power lines PL with each other through a contact hole CH. For example, each of the plurality of bridge lines BL may be patterned on the same layer as the scan line SL or the anode electrode.

[0043] In one embodiment, the OLEDs of the dummy pixels adjacent to the display area are reduced in size in comparison to display area pixels and/or other dummy pixels in order to accommodate the bridge lines BL. This reduction in size may include a reduction in height along the axis running parallel to the columns of pixels, so that bridge lines are able to fit in this space and connect power lines laterally. As a result, the bridge lines do not require any additional space on the surface of the substrate between the display area and dummy pixel area.

[0044] Each of the plurality of bridge lines BL is formed in the dummy pixel area 123 adjacent to the display area 121 such that a pair of pixel power lines PL have equipotential electrically, whereby picture quality deterioration caused by length deviation of the pixel power lines PL is resolved. That is, each of the plurality of bridge lines BL is formed in the dummy pixel area 123, which is adjacent to the display area 121 or spaced apart from the

display area 121 as much as at least one dummy pixel, so as not to generate potential deviation at a pixel power incoming portion which is one side of the pixel power lines PL to which the pixel driving power source is supplied. For reference, each of the plurality of bridge lines BL may be formed in the display area 121 spaced apart from the pixel power incoming portion. In this case, potential deviation is generated at one side of each of the pixel power lines PL between the power incoming portion and the bridge line BL, whereby the pixel power lines PL cannot have equipotential electrically.

[0045] The driving circuit portion 130 according to the first embodiment displays a predetermined image on the display area 121 of the circular display portion 120 by driving the plurality of pixels formed in the display area 121 of the circular display portion 120 by using image data, a control signal, and a driving voltage, which are supplied from the display driving portion through the driving pad portion 113a. The driving circuit portion 130 according to the first embodiment is comprised of an integrated circuit, is packaged in a chip package area provided in the driving circuit connecting portion 113, and is connected to the plurality of scan lines SL and the plurality of data lines DL through link lines formed between the chip package area and the circular display portion 120, whereby the data signal is supplied to the plurality of data lines DL to synchronize with supply of the scan pulse to the plurality of scan lines SL. That is, the driving circuit portion 130 according to the first embodiment converts image data to analog type data signal in response to the control signal and generates the scan pulse, and supplies the data signal to the plurality of data lines DL to synchronize with sequential supply of the generated scan pulse to the plurality of scan lines SL. At this time, the driving circuit portion 130 generates pixel data per pixel by aligning the input image data to be suitable for the pixel arrangement structure of the circular display portion 120, and converts the generated pixel data to the data signal.

[0046] The driving circuit portion 130 according to the second embodiment supplies the data signal to the plurality of data lines DL formed in the circular display portion 120 by using image data, a control signal, and a driving voltage, which are supplied from the display driving portion through the driving pad portion 113a. The driving circuit portion 130 according to the second embodiment is comprised of an integrated circuit, is packaged in the chip package area provided in the driving circuit connecting portion 113, and is connected to the plurality of data lines through data link lines formed between the chip package area and the circular display portion 120, whereby the data signal is supplied to the plurality of data lines DL. That is, the driving circuit portion 130 according to the second embodiment generates pixel data per pixel by aligning image data input in response to the control signal to be suitable for the pixel arrangement structure of the circular display portion 120, converts the generated pixel data to the data signal, and supplies the converted

data signal to the plurality of data lines DL.

[0047] If the display device according to the present invention includes the driving circuit portion 130 according to the second embodiment, the display device according to the present invention further includes a scan driving circuit 140 formed on the circular arc portion 111 of the substrate 110 along the circumference of the circular display portion 120 instead of omitting a plurality of scan link lines formed in the driving circuit connecting portion 113 to connect a scan channel of the driving circuit portion 130 with the plurality of scan lines SL one to one.

[0048] The scan driving circuit 140 is formed in a shape of a circular arc along the circumference of the circular display portion 120 and then connected to the plurality of scan lines SL. The scan driving circuit 140 generates scan pulses in response to a scan control signal supplied from the display driving portion through scan control link lines and the driving pad portion 130a and sequentially supplies the generated scan pulses to the plurality of scan lines SL. As one example, the scan driving circuit 140 may be formed along a left circumference or right circumference of the circular display portion 120 and may supply the scan pulses to one end or the other end of each of the plurality of scan lines SL. As another example, the scan driving circuit 140 may be formed along the left circumference or right circumference of the circular display portion 120 and may simultaneously supply the scan pulses to one end and the other end of each of the plurality of scan lines SL. As other example, the scan driving circuit 140 may be formed along the left circumference or right circumference of the circular display portion 120, and may supply the scan pulses to one end of the odd numbered scan lines SL and supply the scan pulses to the other end of the odd numbered scan lines SL.

[0049] If the display device according to the present invention includes the scan driving circuit 140, the present invention may reduce the bezel width BW of the display device by reducing a size of the driving circuit connecting portion 113 in accordance with omission of the plurality of scan link lines or reducing a length of the driving circuit connecting portion 113, and the circular arc portion 111 may be formed in a shape of a concentric circle with the circular display portion 120. Alternatively, the present invention may arrange or form the plurality of data link lines in the driving circuit connecting portion 113 more sufficiently by obtaining a space for forming the data link lines as much as a space reserved by the plurality of scan link lines which are omitted, instead of reducing the bezel width BW of the display device.

[0050] The driving power supply line 150 serves as a main power line supplied to the plurality of pixel power lines PL formed in the circular display portion 120 and is formed on the substrate 110 along the circumference of the circular display portion 120 to have a constant width and thickness, and its both ends are connected to a driving power pad of the driving pad portion 113a formed in the driving circuit connecting portion 113.

[0051] The driving power supply line 150 according to

one embodiment may be categorized into a circumference line 151, a first shoulder line 153 and a second shoulder line 155 in accordance with its position formed on the substrate 110.

[0052] The circumference line 151 is formed along the circumference of the other circular display portion 120 except one side of the circular display portion 120 adjacent to the driving circuit connecting portion 113. Preferably, the circumference line 151 is formed in a shape of a concentric circle with at least one of the circular display portion 120 and an outer sidewall of the substrate 110. That is, since the driving power supply line 150 is formed at the outmost of the substrate 110, the driving power supply line 150 should be spaced apart from the outer sidewall 110a of the substrate 110 as much as a predetermined distance D1 by considering inflow of static electricity, etc. If the circumference line 151 is not formed in a shape of a concentric circle with the circular display portion 120, the distance D1 between the outer sidewall 110a of the substrate 110 and the circumference line 151 becomes nonuniform, whereby static electricity may be entered from the circumference line 151 arranged to be relatively close to the outer sidewall 110a of the substrate 110. Therefore, it is preferable that the circumference line 151 is formed in a shape of a concentric circle with the circular display portion 120, and is also formed in a shape of a concentric circle with the outer sidewall 110a of the substrate 110.

[0053] The first shoulder line 153 is formed between one side end of the circumference line 151 adjacent to the driving circuit connecting portion 113 and a first driving power pad of the driving pad portion 113a at a certain curvature and connects one side end of the circumference line 151 to the first driving power pad.

[0054] The second shoulder line 155 is formed between the other side end of the circumference line 151 adjacent to the driving circuit connecting portion 113 and a second driving power pad of the driving pad portion 113a at a certain curvature and connects the other side end of the circumference line 151 to the second driving power pad.

[0055] The driving power supply line 150 constructed as above is connected to a lower end of each of the plurality of pixel power lines PL based on the center portion of the display area 121 through each of the plurality of driving power link lines PLL.

[0056] Each of the plurality of driving power link lines PLL is extended or projected from the driving power supply line 150 along a direction (for example, longitudinal direction of the scan line SL) crossing the pixel power line PL to have a certain width and thus is connected to the lower end of the corresponding pixel power line PL. Also, each of the plurality of driving power link lines PLL is formed between the center portion of the circular display portion 120 and the lower side of the circular display portion 120 so as not to cross the data line DL. In this case, according to the present invention, picture quality deterioration caused by signal interference between the

data signal and the pixel driving power source may be prevented from being generated.

[0057] Each of the plurality of driving power link lines PLL may be extended from the driving power supply line 150 along a longitudinal direction of the pixel power line PL and thus may be connected to the lower end of the corresponding pixel power line PL. However, since a horizontal width of the pixel P is narrower than its vertical width, a side area of the pixel P becomes relatively wider than the lower area of the pixel P. Therefore, in order to minimize signal interference caused by the narrow interval between the driving power link lines PLL, it is preferable that the plurality of driving power link lines PLL are extended from the driving power supply line 150 to correspond to the direction crossing the pixel power line PL and thus connected to the lower end of the pixel power line PL. However, the pixel power lines PL formed at the lower end of the display area 121 adjacent to the touch pad portion 115a, that is, at the center of the display area 121, may be formed along the longitudinal direction of the pixel power line PL.

[0058] The aforementioned driving power supply line 150 is connected to the lower end of each of the plurality of pixel power lines PL, whereby the pixel driving power source is supplied to each pixel power line PL in a direction opposite to a supply direction of the data signal supplied from the data driving portion 130 to the data line DL. As a result, the present invention may resolve picture quality deterioration or luminance non-uniformity, which is caused by deviation of the data signal based on resistance of the data line DL per position of each pixel P and deviation of the pixel driving power source based on resistance of the pixel power line PL. For example, in a middle pixel (hereinafter, referred to as "first middle pixel") of the first horizontal line and a middle pixel (hereinafter, referred to as "second middle pixel") of the last horizontal line, if the supply direction of the data signal and the supply direction of the pixel driving power source are the same as each other, voltage drop of each of the data signal and the pixel driving power source occurs more frequently in the second middle pixel than the first middle pixel, whereby luminance deviation between the first and second middle pixels occurs even in case of the same data signal. In contrast, if the supply direction of the data signal and the supply direction of the pixel driving power source are opposite to each other, voltage drop of the data signal occurs more frequently in the second middle pixel than the first middle pixel, and voltage drop of the pixel driving power source occurs more frequently in the first middle pixel than the second middle pixel, whereby deviation of the data signal and deviation of the pixel driving power source may mutually be compensated and as a result luminance deviation between the first and second middle pixels may be minimized for the same data signal.

[0059] The cathode power supply line 160 is formed on the substrate 110 between the driving power supply line 150 and the circular display portion 120 along the

circumference of the circular display portion 120 to have a constant width and thickness, and its both ends are connected to a cathode power pad of the driving pad portion 113a formed in the driving circuit connecting portion 113. The cathode power supply line 160 according to one embodiment may be formed in parallel with the driving power supply line 150 while having the same structure as that of the driving power supply line 150. The cathode power supply line 160 is electrically connected with the cathode electrode (CE) layer formed on the circular arc portion 111 to cover the circular display portion 120. The cathode power supply line 160 supplies a cathode power, which is supplied from the display driving portion through the cathode power pad, to the cathode electrode (CE) layer, whereby the cathode power is supplied to the organic light emitting diode OLED of every pixel P formed in the circular display portion 120 through the cathode electrode layer.

[0060] As described above, the cathode power supply line 160 is formed between the driving power supply line 150 and the circular display portion 120, whereby the bezel width BW of the display device according to the present invention may be reduced. In more detail, since the transistor of each pixel P is covered by a passivation layer 117 made of an organic material for enabling active water permeation, the passivation layer 117 should be spaced apart from the outer sidewall 110a of the substrate 110 as much as a certain distance D2 to prevent the organic light emitting diode OLED from being damaged by water permeated into the passivation layer 117. Therefore, in the present invention, the cathode power supply line 160 connected to the cathode electrode layer CE surrounding the passivation layer 117 is formed between the driving power supply line 150 and the circular display portion 120 such that the passivation layer 117 may be spaced apart from the outer sidewall 110a of the substrate 110 as much as the certain distance D2, whereby the bezel width BW of the display device, which is defined by a width between the outer sidewall 110a of the substrate 110 and the circular display portion 120, may be reduced.

[0061] Meanwhile, the cathode power supply line 160 may be formed to be more adjacent to the outer sidewall 110a of the substrate 110 than the driving power supply line 150. However, in this case, the corner portion of the substrate 110 should be extended toward the outskirts to space the passivation layer 117 apart from the outer sidewall 110a of the substrate 110 as much as the certain distance D2, whereby a problem occurs in that the bezel width BW of the display device is increased. Therefore, it is preferable that the cathode power supply line 160 is formed between the driving power supply line 150 and the circular display portion 120.

[0062] Additionally, the display device according to one embodiment of the present invention may further include an encapsulation layer 118 formed on the substrate 110 to cover the cathode electrode layer CE, and a barrier substrate 119 formed on the encapsulation layer 118.

[0063] The encapsulation layer 118 may be formed in a multi-layered structure that an organic material layer or an inorganic material layer, the organic material layer and the inorganic material layer are deposited alternately.

[0064] The barrier substrate 119 may be made of a material having low water permeability, for example, polymer material, and may be attached onto the encapsulation layer 118 by a transparent adhesive. A touch panel is attached onto the barrier substrate 119, and a polarizing film may additionally be attached onto the touch panel.

[0065] As described above, according to the present invention, as the adjacent pixel power lines PL are connected to each other through the plurality of bridge lines BL, luminance deviation per area of the circular display portion may be minimized due to equipotential of the pixel power lines PL, whereby picture quality deterioration caused by length deviation of the pixel power lines PL may be resolved. Also, according to the present invention, the circular arc portion 111 of the substrate 110 and the circular display portion 120 are formed in a shape of a concentric circle, whereby the display device may have a thin bezel width BW while having the circular display portion 120. Furthermore, according to the present invention, the driving power supply line 150 is formed along the circumference of the circular display portion 120 and also the cathode power line 160 is formed between the driving power supply line 150 and the circular display portion 120, whereby picture quality deterioration caused by voltage drop deviation per position of the driving power supply line 150 may be resolved, reliability deterioration of the pixel P, which is caused by water permeation, may be avoided, and a thinner bezel width BW may be obtained together with the circular display portion 120.

[0066] FIG. 5 is an enlarged view of a portion "A" shown in FIG. 1, and illustrates a modified example of the bridge lines in the display device according to the present invention.

[0067] As shown in FIG. 5, each of the plurality of bridge lines BL according to the modified example is formed in the dummy pixel area 123, so as to connect the adjacent pixel power lines PL to each other, whereby all the plurality of pixel power lines PL have equipotential electrically. In more detail, the outer circumference portion of the display area 121 is formed in a shape of a stair in accordance with the curvature of the circular display portion 120, and two or more pixel power lines PL are formed in parallel at the outer circumference portion of the display area 121 having the stair shape. As a result, the plurality of pixel power lines PL may be categorized into a plurality of power line groups having two or more adjacent pixel power lines PL in accordance with the stair shape of the display area 121.

[0068] Each of the plurality of bridge lines BL according to the modified example is formed in the plurality of power line groups one to one, thereby electrically connecting all the pixel power lines PL included in each power line

group with each other and electrically connecting the respective pixel power lines PL of the adjacent power line groups with each other. Therefore, each of the plurality of bridge lines BL according to the modified example is formed in each dummy pixel area 123 adjacent to the display area 121 along the circumference of the display area 121 to allow all the pixel power lines PL to have equipotential electrically.

[0069] As described above, each of the plurality of bridge lines BL allows all the pixel power lines PL to have equipotential electrically, whereby picture quality deterioration caused by length deviation of the pixel power lines PL may be resolved.

[0070] FIG. 6 is a view illustrating a modified example of a display device according to the present invention, which is shown in FIGS. 1 to 5. In FIG. 6, a selective portion is additionally provided. Therefore, in FIG. 6, a repeated description of elements corresponding to the same reference numerals as those of FIG. 1 will be omitted, and the selective portion and its related elements will only be described hereinafter.

[0071] As shown in FIG. 6, the selective portion 170 includes a plurality of selective circuits 172 formed along the circumference of the circular display portion 120 and connected to two or more data lines DL.

[0072] Each of the plurality of selective circuits 172 is connected to a plurality of data groups, each of which includes i (i is a natural number more than 2) number of data lines one to one, thereby driving the i number of data lines, which are included in each data group, based on time division. Each of the plurality of selective circuits 172 according to one example may be a multiplexing circuit, for example, multiplexer, which has one input terminal and i number of output terminals. A data signal is supplied from the driving circuit portion 130 to each input terminal of the plurality of selective circuits 172. The output terminals of each of the plurality of selective circuits 172 are connected to the i number of data lines, which are included in the corresponding data group, one to one. Each of the plurality of selective circuits 172 supplies the data signal, which is supplied to the input terminal, to the i number of data lines included in the corresponding data group, in due order in response to a time-division selective signal.

[0073] For example, if one unit pixel includes red, green and blue pixels, each data group may include $3j$ (j is a natural number) number of data lines to facilitate driving of the unit pixel. In this case, each of the plurality of selective circuits 172 may have $3j$ number of output channels. It is preferable that the number of data lines included in each data group and the number of output terminals of the selective circuit 172 correspond to the number of pixels constituting one unit pixel or an integer multiple of the number of pixels constituting one unit pixel, without being limited to the $3j$ number of output terminals.

[0074] According to the display device of the present invention, which includes the selective portion 17 as above, as the number of data link lines for connecting

the data line DL with the driving circuit portion 130 and its formation area are reduced due to the selective portion 170, the size of the driving circuit connecting portion 113 may be reduced or the driving power supply line 150 and the power supply line 160 may be formed in a shape of a concentric circle. As a result, the bezel width BW of the display device according to the present invention may be more reduced.

[0075] Meanwhile, as described above, in the display device according to one embodiment of the present invention, each pixel may be modified to that disclosed in the Korean Laid-Open Patent Nos. 10-2009-0046983, 10-2010-0047505, 10-2011-0057534, 10-2012-0045252, 10-2012-0076215, 10-2013-0066449, 10-2013-0066450, 10-2013-0074147, and the Korean Registered Patent No. 10-0846970 or 10-1073226. In this case, each pixel is connected to the driving power supply line and a reference line. At this time, the driving power supply line is formed in the same structure as that of the aforementioned driving power supply line. The reference line is formed between the cathode power supply line 160 and the circular display portion 120 to have the same structure as that of the aforementioned driving power supply line, whereby the reference line may supply a reference voltage, which is supplied from the display driving portion, to each pixel.

[0076] On the other hand, in the display device according to one embodiment of the present invention, each pixel may be modified to that disclosed in the Korean Registered Patent No. 10-0846591 and the Korean Laid-Open Patent Nos. 10-2012-0042084, 10-2012-0069481, and 10-2012-0075828. In this case, each pixel is connected to the driving power supply line and a compensation power line. At this time, the driving power supply line is formed in the same structure as that of the aforementioned driving power supply line. The compensation power line is formed between the cathode power supply line 160 and the circular display portion 120 to have the same structure as that of the aforementioned driving power supply line, whereby the compensation power line may supply a compensation voltage, which is supplied from the display driving portion, to each pixel.

[0077] As a result, the structure of the driving power supply line and the equipotential structure of the pixel driving power sources based on the bridge lines according to the present invention may equally be applied to all the pixel structures of the organic light emitting display device.

[0078] As described above, the display device according to the present invention has the following advantages.

[0079] First, as luminance deviation per area of the circular display portion is minimized, picture quality deterioration caused by length deviation of the pixel power lines may be resolved. In addition, the display device according to the present invention may have a thin bezel width while having the circular display portion.

[0080] It will be apparent to those skilled in the art that

various modifications and variations can be made in the present invention without departing from the scope of the inventions. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims.

Claims

1. An organic light emitting diode "OLED" display device comprising:

a substrate (110) comprising a circular arc portion (111) and a driving circuit connecting portion (113) connected to the circular arc portion (111), wherein the circular arc portion (111) is substantially circular around a center point;

a display area (121) within the circular arc portion (111), the display area (121) comprising a circular shape centered around the center point;

a driving power supply line (150) formed in the circular arc portion (111) and configured to provide a driving voltage for OLED pixels (P) of the OLED display device, the driving power supply line (150) formed to at least partially surround the display area (121);

a plurality of power lines (PL) electrically connecting the driving power supply line (150) to the OLED pixels (P); **characterised in that** the OLED display comprises

a plurality of bridge lines (BL) formed outside of the display area (121), each bridge line (BL) connecting one of the power lines (PL) with at least one adjacent power line (PL).

2. The OLED display device of claim 1, further comprising:

a plurality of dummy pixels (DP) formed in a dummy pixel area (123) surrounding the display area (121), wherein each bridge line (BL) is disposed between at least one of the dummy pixels (DP) and at least one of the OLED pixels (P).

3. The OLED display device of any preceding claim, wherein each power line (PL) is connected to two adjacent columns of pixels (P), and each pixel (P) is connected to one of the power lines (PL).

4. The OLED display device of any preceding claim, further comprising:

a plurality of data lines (DL), wherein a first data line is shared by the first column of pixels (P) and a second data line is shared by the second column of pixels (P);

wherein the first data line is located on an opposite side of the first column of pixels to the

- shared power line; and
wherein the second data line is located on an opposite side of the second column of pixels to the shared power line.
- 5 5. The OLED display device of any preceding claim, wherein a proximal portion (PLL) of the power lines (PL) are formed to extend away from the driving power supply line (150) along a direction parallel to a plurality of scan lines (SL). 10
6. The OLED display device of claim 5, wherein each power line (PL) comprises a 90 degree angle, directing a remaining portion of the power line (PL) along an axis parallel with and between two columns of pixels (P). 15
7. The OLED display device of any preceding claim, wherein the power lines (PL) do not intersect or cross any of the data lines (DL). 20
8. The OLED display device of any preceding claim, wherein each of the power lines (PL) is connected to one of the bridge lines (BL).
9. The OLED display device of any preceding claim, wherein at least one bridge line (BL) is connected to more than two of the power lines (PL).
10. The OLED display device of any preceding claim, wherein the bridge lines (BL) are oriented along an axis running perpendicular to columns of the pixels (P). 30
11. The OLED display device of any preceding claim, wherein the driving power supply line (150) includes a section (151) formed on the circular arc portion (111) opposite the driving circuit connecting portion (113); and wherein the power lines (PL) extend from the section (151) of the driving power supply line (150). 35 40
12. The OLED display device of claim 11, wherein the section (151) of the driving power supply line (150) is within a half circle of the circular arc portion (111) opposite the driving circuit connecting portion (113). 45
13. The OLED display device of any preceding claim, wherein each pixel (P) comprises: 50
- an OLED comprising an anode and a cathode; a driving transistor (Tdr) comprising a gate, a source, and a drain, wherein the drain is connected to one of the power lines (PL) to receive the driving voltage, and the source is connected to the anode of the OLED. 55

14. The OLED display device of any preceding claim, comprising a cathode power supply line (160) formed in the circular arc portion (111) between the driving power supply line (150) and the display area (121), a cathode of each pixel (P) being electrically connected to the cathode power supply line (160), optionally, wherein the cathode power supply line (160) comprises a circular shape centered around the center point.
15. The OLED display device of any preceding claim, wherein each end of the driving power supply line (150) is connected to an associated driving power pad (113a) formed in the driving circuit connecting portion (113), optionally, wherein the circular portion (151) of the driving power supply line (150) is connected at each end to a corresponding shoulder portion (153, 155) of the driving power supply line (150) that extends into the driving circuit connecting portion (113).

25 Patentansprüche

1. Organische lichtemittierende Diode "OLED"-Anzeigevorrichtung, umfassend:
- ein Substrat (110), welches einen Kreisbogenanteil (111) und einen Treiberschaltungsverbindungsanteil (113) umfasst, der mit dem Kreisbogenanteil (111) verbunden ist, wobei der Kreisbogenanteil (111) im Wesentlichen um einen Mittelpunkt herum kreisförmig ist; einen Anzeigebereich (121) innerhalb des Kreisbogenanteils (111), wobei der Anzeigebereich (121) eine Kreisform umfasst, die um den Mittelpunkt herum zentriert ist; eine Treiberstromversorgungsleitung (150), die in dem Kreisbogenanteil (111) gebildet ist und ausgestaltet ist, um der OLED-Anzeigevorrichtung eine Treiberspannung für OLED-Pixel (P) bereitzustellen, wobei die Treiberstromversorgungsleitung (150) so gebildet ist, dass sie den Anzeigebereich (121) mindestens teilweise umgibt; eine Vielzahl von Stromleitungen (PL), die die Treiberstromversorgungsleitung (150) elektrisch mit den OLED-Pixeln (P) verbindet, **dadurch gekennzeichnet, dass** die OLED-Anzeige umfasst: eine Vielzahl von Brückenleitungen (BL), die außerhalb des Anzeigebereichs (121) gebildet sind, wobei jede Brückenleitung (BL) eine der Stromleitungen (PL) mit mindestens einer benachbarten Stromleitung (PL) verbindet.

2. OLED-Anzeigevorrichtung nach Anspruch 1, ferner umfassend:
eine Vielzahl von Dummy-Pixeln (DP), die in einem Dummy-Pixelbereich (123) gebildet sind, der den Anzeigebereich (121) umgibt, wobei jede Brückenleitung (BL) zwischen mindestens einem der Dummy-Pixel (DP) und mindestens einem der OLED-Pixel (P) angeordnet ist.
3. OLED-Anzeigevorrichtung nach einem der vorhergehenden Ansprüche, wobei jede Stromleitung (PL) mit zwei benachbarten Spalten von Pixeln (P) verbunden ist und jedes Pixel (P) mit einer der Stromleitungen (PL) verbunden ist.
4. OLED-Anzeigevorrichtung nach einem der vorhergehenden Ansprüche, ferner umfassend:

eine Vielzahl von Datenleitungen (DL), wobei eine erste Datenleitung von der ersten Spalte von Pixeln (P) gemeinsam genutzt wird und eine zweite Datenleitung von der zweiten Spalte von Pixeln (P) gemeinsam genutzt wird;
wobei sich die erste Datenleitung auf einer Seite der ersten Spalte von Pixeln befindet, die der gemeinsam genutzten Stromleitung gegenüber liegt; und
wobei sich die zweite Datenleitung auf einer Seite der zweiten Spalte von Pixeln befindet, die der gemeinsam genutzten Stromleitung gegenüber liegt.
5. OLED-Anzeigevorrichtung nach einem der vorhergehenden Ansprüche,
wobei ein naher Anteil (PLL) der Stromleitungen (PL) so gebildet ist, dass sie sich entlang einer Richtung, die zu einer Vielzahl von Abtastlinien (SL) parallel ist, von der Treiberstromversorgungsleitung (150) weg erstrecken.
6. OLED-Anzeigevorrichtung nach Anspruch 5, bei dem jede Stromleitung (PL) einen 90 Grad-Winkel umfasst, der einen verbleibenden Anteil der Stromleitung (PL) entlang einer Achse lenkt, die parallel zu zwei Spalten von Pixeln (P) und zwischen diesen ist.
7. OLED-Anzeigevorrichtung nach einem der vorhergehenden Ansprüche,
wobei die Stromleitungen (PL) keine der Datenleitungen (DL) schneiden oder kreuzen.
8. OLED-Anzeigevorrichtung nach einem der vorhergehenden Ansprüche, wobei jede der Stromleitungen (PL) mit einer der Brückenleitungen (BL) verbunden ist.
9. OLED-Anzeigevorrichtung nach einem der vorhergehenden Ansprüche, wobei mindestens eine Brückenleitung (BL) mit mehr als zwei der Stromleitungen (PL) verbunden ist.
10. OLED-Anzeigevorrichtung nach einem der vorhergehenden Ansprüche, wobei die Brückenleitungen (BL) entlang einer Achse orientiert sind, die senkrecht zu Spalten der Pixel (P) verläuft.
11. OLED-Anzeigevorrichtung nach einem der vorhergehenden Ansprüche,
wobei die Treiberstromversorgungsleitung (150) einen Abschnitt (151) einschließt, der auf dem Kreisbogenanteil (111) gegenüber dem Treiberschaltungsverbindungsanteil (113) gebildet ist; und
wobei die Stromleitungen (PL) sich von dem Abschnitt (151) der Treiberstromversorgungsleitung (150) erstrecken.
12. OLED-Anzeigevorrichtung nach Anspruch 11, wobei der Abschnitt (151) der Treiberstromversorgungsleitung (150) innerhalb eines Halbkreises des Kreisbogenanteils (111) ist, der dem Treiberschaltungsverbindungsanteil (113) gegenüber liegt.
13. OLED-Anzeigevorrichtung nach einem der vorhergehenden Ansprüche, wobei jedes Pixel (P) umfasst:

eine OLED, die eine Anode und eine Kathode umfasst;
einen Treibertransistor (Tdr), der ein Gate, eine Source und ein Drain umfasst, wobei das Drain mit einer der Stromleitungen (PL) verbunden ist, um die Treiberspannung zu empfangen, und
die Source mit der Anode der OLED verbunden ist.
14. OLED-Anzeigevorrichtung nach einem der vorhergehenden Ansprüche, umfassend eine Kathodenstromversorgungsleitung (160), die in dem Kreisbogenanteil (111) zwischen der Treiberstromversorgungsleitung (150) und dem Anzeigebereich (121) gebildet ist, wobei eine Kathode jedes Pixels (P) elektrisch mit der Kathodenstromversorgungsleitung (160) verbunden ist,
wobei gegebenenfalls die Kathodenstromversorgungsleitung (160) eine Kreisform umfasst, die um den Mittelpunkt zentriert ist.
15. OLED-Anzeigevorrichtung nach einem der vorhergehenden Ansprüche, wobei jedes Ende der Treiberstromversorgungsleitung (150) mit einer dazugehörigen Treiberstromkontaktstelle (113a) verbunden ist, die in dem Treiberschaltungsverbindungsanteil (113) gebildet ist,
wobei gegebenenfalls der Kreisanteil (151) der Trei-

berstromversorgungsleitung (150) an jedem Ende mit einem entsprechenden Schulteranteil (153, 155) der Treiberstromversorgungsleitung (150) verbunden ist, welcher sich in den Treiberschaltungsverbindungsanteil (113) hinein erstreckt.

Revendications

1. Dispositif d'affichage à diodes électroluminescentes organiques "OLED" (organic light emitting diode), comprenant :

un substrat (110) comprenant une partie en arc de cercle (111) et une partie de connexion de circuit de commande (113) connectée à la partie en arc de cercle (111), dans lequel la partie en arc de cercle (111) est sensiblement circulaire autour d'un point central ;

une zone d'affichage (121) dans la partie en arc de cercle (111), la zone d'affichage (121) comprenant une forme circulaire centrée autour du point central ;

une ligne d'alimentation de commande (150) formée dans la partie en arc de cercle (111) et configurée pour fournir une tension de commande aux pixels OLED (P) du dispositif d'affichage OLED, la ligne d'alimentation de commande (150) étant formée de manière à entourer au moins partiellement la zone d'affichage (121) ;

une pluralité de lignes d'alimentation électrique (PL - power lines) connectant électriquement la ligne d'alimentation de commande (150) aux pixels OLED (P) ; **caractérisé en ce que** l'affichage OLED comprend

une pluralité de lignes de pont (BL - bridge lines) formées à l'extérieur de la zone d'affichage (121), chaque ligne de pont (BL) connectant l'une des lignes d'alimentation électrique (PL) à au moins une ligne d'alimentation électrique (PL) adjacente.

2. Dispositif d'affichage OLED selon la revendication 1, comprenant en outre :

une pluralité de pixels factices (DP - dummy pixels) formés dans une zone de pixels factices (123) entourant la zone d'affichage (121), dans lequel chaque ligne de pont (BL) est disposée entre au moins l'un des pixels factices (DP) et au moins l'un des pixels OLED (P) .

3. Dispositif d'affichage OLED selon l'une quelconque des revendications précédentes, dans lequel chaque ligne d'alimentation électrique (PL) est connectée à deux colonnes de pixels (P) adjacentes, et chaque pixel (P) est connecté à l'une des lignes d'alimentation électrique (PL).

4. Dispositif d'affichage OLED selon l'une quelconque des revendications précédentes, comprenant en outre :

une pluralité de lignes de données (DL - data lines), une première ligne de données étant partagée par la première colonne de pixels (P) et une seconde ligne de données étant partagée par la seconde colonne de pixels (P) ;

dans lequel la première ligne de données est située sur un côté opposé de la première colonne de pixels par rapport à la ligne d'alimentation électrique partagée ; et

dans lequel la seconde ligne de données est située sur un côté opposé de la seconde colonne de pixels par rapport à la ligne d'alimentation électrique partagée.

5. Dispositif d'affichage OLED selon l'une quelconque des revendications précédentes, dans lequel une partie proximale (PLL - proximal portion) des lignes d'alimentation électrique (PL) est formée de façon à s'étendre à l'écart de la ligne d'alimentation de commande (150) le long d'une direction parallèle à une pluralité de lignes de balayage (SL - scan lines).

6. Dispositif d'affichage OLED selon la revendication 5, dans lequel chaque ligne d'alimentation électrique (PL) comprend un angle de 90 degrés, dirigeant une partie restante de la ligne d'alimentation électrique (PL) le long d'un axe parallèle à deux colonnes de pixels (P) et entre celles-ci.

7. Dispositif d'affichage OLED selon l'une quelconque des revendications précédentes, dans lequel les lignes d'alimentation électrique (PL) ne se croisent ni ne croisent aucune des lignes de données (DL).

8. Dispositif d'affichage OLED selon l'une quelconque des revendications précédentes, dans lequel chacune des lignes d'alimentation électrique (PL) est connectée à l'une des lignes de pont (BL).

9. Dispositif d'affichage OLED selon l'une quelconque des revendications précédentes, dans lequel au moins une ligne de pont (BL) est connectée à plus de deux des lignes d'alimentation électrique (PL).

10. Dispositif d'affichage OLED selon l'une quelconque des revendications précédentes, dans lequel les lignes de pont (BL) sont orientées le long d'un axe perpendiculaire aux colonnes des pixels (P).

11. Dispositif d'affichage OLED selon l'une quelconque des revendications précédentes, dans lequel la ligne d'alimentation de commande

(150) comprend une section (151) formée sur la partie en arc de cercle (111) opposée à la partie de connexion du circuit de commande (113) ; et dans lequel les lignes d'alimentation électrique (PL) s'étendent depuis la section (151) de la ligne d'alimentation de commande (150). 5

12. Dispositif d'affichage OLED selon la revendication 11, dans lequel la section (151) de la ligne d'alimentation de commande (150) se situe dans un demi-cercle de la partie en arc de cercle (111) opposée à la partie de connexion de circuit de commande (113). 10

13. Dispositif d'affichage OLED selon l'une quelconque des revendications précédentes, dans lequel chaque pixel (P) comprend : 15

une OLED comprenant une anode et une cathode ;
un transistor de commande (Tdr) comprenant une grille, une source et un drain, le drain étant connecté à l'une des lignes d'alimentation électrique (PL) pour recevoir la tension de commande, et la source étant connectée à l'anode de l'OLED. 20 25

14. Dispositif d'affichage OLED selon l'une quelconque des revendications précédentes, comprenant une ligne d'alimentation de cathode (160) formée dans la partie en arc de cercle (111) entre la ligne d'alimentation de commande (150) et la zone d'affichage (121), une cathode de chaque pixel (P) étant connectée électriquement à la ligne d'alimentation de cathode (160), éventuellement, dans lequel la ligne d'alimentation de cathode (160) comprend une forme circulaire centrée autour du point central. 30 35

15. Dispositif d'affichage OLED selon l'une quelconque des revendications précédentes, dans lequel chaque extrémité de la ligne d'alimentation de commande (150) est connectée à un plot d'alimentation de commande associé (113a) formé dans la partie de connexion de circuit de commande (113), éventuellement, dans lequel la partie circulaire (151) de la ligne d'alimentation de commande (150) est connectée au niveau de chaque extrémité à une partie d'épaule correspondante (153, 155) de la ligne d'alimentation de commande (150) qui s'étend dans la partie de connexion de circuit de commande (113). 40 45 50

55

FIG. 1

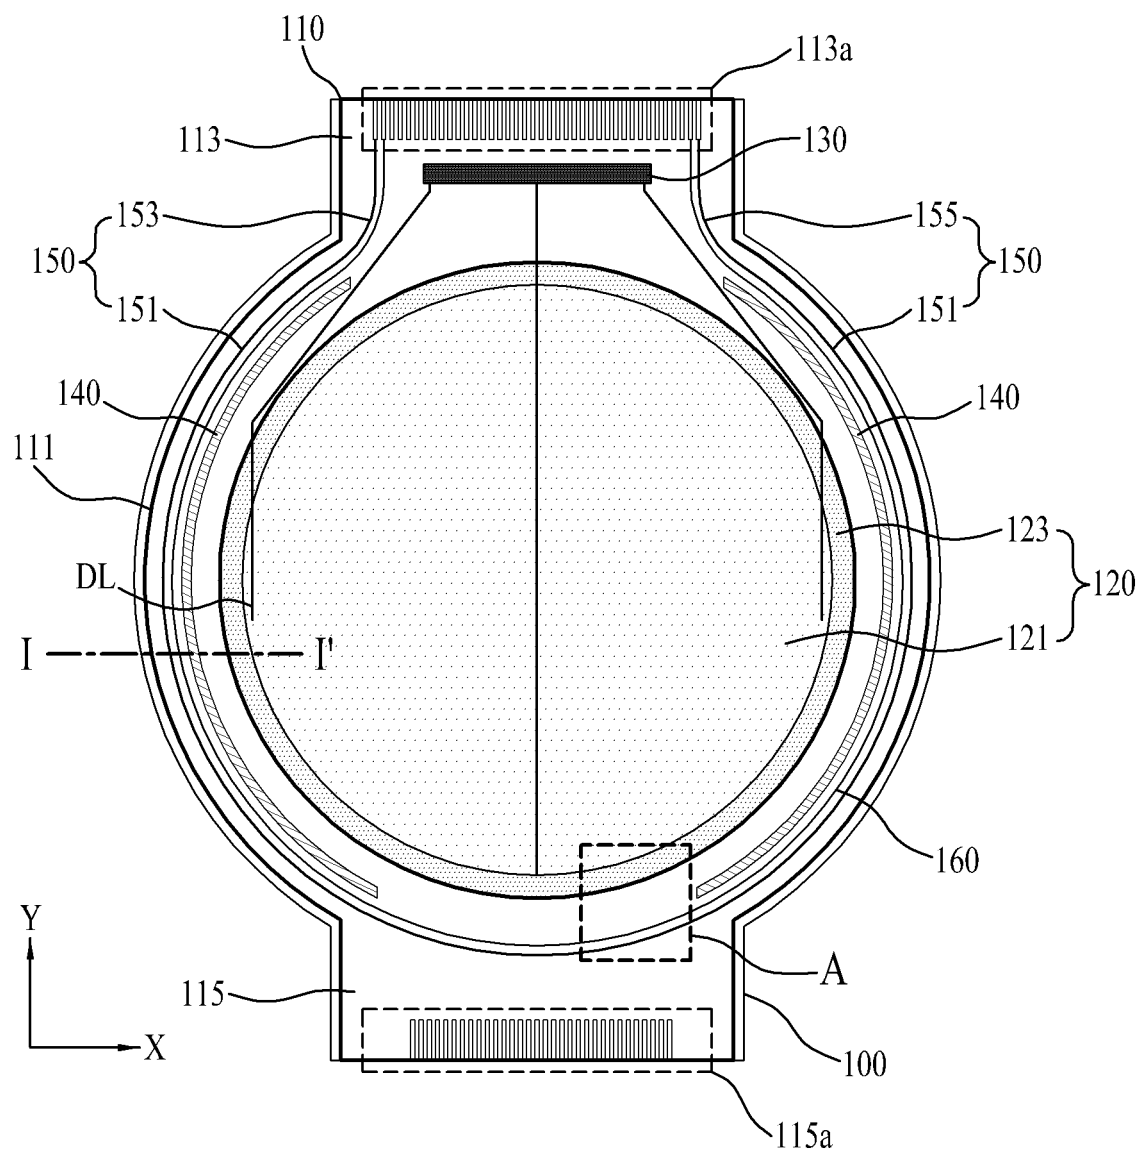


FIG. 2

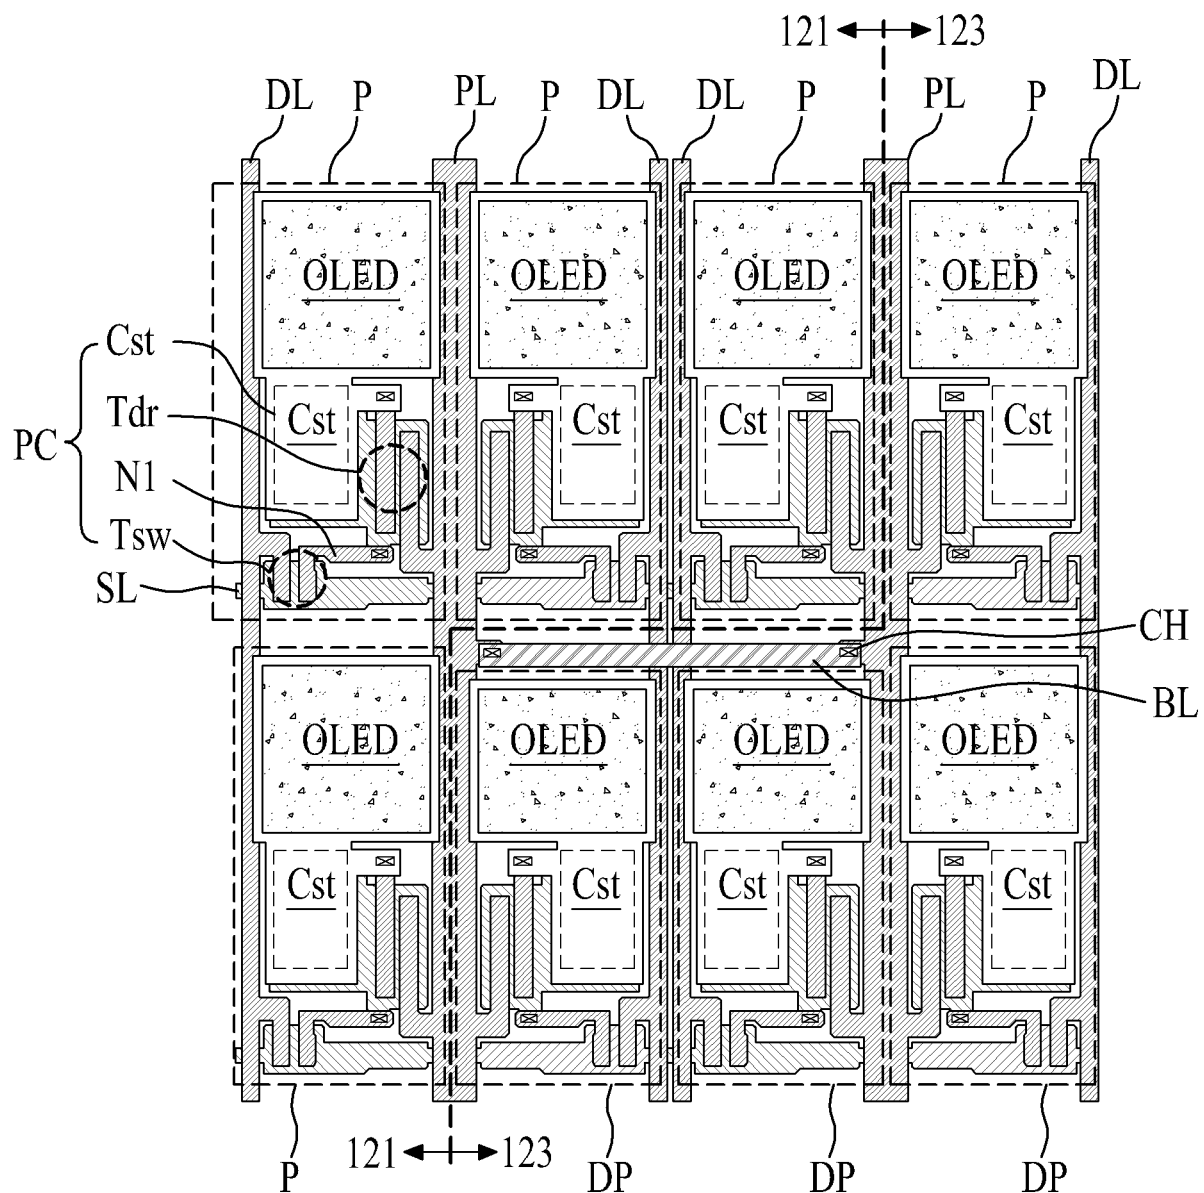


FIG. 3

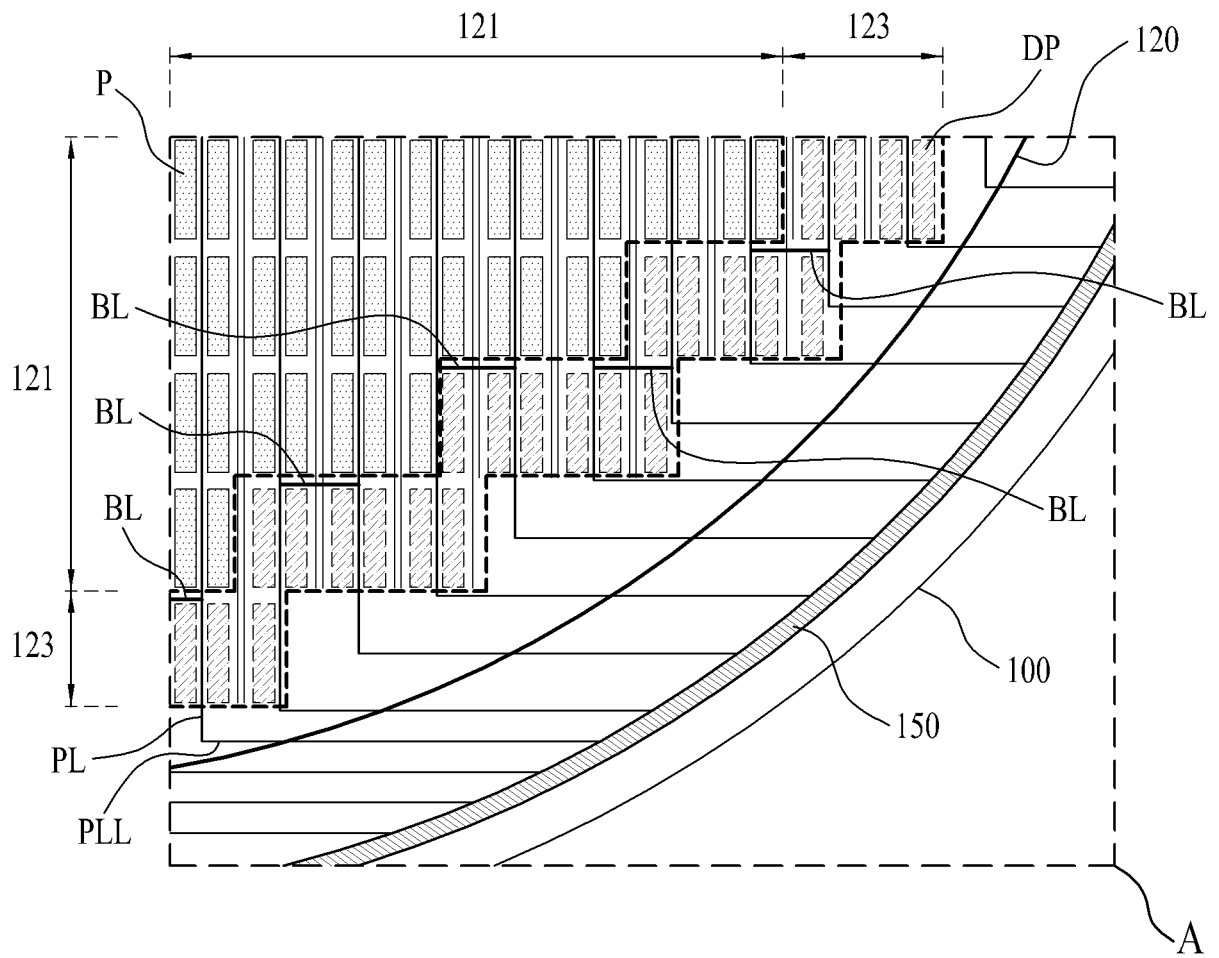


FIG. 4

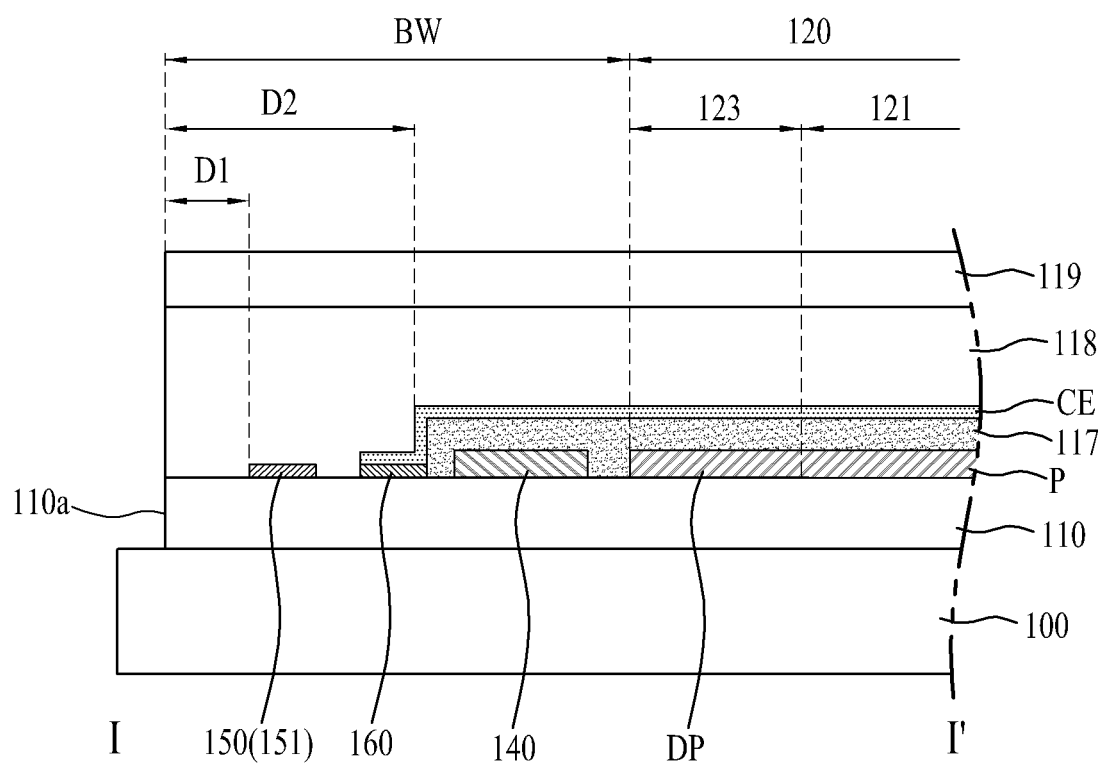


FIG. 5


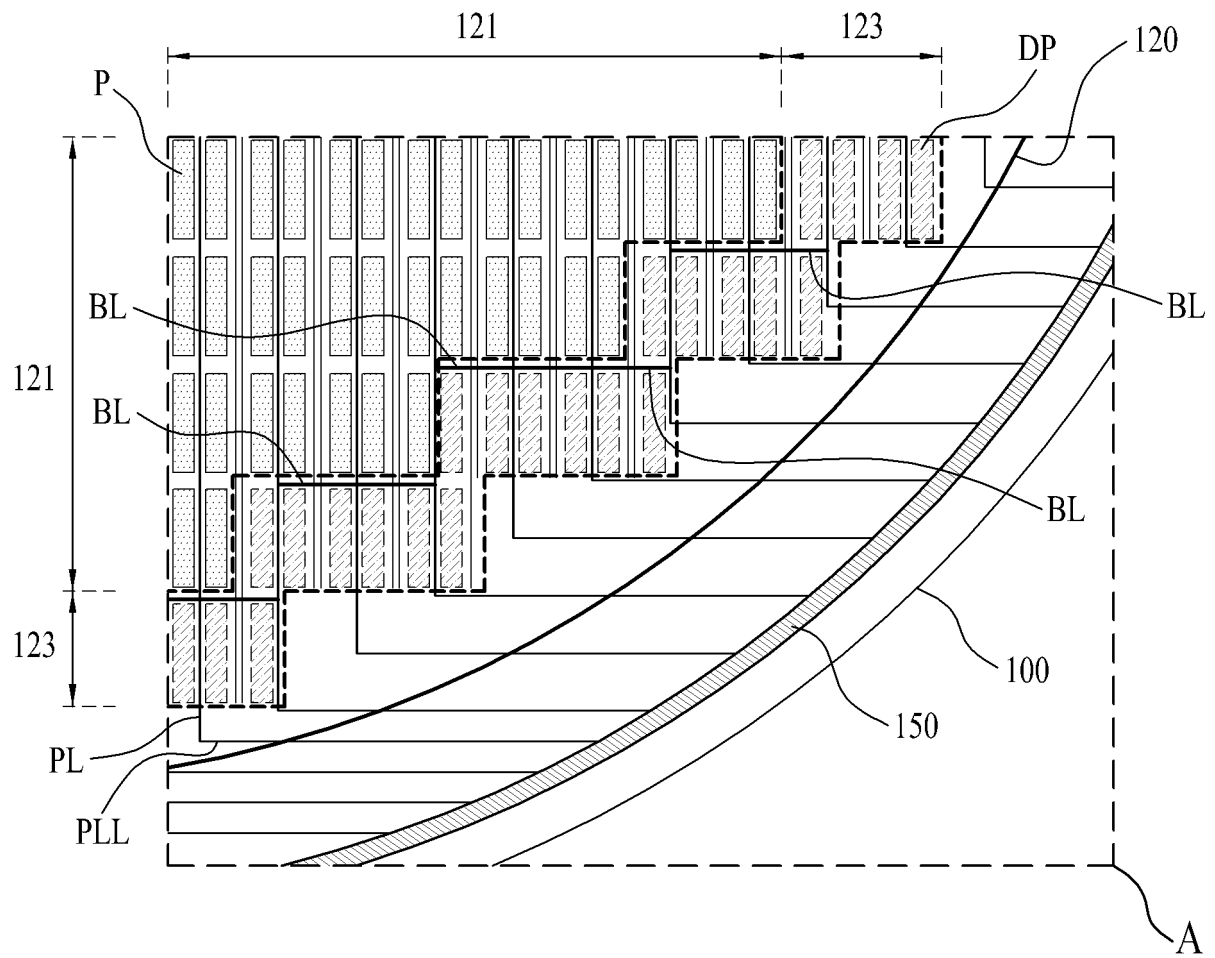


FIG. 6

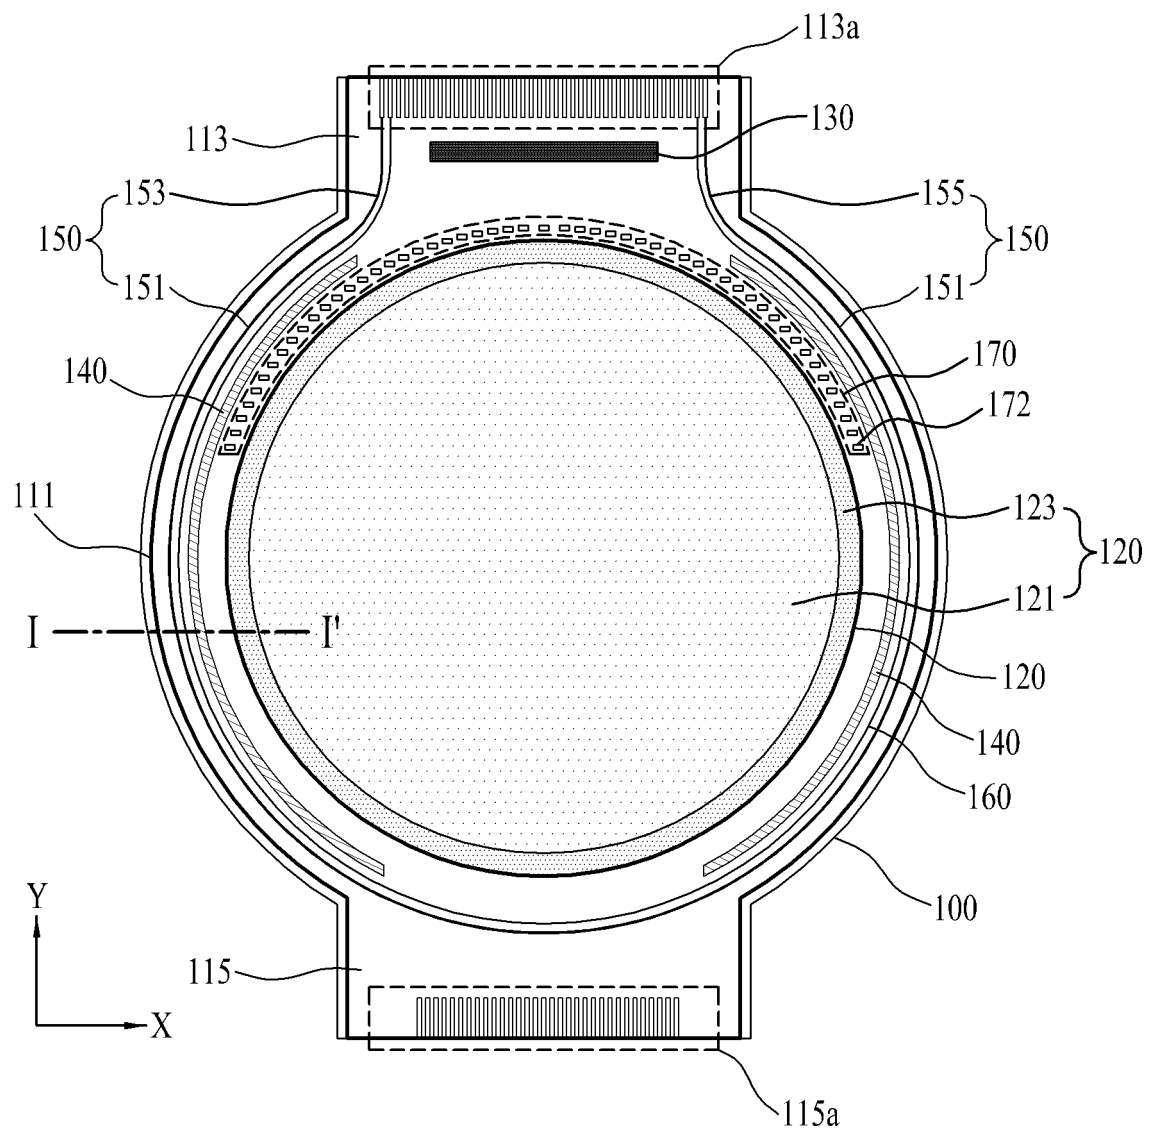

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 20080266210 A1 [0009]
- US 20060279499 A1 [0010]
- KR 1020090046983 [0075]
- KR 1020100047505 [0075]
- KR 1020110057534 [0075]
- KR 1020120045252 [0075]
- KR 1020120076215 [0075]
- KR 1020130066449 [0075]
- KR 1020130066450 [0075]
- KR 1020130074147 [0075]
- KR 100846970 [0075]
- KR 101073226 [0075]
- KR 100846591 [0076]
- KR 1020120042084 [0076]
- KR 1020120069481 [0076]
- KR 1020120075828 [0076]

专利名称(译)	有机发光二极管显示装置		
公开(公告)号	EP2980854B1	公开(公告)日	2018-12-26
申请号	EP2015179428	申请日	2015-07-31
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	JUNG DAE SUNG YUN YEONG HYEOK KIM MI SO LEE SEONG RIM		
发明人	JUNG, DAE SUNG YUN, YEONG HYEOK KIM, MI SO LEE, SEONG RIM		
IPC分类号	H01L27/32 G06F1/16		
CPC分类号	G02F2201/56 G06F1/163 G06F1/1637 G06F1/1643 G06F3/0412 G09G3/3233 G09G2300/0426 H01L27/3223 H01L27/3276 G09G3/3258 G09G2300/0408 G09G2300/0413 G09G2300/0809 G09G2310/0232 G09G2310/0272		
优先权	1020140098514 2014-07-31 KR		
其他公开文献	EP2980854A1		
外部链接	Espacenet		

摘要(译)

有机发光二极管 (OLED) 显示装置包括基板 (110) , 基板包括圆弧部分 (111) 和连接到圆弧部分顶部的驱动电路 (130) 连接部分。圆弧部分围绕中心点基本上是圆形的。显示区域 (120) 形成在圆弧部分中。显示区域具有以中心点为中心的圆形形状。驱动电源线 (150) 形成在圆弧部分中, 并被配置为为OLED显示装置的OLED像素提供驱动电压。形成的驱动电源线至少部分地围绕显示区域。多条电源线 (PL) 将驱动电源线电连接到OLED像素。在显示区域外部形成多条桥接线 (BL) , 其中每条桥接线将一条电力线与至少一条相邻的电力线连接。

FIG. 1

