



(11)

EP 3 327 713 A1

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
30.05.2018 Bulletin 2018/22

(51) Int Cl.:
G09G 3/3233 (2016.01)

(21) Application number: **17203492.8**

(22) Date of filing: **24.11.2017**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
 GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
 PL PT RO RS SE SI SK SM TR**
 Designated Extension States:
BA ME
 Designated Validation States:
MA MD

(72) Inventors:

- LIM, Myunggi
10845 Paju-si, Gyeonggi-do (KR)
- WOO, Kyoungdon
10845 Paju-si, Gyeonggi-do (KR)
- BAE, Jaeyoon
10845 Paju-si, Gyeonggi-do (KR)

(74) Representative: **Viering, Jentschura & Partner
mbB**
Patent- und Rechtsanwälte
Am Brauhaus 8
01099 Dresden (DE)


(30) Priority: 29.11.2016 KR 20160160638

(71) Applicant: **LG Display Co., Ltd.**
Seoul, 07336 (KR)

(54) **ORGANIC LIGHT-EMITTING DISPLAY AND DRIVING METHOD THEREOF**

(57) An organic light-emitting display includes a driving transistor (DT) that drives an organic light-emitting diode (OLED), a first transistor (T1) connected between a data line (14A) supplying a data voltage and a gate electrode of the driving transistor (DT), a second transistor (T2) connected between a reference voltage input line (14B) and a source electrode of the driving transistor (DT), and a third transistor (T3) that directly charges the gate electrode of the driving transistor (DT) with a reference voltage supplied from the reference voltage input line (14B), in response to a black data control signal (BS), wherein the third transistor (T3) directly receives the reference voltage by being turned on for a certain period of time after the gate electrode of the driving transistor (DT) is programmed with the data voltage in one frame before receiving a data voltage in the next frame.

FIG. 2

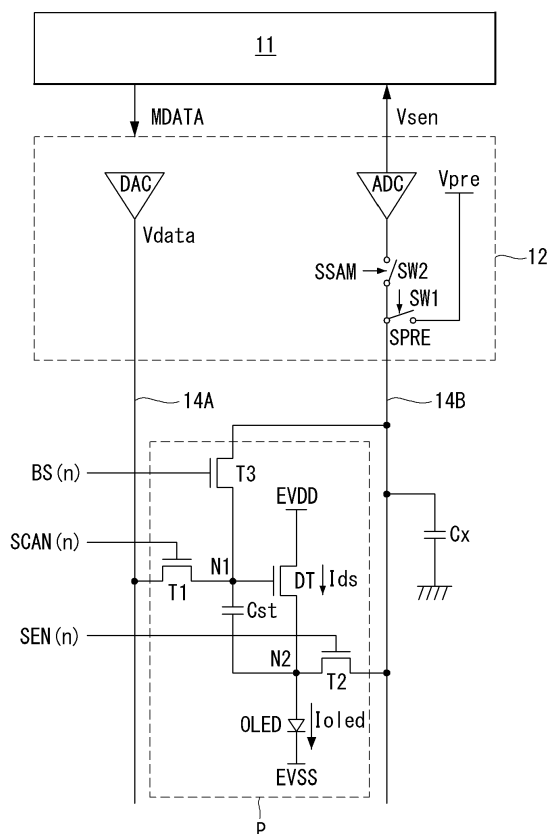

Description

BACKGROUND

Field of the Invention

[0001] The present invention relates to an active-matrix organic light-emitting display and a driving method thereof.

Discussion of the Related Art

[0002] Flat-panel displays (FPDs) are widely used for monitors for desktop computers, portable computers such as laptops and personal digital assistants (PDAs), mobile phones, and so on, because they offer advantages in terms of slimness and light-weightness. Such flat-panel displays include liquid-crystal displays (LCDs), plasma display panels (PDPs), field emission displays (FEDs), and organic light-emitting diode (OLED) displays.

[0003] An OLED, which is a self-luminous device, comprises an anode and a cathode, and an organic compound layer formed between the anode and cathode. The organic compound layer comprises a hole transport layer HTL, an emission layer EML, and an electron transport layer ETL. When an operating voltage is applied to the anode and the cathode, a hole passing through the hole transport layer HTL and an electron passing through the electron transport layer ETL move to the emission layer EML, forming an exciton. As a result, the emission layer EML generates visible light.

[0004] An active matrix organic-light emitting display comprises a plurality of OLEDs each emitting light itself, and is used in various applications due to their advantages of fast response time, high luminous efficiency, high luminance, and wide viewing angle.

[0005] In the organic light-emitting display, pixels each comprising an OLED are arranged in a matrix, and the luminance of the pixels is adjusted depending on the gray levels of their video data. Each pixel further comprises a driving transistor that controls drive current flowing through the OLED depending on a gate-source voltage, and at least one switching transistor that programs the gate-source voltage of the driving transistor. The drive current is determined by the gate-source voltage of the driving transistor relative to a data voltage and the threshold voltage of the driving transistor, and the luminance of each pixel is proportional to the amount of drive current flowing through the OLED.

[0006] Meanwhile, a technology for inserting a black image was proposed to reduce the motion picture response time (MPRT) of an organic light-emitting display. That is, this technology is to eliminate an image of a previous frame by displaying a black image in between image frames. However, the general techniques of displaying a black image require twice as high video frame rates, which creates a problem of making the data charging

time shorter.

SUMMARY OF THE INVENTION

[0007] Various embodiments provide an organic light-emitting display and a driving method of an organic light-emitting display according to the independent claims. Further embodiments are described in the dependent claim.

[0008] Various embodiments of the present invention provide an organic light-emitting display comprising a driving transistor that drives an organic light-emitting diode; a first transistor connected between a data line supplying a data voltage and a gate electrode of the driving transistor; a second transistor connected between a reference voltage input line and a source electrode of the driving transistor; and a third transistor that directly charges the gate electrode of the driving transistor with a reference voltage supplied from the reference voltage input line, in response to a black data control signal, wherein the third transistor directly receives the reference voltage by being turned on for a certain period of time after the gate electrode of the driving transistor is programmed with the data voltage in one frame before receiving a data voltage in the next frame.

[0009] In one or more embodiments, the source electrode of the driving transistor is connected to an anode of the organic light-emitting diode, and the reference voltage supplied from the reference voltage input line is applied to the gate electrode and the source electrode of the driving transistor in a black data display period so as to reset the gate electrode and the source electrode and keep the organic light-emitting diode turned off.

[0010] In one or more embodiments, the organic light-emitting display further comprises a display panel that comprises a first pixel line to a nth pixel line, wherein the first transistor of each pixel on each pixel line is turned on in response to a scan signal during a programming period to charge the gate electrode of the driving transistor with the data voltage, and the pixels arranged on the first pixel line to the nth pixel line are sequentially supplied with the scan signal, where n is a natural number.

[0011] In one or more embodiments, the second transistor is turned on in synchronization with the first transistor during the programming period.

[0012] In one or more embodiments, the one frame comprises the period of time from a first horizontal period corresponding to the programming period of the pixels arranged on the first pixel line to an nth horizontal period corresponding to the programming period of the pixels arranged on the nth pixel line, and the third transistor of each of the pixels arranged on the first pixel line is turned on for a kth horizontal period, where k is a natural number greater than 2 and less than or equal to n.

[0013] In one or more embodiments, as the average value of data voltages of pixels arranged on one pixel line is lowered, the value of k is lowered.

[0014] Various embodiments provide a driving method of an organic light-emitting display comprising pixels arranged on a first pixel line to an nth pixel line, where n is a natural number, the method comprising: sequentially programming a data voltage for the pixels arranged on the first pixel line to the nth pixel line; sequentially causing the programmed pixels to emit light; and writing black data to the pixels arranged on the first pixel line, in a period synchronized with the programming of the pixels arranged on a kth pixel line, where k is a natural number greater than 2 and less than or equal to n.

[0015] In one or more embodiments, the sequentially programming of the data voltage comprises: charging a gate electrode of a driving transistor of each pixel with a data voltage and applying a reference voltage to a source electrode of the driving transistor, wherein the reference voltage is lower than an operating voltage of an organic light-emitting diode.

[0016] In one or more embodiments, the writing of the black data comprises: applying the reference voltage to the gate electrode and source electrode of the driving transistor.

[0017] In one or more embodiments, in the writing of the black data to the pixels arranged on the first pixel line, as the average value of video data of the first pixel line is lowered, the value of k is lowered.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention. In the drawings:

FIG. 1 is a view showing an organic light-emitting display according to an exemplary embodiment of the present invention;

FIG. 2 is an equivalent circuit diagram of a pixel of an organic light-emitting display according to a first exemplary embodiment of the present invention;

FIG. 3 is a view showing an example of display and non-display periods for the organic light-emitting display according to the present invention;

FIG. 4 is a view showing an example of driving signals in a sensing period for the organic light-emitting display according to the present invention;

FIG. 5 is a view showing an example of the timings of driving signals in a display interval of the organic light-emitting display according to the first exemplary embodiment;

FIG. 6 is a view showing an example of a light-emission period and black data display period for each pixel line on a display panel according to an embodiment of the present invention;

FIG. 7 is a view showing an example of a variation of luminance with black data display period accord-

ing to an embodiment of the present invention;

FIG. 8 is an equivalent circuit diagram of a pixel of an organic light-emitting display according to a second exemplary embodiment of the present invention; and

FIG. 9 is a view showing the timings of driving signals in a display interval for an organic light-emitting display according to the second exemplary embodiment.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0019] Advantages and features of the present disclosure and methods of accomplishing the same may be understood more readily by reference to the following detailed description of preferred embodiments and the accompanying drawings. The present invention may, however, be embodied in many different forms and should not be construed as being limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete and will fully convey the concept of the invention to those skilled in the art, and the present invention will only be defined by the appended claims.

[0020] Hereinafter, exemplary embodiments of the present invention will be described in detail with reference to the accompanying drawings. Throughout the specification, the same reference numerals indicate substantially the same components. In describing the present invention, when it is deemed that a detailed description of known functions or configurations may unnecessarily obscure the subject matter of the present invention, the detailed description will be omitted.

[0021] Although the embodiments of the present invention disclose transistors of a pixel that are all implemented as P-type, the technical idea of the present invention is not limited thereto and may be applicable to N-type transistors.

[0022] FIG. 1 is a view showing an organic light-emitting display according to an exemplary embodiment of the present invention. All the components of the organic light-emitting display according to all embodiments of the present invention are operatively coupled and configured.

[0023] Referring to FIG. 1, the organic light-emitting display according to the present invention comprises a display panel 10 with a plurality of pixels P, a timing controller 11, a data driver 12, and a gate driver 13.

[0024] The pixels P are arranged in a matrix on the display panel 10. Each pixel P is connected to a data line region 14 and a gate line region 15. The data line region 14 comprises data lines 14A and reference voltage lines 14B (see FIG. 2). The gate line region 15 comprises a plurality of gate lines.

[0025] A semiconductor layer of transistors of each pixel P may be an oxide semiconductor layer, amorphous silicon (a-Si), polycrystalline silicon (poly-Si), or organic semiconductor.

[0026] The timing controller 11 generates a data control signal DDC for controlling the operation timing of the data driver 12 and a gate control signal GDC for controlling the operation timing of the gate driver 13, based on timing signals such as a vertical synchronization signal Vsync, a horizontal synchronization signal Hsync, a dot clock signal DCLK, and a data enable signal DE. Also, the timing controller 11 generates digital compensation data MDATA for compensating for changes in the threshold voltage and mobility of a driving transistor by modulating input digital video data DATA with reference to a digital sensing voltage value supplied from the data driver 12, and then supplies the digital compensation data MDATA to the data driver 12.

[0027] In a sensing operation, the data driver 12 supplies the pixels P with a sensing data voltage synchronized with a first scan signal for sensing, based on a data control signal DDC from the timing controller 11, and converts sensing voltages input from the display panel 10 through the reference voltage lines (14B of FIG. 2) into digital values and supplies them to the timing controller 11. In an image display operation, the data driver 12 converts digital compensation data MDATA input from the timing controller 11 into a data voltage for image display, and then synchronizes the data voltage for image display with a first scan signal for image display and supplies it to the data lines (14A of FIG. 2).

[0028] The gate driver 13 generates a gate pulse based on a gate control signal GDC from the timing controller 11. The gate pulse comprises a scan signal, a sense signal, and a black data control signal. The black data control signal maintains gate-off voltage in the sensing operation. The timings of the scan signal and sense signal may vary for sensing and display operations. The gate driver 13 may be provided directly on the display panel 10 by GIP (gate-driver in panel) technology.

[0029] FIG. 2 is a view showing an example of a pixel structure and a data driver according to a first exemplary embodiment of the present invention. FIG. 2 depicts a first pixel P arranged on an nth pixel line HL_n.

[0030] Referring to FIGS. 1 and 2, the pixels arranged on the nth pixel line are connected to the data driver 12 through a first data line 14A and a first reference voltage line 14B. A sensing capacitor C_x for storing the source voltage of a second node N2 as a sensing voltage V_{sen} may be formed on the reference voltage line 14B.

[0031] The data driver 12 comprises a digital-analog converter DAC, an analog-digital converter ADC, a reset switch SW1, and a sampling switch SW2.

[0032] In a sensing operation, the digital-analog converter DAC may generate a data voltage V_{data} for sensing and output it to the data line 14A, under control of the timing controller 11. In an image display operation, the DAC may convert digital compensation data into a data voltage V_{data} for image display and output it to the data line 14A, under control of the timing controller 11.

[0033] The reset switch SW1 switches the current flow between an input terminal of reset voltage V_{pre} and the

reference voltage line 14B, in response to a reset control signal SPRE. In the sensing operation, the sampling switch SW2 switches the current flow between the reference voltage line 14B and the analog-digital converter ADC, in response to a sampling control signal SSAM, and supplies the ADC with a sensing voltage V_{sen}, which is the source voltage of the driving transistor DT stored in the sensing capacitor C_x on the reference voltage line 14B for a certain period of time. In the display operation, the sampling switch SW2 continues to remain turned off in response to a sampling control signal SSAM.

[0034] Each pixel P comprises an organic light-emitting diode OLED, a driving transistor DT, first to third transistors T1 to T3, and a capacitor C_{st}.

[0035] The organic light-emitting diode OLED emits light by a drive current supplied from the driving transistor DT. Multiple layers of organic compounds are formed between an anode and cathode of the organic light-emitting diode OLED. The organic compound layers may comprise at least one hole transfer layer, at least an electron transfer layer, and an emission layer EML. The hole transfer layer is a layer that injects or transfers a hole into the emission layer - for example, a hole injection layer HIL, a hole transport layer HTL, and an electron blocking layer EBL. The electron transfer layer is a layer that injects or transfers an electron into the emission layer - for example, an electron transport layer ETL, an electron injection layer EIL, and a hole blocking layer HBL. The anode of the organic light-emitting diode OLED is connected to the second node N2, and the cathode of the organic light-emitting diode OLED is connected to an input terminal of low-potential driving voltage EVSS.

[0036] The driving transistor DT controls the drive current I_{oled} flowing through the organic light-emitting diode OLED according to a gate-source voltage V_{gs}. The driving transistor DT comprises a gate electrode connected to a first node N1, a drain electrode connected to an input terminal of high-potential driving voltage EVDD, and a source electrode connected to the second node N2.

[0037] The storage capacitor C_{st} is connected between the first node N1 and the second node N2.

[0038] The first transistor T1 comprises a gate electrode connected to an input terminal that supplies a scan signal SCAN, a drain electrode connected to the data line 14A, and a source electrode connected to the first node N1.

[0039] The second transistor T2 comprises a gate electrode connected to an input terminal that supplies a sense signal SEN, a drain electrode connected to the second node N2, and a source electrode connected to the reference voltage line 14B.

[0040] The third transistor T3 comprises a gate electrode connected to an input terminal that supplies a black data control signal BS, a drain electrode connected to the reference voltage line 14B, and a source electrode connected to the first node N1.

[0041] A reference voltage V_{ref} applied through the reference voltage line 14B may be well below an oper-

ating range of the organic light-emitting diode OLED so as to keep the organic light-emitting diode OLED from emitting light during a programming period. For example, the reference voltage V_{ref} may be set to be equal to or lower than the low-potential driving voltage $EVSS$.

[0042] FIG. 3 is a view showing an example of a driving period for the organic light-emitting display according to the present invention.

[0043] Referring to FIG. 3, the driving period for the organic light-emitting display according to the present invention comprises first and second non-display periods $X1$ and $X2$ and an image display period $X0$.

[0044] The first non-display period $X1$ may be defined as the time from power on PON until several tens or hundreds of frames later, and the second non-display period $X2$ may be defined as the time from power off $POFF$ until several tens or hundreds of frames later.

[0045] The image display period $X0$ comprises display intervals DF during which a data voltage is written to the pixels P and vertical blanking intervals VB during which no video data is written.

[0046] A compensation period is positioned in a part other than the display intervals DF . The compensation period may belong to the first and second non-display periods $X1$ and $X2$ or to the vertical blanking intervals VB . During the compensation period, the data driver 12 generates a compensation data voltage by sensing the threshold voltage V_{th} of the driving transistor DT and calculating the variation in threshold voltage V_{th} based on the sampled threshold voltage V_{th} .

[0047] The compensation period comprises a programming period T_{pg} , a sensing period T_{sen} , and a sampling period T_{sam} .

[0048] FIG. 4 is a view showing an example of the timings of driving signals in a compensation period according to an embodiment of the present invention. An operation of the compensation period will be described below with reference to FIGS. 2 and 4.

[0049] In the programming period T_{pg} , the gate-source voltage of the driving transistor DT is set to turn on the driving transistor DT . To this end, a scan signal $SCAN$, a sense signal SEN , and a reset control signal $SPRE$ are input at gate-on level, and a sampling control signal $SSAM$ is input at gate-off level. Accordingly, the first transistor $T1$ is turned on to supply the first node $N1$ with a data voltage V_{data} for sensing that is output from the digital-analog converter DAC , and the reset switch $SW1$ and the second transistor $T2$ are turned on to supply a reference voltage V_{ref} to the second node $N2$. In this case, the sampling switch $SW2$ is in the off state.

[0050] In the sensing period T_{sen} , the source voltage of the driving transistor DT rises due to the current I_{ds} flowing through the driving transistor DT , and is detected as a first sensing voltage V_{sen1} when it is saturated. In the sensing period T_{sen} , the gate-source voltage of the driving transistor DT should be kept constant for accurate sensing. To this end, scan signal $SCAN$ for sensing and a sense signal SEN for sensing is input at gate-on level,

and the reset control signal $SPRE$ and the sampling control signal $SSAM$ are input at gate-off level. In the sensing period T_{sen} , the voltage at the second node $N2$ increases due to the current I_{ds} flowing through the driving transistor DT , and the voltage at the first node $N1$ increases with the increasing voltage at the second node $N2$.

[0051] In the sampling period T_{sam} , the source voltage of the driving transistor DT stored in the sensing capacitor C_x for a certain period of time is supplied as the first sensing voltage V_{sen1} to the ADC . To this end, sense signal SEN and the sampling control signal $SSAM$ are input at gate-on level, and the reset control signal $SPRE$ is input at gate-off level.

[0052] FIG. 5 is a view showing an example of the timings of gate signals for display operation according to the first exemplary embodiment of the present invention depicted in FIG. 2.

[0053] Referring to FIGS. 2 and 5, an operation for a display interval according to the first exemplary embodiment will be described below.

[0054] During the display interval DF , the reset control signal $SPRE$ is kept at gate-on voltage, and the sampling control signal $SSAM$ is kept at gate-off voltage. As a result, the reference voltage line 14B supplies the reference voltage V_{ref} to the second node $N2$.

[0055] In this example, 1 frame comprises the period of time from a first horizontal period 1st H in which data is written to a first pixel line $HL1$ to an n th horizontal period n -th H in which data is written to an n th pixel line HLn . That is, within 1 frame, the pixels P arranged on the first pixel line $HL1$ to n th pixel line HLn are sequentially programmed.

[0056] The driving period for each pixel line HL comprises a programming period, a light-emission period, and a black data display period.

[0057] During the programming period, the gate-source voltage of the driving transistor DT of each pixel P is programmed to a voltage value that reflects a data voltage. During the light-emission period, the driving transistor DT of each pixel P generates a drive current that is proportional to the programmed voltage value, and the organic light-emitting diode $OLED$ emits light by this drive current. The black data display period T_{bdi} is a phase in which the gate electrode and source electrode of the driving transistor DT are reset to stop the organic light-emitting diode $OLED$ from emitting light. The black data display period T_{bdi} is performed for a certain period of time after the organic light-emitting diode $OLED$ emits light, and the start time of the black data display period T_{bdi} may be determined by a black data controller 100 to be described later.

[0058] During the first horizontal period 1st H , the pixels P arranged on the first pixel line $HL1$ receive a first scan signal $SCAN(1)$ and a first sense signal $SEN(1)$. As a result, the first node $N1$ of each of the pixels P arranged on the first pixel line $HL1$ is charged with a data voltage from the data line 14A, and the second node $N2$ is charged with the reference voltage V_{ref} . That is, during

the first horizontal period 1st H, the gate-source voltage V_{gs} of the driving transistor of each of the pixels P arranged on the first pixel line HL1 is programmed to a desired voltage level that reflects the data voltage.

[0059] After completion of the first horizontal period 1st H, the first scan signal SCAN(1) and the first sense signal SEN(1) are inverted to gate-off voltage, and the first node N1 and second node N2 of each of the pixels P arranged on the first pixel line HL1 go to a floating state. Accordingly, the driving transistor DT of each of the pixels P arranged on the first pixel line HL1 generates a drive current I_{ds} in proportion to the programmed voltage level and applies it to the organic light-emitting diode OLED. After the end of the first horizontal period 1st H, the organic light-emitting diode OLED emits light at a brightness corresponding to the drive current I_{ds} to represent a gray level.

[0060] During the second horizontal period 2nd H, the gate-source voltage of the driving transistor DT of each of the pixels P arranged on the second pixel line HL2 is programmed in response to a second scan signal SCAN(2) and a second sense signal SEN(2). Likewise, after completion of the second horizontal period 2nd H, the pixels P arranged on the second pixel line HL2 emit light in response to the programmed voltage.

[0061] During a kth horizontal period (k)th H, the gate-source voltage of the driving transistor DT of each of the pixels P arranged on the kth pixel line is programmed in response to a kth scan signal SCAN(k) and a kth sense signal SEN(k).

[0062] During the kth horizontal period (k)th H, the first sense signal SEN(1) and a first black data control signal BS(1) are inverted to gate-on voltage. As a result, the first and second nodes N1 and N2 of each of the pixels P arranged on the first pixel line HL1 are charged with the reference voltage V_{ref} . Accordingly, after the kth horizontal period (k)th H, the driving transistor DT of each of the pixels P arranged on the first pixel line HL1 generates no drive current, and the organic light-emitting diode OLED is turned off. The organic light-emitting diode OLED of each of the pixels P arranged on the first pixel line HL1 remains turned off until the first horizontal period 1st H of the next frame. That is, the black data display period for the pixels P arranged on the first pixel line HL1 continues from the kth horizontal period (k)th H until the first horizontal period 1st H of the next frame.

[0063] Likewise, during a (k+1)th horizontal period (k+1)th H, the pixels P arranged on a (k+1)th pixel line are programmed, and the pixels P arranged on the second pixel line HL2 are charged with black data and thereby stop emitting light.

[0064] As described above, the organic light-emitting display according to the present invention may improve motion picture response time by using a black data display period. Particularly, the organic light-emitting display according to the present invention may display black data without changing driving frequency. That is, it is possible to improve motion picture response time by inserting

black data without reducing the length of a programming period.

[0065] Moreover, the black data display period according to the present invention may vary in real time.

[0066] FIG. 6 is a view showing an example of a light-emission period and black data display period for each pixel line on a display panel according to an embodiment of the present invention. FIG. 7 is a view showing an example of the relationship between the black data display period and luminance according to an embodiment of the present invention.

[0067] Referring to FIGS. 6 and 7, a black data display period T_{bdi} for each pixel line starts after a certain period of time from the start of a programming period.

[0068] A duty cycle, which is defined as the ratio of a light-emission period to 1 frame, is proportional to k. Since the luminance of each pixel P during 1 frame is proportional to the light-emission period, the value of k determines the luminance of each pixel P.

[0069] A first line gr1 on the graph of FIG. 7 shows the luminance relative to data voltage V_{data} when there is no black data display period T_{bdi} . A second line gr2 shows the luminance relative to data voltage V_{data} when the percentage of a light-emission period T_e in one frame is 50 % ($k=n/2$). A third line gr3 shows the luminance relative to data voltage V_{data} when the percentage of the light-emission period T_e in one frame is 25 % ($k=n/4$).

[0070] The black data controller 100 controls the black data display period T_{bdi} using the relationship between the black data display period T_{bdi} and luminance shown in FIG. 7. Particularly, the black data controller 100 controls the black data display period T_{bdi} by controlling the timings of scan signals SCAN and black data control signals BS, in order to improve the luminance characteristics of a low grayscale region.

[0071] [Table 1] below shows an example in which the black data controller 100 sets a duty cycle.

[Table 1]

Average value of video data	Duty cycle
$DATA_avg \geq DATA_ref$	50 %
$DATA_avg < DATA_ref$	25 %

[0072] Referring to [Table 1], an operation of the black data controller 100 will be described below.

[0073] The black data controller 100 receives video data DATA for each pixel line, and calculates the average video data $DATA_avg$ for each pixel line. For example, for m pixels P (m is a natural number) arranged on each pixel line HL, the black data controller 100 calculates the average value of m video data sets DATA. The black data controller 100 compares the average video data $DATA_avg$ with a preset threshold value $DATA_ref$. If the average video data $DATA_avg$ is at or above the threshold value $DATA_ref$, the black data controller 100 sets the duty cycle to 50 %. If the average video data

DATA_avg is below the threshold value DATA_ref, the black data controller 100 sets the duty cycle to 25 %. That is, the black data controller 100 sets the duty cycle to a low percentage when the average video data DATA_avg is low, so as to decrease the luminance of the pixels P. The black data controller 100 may set the duty cycle by varying the value of "k" shown in FIGS. 5 and 7. That is, the black data controller 100 controls the output timing of a black data control signal BS and the timing of a sense signal SEN synchronized with the black data control signal BS. The duty cycle set by the black data controller 100 is not limited to the examples given in [Table 1]. The threshold value DATA_ref is a reference luminance for making low gray levels distinctive.

[0074] In the organic light-emitting display, when the black data display period T_{bdi} is inserted, the overall luminance of the pixels P decreases. Due to this, the luminance differences in low grayscale display areas decrease depending on video data. The black data controller 100 according to the present invention may decrease luminance by reducing the light-emission period T_e of pixels P representing low gray levels, thereby providing a highlighted low grayscale representation.

[0075] FIG. 8 is a view showing a pixel array of an organic light-emitting display according to a second exemplary embodiment. FIG. 9 is a view showing driving signals for the pixel array of FIG. 8. Regarding the components in FIGS. 8 and 9, a detailed description will be omitted or brief if they are substantially the same as those in the foregoing exemplary embodiments.

[0076] Referring to FIGS. 8 and 9, each pixel according to the second exemplary embodiment comprises a first transistor T1 connected to a first node N1 and a second transistor T2 connected to a second node N2. The first transistor T1 comprises a gate electrode connected to an input terminal that supplies a scan signal SCAN, a drain electrode connected to a data line 14A, and a source electrode connected to the first node N1. The second transistor T2 comprises a gate electrode connected to the input terminal that supplies a scan signal SCAN, a drain electrode connected to the second node N2, and a source electrode connected to a reference voltage line 14B. That is, the first and second transistors T1 and T2 are all turned on in response to a scan signal SCAN.

[0077] Like in the first exemplary embodiment, an operation of the organic light-emitting display according to the second exemplary embodiment comprises a programming period, a light-emission period, and a black data display period. The programming period, light-emission period, and black data display period operate in the same way as the first exemplary embodiment, except that the first transistor T1 and the second transistor T2 are all controlled by scan signals SCAN. Since the timings at which the first to third transistors are turn-on and turn-off are substantially the same as in the first exemplary embodiment, the pixels P work in the same way in the first and second exemplary embodiments.

[0078] Although embodiments have been described

with reference to a number of illustrative embodiments thereof, it should be understood that numerous other modifications and embodiments can be devised by those skilled in the art that will fall within the scope of this disclosure. More particularly, various variations and modifications are possible in the component parts and/or arrangements of the subject combination arrangement within the scope of the disclosure, the drawings and the appended claims. In addition to variations and modifications in the component parts and/or arrangements, alternative uses will also be apparent to those skilled in the art.

Claims

1. An organic light-emitting display comprising:

a driving transistor (DT) that is configured to drive an organic light-emitting diode (OLED);
a first transistor (T1) connected between a data line (14A) configured to supply a data voltage (V_{data}) and a gate electrode of the driving transistor (DT);
a second transistor (T2) connected between a reference voltage input line (14B) and a source electrode of the driving transistor (DT); and
a third transistor (T3) that is configured to directly charge the gate electrode of the driving transistor (DT) with a reference voltage supplied from the reference voltage input line (14B), in response to a black data control signal (BS),
wherein the organic light-emitting display is configured such that the third transistor (T3) directly receives the reference voltage by being turned on for a certain period of time after the gate electrode of the driving transistor (DT) is programmed with the data voltage (V_{data}) in one frame before receiving a data voltage (V_{data}) in the next frame.

2. The organic light-emitting display of claim 1, wherein the source electrode of the driving transistor (DT) is connected to an anode of the organic light-emitting diode (OLED), and the organic light-emitting display is configured such that the reference voltage supplied from the reference voltage input line (14B) is applied to the gate electrode and the source electrode of the driving transistor (DT) in a black data display period (T_{bdi}) so as to reset the gate electrode and the source electrode and keep the organic light-emitting diode (OLED) turned off.

3. The organic light-emitting display of claim 2, further comprising a display panel (10), wherein the display panel (10) comprises a first pixel line (HL1) to a nth pixel line (HLn), wherein the organic light-emitting display is configured such that the first transistor (T1) of each pixel (P) on each pixel line is turned on in

response to a scan signal (SCAN) during a programming period (Tpg) to charge the gate electrode of the driving transistor (DT) with the data voltage (Vdata), and the pixels (P) arranged on the first pixel line (HL1) to the nth pixel line (HLn) are sequentially supplied with the scan signal (SCAN), where n is a natural number.

4. The organic light-emitting display of claim 3, configured such that the second transistor (T2) is turned on in synchronization with the first transistor (T1) during the programming period (Tpg).
5. The organic light-emitting display of claim 4, wherein the one frame comprises the period of time from a first horizontal period (1st H) corresponding to the programming period (Tpg) of the pixels (P) arranged on the first pixel line (HL1) to an nth horizontal period corresponding to the programming period (Tpg) of the pixels (P) arranged on the nth pixel line (HLn), and the organic light-emitting display is configured such that the third transistor (T3) of each of the pixels (P) arranged on the first pixel line (1st H) is turned on for a kth horizontal period ((k)th H), where k is a natural number greater than 2 and less than or equal to n.
6. The organic light-emitting display of claim 5, configured such that as the average value of data voltages (Vdata) of pixels (P) arranged on one pixel line is lowered, the value of k is lowered.
7. A driving method of an organic light-emitting display comprising pixels (P) arranged on a first pixel line (HL1) to an nth pixel line (HLn), where n is a natural number, the method comprising:

sequentially programming a data voltage (Vdata) for the pixels (P) arranged on the first pixel line (HL1) to the nth pixel line (HLn);
sequentially causing the programmed pixels (P) to emit light; and
writing black data to the pixels (P) arranged on the first pixel line (HL1), in a period synchronized with the programming of the pixels (P) arranged on a kth pixel line, where k is a natural number greater than 2 and less than or equal to n.

8. The driving method of claim 7, wherein the sequentially programming of the data voltage (Vdata) comprises:

charging a gate electrode of a driving transistor (DT) of each pixel (P) with a data voltage (Vdata) and applying a reference voltage to a source electrode of the driving transistor (DT),
wherein the reference voltage is lower than an operating voltage of an organic light-emitting di-

ode (OLED).

9. The driving method of claim 8, wherein the writing of the black data comprises:

applying the reference voltage to the gate electrode and source electrode of the driving transistor (DT).

10. The driving method of claim 8 or 9, wherein, in the writing of the black data to the pixels (P) arranged on the first pixel line (HL1), as the average value of video data (DATA) of the first pixel line (HL1) is lowered, the value of k is lowered.

FIG. 1

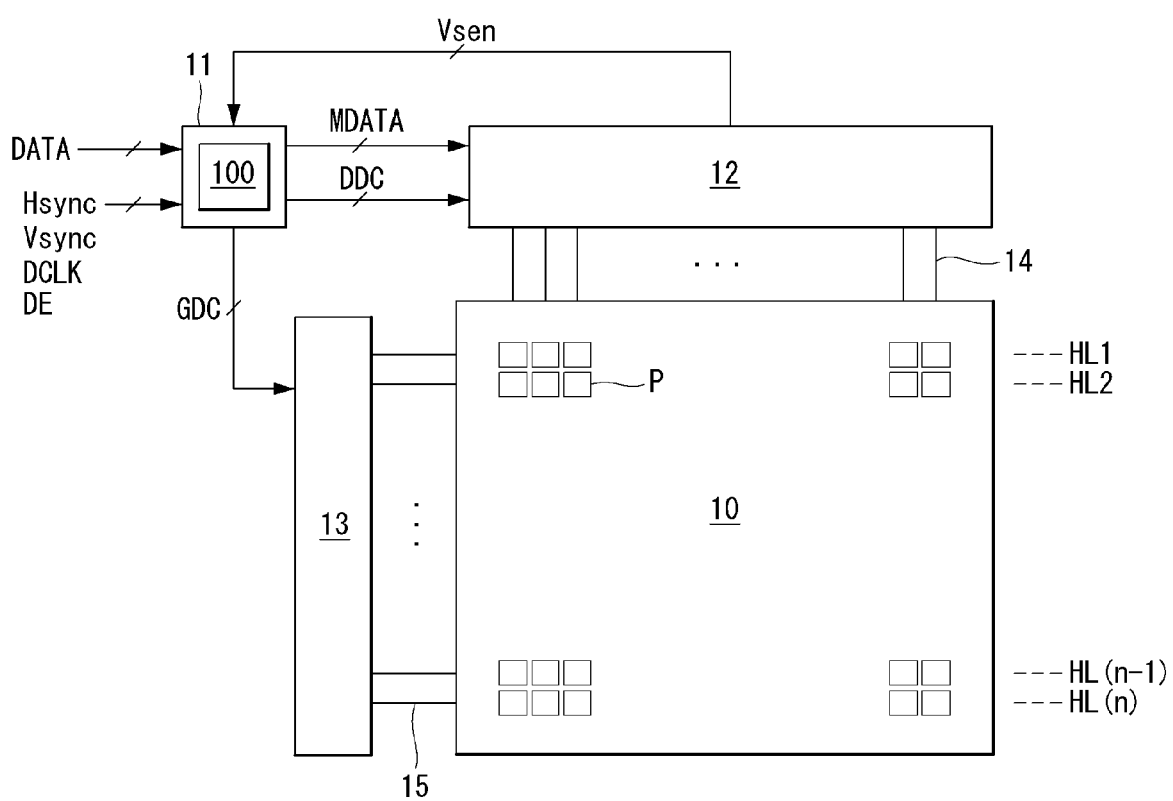


FIG. 2

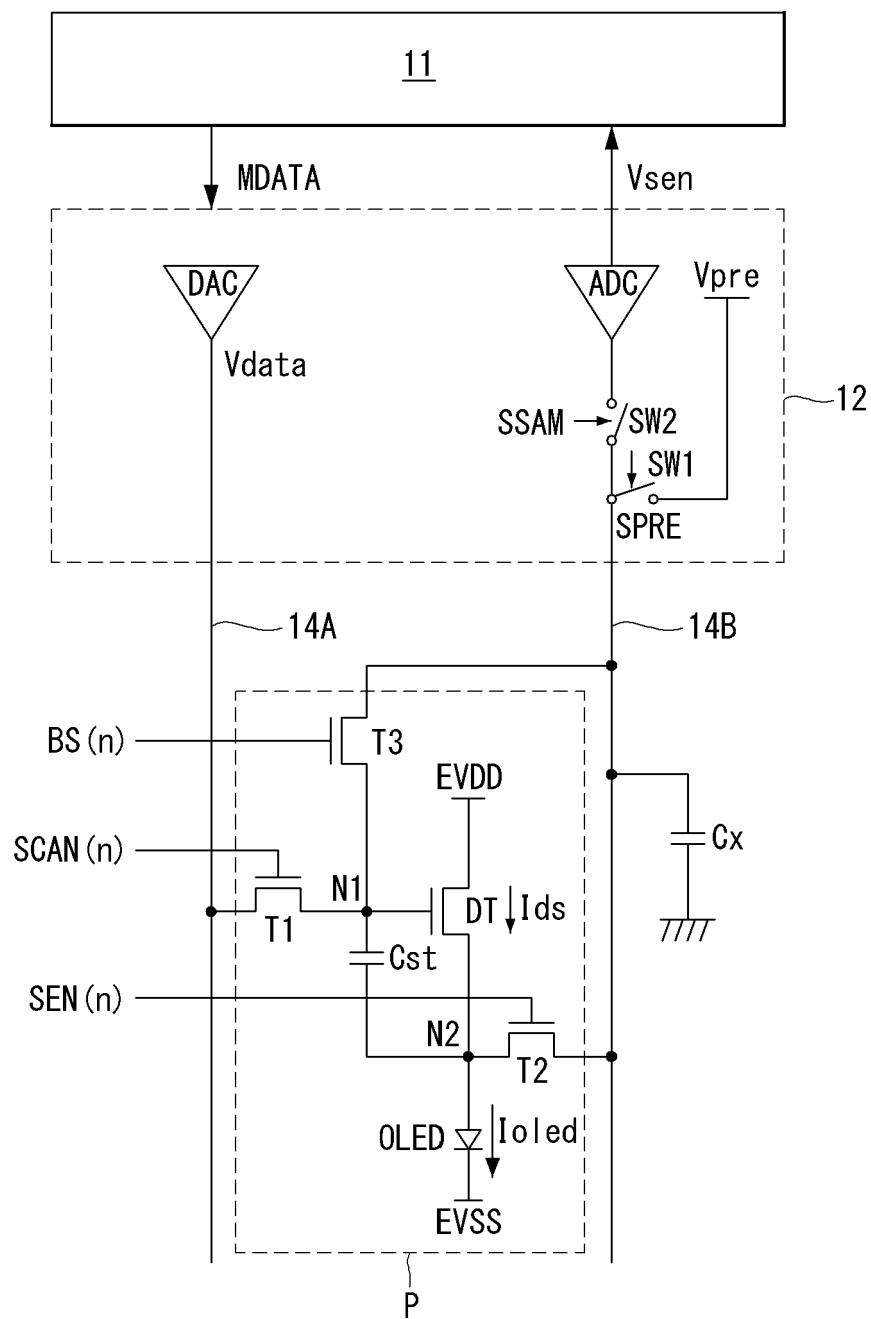


FIG. 3

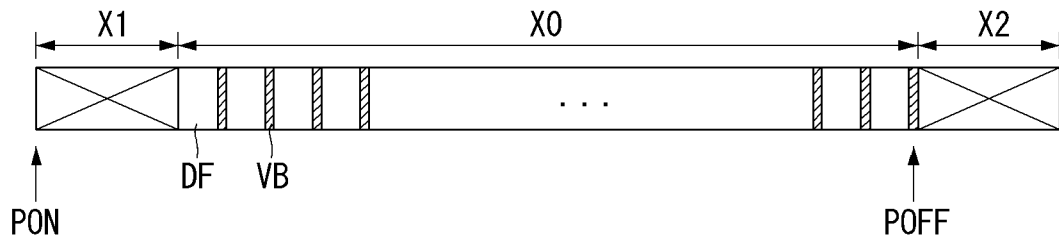


FIG. 4

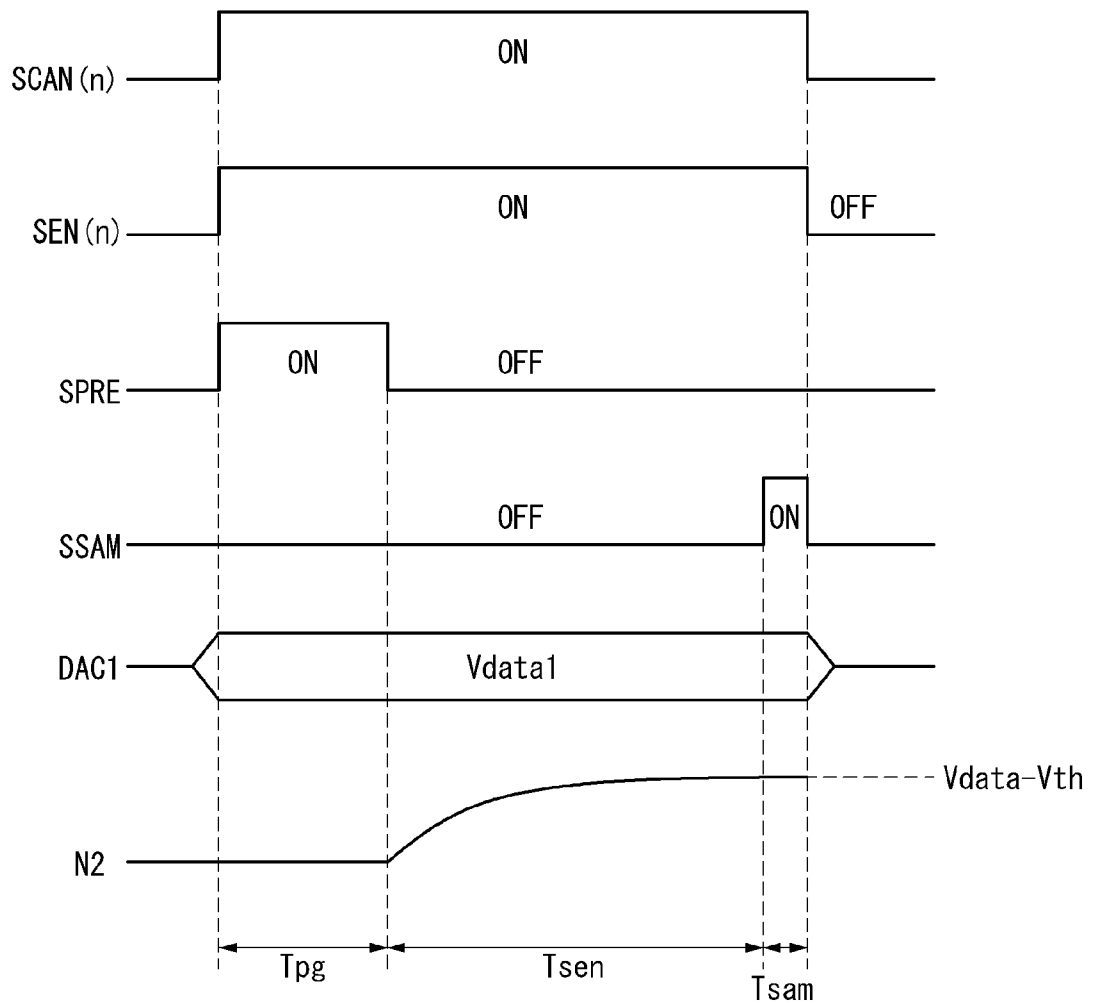


FIG. 5

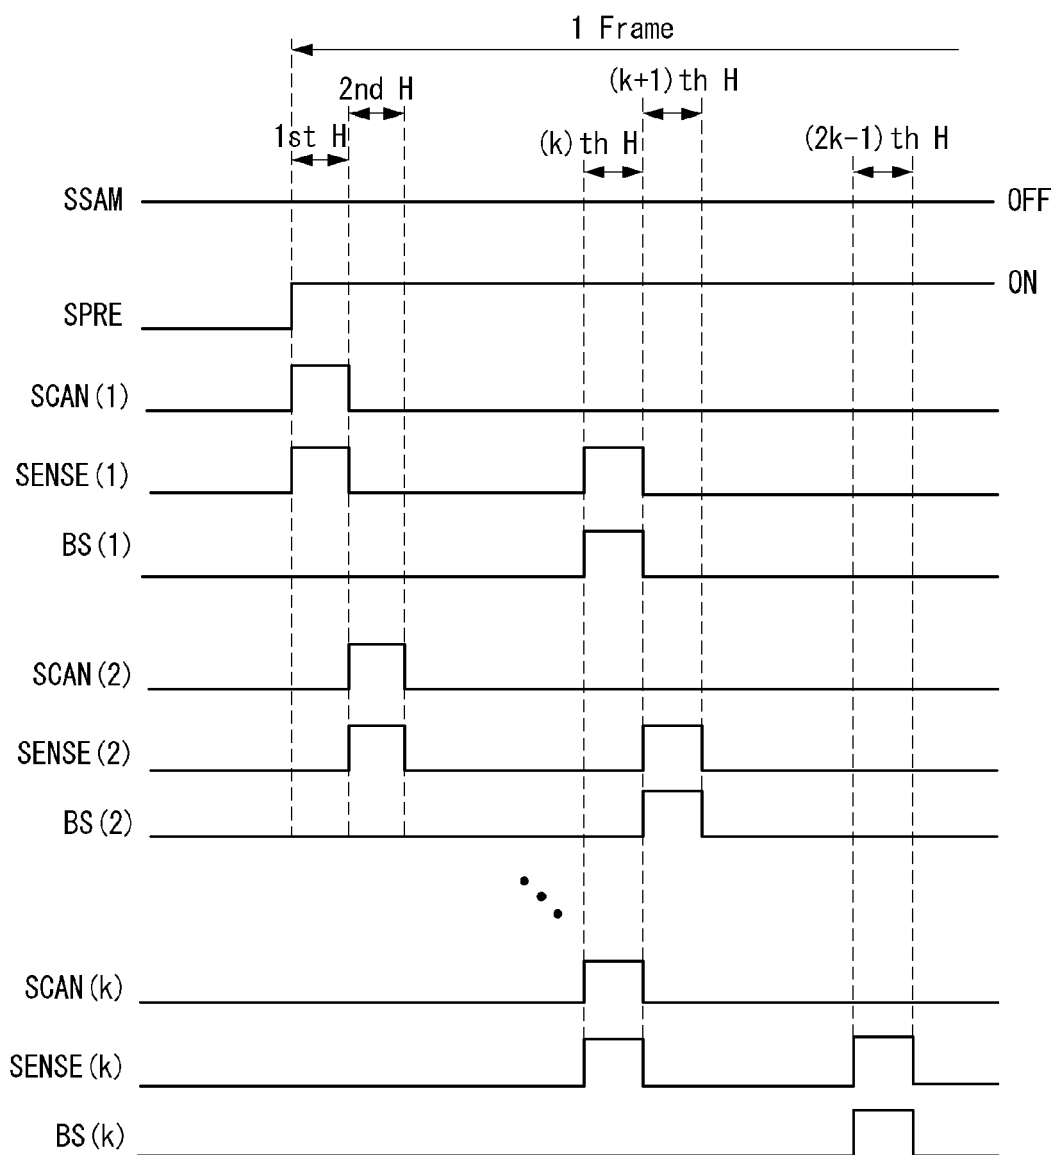


FIG. 6

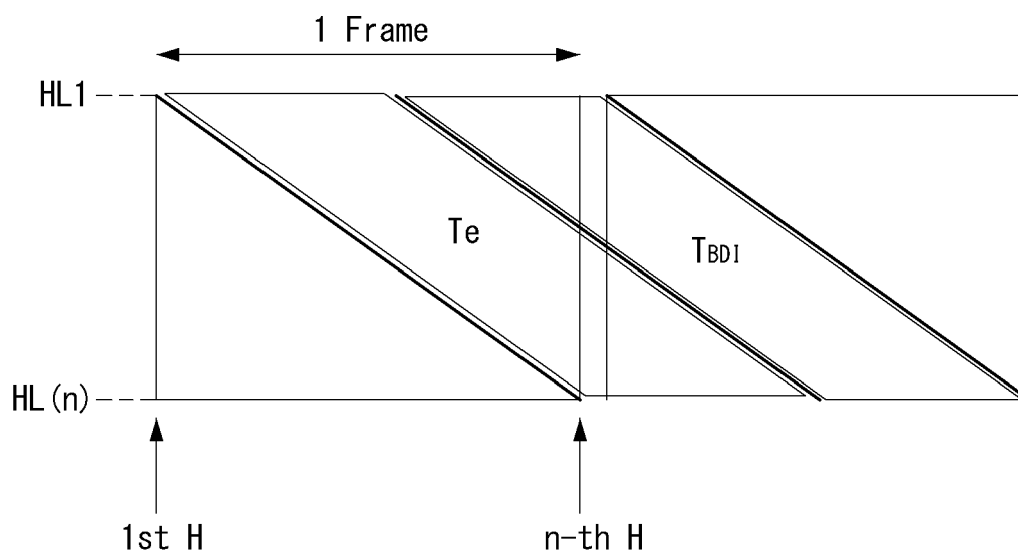


FIG. 7

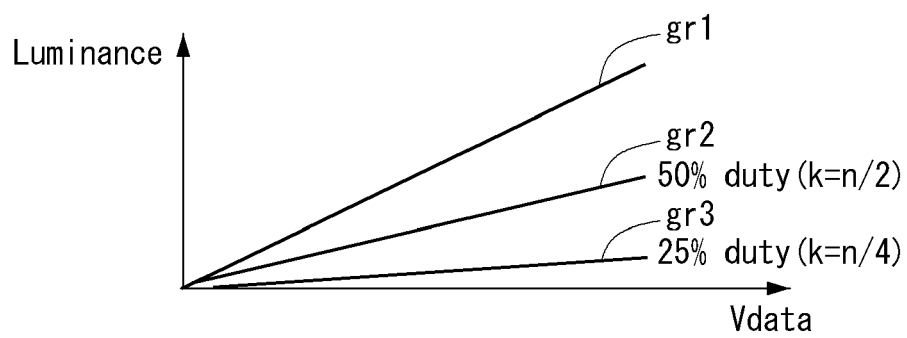


FIG. 8


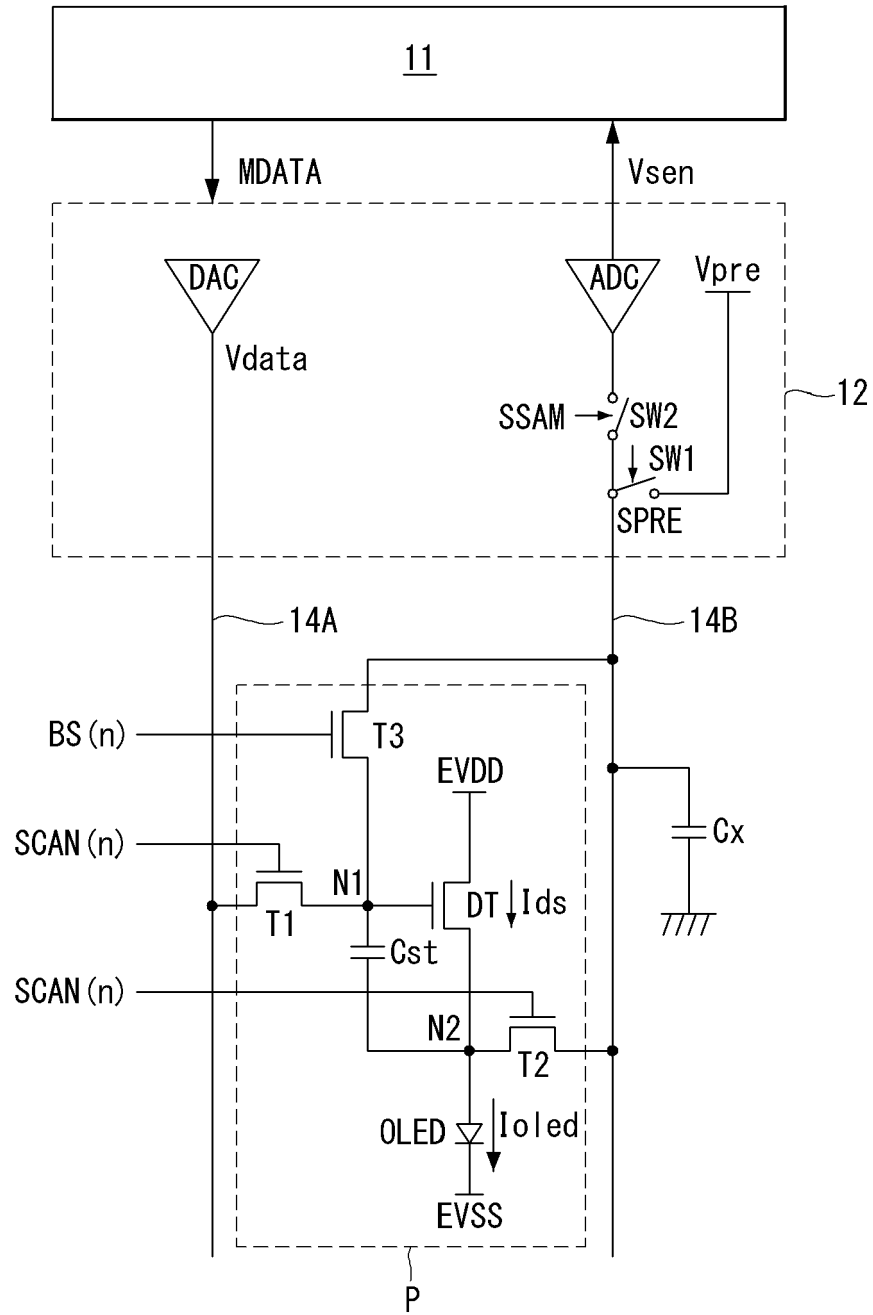


FIG. 9



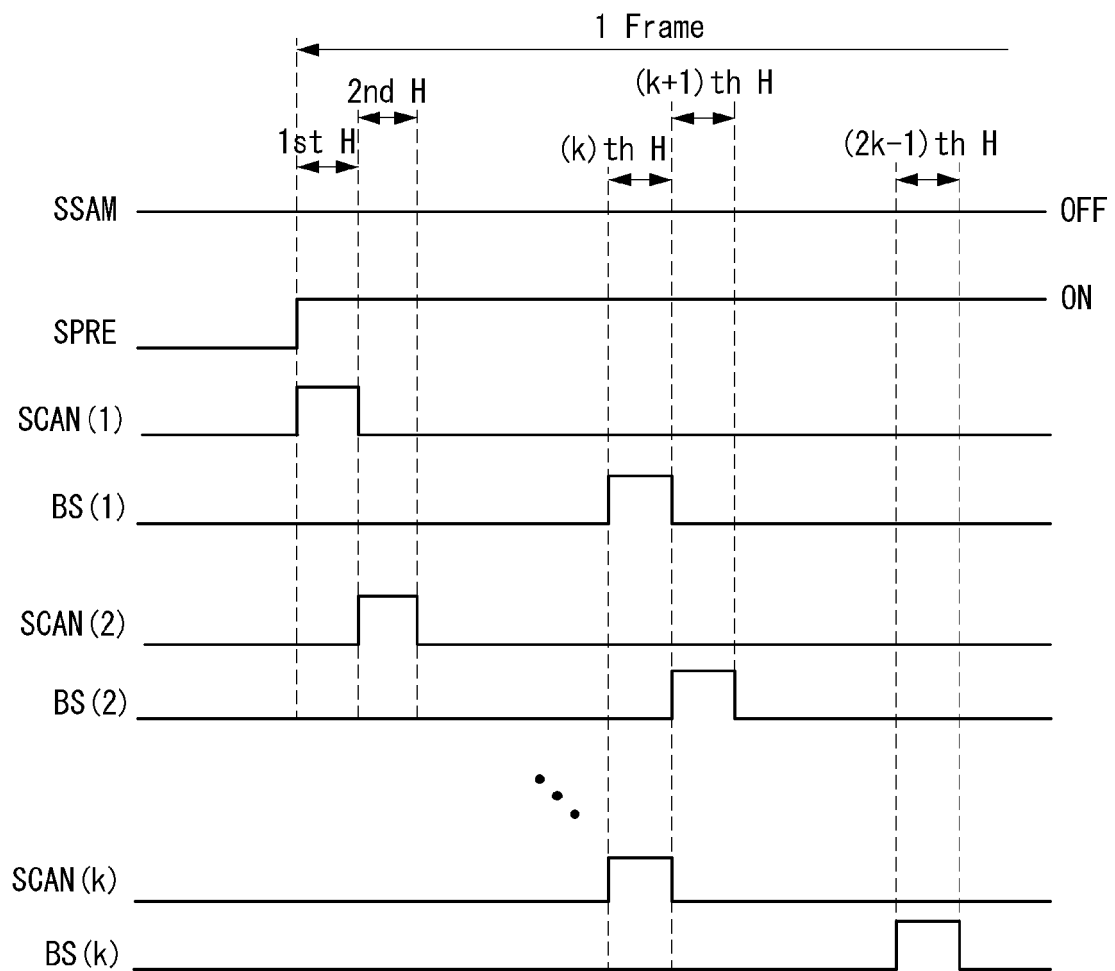

EUROPEAN SEARCH REPORT

Application Number
EP 17 20 3492

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT				
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)	
X	WO 2015/118601 A1 (JOLED INC [JP]) 13 August 2015 (2015-08-13)	1	INV. G09G3/3233	
Y	* the whole document * & US 2017/011684 A1 (NAKATANI TOSHIKUNI [JP]) 12 January 2017 (2017-01-12) * abstract; figures 2,5 * * paragraph [0044] * * paragraph [0056] - paragraph [0058] * * paragraph [0131] *	2,3,8,9		
X	US 2016/225318 A1 (CHOI JUNG HO [KR]) 4 August 2016 (2016-08-04)	7		
Y	* abstract; figure 1 * * paragraph [0069] - paragraph [0076] * * paragraph [0070] - paragraph [0071] * * paragraph [0075] - paragraph [0076] *	2,3,8,9		
A	US 2012/038608 A1 (SEO HAE-KWAN [KR] ET AL) 16 February 2012 (2012-02-16) * abstract * * paragraph [0027] - paragraph [0033] *	1-5		
				TECHNICAL FIELDS SEARCHED (IPC)
				G09G
The present search report has been drawn up for all claims				
Place of search The Hague		Date of completion of the search 23 March 2018	Examiner Gonzalez Ordenez, O	
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document				

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 20 3492

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-03-2018

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2015118601 A1	13-08-2015	JP 6206512 B2	04-10-2017
		JP W02015118601 A1	23-03-2017
		US 2017011684 A1	12-01-2017
		WO 2015118601 A1	13-08-2015

US 2016225318 A1	04-08-2016	KR 20160095306 A	11-08-2016
		US 2016225318 A1	04-08-2016

US 2012038608 A1	16-02-2012	CN 102376248 A	14-03-2012
		JP 6017756 B2	02-11-2016
		JP 2012037858 A	23-02-2012
		KR 20120014713 A	20-02-2012
		TW 201207817 A	16-02-2012
		US 2012038608 A1	16-02-2012

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

专利名称(译)	有机发光显示器及其驱动方法		
公开(公告)号	EP3327713A1	公开(公告)日	2018-05-30
申请号	EP2017203492	申请日	2017-11-24
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	LIM MYUNGGI WOO KYOUNGDON BAE JAEYOON		
发明人	LIM, MYUNGGI WOO, KYOUNGDON BAE, JAEYOON		
IPC分类号	G09G3/3233		
CPC分类号	G09G3/3233 G09G2300/0819 G09G2300/0861 G09G2310/0251 G09G2310/0262 G09G2320/0247 G09G2320/0295		
优先权	1020160160638 2016-11-29 KR		
外部链接	Espacenet		

摘要(译)

有机发光显示器包括驱动有机发光二极管 (OLED) 的驱动晶体管 (DT) , 连接在提供数据电压的数据线 (14A) 和驱动的栅电极之间的第一晶体管 (T1) 晶体管 (DT) , 连接在参考电压输入线 (14B) 和驱动晶体管 (DT) 的源极之间的第二晶体管 (T2) , 以及直接对驱动晶体管 (DT) 的栅极进行充电的第三晶体管 (DT) , 其响应于黑数据控制信号 (BS) 而从参考电压输入线 (14B) 供应参考电压, 其中第三晶体管 (T3) 通过导通一段时间直接接收参考电压在接收下一帧中的数据电压之前的时间。

