

(19)



(11)

EP 1 748 507 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
05.03.2014 Bulletin 2014/10

(51) Int Cl.:
H01L 27/32 ^(2006.01) **H01L 51/52** ^(2006.01)

(21) Application number: **06118035.2**

(22) Date of filing: **28.07.2006**

(54) Organic light emitting display and its method of fabrication

Organische lichtemittierende Anzeige und Herstellungsverfahren

Dispositif électroluminescent organique et méthode de fabrication

(84) Designated Contracting States:
DE FR GB

(30) Priority: **28.07.2005 KR 20050069173**

(43) Date of publication of application:
31.01.2007 Bulletin 2007/05

(73) Proprietor: **Samsung Display Co., Ltd.**
Yongin-City, Gyeonggi-Do, 446-711 (KR)

(72) Inventors:
• **Shin, Hyun Soo**
Legal & IP Team, Samsung SDI Co., Ltd
Gyeonggi-do (KR)
• **Jeong, Jae Kyeong**
Legal & IP Team, Samsung SDI Co.,
Gyeonggi-do (KR)

• **Mo, Yeon Gon**
Legal & IP Team, Samsung SDI Co., Ltd.
Gyeonggi-do (KR)
• **Jin, Dong Un**
Legal & IP Team, Samsung SDI Co., Ltd.
Gyeonggi-do (KR)

(74) Representative: **Hengelhaupt, Jürgen et al**
Gulde Hengelhaupt Ziebig & Schneider
Patentanwälte - Rechtsanwälte
Wallstrasse 58/59
10179 Berlin (DE)

(56) References cited:
WO-A-98/30923 WO-A-03/001555
US-A- 5 256 601 US-A- 5 965 981
US-A1- 2004 155 846

EP 1 748 507 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

1. Field of the Invention

[0001] The present invention relates to an Organic Light Emitting Display (OLED) and its method of fabrication, and more particularly, to an OLED and its method of fabrication in which a photochromatic layer is formed on a first surface of a transparent substrate of an OLED so that it is possible to realize a light emitting display of high visibility and contrast even when intense external light is incident.

2. Description of the Related Art

[0002] An OLED is formed of uniform and flat thin films. Also, in the OLED, an electrode that emits light is formed of a transparent conductive thin film and the opposite electrode is formed of aluminum or another heat resistant metal. Since the metal thin films have a high reflectivity, when intense light (light emitted from a strong light source, such as solar rays) is directly incident from an external light source, the clarity of a screen deteriorates.

[0003] Therefore, in order to prevent the displayed image from deteriorating due to the reflection of external light, a reflection preventing film is formed on the surface of or inside the display. According to such a technology, for example, in OLEDs of common and charged structures, a diamond like carbon thin film of low reflectivity is formed between a metal electrode film and an insulating film, between an insulating film and a fluorescent film, or between a metal conductive film and a fluorescent film so that it is possible to minimize reflection of the external light from the metal electrodes and to thus increase the efficiency of electrons irradiated into the fluorescent film.

[0004] As described above, when a reflection preventing layer is inserted in order to prevent the external light from being reflected from the metal thin films, it is possible to see a clear image under an intense external light source. However, when the external light source does not exist, the reflection preventing layer is not required. However, the reflection preventing layer is still present so that the emission efficiency of the OLED is reduced.

SUMMARY OF THE INVENTION

[0005] Accordingly, it is an object of the present invention to provide an Organic Light Emitting Display (OLED) and its method of fabrication in which a photochromatic layer is formed on a first surface of a transparent substrate of the OLED so that it is possible to realize a light emitting display of high visibility and contrast even when intense external light is incident.

[0006] In order to achieve the foregoing and/or other aspects of the present invention, an Organic Light Emitting Display (OLED) is provided including: a transparent substrate; at least one transparent thin film transistor arranged on a first surface of the transparent substrate;

and an organic light emitting device arranged on and electrically connected to the transparent thin film transistor, wherein the organic light emitting device comprises a first electrode layer, an emission layer and a second electrode layer, wherein the first electrode layer and the second electrode layer comprise transparent electrodes, and wherein a photochromatic layer is arranged on a second surface of the transparent substrate.

[0007] The photochromatic layer preferably includes at least one of an inorganic material, an organic material, and a glass material that visibly changes in response to light.

[0008] Preferably the material of the photochromatic layer is adapted to change its transmissibility for light in the visible range in response to the intensity (or energy density) of radiation (which is radiated onto the photochromatic layer or through the photochromatic layer) in the visible range or the ultraviolet range. Preferably the transmissibility is lower than 50% for a radiation having an energy density of 50 W/m² or more and the transmissibility is higher than 60% for a radiation having an energy density of 20 W/m² or less. More preferably, the transmissibility is lower than 35% for a radiation having an energy density of 250 W/m² or more and the transmissibility is higher than 70% for a radiation having an energy density of 10 W/m² or less. And still more preferably, the transmissibility is lower than 15% for a radiation having an energy density of 500 W/m² or more and the transmissibility is higher than 80% for a radiation having an energy density of 5 W/m² or less.

Therefore, the Organic Light Emitting Display (OLED) of the present invention preferably does not comprise a reflection preventing layer (e.g. a diamond like carbon thin film) having a low reflectivity (e.g. a reflectivity of less than 10%) independent of the intensity of radiation being formed between a metal electrode film and an insulating film, between an insulating film and a fluorescent film, or between a metal conductive film and a fluorescent film. The photochromatic layer preferably includes a borosilicate containing either Ag or halogen compound crystals. The color of the photochromatic layer preferably changes in response to being exposed to either light or ultraviolet (UV) rays.

[0009] The transparent TFT preferably includes a semiconductor layer, a gate electrode, and source and drain electrodes.

[0010] The semiconductor layer preferably includes a material having a wide band gap of at least 3.0 eV. The semiconductor layer preferably includes one of: an oxide, including ZnO, ZnSnO, CdSnO, GaSnO, TiSnO, InGaZnO, CuAlO, SrCuO or LaCuOS; a nitride including GaN, InGaN, AlGaN or InGaAlN; a carbide including SiC; and diamond.

[0011] The gate electrode and the source and drain electrode preferably include one of Indium Tin Oxide (ITO), Indium Zinc Oxide (IZO) and Indium Tin Zinc Oxide (ITZO).

[0012] The first electrode layer and the second elec-

trode layer preferably include one of ITO, IZO and ITZO.

[0013] The organic light emitting device preferably effects two sided emission.

[0014] In order to also achieve the foregoing and/or other aspects of the present invention, a method of fabricating an Organic Light Emitting Display (OLED) is provided, the method including: forming a photochromatic layer on a first surface of a transparent substrate; forming at least one transparent Thin Film Transistor (TFT) on a second surface of the transparent substrate; and forming an organic light emitting device on the transparent TFT and electrically connecting the organic light emitting device to the transparent TFT, wherein the organic light emitting device comprises a first electrode layer, an emission layer and a second electrode layer, wherein the first electrode layer and the second electrode layer comprise transparent electrodes.

[0015] The photochromatic layer is preferably formed by a sol-gel method.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] A more complete appreciation of the present invention, and many of the attendant advantages thereof, will be readily apparent as the present invention becomes better understood by reference to the following detailed description when considered in conjunction with the accompanying drawings in which like reference symbols indicate the same or similar components, wherein:

FIG. 1 is a schematic sectional view of an Organic Light Emitting Display (OLED) according to a first embodiment of the present invention;

FIGs. 2A to 2C are sectional views of processes of a method of fabricating the OLED according to the first embodiment of the present invention;

FIG. 3 is a schematic sectional view of an Organic Light Emitting Display (OLED) according to a second embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0017] Hereinafter, exemplary embodiments of the present invention are described in detail with reference to the attached drawings.

[0018] FIG. 1 is a schematic sectional view of an Organic Light Emitting Display (OLED) according to a first embodiment of the present invention.

[0019] Referring to FIG. 1, an OLED 10 includes a transparent substrate 100, a photochromatic layer 110 formed on a first surface of the transparent substrate 100, at least one transparent Thin Film Transistor (TFT) 130 formed on a second surface of the transparent substrate 100, and an organic light emitting device formed on and electrically connected to the transparent TFT 130.

[0020] The transparent substrate 100 can be formed of an insulating material, such as glass, plastic, silicon, or a synthetic resin, and is preferably a transparent sub-

strate, such as a glass substrate.

[0021] The photochromatic layer 110 is formed on a first surface of the transparent substrate 100 of at least one of an inorganic, an organic, or a glass material that visibly changes by light. In particular, the photochromatic layer 110 is preferably formed of a borosilicate containing Ag or halogen compound crystals. When the photochromatic layer 110 is exposed to light or UV rays, the Cl⁻ ions of the Ag or halogen compound crystals are emitted as electrons so that the emitted electrons reduces Ag⁺ to change Cl⁻ and Ag⁺ into Cl and Ag in a neutral state. Therefore, the photochromatic layer 110 becomes opaque to operate as a black matrix.

[0022] The buffer layer 120 is formed on the transparent substrate 100 of a transparent insulating material, such as a nitride film or an oxide film. However, the present invention is not limited to the above.

[0023] The transparent TFT 130 is formed on the buffer layer 120.

[0024] Hereinafter, the transparent TFT 130 is described in detail. A transparent semiconductor layer 131 of the transparent TFT 130 is formed on the buffer layer 120 in a predetermined pattern. The transparent semiconductor layer 131 can be formed of at least one conductive metal material selected from the group consisting of ZnO, ZnSnO, GaSnO, GaN, and SiC that are wide band gap materials whose band gap is no less than 3.0eV. On the other hand, if the band gap is less than 3.0eV, the semiconductor layer 131 cannot transmit visible rays.

[0025] A gate insulating layer 132 of the transparent TFT 130 is formed on the transparent semiconductor layer 131 to insulate the semiconductor layer 131 from the source and drain electrodes 135a and 135b. The gate insulating layer 132 is formed of an oxide film, a nitride film, or a transparent insulating material. However, the present invention is not limited to the above.

[0026] A gate electrode 133 of the transparent TFT 130 is formed on the gate insulating layer 132. The gate electrode 133 is formed on a channel region (not shown) of the transparent semiconductor layer 131 in a predetermined pattern. The gate electrode 133 can be formed of Indium Tin Oxide (ITO), Indium Zinc Oxide (IZO), Indium Tin Zinc Oxide (ITZO), or Indium Cesium Oxide (ICO) that are either a transparent or semi-transparent metal. However, the present invention is not limited to the above.

[0027] An interlayer insulating layer 134 of the transparent TFT 130 is formed on the gate electrode 133. The insulating material of the interlayer insulating layer 134 can be formed of the same material as the gate insulating layer 132.

[0028] The source and drain electrodes 135a and 135b of the transparent TFT 130 are formed on the interlayer insulating layer 134 to be electrically connected to both sides of the transparent semiconductor layer 131 through contact holes formed in the gate insulating layer 132 and the interlayer insulating layer 134. The source and drain electrodes 135a and 135b can be formed of either metals

having a high conductivity and transparency, such as ITO, IZO, ITZO, and ICO, or semi-transparent metals. However, the present invention is not limited to the above.

[0029] The planarization layer 140 is formed on the transparent TFT 130 of a nitride film, an oxide film, or a transparent insulating material. However, the present invention is not limited to the above. A via hole 151a is formed on the planarization layer 140 by etching a region of the planarization layer 140.

[0030] The first electrode layer 150 is electrically connected to one of the source and drain electrodes 135a and 135b through the via hole 151a formed on the planarization layer 140.

[0031] The pixel defining layer 160 is formed on the first electrode layer 150 to form an aperture 180 that at least partially exposes the first electrode layer 150.

[0032] The emission layer 170 is formed in a region on the pixel defining layer 160 and on the aperture 180. The emission layer 170 can further include a hole injecting layer, a hole transporting layer, an electron transporting layer, or an electron injecting layer. In the emission layer 170, holes and electrons injected from the first electrode layer 150 and the second electrode layer 190 are combined with each other to generate light.

[0033] The second electrode layer 190 is formed on the emission layer 170 and the pixel defining layer 160. The second electrode layer 190 can be formed of the same metal as the first electrode layer 150.

[0034] FIGs. 2A to 2C are sectional views of processes of a method of fabricating the OLED according to the first embodiment of the present invention.

[0035] First, as illustrated in FIG. 2A, the photochromatic layer 110 is formed on a first surface of the transparent substrate 100 to a predetermined thickness.

[0036] To be specific, the photochromatic layer 110 is formed of at least one photochromatic material selected from the group consisting of an inorganic, an organic, and glass materials that visibly change by light. For example, after forming a material, such as SiO_2 , Al_2O_3 , TiO_2 , and ormosils by a sol-gel method, a dopant having an organic photochromatic property is penetrated into a porous space to form the photochromatic layer. The sol-gel method is the most effective method to prevent organic molecules, such as SiO_2 , from being damaged by heat at a low temperature.

[0037] The photochromatic material can be applied under the transparent substrate by any common method used in a thin film coating field, such as a spin coating method, a dip coating method, and a spray coating method.

[0038] When the photochromatic layer 110 is exposed to light or UV rays, the photochromatic layer 110 absorbs light so that the molecular structure of the photochromatic layer 110 changes to have color. To the contrary, when light becomes weak or indoors where no light source exists, the photochromatic layer 110 becomes transparent. Therefore, when the photochromatic layer 110 is exposed to light or UV rays, the photochromatic layer 110

operates as a black matrix. When the photochromatic layer 110 is exposed to darkness, the photochromatic layer 110 becomes transparent.

[0039] The buffer layer 120 is formed on the transparent substrate 100. The buffer layer 120 is obtained by coating the transparent substrate 100 with one material selected from the group consisting of a nitride film, an oxide film, and a transparent insulating material by a Plasma Enhanced Chemical Vapor Deposition (PECVD) method to a thickness of about 3,000Å (1nm=10Å).

[0040] Then, as illustrated in FIG. 2B, the transparent TFT 130 is formed on the buffer layer.

[0041] The transparent semiconductor layer 131 of the transparent TFT is formed on the buffer layer 120 in a predetermined pattern. The transparent semiconductor layer 131 is formed of at least one conductive metal material selected from the group consisting of ZnO, ZnSnO, GaSnO, GaN, and SiC that are wide band gap materials whose band gap is no less than 3.0eV. The transparent semiconductor layer 131 is obtained by applying a transparent material by a CVD method to a thickness of about 300 Å to 2,000Å and then, patterning the transparent material in a predetermined shape, for example, an island shape. The transparent semiconductor layer 131 is patterned using an etching mask obtained by applying, exposing, and developing a photoresist (PR).

[0042] The transparent semiconductor layer 131 is obtained by applying a transparent material to improve an aperture ratio so that it is possible to relax basic data values required during designing.

[0043] According to the above-described embodiment, the transparent semiconductor layer 131 is formed by the CVD method. However, it can be formed by one of a Pulse Laser Deposition (PLD) method, an Atomic Layer Deposition (ALD) method, a sputtering method, or a Molecular Beam Epitaxy (MBE) method.

[0044] Then, the gate insulating layer 132 of the transparent TFT 130 is formed on the transparent semiconductor layer 131. The gate insulating layer 132 is obtained by applying an oxide layer, a nitride layer, or a transparent insulating material by the PECVD method to a thickness of about 700 Å to 1,000Å.

[0045] The gate electrode 133 of the transparent TFT 130 is formed on the gate insulating layer 120. To be specific, after depositing a transparent conductive metal, such as ITO, IZO, ITZO, or ICO, or a semi-transparent metal on the gate insulating layer 120 by the sputtering method to a thickness of about 2,000 to 3,000Å, the metal is patterned in a predetermined shape.

[0046] The interlayer insulating layer 134 of the transparent TFT 130 is formed on the gate insulating layer 120 including the gate electrode 130. The interlayer insulating layer 140 can be formed by the same method as that of the gate insulating layer 120.

[0047] The source and drain electrodes 135a and 135b of the transparent TFT 130 are formed on the interlayer insulating layer 134 to be electrically connected to both sides of the transparent semiconductor layer 131 through

contact holes formed in the gate insulating layer 132 and the interlayer insulating layer 134. Source and drain electrodes 150a and 150b are formed on the transparent semiconductor layer 130 by coating a metal layer with a photoresist to pattern the metal layer in a predetermined shape. The source and drain electrodes 135a and 135b are formed of a metal having a high conductivity and transparency, such as ITO, IZO, ITZO, or ICO, or a semi-transparent metal. However, the present invention is not limited to the above.

[0048] Then, as illustrated in FIG. 2C, the planarization layer 140 is formed on the transparent TFT 130.

[0049] The first electrode layer 150 is electrically connected to one of the source and drain electrodes 135a and 135b through the via hole 151a formed by etching a region of the planarization layer 140 to expose one of the source and drain electrodes 135a and 135b.

[0050] The pixel defining layer 160 is formed on the first electrode layer 150 and the aperture that at least partially exposes the first electrode layer 150 is formed on the planarization layer 140. The pixel defining layer 160 is formed to a thickness of 500 to 3,000Å.

[0051] The emission layer 170 is formed in a region on the pixel defining layer 160 and on the aperture 180. The emission layer 150 can be formed of at least one single layer or a plurality of multi-layers selected from among a hole injecting layer, a hole transporting layer, an emission layer, a hole suppressing layer, an electron transporting layer, and an electron injecting layer.

[0052] The second electrode layer 190 is formed on the emission layer 170. The OLED of the above structure emits light by the following emission principle. First, holes injected from the first electrode layer 150 and holes generated by the second electrode layer 190 are combined with each other in the emission layer 170 to generate excitons. According as the excited excitons are changed to be in a base state, the fluorescent molecules of the emission layer emit light.

[0053] FIG. 3 is a schematic sectional view of an organic light emitting display according to a second embodiment of the present invention.

[0054] Referring to FIG. 3, an OLED 20 includes a transparent substrate 200, a photochromatic layer 210 formed on a first surface of the transparent substrate 200, at least one transparent Thin Film Transistor (TFT) 230 formed on a second surface of the transparent substrate 200, and an organic light emitting device formed on and electrically connected to the transparent TFT 230.

[0055] The transparent substrate 200 can be formed of an insulating material, such as glass, plastic, silicon, or a synthetic resin, and is preferably a transparent substrate, such as a transparent glass substrate.

[0056] The photochromatic layer 210 is formed on a first surface of the transparent substrate 200 of at least one of inorganic, organic, and glass materials that visibly change by light. In particular, the photochromatic layer 210 is preferably formed of a borosilicate containing Ag or halogen compound crystals. When the photochromat-

ic layer 210 is exposed to light or UV rays, the Cl⁻ ions of the Ag or halogen compound crystals are emitted as electrons so that the emitted electrons reduces Ag⁺ to change Cl⁻ and Ag⁺ into Cl and Ag in a neutral state. Therefore, the photochromatic layer 210 becomes opaque to operate as a black matrix.

[0057] The buffer layer 210 is formed on the transparent substrate 200 of a transparent insulating material, such as a nitride film or an oxide film. However, the present invention is not limited to the above.

[0058] The transparent TFT 230 has a gate electrode 231 formed on the buffer layer 220 in a predetermined pattern and including Indium Tin Oxide (ITO), Indium Zinc Oxide (IZO), Indium Tin-Zinc Oxide (ITZO), Indium Cesium Oxide (ICO) or an opaque metal. However, the present invention is not limited to the above.

[0059] Furthermore, the transparent TFT 230 includes a gate insulating layer 232 formed on the buffer layer 220 having the gate electrode 231 and insulating the gate electrode 231 from a transparent semiconductor layer 233. The gate insulating layer 232 includes an oxide layer, a nitride layer or a transparent insulating material. However, the present invention is not limited to the above.

[0060] The transparent semiconductor layer 233 of the transparent TFT 230 is formed on the gate insulating layer 220 in a predetermined pattern. The transparent semiconductor layer 230 includes at least one conductive metal material selected from the group consisting of ZnO, ZnSnO, CdSnO, GaSno, TISnO, InGaZnO, CuAlO, SrCuO and LaCuOS that are wide band gap semiconductor material oxides, whose band gap is no less than 3.0eV, the group consisting of GaN, InGaN, AlGaN, and InGaIN that are nitrides, or the group consisting of SiC and diamond that are carbides. On the other hand, if the band gap is less than 3.0eV, the semiconductor layer 233 cannot transmit visible rays.

[0061] The transparent TFT 230 includes source/drain electrodes 234a and 234b which are formed on the transparent semiconductor layer 233 to expose a region of the transparent semiconductor layer 233. The source/drain electrodes 234a and 234b include a metal excellent in conductivity and transparency, for example, ITO, IZO, ITXO, ICO or an opaque metal, etc. However, the present invention is not limited to the above.

[0062] The planarization layer 240 is formed on the transparent TFT 230 of a nitride film, an oxide film, or a transparent insulating material. However, the present invention is not limited to the above. A via hole 251a is formed on the planarization layer 140 by etching a region of the planarization layer 240.

[0063] The first electrode layer 250 is electrically connected to one of the source and drain electrodes 234a and 234b through the via hole 251a formed on the planarization layer 240.

[0064] The pixel defining layer 260 is formed on the first electrode layer 250 to form an aperture 280 that at least partially exposes the first electrode layer 250.

[0065] The emission layer 270 is formed in a region on

the pixel defining layer 260 and on the aperture 280. The emission layer 270 can further include a hole injecting layer, a hole transporting layer, an electron transporting layer, or an electron injecting layer. In the emission layer 270, holes and electrons injected from the first electrode layer 250 and the second electrode layer 290 are combined with each other to generate light.

[0066] The second electrode layer 290 is formed on the emission layer 270 and the pixel defining layer 260. The second electrode layer 290 may be formed of the same metal as the first electrode layer 250.

[0067] In the foregoing embodiments, the TFT has a top gate structure (coplanar type) - see Fig. 1 - and a bottom gate structure (inverted staggered) - see Fig. 3. However, the present invention is not limited to the above. Alternatively, the thin film transistor can have a staggered structure.

[0068] As described above, according to the present invention, the photochromatic layer is formed on a first surface of the transparent substrate of the OLED so that it is possible to realize a light emitting display having high visibility and contrast even when intense external light is incident and to realize the two side emission of the OLED whose emission efficiency is improved. Also, the OLED according to the present invention can be applied to an image display device and various displays.

Claims

1. An organic light emitting display, comprising:

a transparent substrate (100);
at least one transparent thin film transistor (130) arranged on a first surface of the transparent substrate (100); and
an organic light emitting device (150, 170, 190) arranged on and electrically connected to the transparent thin film transistor (130), wherein the organic light emitting device (150, 170, 190) comprises a first electrode layer (150), an emission layer (170) and a second electrode layer (190), wherein the first electrode layer (150) and the second electrode layer (190) comprise transparent electrodes, **characterized in that** a photochromatic layer (110) is arranged on a second surface of the transparent substrate (100).

2. The organic light emitting display according to claim 1, wherein the photochromatic layer (110) comprises a borosilicate containing either Ag or halogen compound crystals.

3. The organic light emitting display according to one of the preceding claims, wherein the transparent thin film transistor (130) comprises a semiconductor layer, a gate electrode, and source and drain elec-

trodes.

4. The organic light emitting display according to claim 3, wherein the semiconductor layer comprises a material having a band gap of at least 3.0 eV.

5. The organic light emitting display as claimed in claims 3 or 4, wherein the semiconductor layer comprises one of: an oxide, including ZnO, ZnSnO, Cd-SnO, GaSnO, TlSnO, InGaZnO, CuAlO, SrCuO or LaCuOS; a nitride including GaN, InGaN, AlGaIn or InGaAlN; a carbide including SiC; and diamond.

6. The organic light emitting display according to one of claims 3-5, wherein the gate electrode and the source and drain electrode comprise one of indium tin oxide, indium zinc oxide and indium tin zinc oxide.

7. The organic light emitting display according to one of the preceding claims, wherein the first electrode layer and the second electrode layer comprise one of indium tin oxide, indium zinc oxide and indium tin zinc oxide.

8. A method of fabricating an organic light emitting display, the method comprising:

forming at least one transparent thin film transistor (130) on a second surface of the transparent substrate (100); and
forming an organic light emitting device (150, 170, 190) on the transparent thin film transistor (130) and electrically connecting the organic light emitting device (150, 170, 190) to the transparent thin film transistor (130), wherein the organic light emitting device (150, 170, 190) comprises a first electrode layer (150), an emission layer (170) and a second electrode layer (190), wherein the first electrode layer (150) and the second electrode layer (190) comprise transparent electrodes **characterized in that** a photochromatic layer (110) is formed on a first surface of a transparent substrate (100).

9. The method as claimed in claim 8, wherein the photochromatic layer is formed by a sol-gel method.

Patentansprüche

1. Organische lichtemittierende Anzeige, aufweisend:

ein transparentes Substrat (100);
zumindest einen transparenten Dünnschichttransistor (130), der auf einer ersten Oberfläche des transparenten Substrats (100) angeordnet ist; und
eine organische lichtemittierende Vorrichtung

- (150, 170, 190), die auf dem transparenten Dünnschichttransistor (130) angeordnet ist und elektrisch mit ihm verbunden ist, wobei die organische lichtemittierende Vorrichtung (150, 170, 190) eine erste Elektrodenschicht (150), eine Emissionsschicht (170) und eine zweite Elektrodenschicht (190) aufweist, wobei die erste Elektrodenschicht (150) und die zweite Elektrodenschicht (190) transparente Elektroden aufweisen,
- dadurch gekennzeichnet, dass** eine photochromatische Schicht (110) auf einer zweiten Oberfläche des transparenten Substrats (100) angeordnet ist.
2. Organische lichtemittierende Anzeige nach Anspruch 1, wobei die photochromatische Schicht (110) ein Borosilikat aufweist, das entweder Ag- oder Halogenverbindungskristalle aufweist.
 3. Organische lichtemittierende Anzeige nach einem der vorhergehenden Ansprüche, wobei der transparente Dünnschichttransistor (130) eine Halbleiterschicht, eine Gate-Elektrode und eine Source- und Drain-Elektrode aufweist.
 4. Organische lichtemittierende Anzeige nach Anspruch 3, wobei die Halbleiterschicht ein Material aufweist, das eine Bandlücke von zumindest 3,0 eV aufweist.
 5. Organische lichtemittierende Anzeige nach Anspruch 3 oder 4, wobei die Halbleiterschicht eines aus Folgendem aufweist: ein Oxid, aufweisend ZnO, ZnSnO, CdSnO, GaSnO, TiSnO, InGaZnO, CuAlO, SrCuO oder LaCuOS; ein Nitrid, aufweisend GaN, InGaN, AlGaN oder InGaAlN; ein Carbid, aufweisend SiC; und Diamant.
 6. Organische lichtemittierende Anzeige nach einem der Ansprüche 3-5, wobei die Gate-Elektrode und die Source- und Drain-Elektrode Indiumzinnoxid oder Indiumzinkoxid oder Indiumzinnoxid aufweisen.
 7. Organische lichtemittierende Anzeige nach einem der vorhergehenden Ansprüche, wobei die erste Elektrodenschicht und die zweite Elektrodenschicht Indiumzinnoxid oder Indiumzinkoxid oder Indiumzinnoxid aufweisen.
 8. Verfahren zur Herstellung einer organischen lichtemittierenden Anzeige, wobei das Verfahren aufweist:

Ausbildung zumindest eines transparenten Dünnschichttransistors (130) auf einer zweiten Oberfläche des transparenten Substrats (100);
- und
- Ausbildung einer organischen lichtemittierenden Vorrichtung (150, 170, 190) auf dem transparenten Dünnschichttransistor (130) und elektrisches Verbinden der organischen lichtemittierenden Vorrichtung (150, 170, 190) mit dem transparenten Dünnschichttransistor (130), wobei die organische lichtemittierende Vorrichtung (150, 170, 190) eine erste Elektrodenschicht (150), eine Emissionsschicht (170) und eine zweite Elektrodenschicht (190) aufweist, wobei die erste Elektrodenschicht (150) und die zweite Elektrodenschicht (190) transparente Elektroden aufweisen,
- dadurch gekennzeichnet, dass** eine photochromatische Schicht (110) auf einer ersten Oberfläche eines transparenten Substrats (100) ausgebildet wird.
9. Verfahren nach Anspruch 8, wobei die photochromatische Schicht durch ein Sol-Gel-Verfahren ausgebildet wird.
- ## Revendications
1. Dispositif d'affichage électroluminescent organique, comprenant :

un substrat transparent (100) ;

au moins un transistor à couche mince transparent (130) placé sur une première surface du substrat transparent (100) ; et

un dispositif électroluminescent organique (150, 170, 190) placé sur le, et connecté électriquement au, transistor à couche mince transparent (130), ledit dispositif électroluminescent organique (150, 170, 190) comprenant une première couche d'électrode (150), une couche émissive (170) et une seconde couche d'électrode (190), la première couche d'électrode (150) et la seconde couche d'électrode (190) comprenant des électrodes transparentes,

caractérisé en ce que :

une couche photochromatique (110) est placée sur une seconde surface du substrat transparent (100).
 2. Dispositif d'affichage électroluminescent organique suivant la revendication 1, dans lequel la couche photochromatique (110) comprend un borosilicate contenant des cristaux de composé halogéné ou Ag.
 3. Dispositif d'affichage électroluminescent organique suivant l'une des revendications précédentes, dans lequel le transistor à couche mince transparent (130) comprend une couche semiconductrice, une élec-

trode de grille et des électrodes de sources et de drain.

4. Dispositif d'affichage électroluminescent organique suivant la revendication 3, dans lequel la couche semiconductrice comprend une matière ayant une bande interdite d'au moins 3,0 eV. 5

5. Dispositif d'affichage électroluminescent organique suivant la revendication 3 ou 4, dans lequel la couche semiconductrice comprend l'un : d'un oxyde, comprenant ZnO, ZnSnO, CdSnO, GaSnO, TlSnO, InGaZnO, CuAlO, SrCuO ou LaCuOS ; d'un nitrure comprenant GaN, InGaN, AlGaN ou InGaAlN ; d'un carbure comprenant SiC ; et du diamant. 10 15

6. Dispositif d'affichage électroluminescent organique suivant l'une des revendications 3 à 5, dans lequel l'électrode de grille et les électrodes de source et de drain comprennent l'un de l'oxyde d'indium-étain, de l'oxyde d'indium-zinc et de l'oxyde d'indium-étain-zinc. 20

7. Dispositif d'affichage électroluminescent organique suivant l'une des revendications précédentes, dans lequel la première couche d'électrode et la seconde couche d'électrode comprennent l'un de l'oxyde d'indium-étain, de l'oxyde d'indium-zinc et de l'oxyde d'indium-étain-zinc. 25 30

8. Procédé de fabrication d'un dispositif d'affichage électroluminescent organique, le procédé comprenant :
 - la formation d'au moins un transistor à couche mince transparent (130) sur une seconde surface du substrat transparent (100) ; et 35
 - la formation d'un dispositif électroluminescent organique (150, 170, 190) sur le transistor à couche mince transparent (130) et la connexion 40
 - électrique du dispositif électroluminescent organique (150, 170, 190) au transistor à couche mince transparent (130), ledit dispositif électroluminescent organique (150, 170, 190) comprenant 45
 - une première couche d'électrode (150), une couche émissive (170) et une seconde couche d'électrode (190), la première couche d'électrode (150) et la seconde couche d'électrode (190) comprenant des électrodes transparentes, 50
 - caractérisé en ce qu'une** couche photochromatique (110) est formée sur une première surface du substrat transparent (100).

9. Procédé suivant la revendication 8, dans lequel la couche photochromatique est formée par un procédé sol-gel. 55

FIG. 1

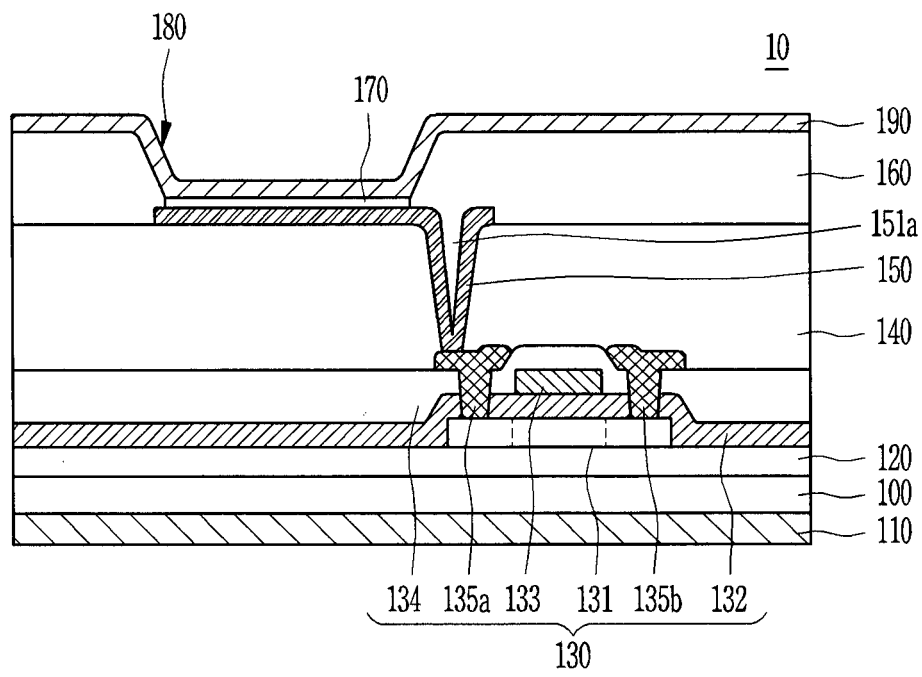


FIG. 2A

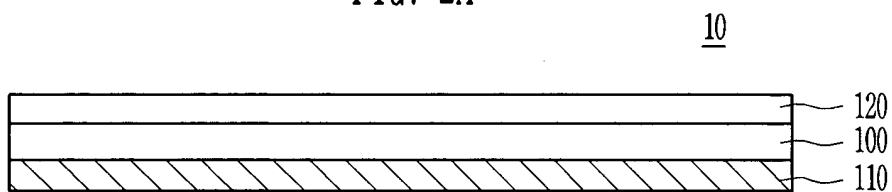


FIG. 2B

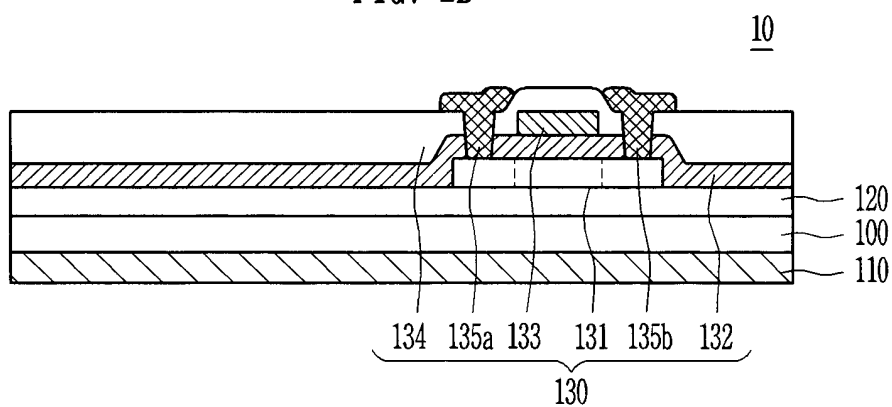


FIG. 2C


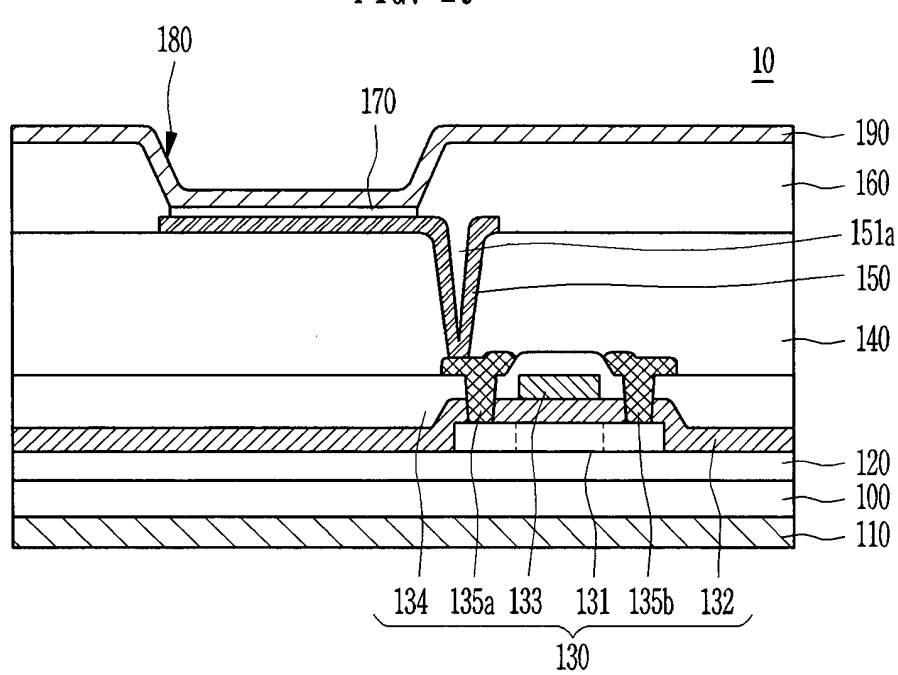


FIG. 3

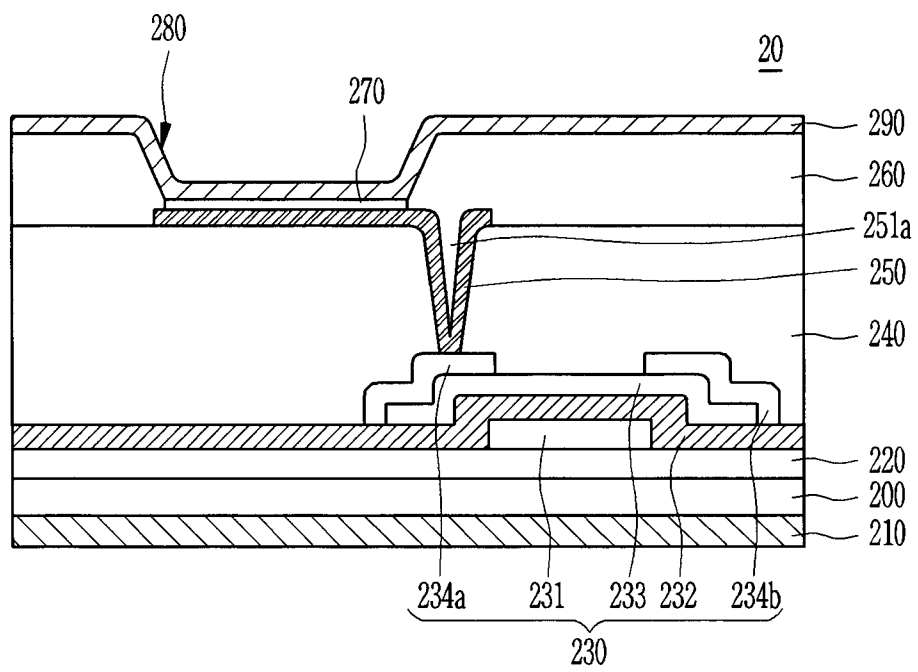

专利名称(译)	有机发光显示器及其制造方法		
公开(公告)号	EP1748507B1	公开(公告)日	2014-03-05
申请号	EP2006118035	申请日	2006-07-28
[标]申请(专利权)人(译)	三星斯笛爱股份有限公司		
申请(专利权)人(译)	三星SDI CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	SHIN HYUN SOO LEGAL & IP TEAM SAMSUNG SDI CO LTD JEONG JAE KYEONG LEGAL & IP TEAM SAMSUNG SDI CO MO YEON GON LEGAL & IP TEAM SAMSUNG SDI CO LTD JIN DONG UN LEGAL & IP TEAM SAMSUNG SDI CO LTD		
发明人	SHIN, HYUN SOO LEGAL & IP TEAM,SAMSUNG SDI CO.,LTD JEONG, JAE KYEONG LEGAL & IP TEAM,SAMSUNG SDI CO., MO, YEON GON LEGAL & IP TEAM,SAMSUNG SDI CO.,LTD. JIN, DONG UN LEGAL & IP TEAM,SAMSUNG SDI CO.,LTD.		
IPC分类号	H01L27/32 H01L51/52		
CPC分类号	H01L51/5281 H01L27/3244 H01L2251/5323		
代理机构(译)	hengelhaupt , Jürgen		
优先权	1020050069173 2005-07-28 KR		
其他公开文献	EP1748507A1		
外部链接	Espacenet		

摘要(译)

有机发光显示器 (OLED) (10) 及其制造方法包括 : 透明基板 (100) ; 形成在透明基板 (100) 的第一表面上的光致变色层 (110) ; 至少一个透明薄膜晶体管 (TFT) (130) 形成在透明基板 (100) 的第二表面上 , 有机发光器件 (150-190) 形成在透明TFT (130) 上并与之电连接。

FIG. 1

