



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**27.01.2010 Bulletin 2010/04**

(51) Int Cl.:  
**H01L 27/32 (2006.01)**

(21) Application number: **09251834.9**

(22) Date of filing: **21.07.2009**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK SM TR**  
Designated Extension States:  
**AL BA RS**

(72) Inventor: **Park, Sung-Chun**  
**Uiju-gun, Ulsan (KR)**

(74) Representative: **Taor, Simon Edward William**  
**Marks & Clerk LLP**  
**90 Long Acre**  
**London**  
**WC2E 9RA (GB)**

(30) Priority: **21.07.2008 KR 20080070607**


(71) Applicant: **Samsung Mobile Display Co., Ltd.**  
**Yongin-city, Gyunggi-do 446-711 (KR)**

(54) **Organic light-emitting display device**

(57) An organic light-emitting display device including: a substrate including a pixel region and a non-pixel region; a first electrode formed on the pixel region in a first direction; a first wire coupled to the first electrode and formed in the non-pixel region; a second electrode formed in the pixel region in a second direction; a second

wire coupled to the second electrode and formed in the non-pixel region; an organic thin film layer formed between the first electrode and the second electrode; a drive circuit coupled to the first wire and the second wire; and a passivation layer formed across the pixel region and the non-pixel region and having an opening to expose at least one of the first wire and the second wire.

**FIG. 1**

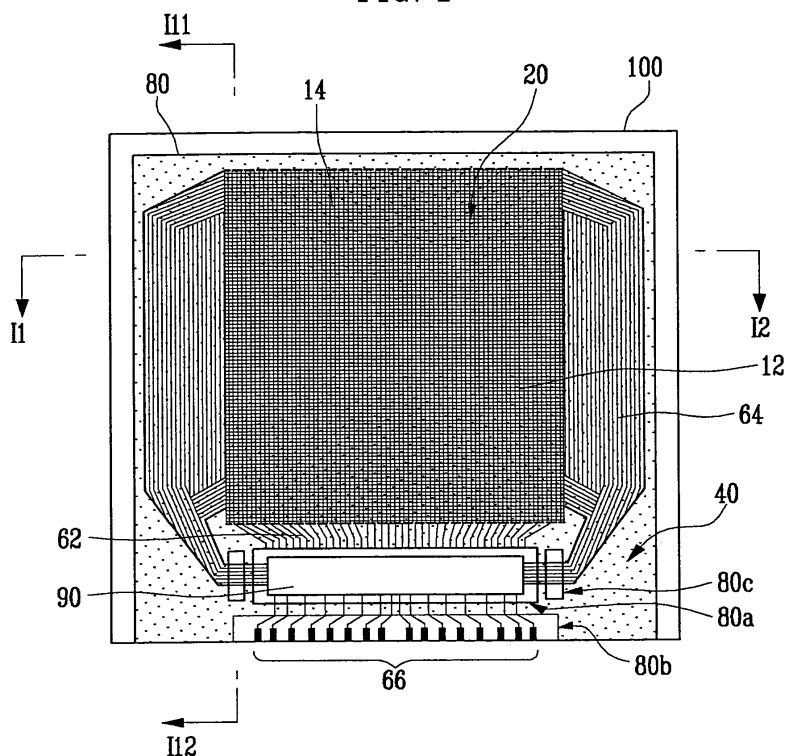

## Description

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

**[0001]** Aspects of the present invention relate to an organic light-emitting display device.

#### 2. Description of the Related Art

**[0002]** An organic light-emitting display device is a self-emissive, next-generation, display device that has an improved viewing angle, contrast, response time, and power consumption, as compared to a liquid crystal display device (LCD). An organic light-emitting display device can be a passive-matrix, organic light-emitting display device, where pixels are coupled in a matrix between scan lines and signal lines, or an active-matrix, organic light-emitting display device, where pixels are controlled by thin film transistors (TFT).

**[0003]** The organic light-emitting diodes constituting a pixel are each composed of an anode electrode, an organic thin film layer, and a cathode electrode. When a predetermined voltage is applied between the anode electrode and the cathode electrode, holes injected through the anode electrode are recombined with electrons injected through the cathode electrode, to form excitons in a light-emitting layer. Photons are emitted when the excitons return to a lower energy state.

**[0004]** In general, pixels are tested using a lightening test and an aging test, during the manufacture of an organic light-emitting display device. In this case, a short bar is used to supply a constant test signal to scan lines or signal lines. Korean Patent Publication No. 2006-29086 (April 04, 2006) and Korean Patent Publication No. 2006-127561 (December 13, 2006) disclose a positive short bar and a negative short bar, which are formed in a data pad that is coupled to data lines and a scan pad that is coupled to scan lines. The lightening test is carried out when a test pin is in contact with the short bar. The short bars are removed during a scribing procedure, which involves cutting a substrate when the lightening test is completed.

**[0005]** However, in a structure where a drive circuit is formed on a substrate, or a drive circuit (in the form of semiconductor chips) is mounted onto a substrate using a chip on glass or wire bonding process, pads coupled to input terminals of the drive circuit are formed on an edge of the substrate, adjacent to the scribe lines. Therefore, such an organic light-emitting display device has a problem, in that it is difficult to construct a short bar using the above-mentioned processes.

### SUMMARY OF THE INVENTION

**[0006]** An aspect of the present invention provides an organic light-emitting display device, in which a short bar

can be easily formed and removed, in order to perform a lightening test and an aging test. The organic light-emitting display device includes a drive circuit that is mounted on a substrate.

**[0007]** Another aspect of the present invention provides an organic light-emitting display device, in which a short bar can be easily formed and removed, in order to perform a lightening test and an aging test. The organic light-emitting display device includes auxiliary electrodes to reduce the resistance of scan lines and data lines.

**[0008]** One exemplary embodiment of the present invention provides an organic light-emitting display device including: a substrate having a pixel region and a non-pixel region; a first electrode formed on the pixel region and extending in a first direction; a first wire coupled to the first electrode and formed in the non-pixel region; a second electrode formed on the pixel region and extending in a second direction; a second wire coupled to the second electrode and formed in the non-pixel region; an organic thin film layer formed between the first electrode and the second electrode; a drive circuit coupled to the first wire and the second wire; and a passivation layer formed on the pixel region and the non-pixel region, and having an opening to expose a portion of at least one of the first wire and the second wire.

**[0009]** Since a substrate should be increased in size, when a drive circuit is mounted onto the substrate, the brightness and performance of the organic light-emitting display device may be degraded, due to increased resistance therein, resulting from increasing the length of wires. Therefore, an auxiliary electrode formed of a low resistance metal is used to mount the drive circuit to the substrate.

**[0010]** Aspects of the present invention provide an organic light-emitting display device, in which a short bar can be easily formed and removed, in order to perform a lightening test and an aging test, and which prevents damage to an auxiliary electrode when the short bar is removed. The organic light-emitting display device includes a drive circuit mounted on a substrate. The auxiliary electrodes reduce the resistance of scan lines and data lines. The organic light-emitting display device may have a high brightness, excellent performance, and a low operating voltage, due to being produced by a simplified manufacturing process that prevents damage to auxiliary electrodes.

**[0011]** Additional aspects and/or advantages of the invention will be set forth in part in the description which follows and, in part, will be obvious from the description, or may be learned by practice of the invention.

**[0012]** According to an aspect of the present invention, there is provided an organic light-emitting display device, comprising: a substrate having a pixel region and a non-pixel region; first and second electrodes disposed in a matrix in the pixel region; scan lines disposed in the non-pixel region and coupled to the first electrodes; data lines disposed in the non-pixel region and coupled to the second electrodes; an organic thin film layer formed between

the first electrodes and the second electrodes; a drive circuit coupled to the scan and data lines; and a passivation layer formed on the substrate, having first and second openings to respectively connect the scan lines, or the data lines, to a short bar.

**[0013]** According to another aspect of the invention, there is provided an organic light-emitting display device as set out in claim 1. Preferred features of this aspect are set out in claims 2 to 9.

**[0014]** According to another aspect of the invention, there is provided a method of manufacturing an organic light-emitting display device as set out in claim 10. Preferred features of this aspect are set out in claims 11 to 15.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0015]** These and/or other aspects and advantages of the invention will become apparent and more readily appreciated from the following description of the embodiments, taken in conjunction with the accompanying drawings, of which:

FIG. 1 is a plane view showing an organic light-emitting display device, according to one embodiment of the present invention;

FIG. 2 is a cross-sectional view schematically showing section I1 - I2 of FIG. 1;

FIG. 3A and FIG. 3B are cross-sectional views schematically showing section I11 - I12 of FIG. 1;

FIG. 4 is a cross-sectional view showing a region of a short bar of an organic light-emitting display device, according to another embodiment of the present invention; and

FIG. 5 is a cross-sectional view showing a portion of a pixel region, taken along line I1 - I2 of FIG. 1.

## DETAILED DESCRIPTION OF THE EXEMPLARY EMBODIMENTS

**[0016]** Reference will now be made in detail to the embodiments of the present invention, examples of which are illustrated in the accompanying drawings, wherein like reference numerals refer to the like elements throughout. The embodiments are described below, in order to explain the aspects of the present invention, by referring to the figures.

**[0017]** As those skilled in the art would realize, the embodiments may be modified in various different ways, without departing from the scope of the present invention. Accordingly, the drawings and description are illustrative in nature and are not restrictive. In addition, when a first element is referred to as being formed or disposed "on" another element, the first element can directly contact the second element, or one or more intervening elements can be interposed therebetween. Also, when a first element is referred to as being "connected to" a second element, the first element can be directly connected to the second element, or can be connected to the second

element with one or more intervening elements.

**[0018]** FIG. 1 and FIG. 2 are a plane view and a cross-sectional view, respectively, showing an organic light-emitting display device, according to one embodiment of the present invention. FIG. 2 schematically shows section I1 - I2 of FIG. 1.

**[0019]** The organic light-emitting display device includes substrate 100, which can be made of an insulating material, such as glass or plastic, or can be made of a metal. The substrate 100 is divided into a pixel region 20 and a non-pixel region 40. The non-pixel region 40 is disposed around the pixel region 20.

**[0020]** An array of organic light-emitting diodes 110 are coupled between a matrix of anode electrodes 12 and cathode electrodes 14, in the pixel region 20 of the substrate 100. Data lines 62 and scan lines 64 are respectively connected to the anode electrodes 12 and cathode electrodes 14, and are disposed in the non-pixel region 40. A power supply line (not shown) supplies a driving voltage to the organic light-emitting diodes 110, and a drive circuit 90 processes external signals supplied through an input pad 66. The power supply line, drive circuit 90, and the input pad 66 are disposed in the non-pixel region 40.

**[0021]** The organic light-emitting diodes 110 each include a portion of one of the anode electrodes 12 and a portion of one of the cathode electrodes 14, which intersect one another, and a portion of an organic thin film layer (not shown) that is disposed therebetween. The organic thin film layer includes a hole transport layer, an organic light-emitting layer, and an electron transport layer, and may further include a hole injection layer and an electron injection layer.

**[0022]** The drive circuit 90 may be formed on the non-pixel region 40 and coupled to data lines 62 and scan lines 64. The drive circuit 90 may alternatively be an integrated circuit semiconductor chip that is mounted on the substrate 100, by a chip on glass or wire bonding process.

**[0023]** A passivation layer 80 covers the pixel region 20 and the non-pixel region 40, and is made of a polyimide-based, a phenol resin-based, or an acrylic resin-based, insulating material. The passivation layer 80 includes openings 80a-80c. The openings 80a and 80b respectively expose an input pad 66 and a region where the drive circuit 90 is mounted. The opening 80c exposes some of the scan lines 64. The opening 80c is a region in which a short bar, to commonly couple the data lines 62 or the scan lines 64, is formed. The short bar is used to perform a lightening test and/or an aging test. The position of the opening 80c may be suitably selected for minimal size. The opening 80c is shown to expose the scan lines 64, but may also be positioned to expose the data lines 62. In addition, the passivation layer 80 may include another opening to expose the data lines 62. The passivation layer 80 may include two openings 80c, each of which exposes about half of the scan lines 64 or data lines 62, for example.

**[0024]** FIG. 3A and FIG. 3B are cross-sectional views showing a cross-section taken along line I11 - I12 of FIG. 1. FIG. 3A shows that the opening 80c is formed in the passivation layer 80, and FIG. 3B shows a short bar 400 disposed in the opening 80c and commonly coupled to the scan lines 64.

**[0025]** A test signal is supplied to the organic light-emitting diodes 110, via the data lines 62 or the scan lines 64. A test pin is brought into contact with the short bar 400, so as to perform a lightening test and an aging test.

**[0026]** When the lightening test and the aging test are completed, the short bar 400 is removed. The short bar 400 is generally formed of a metal such as aluminum (Al), which may be removed by an acid solution, or the like. In this case, since the passivation layer 80 covers the entire surface of the substrate 100, the data lines 62 and the scan lines 64 are protected, when the substrate 100 is dipped into the acid solution.

**[0027]** This embodiment discloses that the short bar 400 is commonly coupled to some of the scan lines 64, via the opening 80c. However, in other embodiments the opening 80c can include a plurality of openings formed in the passivation layer 80, to expose each of the scan lines 64. The short bar 400 is commonly coupled to the scan lines 64 through the plurality of openings, as shown in FIG. 4.

**[0028]** The data lines 62 and the scan lines 64 may be made of a transparent electrode material selected from the group consisting of indium tin oxide (ITO), indium zinc oxide (IZO), and indium tin zinc oxide (ITZO). Since the transparent electrode material has a high resistance, the data lines 62 and the scan lines 64 can include a auxiliary electrodes that are formed of a material having a low resistance, so as to reduce the resistance of the data lines 62 and the scan lines 64. For example, the scan lines 64 may include transparent electrodes 64a and auxiliary electrodes 64b, as shown in FIG. 4. The auxiliary electrodes 64b may be made of a metal, such as aluminum (Al), silver (Ag), molybdenum (Mo), copper (Cu), chromium (Cr), or multiple layers thereof. For example, the auxiliary electrode 64b may include multiple layers of molybdenum (Mo), aluminum (Al), and/or molybdenum (Mo).

**[0029]** An encapsulation substrate 200 is disposed on the substrate 100, in order to encapsulate the organic light-emitting diodes 100. The substrate 100 and the encapsulation substrate 200 are attached to each other by a sealant 300, such as an epoxy, frit seal, or the like.

**[0030]** As described above, the organic light-emitting display device, according to one embodiment of the present invention, includes the passivation layer 80 formed on the substrate 100. The passivation layer 80 includes the opening 80c to expose some of the data lines 62 and/or the scan lines 64. The passivation layer 80 may cover the pixel region 20 and the non-pixel region 40, as shown in FIG. 3A and FIG. 3B. The passivation layer 80 may be disposed between the anode electrodes 12 and the cathode electrodes 14.

**[0031]** FIG. 5 is a cross-sectional view showing a passivation layer 80 disposed between an anode electrode 12 and a cathode electrode 14, according to an embodiment of the present invention. FIG. 5 is a cross-sectional view showing a portion of the pixel region 20, taken along line I1 - I2 of FIG. 1.

**[0032]** Referring to FIG. 1 and FIG. 5, the anode electrode 12 is formed on the pixel region 20 in one direction, and the data lines 62 extended from the anode electrode 12. The scan lines 64 are coupled to the cathode electrodes 14 and are formed in the non-pixel region 40. In this case, the data lines 62 and the scan lines 64 both comprise auxiliary electrodes and transparent electrodes that are formed on the auxiliary electrodes.

**[0033]** A passivation layer 80 covers the pixel region 20 and the non-pixel region 40, and is patterned to expose the anode electrodes 12. In this case, the openings 80a and 80b expose an input pad 66 and a region where the drive circuit 90 is mounted, respectively. Openings 80c expose the data lines 62. The scan lines 64 are formed on the passivation layer 80.

**[0034]** A barrier rib (not shown) is formed on the passivation layer 80 in the pixel region 20 and extends across the anode electrodes 12. The barrier rib separates the cathode electrodes 12 and an organic thin film layer that is on the passivation layer 80. The walls of the barrier rib are tapered, such that they have a maximum thickness at the passivation layer 80.

**[0035]** After the organic thin film layer 13 is formed on the pixel region 20, the cathode electrodes 14 are formed across the anode electrodes 12. A short bar 400 may be formed during the formation of the cathode electrodes 14.

**[0036]** Although a few embodiments of the present invention have been shown and described, it would be appreciated by those skilled in the art that changes may be made in these exemplary embodiments, without departing from the principles of the invention, the scope of which is defined in the claims and their equivalents.

## Claims

1. An organic light-emitting display device, comprising:
  - a substrate having a pixel region and a non-pixel region;
  - a first electrode disposed in the pixel region and extending in a first direction;
  - a first wire coupled to the first electrode and disposed in the non-pixel region;
  - a second electrode disposed in the pixel region, and extending in a second direction;
  - a second wire coupled to the second electrode and disposed in the non-pixel region;
  - an organic thin film layer disposed between the first and second electrodes;
  - a drive circuit coupled to the first and second wires; and

- a passivation layer formed on the substrate, having an opening to expose the first wire.
2. An organic light-emitting display device according to claim 1, wherein the first wire and the second wire each comprise a transparent electrode and an auxiliary electrode disposed on the transparent electrode. 5
  3. An organic light-emitting display device according to claim 2, wherein: 10
    - the transparent electrode comprises a material selected from the group consisting of indium tin oxide (ITO), indium zinc oxide (IZO), and indium tin zinc oxide (ITZO); and 15
    - the auxiliary electrode comprises a material selected from the group consisting of aluminum (Al), silver (Ag), molybdenum (Mo), copper (Cu), and chromium (Cr). 20
  4. An organic light-emitting display device according to claim 2, wherein the auxiliary electrode comprises two or more layers that each comprise a metal independently selected from the group consisting of aluminum (Al), silver (Ag), molybdenum (Mo), copper (Cu), and chromium (Cr). 25
  5. An organic light-emitting display device according to any one of claims 1 to 4, wherein the passivation layer comprises a material selected from the group consisting of a polyimide, a phenol resin, and an acrylic resin. 30
  6. An organic light-emitting display device according to any one of claims 1 to 5, further comprising a short bar disposed in the opening and connected to the first wire. 35
  7. An organic light-emitting display device according to any one of claims 1 to 6, wherein the passivation layer is disposed between the first electrode and the second electrode. 40
  8. An organic light-emitting display device according to any one of claims 1 to 7, further comprising an input pad formed in the non-pixel region, coupled to an input terminal of the drive circuit, and exposed through a second opening formed in the passivation layer. 45
  9. An organic light-emitting display device according to any one of claims 1 to 8, comprising a plurality of first wires and second wires; wherein the first wires form one of either scan lines or data lines, and the second wires form the other of scan lines or data lines, wherein the passivation layer has at least one opening to respectively connect the 50
  - scan lines, or the data lines, to a short bar.
  10. A method of manufacturing an organic light-emitting display device, comprising:
    - forming a substrate having a pixel region and a non-pixel region;
    - forming a plurality of first electrodes disposed in the pixel region to extend in a first direction;
    - forming a plurality of first wires, each first wire being coupled to a respective first electrode to extend into the non-pixel region;
    - forming a passivation layer on the substrate, the passivation layer having at least one opening to expose the first wires in the non pixel region;
    - forming an organic thin film layer on the first electrodes;
    - forming second electrodes over the organic thin film layer, the second electrodes being disposed in the pixel region to extend in a second direction;
    - forming a plurality of second wires, each second wire being coupled to a respective second electrode to extend into the non-pixel region;
    - forming a drive circuit coupled to the first and second wires; and
    - forming a short bar in the region of the at least one opening of the passivation layer so as to commonly connect the first wires.
  11. A method according to claim 10, wherein the passivation layer has a plurality of openings, each opening exposing one of the first wires in the non pixel region.
  12. A method according to claim 10 or 11, further comprising using the short bar to test the first wires by applying a test signal to the short bar.
  13. A method according to claim 12, wherein after the testing of the first wires, the short bar is removed.
  14. A method according to Claim 13, wherein the passivation layer covers the plurality of first wires and the plurality of second wires in the pixel region, so as to protect the first and second wires during removal of the short bar.
  15. A method according to any one of claims 10 to 14, further comprising forming the short bar during the formation of the second electrodes. 55

FIG. 1

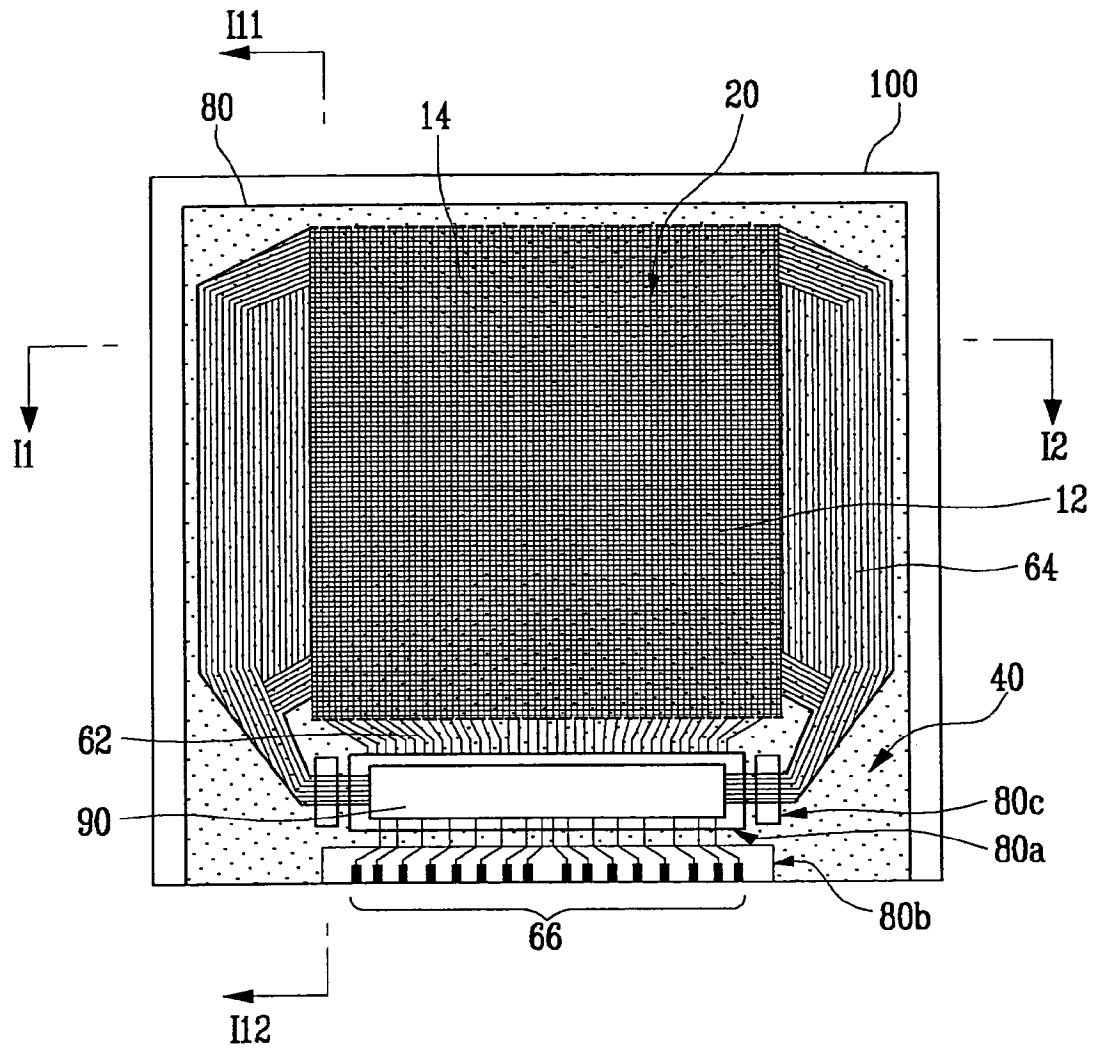


FIG. 2

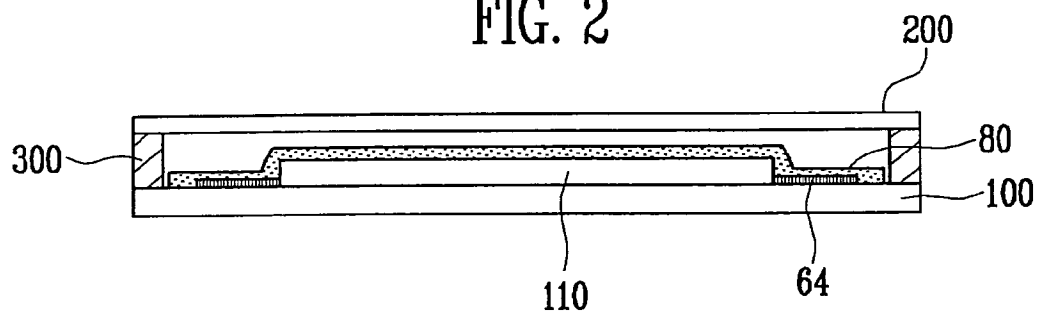


FIG. 3A

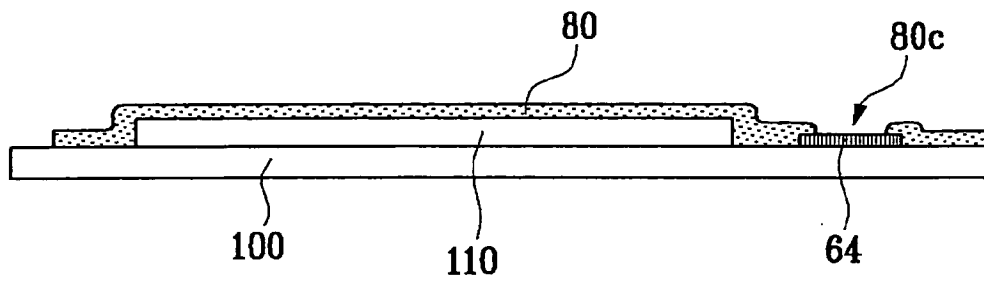


FIG. 3B

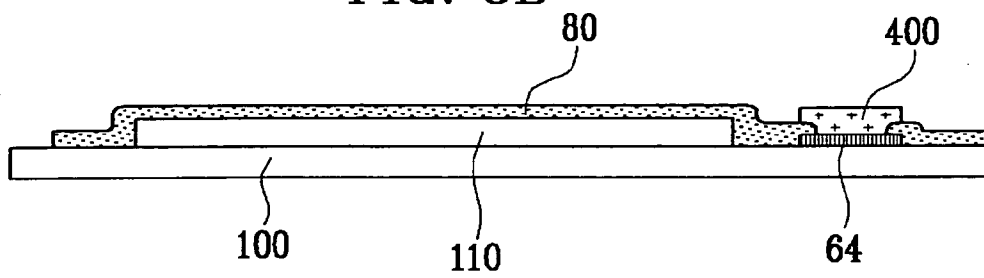


FIG. 4


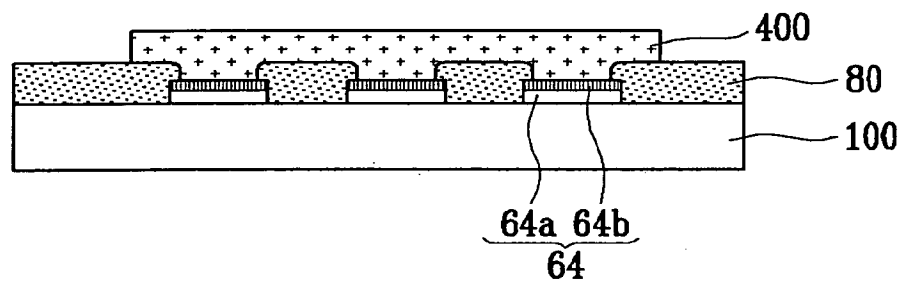


FIG. 5

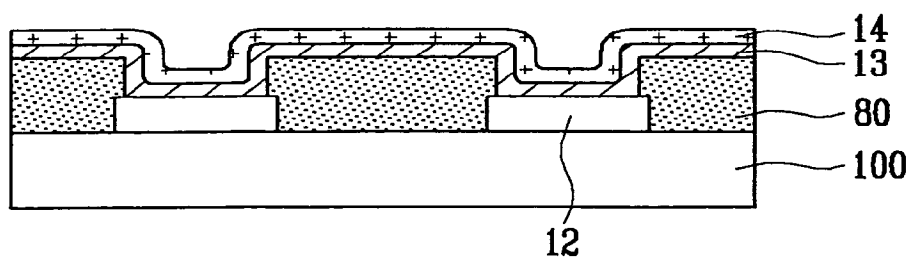

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- KR 200629086 [0004]
- KR 2006127561 [0004]

|                |                             |         |            |
|----------------|-----------------------------|---------|------------|
| 专利名称(译)        | 有机发光显示装置                    |         |            |
| 公开(公告)号        | <a href="#">EP2148371A2</a> | 公开(公告)日 | 2010-01-27 |
| 申请号            | EP2009251834                | 申请日     | 2009-07-21 |
| [标]申请(专利权)人(译) | 三星显示有限公司                    |         |            |
| 申请(专利权)人(译)    | 三星移动显示器有限公司.                |         |            |
| 当前申请(专利权)人(译)  | 三星DISPLAY CO. , LTD.        |         |            |
| [标]发明人         | PARK SUNG CHUN              |         |            |
| 发明人            | PARK, SUNG-CHUN             |         |            |
| IPC分类号         | H01L27/32                   |         |            |
| CPC分类号         | H01L27/3283                 |         |            |
| 优先权            | 1020080070607 2008-07-21 KR |         |            |
| 其他公开文献         | EP2148371B1<br>EP2148371A3  |         |            |
| 外部链接           | <a href="#">Espacenet</a>   |         |            |

#### 摘要(译)

一种有机发光显示装置，包括：包括像素区域和非像素区域的基板；第一电极沿第一方向形成在像素区域上；第一导线，耦合到第一电极并形成在非像素区域中；第二电极沿第二方向形成在像素区域中；第二导线，耦合到第二电极并形成在非像素区域中；在第一电极和第二电极之间形成有机薄膜层；驱动电路，连接第一导线和第二导线；钝化层形成在像素区域和非像素区域的两端，并且具有开口以暴露第一导线和第二导线中的至少一个。

