



(11)

EP 3 113 228 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
04.07.2018 Bulletin 2018/27

(51) Int Cl.:
H01L 27/32 ^(2006.01)

(21) Application number: **16177099.5**

(22) Date of filing: **30.06.2016**

(54) ORGANIC LIGHT EMITTING DIODE DISPLAY DEVICE

ANZEIGEVORRICHTUNG MIT ORGANISCHEN LEUCHTDIODEN

AFFICHAGE À DIODES ÉLECTROLUMINESCENTES ORGANIQUES

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **30.06.2015 KR 20150093651**

(43) Date of publication of application:
04.01.2017 Bulletin 2017/01

(73) Proprietor: **LG Display Co., Ltd.
Yeongdeungpo-gu
Seoul, 07336 (KR)**

(72) Inventors:
• **PARK, Hong-Ki
411-310 Gyeonggi-do (KR)**

• **BAE, Hyo-Dae
413-010 Gyeonggi-do (KR)**

(74) Representative: **Hale, Peter et al
Kilburn & Strode LLP
Lacon London
84 Theobalds Road
London WC1X 8NL (GB)**

(56) References cited:
**US-A1- 2005 116 632 US-A1- 2007 035 242
US-A1- 2009 026 467 US-A1- 2014 145 158
US-A1- 2015 001 486**

EP 3 113 228 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present application claims the priority benefit of Korean Patent Application No. 10-2015-0093651 filed in Republic of Korea on June 30, 2015.

BACKGROUND OF THE INVENTION

Field of the Invention

[0002] The present invention relates to an organic light emitting diode (OLED) display device. In particular, the present invention relates to an OLED display device that has improved uniformity of thickness of an organic light emitting layer.

Discussion of the Related Art

[0003] Recently, flat display devices, such as a plasma display panel (PDP), a liquid crystal display (LCD) device, and an organic light emitting diode (OLED) display device, have been researched.

[0004] Among the flat display devices, the OLED display device is a self-luminescent device and can have a thin profile because the OLED display device does not need a backlight used for the LCD device.

[0005] Further, compared with the LCD device, the OLED display device has advantages of excellent viewing angle and contrast ratio, low power consumption, operation in low DC voltage, fast response speed, being strong to an external impact because of its solid internal components, and wide operating temperature range.

[0006] Particularly, since processes of manufacturing the OLED display device are simple, production cost of the OLED display device can be reduced more than that of the LCD device.

[0007] FIG. 1 is a plan view illustrating an OLED display device according to the related art.

[0008] As shown in FIG. 1, the related art OLED display device includes a plurality of pixel regions P, a first bank 30a and 30b separating the pixel regions P and located at a boundary portion of each pixel region P, and a second bank 50a and 50b exposing edges of the first bank 30a and 30b and located on the first bank 30a and 30b.

[0009] The first bank 30a and 30b is divided into a first portion 30a along a long side of the pixel region P and a second portion 30b along a short side of the pixel region P, and the second bank 50a and 50b is divided into a third portion 50a along the long side of the pixel region P and a fourth portion 50b along the short side of the pixel region P.

[0010] A width of the edge of the first portion 30a is equal to that of the second portion 30b.

[0011] FIG. 2 is a cross-sectional view taken along a line II-II of FIG. 1, and FIG. 3 is a cross-sectional view taken along a line III-III of FIG. 1. In more detail, FIG. 2 is a cross-sectional view of the pixel region P and the boundary portion thereof along a minor axis of the pixel

region, and FIG. 3 is a cross-sectional view of the pixel region P and the boundary portion thereof along a major axis of the pixel region.

[0012] As shown in FIGs. 2 and 3, the related art OLED display device includes a first electrode 20 in the pixel region P on a substrate 11, the first bank 30a and 30b at the boundary portion of the pixel region P on the substrate 11, the second bank 50a and 50b on the first bank 30a and 30b, and an organic light emitting layer 70 on the first electrode 20.

[0013] The first bank 30a and 30b is arranged to cover edges of the first electrode 20, and the second bank 50a and 50b is arranged to expose the edges of the first bank 30a and 30b.

[0014] A width w1 of an edge e1 of the first portion 30a is equal to a width w2 of an edge e2 of the second portion 30b.

[0015] For example, the width w1 of the edge e1 of the first portion 30a and the width w2 of the edge e2 of the second portion 30b may be equally 1 μm to 10 μm.

[0016] Further, a height h1 of the third portion 50a is equal to a height h2 of the fourth portion 50b.

[0017] For example, the height h1 of the third portion 50a and the height h2 of the fourth portion 50b may be equally 1 micrometre (μm) to 10 μm.

[0018] The first electrode 20 may be made of a transparent conductive material having a relatively greater work function to function as an anode. The first bank 30a and 30b may be made of an inorganic material having a hydrophilicity, and the second bank 50a and 50b may be made of an organic material having a hydrophobicity.

[0019] The OLED display device further includes a driving thin film transistor DTf located between the substrate 11 and the first electrode 20 and connected to the first electrode 20.

[0020] The organic light emitting layer 70 is laminated using a soluble process such as an inkjet printing method, a nozzle printing method or the like.

[0021] In detail, the organic light emitting layer 70 is formed by dropping an organic light emitting material solution on the first electrode 20 and then drying the organic light emitting material solution.

[0022] A phenomenon occurs that a thickness of an edge portion of the organic light emitting layer 70 is greater than a thickness of a center portion of the organic light emitting layer 70 in the drying process. This phenomenon is referred to as a pile-up phenomenon.

[0023] In this case, since the edges e1 and e2 of the first bank 30a and 30b is exposed by the second bank 50a and 50b, the dropped organic light emitting material solution contacts top surfaces of the edges e1 and e2 of the first bank 30a and 30b.

[0024] Further, since the first bank 30a and 30b is made of an hydrophilic inorganic material, the first bank 30a and 30b has a surface energy greater than that of the second bank 50a and 50b, and a surface tension of the organic light emitting material solution at the top surfaces of the edges e1 and e2 of the first bank 30a and

30b is reduced.

[0025] Accordingly, the pile-up phenomenon is induced from the top surfaces of the edges e1 and e2 of the first bank 30a and 30b to side walls of the second bank 50a and 50b.

[0026] Thus, the pile-up phenomenon at the boundary portion of a display region out of the pixel region P the can be relieved to some extent.

[0027] In other words, a uniformity of thickness of the display region of the pixel region P can be improved to some extent.

[0028] However, since the pile-up phenomenon at the boundary portion is not completely improved, a non-uniformity of brightness still occurs due to reduction of a uniformity of thickness of the organic light emitting layer 70 and light emission efficiency and lifetime of the OLED display device are reduced.

[0029] Further, since the dual banks of the first bank 30a and 30b and the second bank 50a and 50b are arranged vertically, an aperture ratio of the OLED display device is reduced compared with the LCD device.

[0030] In prior art document US 2005/0116632 A1 is discussed the formation of functional thin film having a uniform thickness in a pixel region.

SUMMARY OF THE INVENTION

[0031] Accordingly, the present invention is directed to an OLED display device that substantially obviates one or more of the problems due to limitations and disadvantages of the related art.

[0032] An object of the present invention is to improve a uniformity of thickness of an organic light emitting layer and a non-uniformity of brightness.

[0033] Additional features and advantages of the disclosure will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the disclosure. The advantages of the disclosure will be realized and attained by the structure particularly pointed out in the written description and claims as well as the appended drawings.

[0034] Aspects of an invention are defined in the appended independent claims.

[0035] To achieve these and other advantages, and in accordance with the purpose of the present invention, as embodied and broadly described herein, an organic light emitting diode (OLED) display device includes a pixel region and a boundary region outside the pixel region. The pixel region comprises an area having a short side and a long side. The pixel region comprises an array of pixels to emit light. The OLED display device includes a substrate in the pixel region and in the boundary region, a first electrode of a light emitting device in the pixel region over the substrate, a first bank covering edges of the first electrode in the pixel region and on the substrate in the boundary region, and a second bank on a portion of the first bank in the boundary region, wherein a width of an edge of the first bank along the short side of the pixel

region is different from a width of an edge of the first bank along the long side of the pixel region.

[0036] Also disclosed, an organic light emitting display (OLED) device includes a pixel region and a boundary region outside the pixel region. The pixel region comprises an area having a short dimension and a long dimension. The pixel region comprises an array of pixels to emit light. A substrate is in the pixel region and in the boundary region. An electrode is on the substrate in the pixel region. The electrode has long edge portions oriented along the long dimension of the pixel region and the electrode has short edge portions oriented along the short dimension of the pixel region. A first bank is on the substrate in the boundary region and on the long and the short edge portions of the electrode in the pixel region. A second bank is on the first bank in the boundary region. The second bank has long edge portions oriented along the long dimension of the pixel region and short edge portions oriented along the short dimension of the pixel region. An organic light emitting layer is on the electrode and on the first bank in the pixel region and on at least a portion of the second bank in the boundary region. An average height of short edge portions of the organic light emitting layer on the second bank is greater than an average height of long edge portions of the organic light emitting layer on the second bank.

[0037] Also disclosed, a display device comprises a plurality of pixel regions each comprising an area having a short dimension and a long dimension. Each of the pixel regions comprises an array of pixels to emit light. A plurality of boundary regions separates the pixel regions. The boundary regions comprise a first bank and a second bank. The first bank comprises a hydrophilic material around a perimeter of the pixel region. The second bank comprises a hydrophobic material on a portion of the first bank around the perimeter of the pixel region. The second bank has long edge portions along the long dimension and short edge portions along the short dimension. A first height of the short edge portions of the second bank is greater than a second height of the long edge portions of the second bank.

[0038] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0039] The accompanying drawings, which are included to provide a further understanding of the disclosure and are incorporated in and constitute a part of this specification, illustrate embodiments of the disclosure and together with the description serve to explain the principles of the disclosure. In the drawings:

FIG. 1 is a plan view illustrating an OLED display device according to the related art;

FIG. 2 is a cross-sectional view taken along a line II-II of FIG. 1;

FIG. 3 is a cross-sectional view taken along a line III-III of FIG. 1;

FIG. 4 is a plan view illustrating an OLED display device according to an embodiment of the present invention;

FIG. 5 is a cross-sectional view taken along a line V-V of FIG. 4;

FIG. 6 is a cross-sectional view taken along a line VI-VI of FIG. 4; and

FIG. 7 is a cross-sectional view taken along a line VII-VII of FIG. 4.

DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

[0040] Reference will now be made in detail to embodiments, examples of which are illustrated in the accompanying drawings. The same or like reference numbers may be used throughout the drawings to refer to the same or like parts.

[0041] FIG. 4 is a plan view illustrating an OLED display device according to an embodiment of the present invention.

[0042] As shown in FIG. 4, the OLED display device of the embodiment includes a plurality of pixel regions P, a first bank 130a and 130b in a boundary region separating the pixel regions P and located at a boundary portion of each pixel region P, and a second bank 150a and 150b in the boundary region not covering (e.g., exposing) edges of the first bank 130a and 130b and located on the first bank 130a and 130b. The edges of the first bank 130a and 130b not covered by the second bank 150a and 150b may be covered by a different layer, such as an organic light emitting layer as described below. The first bank 130a and 130b and second bank 150a and 150b may be located around a perimeter of the pixel region P.

[0043] The first bank 130a and 130b is divided into a first portion 130a (e.g., a long edge portion) along a long side of the pixel region P and a second portion 130b (e.g., a short edge portion) along a short side of the pixel region P, and the second bank 150a and 150b is divided into a third portion 150a (e.g., a long edge portion) along the long side of the pixel region P and a fourth portion 150b (e.g., a short edge portion) along the short side of the pixel region P.

[0044] A width of the edge of the second portion 130b is greater than that of the first portion 130a.

[0045] FIG. 5 is a cross-sectional view taken along a line V-V of FIG. 4, FIG. 6 is a cross-sectional view taken along a line VI-VI of FIG. 4, and FIG. 7 is a cross-sectional

view taken along a line VII-VII of FIG. 4. In more detail, FIG. 5 is a cross-sectional view of the pixel region P and the boundary portion thereof along a minor axis of the pixel region, FIG. 6 is a cross-sectional view of the pixel region P and the boundary portion thereof along a major axis of the pixel region, and FIG. 7 is a cross-sectional view of the pixel region P and the boundary portion thereof with a driving thin film transistor.

[0046] As shown in FIGs. 5-7, the OLED display device of the embodiment includes a first electrode 120 on or over the substrate 101 in the pixel region P and in a boundary region separating the pixel regions P, the first bank 130a and 130b covering edges of the first electrode 120 in the pixel region P and on the substrate 101 in a boundary region surrounding the pixel region P, the second bank 150a and 150b on a portion of the first bank 130a and 130b in the boundary region, and an organic light emitting layer 170 on the first electrode 120 and on the first bank 130a and 130b in the pixel region and on at least a portion of the second bank in the boundary region.

[0047] The first bank 130a and 130b is arranged to cover edges of the first electrode 120, and the second bank 150a and 150b is arranged to not cover the edges e1 and e2 of the first bank 130a and 130b (which may be covered by a different layer such as the organic light emitting layer 170).

[0048] A width w1 of the edge e1 of the first portion 130a is different from a width w2 of the edge e2 of the second portion 130b.

[0049] In detail, the width w2 of the edge e2 of the second portion 130b is greater than the width w1 of the edge e1 of the first portion 130a.

[0050] For example, the width w2 of the edge e2 of the second portion 130b may be about 7.5um to about 10um, and the width w1 of the edge e1 of the first portion 130b may be about 5um. In other example, the width w2 of the edge e2 of the second portion 130b may be about 6um to about 8um, and the width w1 of the edge e1 of the first portion 130b may be about 4um. In other example, the width w2 of the edge e2 of the second portion 130b may be about 4.5um to about 6um, and the width w1 of the edge e1 of the first portion 130b may be about 3um. Thus, in one embodiment, the width w2 may be in the range of 1.5-2 times the width w1.

[0051] Further, a height h1 of the third portion 150a is different from a height h2 of the fourth portion 150b.

[0052] In detail, the height h2 of the fourth portion 150b is greater than the height h1 of the third portion 150a.

[0053] For example, the height h2 of the fourth portion 150b may be about 1.5um to 2um, and the height h1 of the third portion 150a may be about 1um. In other example, the height h2 of the fourth portion 150b may be about 2.5um to 3um, and the height h1 of the third portion 150a may be about 2um. Thus, for example, the height h2 may be in the range of 1.25-2 times the height h1. Further, in an embodiment, the height h2 of the fourth portion 150b may be higher than the height h1 of the third portion 150a

at least by 0.5μm, and the height of h2 of the fourth portion 150b may be 3μm or less.

[0054] In this case, using a half-tone mask or the like including a blocking region, a semi-transmissive region and a transmissive region, the heights h1 and h2 of the second bank 150a and 150b may be formed differently.

[0055] Accordingly, the second bank 150a and 150b having the different heights h1 and h2 can be formed, and thus production process can be simplified.

[0056] The first electrode 120 may be made of a transparent conductive material, for example, indium-tin-oxide (ITO) or indium-zinc-oxide (IZO), having a relatively greater work function to function as an anode.

[0057] The first bank 130a and 130b may be made of an inorganic material, for example, silicon oxide (SiO₂) or silicon nitride (SiN_x), having a hydrophilicity. The second bank 150a and 150b may be made of an organic material, for example, polyacryl, polyimide, polyamide (PA), benzocyclobutene (BCB), or phenol resin, having a hydrophobicity.

[0058] The OLED display device further includes the driving thin film transistor DTr located between the substrate 101 and the first electrode 120 and connected to the first electrode 120.

[0059] The detailed structure of the driving thin film transistor DTr is explained with reference to FIG. 7.

[0060] A semiconductor layer 113 is located on the substrate 101 and includes a first region 113a made of intrinsic polysilicon, and a second region 113b located at each of both sides of the first region 113a and doped with highly concentrated impurities.

[0061] A gate insulating layer 115 is located entirely on the substrate 101 and covers the semiconductor layer 113. A gate electrode 125 is located on the gate insulating layer 115 corresponding to the first region 113a. An inter-layered insulating layer 117 covers the gate electrode 125 and is entirely on the substrate 101.

[0062] A semiconductor contact hole 121 exposing each second region 113b is formed in the gate insulating layer 115 and the inter-layered insulating layer 117.

[0063] Source and drain electrodes 133 and 136 are located on the inter-layered insulating layer 117, are connected to the respective second regions 113b through the respective semiconductor contact holes 121, and are spaced apart from each other.

[0064] The source and drain electrodes 133 and 136, the semiconductor layer 113, the gate electrode 125 form the driving thin film transistor DTr.

[0065] A passivation layer 119 is located on the driving thin film transistor DTr over the entire substrate 101, and has a planarization property.

[0066] A drain contact hole 143 exposing the drain electrode 136 is formed in the passivation layer 119. The drain electrode 136 is connected to the first electrode 120 through the drain contact hole 143.

[0067] The organic light emitting layer 170 is located on the first electrode 120. A second electrode (not shown) is located on the organic light emitting layer 170 and the

second bank 150a and 150b.

[0068] The organic light emitting layer 170 is laminated using a soluble process such as an inkjet printing method, a nozzle printing method or the like.

5 [0069] The organic light emitting layer 170 is formed by dropping an organic light emitting material solution on the first electrode 120 and then drying the organic light emitting material solution.

10 [0070] A phenomenon occurs that a thickness of an edge portion of the organic light emitting layer 170 is greater than a thickness of a center portion of the organic light emitting layer 170 in the drying process. This phenomenon is referred to as a pile-up phenomenon.

15 [0071] In this case, since the edges e1 and e2 of the first bank 130a and 130b are exposed by the second bank 150a and 150b, the dropped organic light emitting material solution contacts top surfaces of the edges e1 and e2 of the first bank 130a and 130b.

20 [0072] Further, since the first bank 130a and 130b is made of an hydrophilic inorganic material, the first bank 130a and 130b has a surface energy greater than that of the second bank 150a and 150b, and a surface tension of the organic light emitting material solution at the top surfaces of the edges e1 and e2 of the first bank 130a and 130b is reduced.

25 [0073] Accordingly, the pile-up phenomenon is induced from the top surfaces of the edges e1 and e2 of the first bank 130a and 130b to side walls of the second bank 150a and 150b.

30 [0074] Further, as shown in the drawings, the width w2 of the edge e2 of the second portion 130b along the short side of the pixel region P is greater than the width w1 of the edge e1 of the first portion 130a along the long side of the pixel region P.

35 [0075] Accordingly, regarding areas that contact the dropped organic light emitting material solution, the area at the edge e2 of the second portion 130b is wider than the area at the edge d1 of the first portion 130a.

40 [0076] Further, as shown in the drawings, the height h2 of the fourth portion 150b along the short side of the pixel region P is greater than the height h1 of the third portion 150a along the long side of the pixel region P.

45 [0077] Accordingly, in the drying process of the organic light emitting material solution, the pile-up phenomenon at the side wall of the fourth portion 150b occurs relatively more while the pile-up phenomenon at the side wall of the third portion 150a occurs relatively less. Thus, an average height of the organic light emitting layer along its short edge portions on the second bank is greater than an average height of the organic light emitting layer along the long edge portions on the second bank. Furthermore, due to the difference in pile-up phenomenon, a width of the organic light emitting layer along its short edge portions over the first bank is greater than a width of the organic light emitting layer along its long edge portions over the first bank.

[0078] Having greater pile-up phenomenon along the short edge portions beneficially acts to stretch the organic

light emitting material and improves a uniformity of thickness of the display region across the pixel region P and results in the reduced pile-up along the long edge portions which forms part of the viewable display. Furthermore, the increased pile-up phenomenon along the short edge does not significantly affect the viewable display area because the area above the driving thin film transistor DTr along the short edge is not used for display or represents a less significant portion of the display, in one embodiment.

[0079] Thus, the OLED display device of the embodiment can prevent a non-uniformity of brightness caused by reduction of a uniformity of thickness, and can improve light emission efficiency and lifetime of an organic light emitting diode.

[0080] Further, the driving thin film transistor DTr is arranged below the second portion 130b and the fourth portion 150b along the short side of the pixel region P.

[0081] In the drawings, it is shown that the driving thin film transistor DTr is arranged at the boundary portion of the lower side of the pixel region P. Alternatively, the driving thin film transistor DTr may be arranged at the boundary portion of the upper side of the pixel region P. Thus, for example, at least a portion of the driving thin film transistor DTr is under the edge of the first bank 130b along either one of the short sides in the pixel region P.

[0082] Accordingly, since the driving thin film transistor DTr is arranged below the second portion 130b and the fourth portion 150b along the short side of the pixel region P where the pile-up phenomenon occurs relatively more, an aperture ratio of the OLED display device can be improved.

[0083] Further, even though the dual banks of the first bank 130a and 130b and the second bank 150a and 150b are arranged vertically, by adjusting the widths w1 and w2 of the first and second portions 130a and 130b along the short side and the long side of the pixel region P, the aperture ratio of the OLED display device can be further improved.

[0084] In the above embodiment, it is described that, in order to improve a uniformity of thickness, the OLED display device is configured with the width w2 of the edge e2 of the second portion 130b being greater than the width w1 of the edge e1 of the first portion 130a and the height h2 of the fourth portion 150b being greater than the height h1 of the third portion 150a. In another embodiment, the OLED can be configured with either, but not necessarily both, the width w2 of the edge e2 of the second portion 130b being greater than the width w1 of the edge e1 of the first portion 130a or the height h2 of the fourth portion 150b being greater than the height h1 of the third portion 150a, and this configuration can improve a uniformity of thickness sufficiently. In other words, the widths w1 and w2 of the first bank and/or the heights h1 and h2 of the second bank can be dimensioned to improve a uniformity of thickness.

[0085] It will be apparent to those skilled in the art that various modifications and variations can be made in a

display device of the present invention without departing from the scope of the disclosure. Thus, it is intended that the present invention covers the modifications and variations of this disclosure provided they come within the scope of the appended claims and their equivalents.

[0086] Further embodiments not forming part of the invention:

Clause 1. An organic light emitting diode (OLED) display device including a pixel region and a boundary region outside the pixel region, the pixel region comprising an area having a short side and a long side, the pixel region comprising an array of pixels to emit light, the OLED display device comprising:

- a substrate in the pixel region and in the boundary region;
- a first electrode of a light emitting device in the pixel region over the substrate;
- a first bank covering edges of the first electrode in the pixel region and on the substrate in the boundary region, wherein a width of an edge of the first bank along the short side of the pixel region is different from a width of an edge of the first bank along the long side of the pixel region; and
- a second bank on a portion of the first bank in the boundary region.

Clause 2. The OLED display device of clause 1, wherein a height of the second bank along the short side of the pixel region is different from a height of the second bank along the long side of the pixel region.

Clause 3. The OLED display device of clause 1, wherein the width of the edge of the first bank along the short side of the pixel region is greater than the width of the edge of the first bank along the long side of the pixel region.

Clause 4. The OLED display device of clause 1, wherein a height of the second bank along the short side of the pixel region is greater than a height of the second bank along the long side of the pixel region.

Clause 5. The OLED display device of clause 4, wherein the first bank comprises a hydrophilic inorganic material, and the second bank comprises a hydrophobic organic material.

Clause 6. The OLED display device of clause 1, further comprising a driving thin film transistor between the substrate and the first electrode and connected to the first electrode.

Clause 7. The OLED display device of clause 6, wherein at least a portion of the driving thin film tran-

sistor is under the edge of the first bank along the short side of the pixel region.

Clause 8. The OLED display device of clause 1, further comprising:

an organic light emitting layer on the first electrode in the pixel region; and

a second electrode on the organic light emitting layer and the second bank.

Clause 9. The OLED display device of clause 8, wherein the organic light emitting layer is laminated using a soluble process.

Clause 10. The OLED display device of clause 8, wherein the width of the edge of the first bank along the short side of the pixel region and the width of the edge of the first bank along the long side of the pixel region are dimensioned such that an average height of short edge portions of the organic light emitting layer on the second bank is greater than an average height of long edge portions of the organic light emitting layer on the second bank.

Clause 11. The OLED display device of clause 8, wherein a height of the second bank along the short side of the pixel region and a height of the second bank along the long side of the pixel region are dimensioned such that an average height of short edge portions of the organic light emitting layer on the second bank is greater than an average height of long edge portions of the organic light emitting layer on the second bank.

Clause 12. An organic light emitting diode (OLED) display device including a pixel region and a boundary region outside the pixel region, the pixel region comprising an area having a short dimension and a long dimension, the pixel region comprising an array of pixels to emit light, the OLED display device comprising:

a substrate in the pixel region and in the boundary region;

an electrode on the substrate in the pixel region, the electrode having long edge portions oriented along the long dimension of the pixel region and the electrode having short edge portions oriented along the short dimension of the pixel region;

a first bank on the substrate in the boundary region and on the long and the short edge portions of the electrode in the pixel region;

a second bank on the first bank in the boundary

region, the second bank having long edge portions oriented along the long dimension of the pixel region and short edge portions oriented along the short dimension of the pixel region;

an organic light emitting layer on the electrode and on the first bank in the pixel region and on at least a portion of the second bank in the boundary region, wherein an average height of short edge portions of the organic light emitting layer on the second bank is greater than an average height of long edge portions of the organic light emitting layer on the second bank.

Clause 13. The OLED display device of clause 12, wherein a width of short edge portions of the organic light emitting layer over the first bank along the short dimension is different than a width of long edge portions of the organic light emitting layer over the first bank along the long dimension.

Clause 14. The OLED display device of clause 13, wherein the width of the short edge portions of the organic light emitting layer over the first bank along the short dimension is greater than the width of the long edge portions of the organic light emitting layer over the first bank along the long dimension.

Clause 15. The OLED display device of clause 12, wherein widths of short edge portions of the first bank on the short edge portions of the electrode are greater than widths of long edge portions of the first bank on the short edge portions of the electrode.

Clause 16. The OLED display device of clause 15, wherein the widths of the short edge portions of the first bank are in a range of approximately 1.5 - 2 times the widths of the long edge portions of the first bank.

Clause 17. The OLED display device of clause 12, wherein heights of the short edge portions of the second bank are greater than heights of the long edge portions of the second bank.

Clause 18. The OLED display device of clause 17, wherein the heights of the short edge portions of the second bank are in a range of approximately 1.25-2 times the heights of the long edge portions of the second bank.

Clause 19. The OLED display device of clause 17, wherein the heights of the short edge portions of the second bank are in a range of about 3µm or less and are at least 0.5µm greater than the heights of the long edge portions of the second bank.

Clause 20. The OLED display device of clause 12,

wherein the first bank comprises a hydrophilic inorganic material, and the second bank comprises a hydrophobic organic material.

Clause 21. The OLED display device of clause 12, wherein widths of short edge portions of the first bank on the short edge portions of the electrode and widths of long edge portions of the first bank on the long edge portions of the electrode are dimensioned such that the average height of the short edge portions of the organic light emitting layer on the second bank is greater than the average height of the long edge portions of the organic light emitting layer on the second bank.

Clause 22. The OLED display device of clause 12, wherein heights of the short edge portions of the second bank and heights of the long edge portions of the second bank are dimensioned such that the average height of the short edge portions of the organic light emitting layer on the second bank is greater than the average height of the long edge portions of the organic light emitting layer on the second bank.

Clause 23. A display device comprising:

a plurality of pixel regions each comprising an area having a short dimension and a long dimension, each of the pixel regions comprising an array of pixels to emit light;

a plurality of boundary regions separating the pixel regions, the boundary regions comprising:

a first bank comprising a hydrophilic material around a perimeter of the pixel region;

a second bank comprising a hydrophobic material on a portion of the first bank around the perimeter of the pixel region, the second bank having long edge portions along the long dimension and short edge portions along the short dimension, wherein a first height of the short edge portions of the second bank is greater than a second height of the long edge portions of the second bank.

Clause 24. The display device of clause 23, wherein the first height is in a range of approximately 1.25 to 2 times the second height.

Clause 25. The display device of clause 23, wherein the first height is in a range of about 3 μ m or less and is at least 0.5 μ m greater than the second height.

Clause 26. The display device of clause 23, wherein the first bank comprises an inorganic material and wherein the second bank comprises an organic ma-

terial.

Clause 27. The display device of clause 23, further comprising an organic light emitting layer on the first bank in the pixel region and on at least a portion of the second bank in the boundary region, wherein the first height and the second height are dimensioned such that an average height of short edge portions of the organic light emitting layer on the second bank is greater than an average height of long edge portions of the organic light emitting layer on the second bank.

Clause 28. The display device of clause 23, further comprising an organic light emitting layer on the first bank in the pixel region and on at least a portion of the second bank in the boundary region, wherein a width of short edge portions of the first bank along the short dimension and a width of long edge portions of the first bank along the long dimension are dimensioned such that an average height of short edge portions of the organic light emitting layer on the second bank is greater than an average height of long edge portions of the organic light emitting layer on the second bank.

Claims

1. An organic light emitting diode "OLED" display device comprising an array of pixels to emit light, the OLED display device comprising:

a substrate (101) defining a pixel region and a boundary region outside the pixel region, the pixel region comprising an area having a short side and a long side;

a first electrode (120) in the pixel region;

a first bank (130a, 130b) overlapping edges of the first electrode in the pixel region and on the substrate in the boundary region, wherein a width (w2) of an edge (e2) of the first bank along the short side of the pixel region is different from a width (w1) of an edge (e1) of the first bank along the long side of the pixel region, wherein the edge of the bank is the portion of the bank in the pixel region; and

a second bank (150a, 150b) on a portion of the first bank in the boundary region.

2. The OLED display device of claim 1, wherein the pixel region comprises the array of pixels.

3. The OLED display device of claim 1 or claim 2, wherein the first bank is around a perimeter of the pixel region and the second bank is around the perimeter of the pixel region.

4. The OLED display device of any preceding claim, wherein a height (h2) of the second bank along the short side of the pixel region is different from a height (h1) of the second bank along the long side of the pixel region. 5
5. The OLED display device of any preceding claim, wherein the width of the edge of the first bank along the short side of the pixel region is greater than the width of the edge of the first bank along the long side of the pixel region. 10
6. The OLED display device of any preceding claim, wherein a height of the second bank along the short side of the pixel region is greater than a height of the second bank along the long side of the pixel region. 15
7. The OLED display device of any preceding claim, wherein the first bank comprises a hydrophilic inorganic material, and the second bank comprises a hydrophobic organic material. 20
8. The OLED display device of any preceding claim, further comprising a driving thin film transistor (DTr) between the substrate and the first electrode and connected to the first electrode. 25
9. The OLED display device of claim 8, wherein at least a portion of the driving thin film transistor is under the edge of the first bank along the short side of the pixel region. 30
10. The OLED display device of any preceding claim, further comprising:
an organic light emitting layer (170) on the first electrode in the pixel region. 35
11. The OLED display device of claim 10, further comprising a second electrode on the organic light emitting layer and the second bank. 40
12. The OLED display device of claim 10 or claim 11, wherein the organic light emitting layer is laminated using a soluble process. 45
13. The OLED display device of claims 10 to 12, wherein the width of the edge of the first bank along the short side of the pixel region and the width of the edge of the first bank along the long side of the pixel region are dimensioned such that an average height of short edge portions of the organic light emitting layer on the second bank are greater than an average height of long edge portions of the organic light emitting layer on the second bank. 50
14. The OLED display device of any of claims 10 to 13, wherein a height of the second bank along the short side of the pixel region and a height of the second 55

bank along the long side of the pixel region are dimensioned such that an average height of short edge portions of the organic light emitting layer on the second bank is greater than an average height of long edge portions of the organic light emitting layer on the second bank.

15. The OLED display device of any preceding claim, wherein the widths of the short edge portions of the first bank are in a range of approximately 1.5 - 2 times the widths of the long edge portions of the first bank.

15 Patentansprüche

1. OLED(Organische Leuchtdiode)-Anzeigeeinrichtung, umfassend ein Pixelarray zum Ausgeben von Licht, wobei die OLED-Anzeigeeinrichtung Folgendes umfasst:

ein Substrat (101), das einen Pixelbereich und einen Grenzbereich außerhalb des Pixelbereichs definiert, wobei der Pixelbereich eine Fläche mit einer kurzen Seite und einer langen Seite umfasst;

eine erste Elektrode (120) in dem Pixelbereich; eine erste Begrenzung (130a, 130b), die Kanten der ersten Elektrode in dem Pixelbereich und auf dem Substrat in dem Grenzbereich überlappt, wobei sich eine Breite (w2) einer Kante (e2) der ersten Begrenzung entlang der kurzen Seite des Pixelbereichs von einer Breite (w1) einer Kante (e1) der ersten Begrenzung entlang der langen Seite des Pixelbereichs unterscheidet, wobei die Kante der Begrenzung der sich im Pixelbereich befindende Abschnitt der Begrenzung ist; und

eine zweite Begrenzung (150a, 150b) an einem Abschnitt der ersten Begrenzung in dem Grenzbereich.

2. OLED-Anzeigeeinrichtung nach Anspruch 1, wobei der Pixelbereich das Pixelarray umfasst.
3. OLED-Anzeigeeinrichtung nach Anspruch 1 oder Anspruch 2, wobei die erste Begrenzung um einen Perimeter des Pixelbereichs verläuft und die zweite Begrenzung um den Perimeter des Pixelbereichs verläuft.
4. OLED-Anzeigeeinrichtung nach einem vorhergehenden Anspruch, wobei sich eine Höhe (h2) der zweiten Begrenzung entlang der kurzen Seite des Pixelbereichs von einer Höhe (h1) der zweiten Begrenzung entlang der langen Seite des Pixelbereichs unterscheidet.

5. OLED-Anzeigeeinrichtung nach einem vorhergehenden Anspruch, wobei die Breite der Kante der ersten Begrenzung entlang der kurzen Seite des Pixelbereichs größer als die Breite der Kante der ersten Begrenzung entlang der langen Seite des Pixelbereichs ist. 5
6. OLED-Anzeigeeinrichtung nach einem vorhergehenden Anspruch, wobei eine Höhe der zweiten Begrenzung entlang der kurzen Seite des Pixelbereichs größer als eine Höhe der zweiten Begrenzung entlang der langen Seite des Pixelbereichs ist. 10
7. OLED-Anzeigeeinrichtung nach einem vorhergehenden Anspruch, wobei die erste Begrenzung ein hydrophiles anorganisches Material umfasst, und die zweite Begrenzung ein hydrophobes organisches Material umfasst. 15
8. OLED-Anzeigeeinrichtung nach einem vorhergehenden Anspruch, ferner umfassend einen Ansteuerungsdünnschichttransistor (DTr) zwischen dem Substrat und der ersten Elektrode, der mit der ersten Elektrode verbunden ist. 20
9. OLED-Anzeigeeinrichtung nach Anspruch 8, wobei mindestens ein Abschnitt des Ansteuerungsdünnschichttransistors unter der Kante der ersten Begrenzung entlang der kurzen Seite des Pixelbereichs liegt. 25
10. OLED-Anzeigeeinrichtung nach einem vorhergehenden Anspruch, ferner umfassend:
eine organische Leuchtschicht (170) auf der ersten Elektrode in dem Pixelbereich. 30
11. OLED-Anzeigeeinrichtung nach Anspruch 10, ferner umfassend eine zweite Elektrode auf der organischen Leuchtschicht und der zweiten Begrenzung. 35
12. OLED-Anzeigeeinrichtung nach Anspruch 10 oder Anspruch 11, wobei die organische Leuchtschicht mittels eines löslichen Verfahrens laminiert ist. 40
13. OLED-Anzeigeeinrichtung nach Ansprüchen 10 bis 12, wobei die Breite der Kante der ersten Grenze entlang der kurzen Seite des Pixelbereichs und die Breite der Kante der ersten Begrenzung entlang der langen Seite des Pixelbereichs derart dimensioniert sind, dass eine Durchschnittshöhe von kurzen Kantenabschnitten der organischen Leuchtschicht auf der zweiten Begrenzung größer als eine Durchschnittshöhe von langen Kantenabschnitten der organischen Leuchtschicht auf der zweiten Begrenzung ist. 45
14. OLED-Anzeigeeinrichtung nach einem der Ansprüche 10 bis 13, wobei eine Höhe der zweiten Begrenzung 50

zung entlang der kurzen Seite des Pixelbereichs und eine Höhe der zweiten Begrenzung entlang der langen Seite des Pixelbereichs derart dimensioniert sind, dass eine Durchschnittshöhe von kurzen Kantenabschnitten der organischen Leuchtschicht auf der zweiten Begrenzung größer als eine Durchschnittshöhe von langen Kantenabschnitten der organischen Leuchtschicht auf der zweiten Begrenzung ist.

15. OLED-Anzeigeeinrichtung nach einem vorhergehenden Anspruch, wobei die Breiten der kurzen Kantenabschnitte der ersten Begrenzung in einem Bereich von ungefähr 1,5-2-mal die Breite der langen Kantenabschnitte der ersten Begrenzung liegen. 55

Revendications

1. Dispositif d'affichage à diode électroluminescente organique « OLED », comprenant une matrice de pixels pour émettre de la lumière, le dispositif d'affichage OLED comprenant :

un substrat (101) définissant une région de pixel et une région de limite à l'extérieur de la région de pixel, la région de pixel comprenant une zone possédant un côté court et un côté long ;

une première électrode (120) dans la région de pixel ;

un premier flanc (130a, 130b) chevauchant des bords de la première électrode dans la région de pixel et sur le substrat dans la région de limite, dans lequel une largeur (w2) d'un bord (e2) du premier flanc le long du côté court de la région de pixel est différente d'une largeur (w1) d'un bord (e1) du premier flanc le long du côté long de la région de pixel, dans lequel le bord du flanc est la portion du flanc dans la région de pixel ; et un second flanc (150a, 150b) sur une portion du premier flanc dans la région de limite.

2. Dispositif d'affichage OLED selon la revendication 1, dans lequel la région de pixel comprend la matrice de pixels.
3. Dispositif d'affichage OLED selon la revendication 1 ou la revendication 2, dans lequel le premier flanc est autour d'un périmètre de la région de pixel et le second flanc est autour du périmètre de la région de pixel.
4. Dispositif d'affichage OLED selon une quelconque revendication précédente, dans lequel une hauteur (h2) du second flanc le long du côté court de la région de pixel est différente d'une hauteur (h1) du second flanc le long du côté long de la région de pixel.

5. Dispositif d'affichage OLED selon une quelconque revendication précédente, dans lequel la largeur du bord du premier flanc le long du côté court de la région de pixel est supérieure à la largeur du bord du premier flanc le long du côté long de la région de pixel. 5
6. Dispositif d'affichage OLED selon une quelconque revendication précédente, dans lequel une hauteur du second flanc le long du côté court de la région de pixel est supérieure à une hauteur du second flanc le long du côté long de la région de pixel. 10
7. Dispositif d'affichage OLED selon une quelconque revendication précédente, dans lequel le premier flanc comprend un matériau inorganique hydrophile, et le second flanc comprend un matériau organique hydrophobe. 15
8. Dispositif d'affichage OLED selon une quelconque revendication précédente, comprenant en outre un transistor d'excitation à film mince (DTr) entre le substrat et la première électrode et connecté à la première électrode. 20
25
9. Dispositif d'affichage OLED selon la revendication 8, dans lequel au moins une portion du transistor d'excitation à film mince est en dessous du bord du premier flanc le long du côté court de la région de pixel. 30
10. Dispositif d'affichage OLED selon une quelconque revendication précédente, comprenant en outre :
une couche électroluminescente organique (170)
sur la première électrode dans la région de pixel. 35
11. Dispositif d'affichage OLED selon la revendication 10, comprenant en outre une seconde électrode sur la couche électroluminescente organique et le second flanc. 40
12. Dispositif d'affichage OLED selon la revendication 10 ou la revendication 11, dans lequel la couche électroluminescente organique est stratifiée en utilisant un procédé soluble. 45
13. Dispositif d'affichage OLED selon les revendications 10 à 12, dans lequel la largeur du bord du premier flanc le long du côté court de la région de pixel et la largeur du bord du premier flanc le long du côté long de la région de pixel sont dimensionnées de telle sorte qu'une hauteur moyenne de portions de bord court de la couche électroluminescente organique sur le second flanc soit supérieure à une hauteur moyenne de portions de bord long de la couche électroluminescente organique sur le second flanc. 50
55
14. Dispositif d'affichage OLED selon l'une quelconque

des revendications 10 à 13, dans lequel une hauteur du second flanc le long du côté court de la région de pixel et une hauteur du second flanc le long du côté long de la région de pixel sont dimensionnées de telle sorte qu'une hauteur moyenne de portions de bord court de la couche électroluminescente organique sur le second flanc soit supérieure à une hauteur moyenne de portions de bord long de la couche électroluminescente organique sur le second flanc.

15. Dispositif d'affichage OLED selon une quelconque revendication précédente, dans lequel les largeurs des portions de bord court du premier flanc sont dans une plage d'approximativement 1,5 à 2 fois les largeurs des portions de bord long du premier flanc.

FIG. 1
RELATED ART

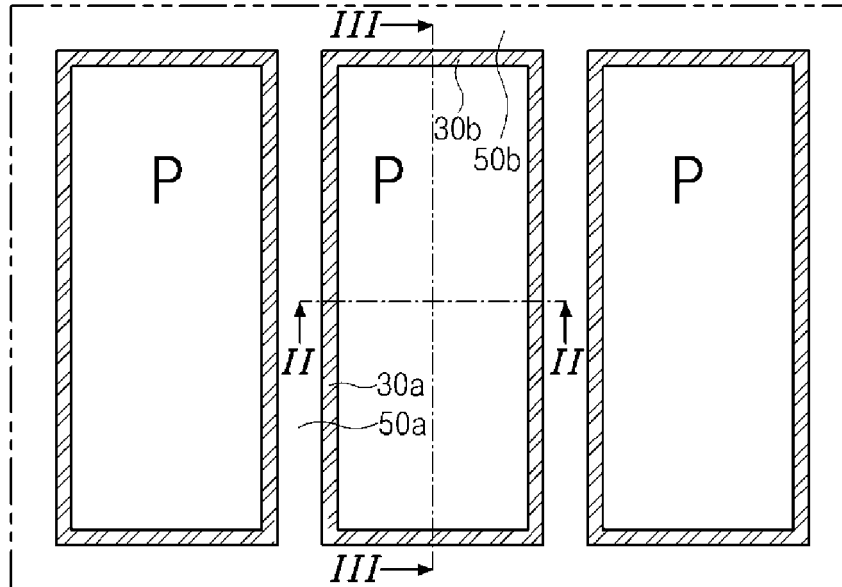


FIG. 2
RELATED ART

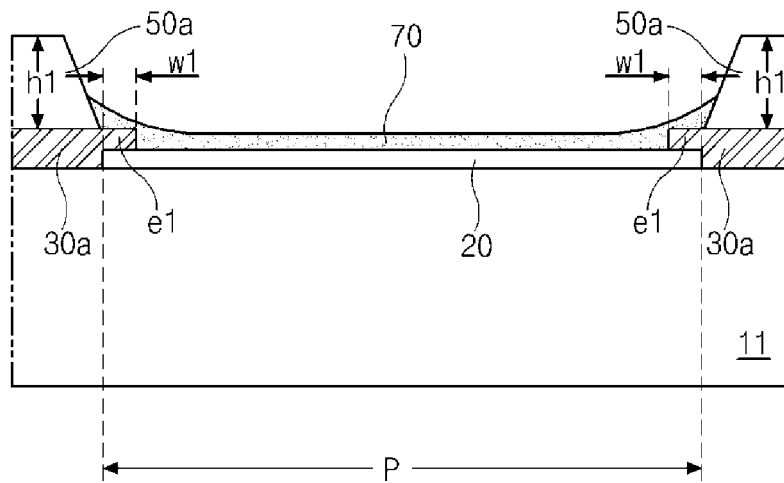


FIG. 3

RELATED ART

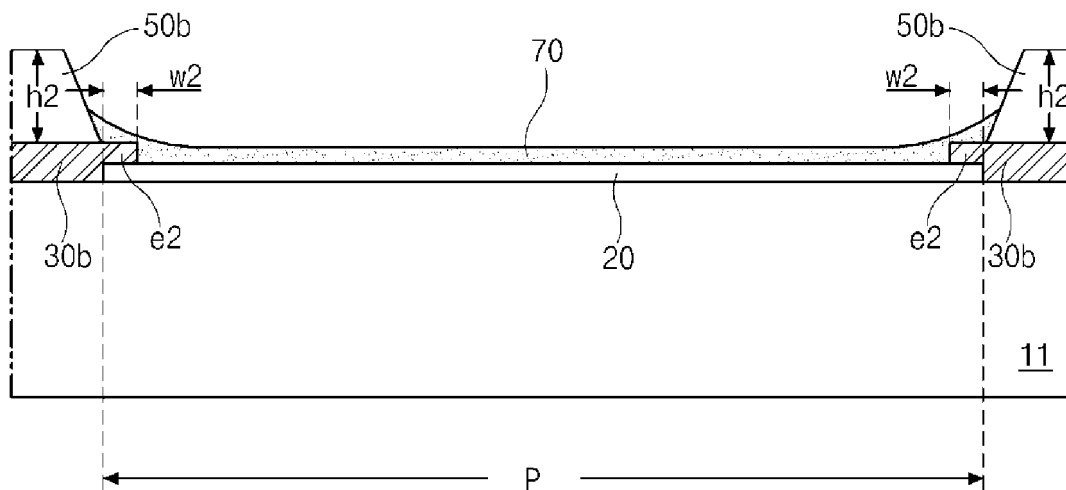


FIG. 4

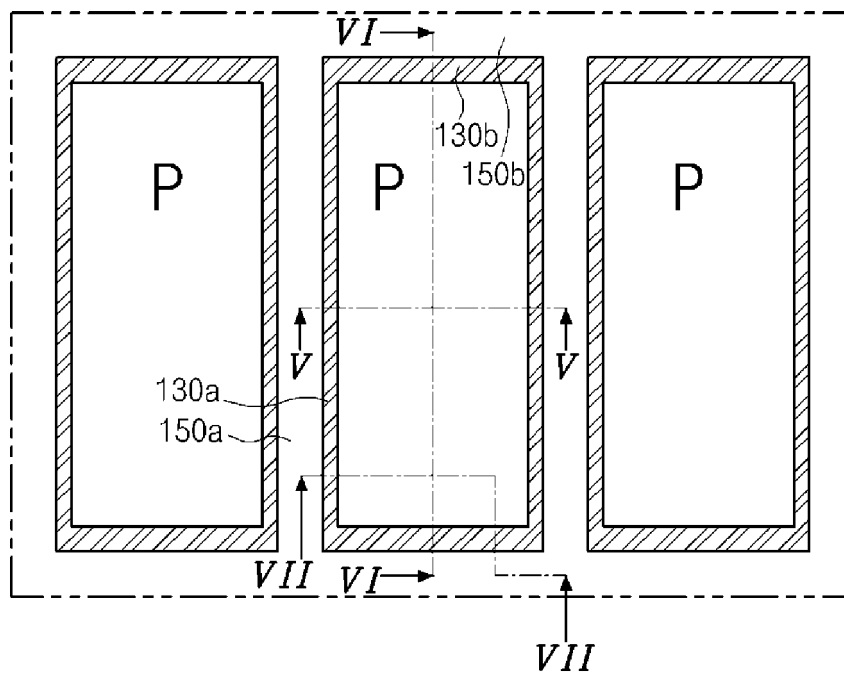


FIG. 5

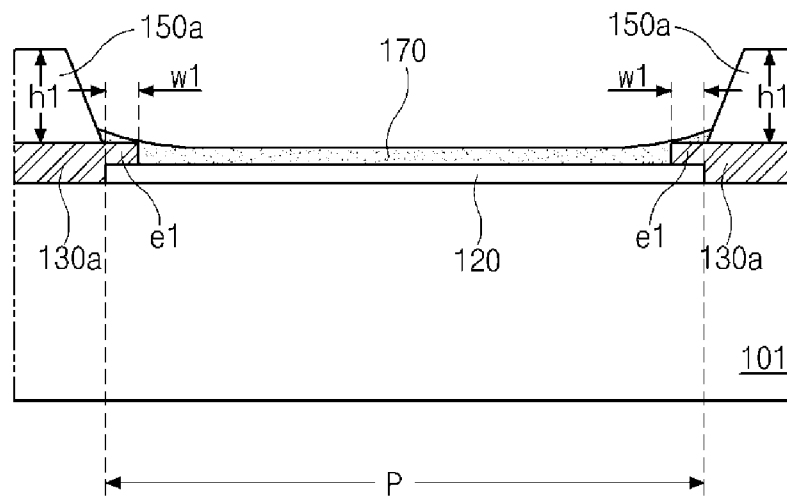


FIG. 6


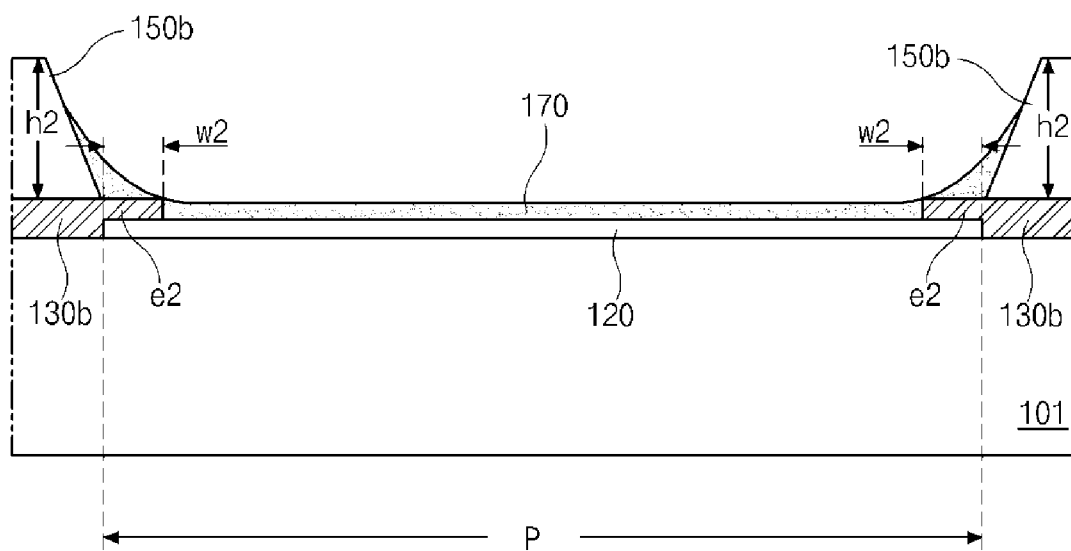


FIG. 7

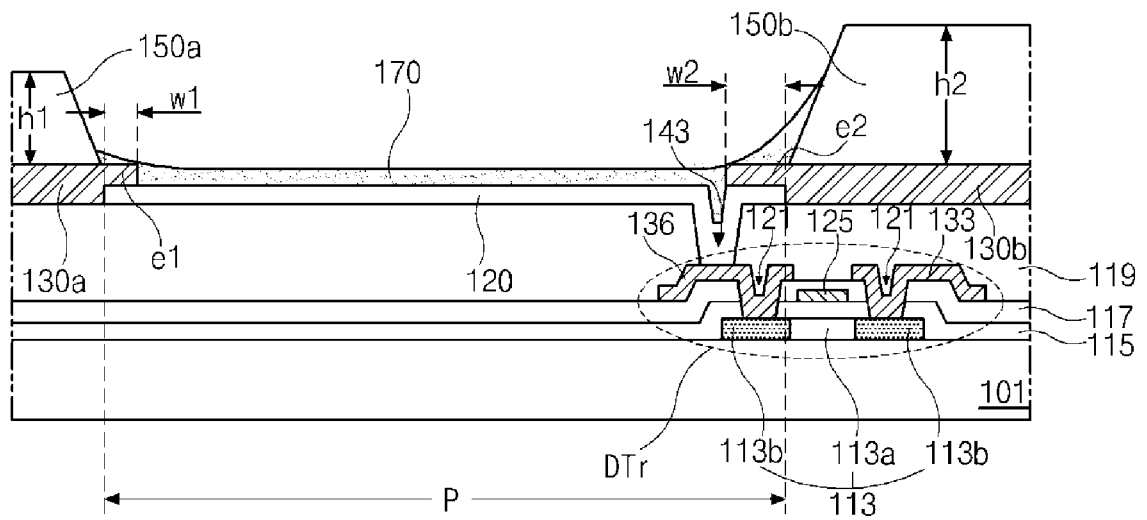

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 1020150093651 [0001]
- US 20050116632 A1 [0030]

专利名称(译)	有机发光二极管显示装置		
公开(公告)号	EP3113228B1	公开(公告)日	2018-07-04
申请号	EP2016177099	申请日	2016-06-30
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	PARK HONG KI BAE HYO DAE		
发明人	PARK, HONG-KI BAE, HYO-DAE		
IPC分类号	H01L27/32		
CPC分类号	H01L27/3246 H01L27/1214 H01L27/3262 H01L51/0004 H01L51/5012 H01L51/56		
代理机构(译)	HALE , PETER		
优先权	1020150093651 2015-06-30 KR		
其他公开文献	EP3113228A1		
外部链接	Espacenet		

摘要(译)

公开了一种有机发光二极管 (OLED) 显示装置, 包括: 基板, 包括像素区域和像素区域外部的边界区域。像素区域包括具有短边和长边的区域。OLED显示装置包括位于像素区域中和边界区域中的基板.OLED显示装置还包括位于基板上方的像素区域中的发光装置的第一电极, 第一堤岸覆盖像素中的第一电极的边缘边界区域中的基板上的区域, 其中沿着像素区域的短边的第一堤岸的边缘的宽度不同于沿着像素区域的长边的第一堤岸的边缘的宽度, 并且在边界地区的第一个银行的一部分上的第二个银行。

FIG. 1
RELATED ART

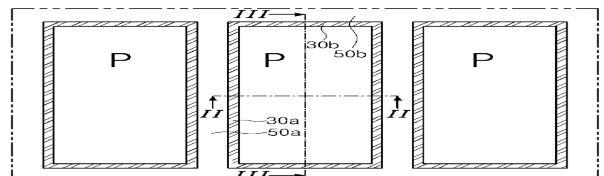


FIG. 2
RELATED ART

