



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
05.03.2014 Bulletin 2014/10

(51) Int Cl.:
H01L 27/32 (2006.01) G06F 3/041 (2006.01)

(21) Application number: **12196643.6**

(22) Date of filing: **12.12.2012**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(72) Inventors:
• **Choi, Ho-Won**
Paju-si,
Gyeonggi-do 413-772 (KR)
• **Kim, Seung-Hyun**
Goyang-si (KR)

(30) Priority: **29.08.2012 KR 20120095260**

(74) Representative: **Viering, Jentschura & Partner**
Patent- und Rechtsanwälte
Am Brauhaus 8
01099 Dresden (DE)


(71) Applicant: **LG Display Co., Ltd.**
Seoul 150-721 (KR)

(54) **Organic light emitting display and method for manufacturing the same**

(57) Disclosed are an organic light emitting display that enables realization of a thin film shape and flexibility, and exhibits superior contact properties based on an improved structure, and a method for manufacturing the same, the organic light emitting display includes a plurality of touch pads spaced from one another in the touch pad portion, each of the touch pads including a metal pad

layer and a transparent electrode pad layer connected to the metal pad layer via a plurality of first contact holes in a first insulating film, a dummy pad portion formed in the dead region of the first buffer layer, the dummy pad portion comprising a plurality of dummy pads corresponding to the touch pads, and a sealant comprising a plurality of conductive balls between the touch pad portion and the dummy pad portion.

FIG. 2

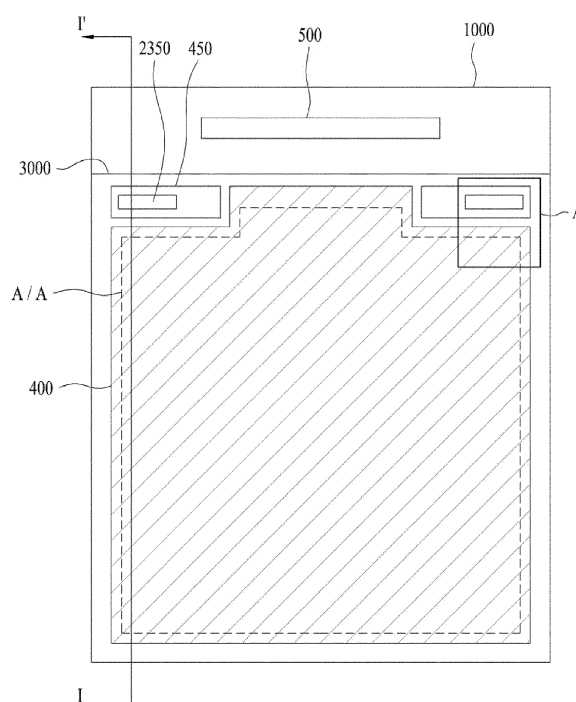

Description

[0001] This application claims the benefit of Korean Patent Application No. 10-2012-0095260, filed on August 29, 2012, which is hereby incorporated by reference as if fully set forth herein.

BACKGROUND OF THE INVENTION**Field of the Invention**

[0002] The present invention relates to an organic light emitting display, and more particularly, to an organic light emitting display that enables realization of a thin film shape and flexibility, and exhibits superior contact properties based on an improved structure, and a method for manufacturing the same.

Discussion of the Related Art

[0003] Examples of flat panel displays include liquid crystal displays (LCDs), organic light emitting displays (OLEDs), plasma display panels (PDPs), quantum dot panels (PDPs), field emission displays (FEDs), electrophoretic displays (EPDs) and the like. These displays include a flat display panel realizing an image in common as an essential component. Such a flat display panel has a configuration in which a pair of transparent insulating substrates are joined together such that they face each other via a layer containing an inherently luminescent or polarizing material or other optical material interposed therebetween.

[0004] In accordance with the recent trend toward large-size displays, demand for flat panel displays taking a smaller space gradually increases. Of these flat panel displays, organic light emitting display technologies are being rapidly developed.

[0005] Organic light emitting displays do not require any separate light source and include an organic light emitting diode that spontaneously emits light in each pixel, to realize display. The organic light emitting displays attract much attention as next-generation displays since they advantageously do not require light sources as well as structures for assembling the light sources with a display panel, thus having advantages of decrease in thickness and weight.

[0006] When electric charges are injected into an organic film formed between an electron injection electrode (cathode) and a hole injection electrode (anode), electrons pair with holes and the pairs then decay. At this time, an organic light emitting diode emits light.

[0007] Meanwhile, there is increasing demand for addition, to an organic light emitting display, of a touchscreen in which a site touched by the hand or separate input element is sensed and information is transferred in response thereto. Such a touchscreen is being applied by adhesion to the outer surface of the display.

[0008] Depending on touch sense method, a touchscreen is divided into resistive, capacitive and infrared sensing types. In consideration of ease of manufacture, sensing force and the like, capacitive type touchscreens attract much attention in small models.

[0009] Hereinafter, a touchscreen-integrated organic light emitting display of related art will be described with reference to the annexed drawings.

[0010] FIG. 1 is a sectional view illustrating a touchscreen organic light emitting display of related art.

[0011] As shown in FIG. 1, the touchscreen-integrated organic light emitting display of related art includes an organic light emitting display panel 1, a touchscreen 2 and a cover window 3 laminated in this order from the bottom and includes first and second adhesive layers 15 and 25 disposed between the respect layers.

[0012] Here, the organic light emitting display panel 1 includes a substrate, a thin film transistor array having a matrix form disposed on the substrate, and an organic light emitting diode connected to each thin film transistor of the thin film transistor array, and includes a protective film and a polarizing layer that cover the top of the organic light emitting diode. In this case, the first adhesive layer 15 corresponds to the polarizing layer of the organic light emitting display panel 1. Also, the second adhesive layer 25 is formed between the touchscreen 2 and the cover window 3 to adhere the touchscreen 2 to the cover window 3.

[0013] The touchscreen-integrated organic light emitting display of related art has the following disadvantages.

[0014] First, in a case in which an organic light emitting display panel and a touchscreen are independently formed and the touchscreen is then attached to the organic light emitting display panel, the organic light emitting display panel and the touchscreen require separate glasses, thus causing increase in hardness and thickness, which makes realization of thin and flexible organic light emitting displays impossible.

[0015] Second, the organic light emitting display panel and the touchscreen have different panel shapes, thus making processes for forming these components complicated and thus decreasing yield and price competitiveness.

[0016] Third, in an in-cell type touchscreen configuration in which a pad portion of the touchscreen faces an inside, that is, a side of a pad portion of an organic light emitting display panel, a bonding process is performed using a sealant

including conductive balls. In this case, relatively small conductive balls may have contact defects due to difference in diameter between the conductive balls. Also, a compression level of conductive balls is changed depending on a pressure applied during bonding and contact defects may thus occur during the bonding process.

SUMMARY OF THE INVENTION

[0017] Accordingly, the present invention is directed to an organic light emitting display and a method for manufacturing the same that substantially obviate one or more problems due to limitations and disadvantages of the related art.

[0018] An object of the present invention is to provide an organic light emitting display that enables realization of a thin film shape and flexibility, and exhibits superior contact properties based on an improved structure, and a method for manufacturing the same.

[0019] Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the invention may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0020] To achieve these objects and other advantages and in accordance with the purpose of the invention, as embodied and broadly described herein, provided is an organic light emitting display including a transistor-organic light emitting diode array and a touch electrode array on a first buffer layer and a second buffer layer, respectively, that have an active region and a dead region and face each other, the organic light emitting display including: a touch pad portion formed in a part of the dead region of the second buffer layer; a plurality of touch pads spaced from one another in the touch pad portion, each of the touch pads including a metal pad layer and a transparent electrode pad layer connected to the metal pad layer via a plurality of first contact holes in a first insulating film; a dummy pad portion formed in the dead region of the first buffer layer, the dummy pad portion including each dummy pad corresponding to each touch pad; and a sealant including a plurality of conductive balls between the touch pad portion and the dummy pad portion.

[0021] The plurality of first contact holes formed in one touch pad are spaced from one another and are arrayed in m and n lines, and the plurality of first contact holes arrayed in odd and even lines are alternately disposed.

[0022] At least one of the plurality of conductive balls side-contact inside at least one of the plurality of first contact holes.

[0023] A width of each first contact hole may be smaller than a diameter of each conductive ball, and the plurality of first contact holes correspond to one conductive ball.

[0024] The metal pad layer of the touch pad may be directly formed on the second buffer layer, the first insulating film including the first contact holes is formed on the metal pad layer, and the transparent electrode pad layer is connected to the metal pad layer through the first contact hole and is formed on the first insulating film.

[0025] The transparent electrode pad layer may include a first transparent electrode pad layer and a second transparent electrode pad layer.

[0026] The touch pad may further include a metal pattern between the first contact holes. In this case, the metal pattern may be disposed between the first transparent electrode pad layer and the second transparent electrode pad layer.

[0027] The first insulating film may include at least one organic film.

[0028] Each dummy pad may include a gate metal pad layer and a source pad layer connected to the gate metal pad layer via a plurality of second contact holes in a third insulating film including , on the first buffer layer.

[0029] Meanwhile, the first insulating film may includes a plurality of first contact hole sidewalls having a taper, the taper forming an angle of 55 degree or less to the surface of the second buffer layer.

[0030] The transistor-organic light emitting diode array may include: a thin film transistor array including a thin film transistor in each of pixels defined in a matrix form in the active region of the first buffer layer; an organic light emitting diode connected to the thin film transistor of each pixel; and a protective layer formed on the first buffer layer such that the protective layer covers the organic light emitting diode.

[0031] The touch electrode array may include: a metal bridge formed in the same layer as the metal pad layer on the second buffer layer; a plurality of first transparent channel electrodes formed in the same layer as the transparent electrode pad layer, the first transparent channel electrodes being electrically connected to the metal bridge while overlapping the metal bridge, and being spaced from one another in a first direction; and a plurality of second transparent channel electrodes formed in the same layer as the first transparent channel electrode, the second transparent channel electrodes traversing the metal bridge and being formed in a second direction.

[0032] Alternatively, the touch electrode array may include: a metal bridge formed in the same layer as the metal pad layer on the second buffer layer; a plurality of first transparent channel electrodes formed in the same layer as the transparent electrode pad layer, the first transparent channel electrodes being electrically connected to the metal bridge while overlapping the metal bridge, and being spaced from one another in a first direction; and a plurality of second transparent channel electrodes formed in the same layer as the first transparent channel electrode, the second transparent channel electrodes traversing the metal bridge and being formed in a second direction; and a common transparent

electrode pattern covering the first and second transparent channel electrodes.

[0033] In this case, the organic light emitting display may further include: a third insulating film formed between the first and second transparent channel electrodes, and the common transparent electrode pattern.

[0034] Also, the organic light emitting display may further include: first and second etching stopper films on the rear surfaces of the first buffer layer and the second buffer layer, respectively.

[0035] Also, the organic light emitting display may further include: a film substrate attached to the rear surface of the first etching stopper film.

[0036] The organic light emitting display may further include: a cover glass formed on the upper surface of the second etching stopper film.

[0037] The first buffer layer and the second buffer layer may include a laminate including a plurality of inorganic films.

[0038] The film substrate may be a plastic insulating film.

[0039] The first etching stopper film and the second etching stopper film may include polyimide or photoacryl.

[0040] In accordance with another aspect of the present invention, provided is a method for manufacturing an organic light emitting display including: forming a first etching stopper film and a first buffer layer on a first substrate, and forming a transistor-organic light emitting diode array having a transistor in each of pixels defined in a matrix form and an organic light emitting diode connected to the thin film transistor in an active region of the first buffer layer; forming a second etching stopper film and a second buffer layer on a second substrate and forming a touch electrode array in the active region of the second buffer layer; forming a touch pad portion in a part of the dead region of the second buffer layer, wherein the touch pad portion comprises a plurality of touch pads and each of the touch pads comprises a metal pad layer and a transparent electrode pad layer connected to each other via a plurality of first contact holes in a first insulating film; forming a dummy pad portion in the dead region of the first buffer layer, wherein the dummy pad portion comprises a plurality of dummy pads, each dummy pad corresponding to each touch pad; and applying a sealant including a conductive ball to the touch pad portion or the dummy pad portion, attaching an adhesive layer to the touch electrode array or the transistor-organic light emitting diode array and joining the first substrate to the second substrate.

[0041] The forming the touch pad of the touch pad portion may include: forming a metal pad layer on the second buffer layer; forming a first insulating film including a plurality of first contact holes on the metal pad layer; forming a transparent electrode pad layer on the first insulating film such that the transparent electrode pad layer is connected to the metal pad layer through the first contact hole.

[0042] The transparent electrode pad layer may include a first transparent electrode pad layer and a second transparent electrode pad layer which are disposed in different layers.

[0043] If desired, the forming each touch pad may include: two-dimensionally disposing a metal pattern between the first contact hole and forming a metal pattern between the first transparent electrode pad layer and the second transparent electrode pad layer disposed in different layers.

[0044] Meanwhile, the forming the dummy pad of the dummy pad portion may include: forming a gate metal pad layer on the first buffer layer; forming a third insulating film including a plurality of second contact holes on the gate metal pad layer; and forming a source pad layer on the third insulating film such that the source pad layer is connected through the second contact holes to the gate metal pad layer.

[0045] After joining, the conductive ball may be compressed to a predetermined thickness between the touch pad portion and the dummy pad portion.

[0046] After joining, the dead region of the touch pad portion neighboring portion may be spaced from the sealant by a predetermined distance.

[0047] The method may further include: removing the first substrate and the second substrate; and adhering a film substrate to an exposed surface of the first etching stopper film.

[0048] The removing the first substrate and the second substrate may be carried out by etching or laser-irradiating the first substrate and the second substrate.

[0049] It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0050] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and simultaneously with the description serve to explain the principle of the invention. In the drawings:

[0051] FIG. 1 is a sectional view illustrating a touchscreen organic light emitting display of related art;

[0052] FIG. 2 is a plan view illustrating an organic light emitting display according to the present invention;

[0053] FIG. 3 is a sectional view taken along the line I-I' of FIG. 2;

[0054] FIG. 4 is an enlarged plan view of a region "A" of FIG. 2;

[0055] FIG. 5 is an enlarged plan view of one touch pad of FIG. 4;
[0056] FIG. 6A is a sectional view taken along the III-III' line of FIG. 5;
[0057] FIG. 6B is an SEM image showing a side of a contact hole of FIG. 6A;
[0058] FIG. 7 is a sectional view taken along the II-II' line of FIG. 4;
[0059] FIGs. 8A to 8C illustrate touch pads of an organic light emitting display according to embodiments of the present invention;
[0060] FIG. 9 is a reference embodiment, compared with FIG. 8A to 8C;
[0061] FIG. 10A illustrates a thin film transistor dummy pad corresponding to the touch pad of an organic light emitting display according to the present invention;
[0062] FIG. 10B is an embodiment modified from the embodiment of FIG. 10A; and
[0063] FIG. 11 is a sectional view illustrating a pad portion, a neighboring portion and an active region of the organic light emitting display of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0064] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. Wherever possible, the same reference numbers will be used throughout the drawings to refer to the same or like parts.

[0065] Hereinafter, an organic light emitting display and a method for manufacturing the same will be described in detail with reference to the annexed drawings.

[0066] In recent years, there is increasing demand for touch sensing as well as thinness and flexibility of organic light emitting displays. In response to this, a method in which a thin film transistor and an organic light emitting array are formed on a first substrate, a touch electrode array is formed on a second substrate, these substrates are joined together, and the hard and thick first and second substrates are removed by laser irradiation or etching in order to realize thin film and flexibility is suggested. In this case, a pad portion of the touch electrode array faces a pad portion of the organic light emitting array, and these pad portions are connected to each other via a conductive ball, thus enabling transfer of signals to the touch electrode array and detection of signals from the touch electrode array.

[0067] Hereinafter, an in-cell organic light emitting display in which a touch electrode array is provided inside a cover glass will be described.

[0068] FIG. 2 is a plan view illustrating an organic light emitting display according to the present invention. FIG. 3 is a sectional view taken along the line I-I' of FIG. 2. FIG. 4 is an enlarged plan view of a region "A" of FIG. 2.

[0069] As shown in FIGs. 2 and FIG. 3, the organic light emitting display according to the present invention has a configuration in which an organic light emitting array 150 and a touch electrode array 230, that are formed at an inside of a film substrate 1000 and at an inside of a cover glass 3000, respectively, and have different sizes, are joined to each other via an adhesive layer 400.

[0070] Also, a polarizing plate 2000 is disposed under the cover glass 3000, which functions to prevent emission of incident light in order to solve a problem in which exterior light incident upon the organic light emitting display is reflected and is seen by a viewer.

[0071] Also, these arrays are not directly formed on the film substrate 1000 or the cover glass 3000 and are obtained by separately preparing first and second substrates (both, not shown), each being made of glass, joining the substrates via an adhesive layer disposed between the organic light emitting array 150 and the touch electrode array 230 (that is, this joining process is performed while keeping the first and second substrates), and removing the first and second substrates by laser irradiation or etching for realization of thin film and flexibility. In this case, as shown in FIG. 2, the first and second substrates formed of glass materials are removed and the film substrate 1000 and the cover glass 3000 are adhered to the bottom of the exposed arrays, respectively, in order to protect these arrays.

[0072] Here, a film adhesive layer 1100, a first etching stopper layer 120, a first buffer layer 130 and a thin film transistor array 140 and an organic light emitting array 150 are formed on the film substrate 1000 in this order and a protective layer 160 is formed to cover the organic light emitting array 150. A second etching stopper layer 210, a second buffer layer 220 and a touch electrode array 230 are disposed on the cover glass 3000. Here, the touch electrode array 230 is disposed to face the organic light emitting array 150. In this case, the protective layer 160 directly contacts the bottom of the adhesive layer 400 and the touch electrode array 230 directly contacts the top thereof.

[0073] An active region and a dead region are defined in the first buffer layer 130 and the second buffer layer 220, respectively, and the touch electrode array 230, the organic light emitting array 150 and thin film transistors present in the thin film transistor array 140 excluding a pad portion are formed in the active region. Also, the touch electrode pad portion 2350 and the pad portion of the thin film transistor array are defined in part regions of the dead region.

[0074] Here, the first etching stopper layer 120 and the second etching stopper layer 210 function to prevent damage to an internal array, in addition to the glass materials of first and second substrates during laser irradiation or etching. If desired, the first and second buffer layers 130 and 220 disposed thereunder are not damaged during removal of the

first and second substrates, the first and/or second etching stopper layers 120 and 210 may be omitted.

[0075] Also, the first buffer layer 130 and the second buffer layer 220 may be formed by sequentially laminating the same type of inorganic film such as an oxide film (SiO₂) or nitride film (SiN_x), or alternatively laminating different types of inorganic films. The first and second buffer layers 130 and 220 serve as barriers that prevent permeation of moisture or exterior air into the organic light emitting array 150 after the second substrate is joined to the first substrate.

[0076] Also, both the touch pad portion 2350 and the touch electrode array 230 are formed on the same surface of the second buffer layer 220.

[0077] The touch pad portion 2350 is connected to the pad portion of the thin film transistor array 140 via a sealant 450 including a conductive ball 455, when the upper and lower substrates are joined to each other via the adhesive layer 400. The adhesive layer 400 functions to prevent permeation of moisture and directly contacts the protective layer 160 that covers the organic light emitting array 150, thus preventing permeation of exterior air into the organic light emitting array 150 and more certainly prevents permeation of moisture, in addition to the functions of the protective layer 160.

[0078] Here, the thin film transistor array 140 including the pad portion has a side that protrudes from the touch electrode array 230. This configuration aims at providing, at the protrusion, an IC 500 that transfers a signal to simultaneously drive the touch electrode array and the thin film transistor array, and the organic light emitting array. Although not shown, the IC 500 is connected through lines (not shown) formed on the IC 500 and the first buffer layer 130 to driving pads and dummy pads of the thin film transistor array. Also, the IC 500 is bonded and connected to a flexible printed circuit board (FPCB, not shown) and may be controlled by a controller (not shown) provided in the FPCB. The dummy pad is formed in the same layer as a metal constituting a gate or data line in a region corresponding to the touch pad portion among the dead region disposed out of the active region.

[0079] The touch pad portion 2350 is formed on the second buffer layer 220 and is formed at both edges of the side adjacent to a portion where the first buffer layer 130 protrudes more than the second buffer layer 220. Also, the touch pad portion 2350 formed at one edge is divided into a plurality of pad electrodes to enable voltage application or detection of first electrodes arrayed in an X-axis direction in the touch electrode array, and the touch pad portion 2350 formed at the other edge is divided into a plurality of pad electrodes to enable voltage application or detection of second electrodes arrayed in an Y-axis direction.

[0080] The conductive ball 455 connected to the touch pad portion 2350 is electrically connected to a dummy electrode (not shown) formed out of the thin film transistor array 140.

[0081] Here, during an actual process, the adhesive layer 400 and the sealant 450 are separately formed by application to different regions.

[0082] Meanwhile, as shown in FIG. 3, the organic light emitting display according to the present invention includes a film substrate 1000, a first etching stopper film 120 and a first buffer layer 130 formed in this order on the film substrate 1000, a thin film transistor array 140 having a thin film transistor in each pixel defined in a matrix form on the first buffer layer 130, an organic light emitting array 150 connected to the thin film transistor of each pixel, a protective layer 160 that covers the thin film transistor array 140 excluding the pad portion and the organic light emitting array 150, a touch electrode array 230 adhered to the protective layer via an adhesive layer 400 interposed between the protective layer 160 and the touch electrode array 230, and a second buffer layer 220 and a second etching stopper film 210 formed in this order on the touch electrode array 230, and includes a cover glass 3000 disposed on the second etching stopper film 210.

[0083] Here, the cover glass 3000 may be adhered to the second etching stopper film 210 via an adhesive layer interposed between the second etching stopper film 210 and the cover glass 3000, or may be disposed on the second etching stopper film 210 by a mechanical method or another method. The cover glass 3000 prevents damage to internal array from direct touch of a user and protects the internal array therefrom.

[0084] The organic light emitting display according to the present invention can be reduced in thickness by omitting a glass substrate having a thickness of about 0.7 mm, which is the thickest of components in the display, and can realize a bendable or flexible display using the film substrate 1000 as a plastic insulating film that functions to support the thin film transistor array 140, the organic light emitting array 150 and the touch electrode array 230.

[0085] In addition, in the process of forming arrays such as the thin film transistor array 140, the organic light emitting array 150 and the touch electrode array 230 on the film substrate, the film substrate is thermally expanded by heat applied to apparatuses for depositing or patterning the arrays, thus making normal processing impossible. In order to prevent this phenomenon, substantially, formation of arrays is carried out by forming etching stopper films 120 and 210 and buffer layers 130 and 220 under the thin film transistor array 140 and the touch electrode array 230, respectively, on the glass substrate, before formation of the thin film transistor array 140 and formation of the touch electrode array 230, and then loading the glass substrate in an apparatus for deposition or patterning.

[0086] Meanwhile, the thin film transistor array 140 includes a plurality of gate lines and a plurality of data lines that intersect each other to define pixels, and thin film transistors formed at the respective intersections between the gate lines and the data lines. A pad portion of the thin film transistor array 140 is obtained by forming a pad portion metal in the process of forming the gate and data lines.

[0087] Also, the organic light emitting array 150 includes a first electrode formed at least in the pixel, a second electrode formed in an upper layer spaced from the first electrode, and an organic light emitting layer formed between the first and second electrodes. Here, the first electrode may be connected to a drain electrode of the thin film transistor.

[0088] In addition, the first etching stopper film 120 and the second etching stopper film 210 may be for example formed of polyimide or photo-acryl.

[0089] The first and second etching stopper films 120 and 210 have a thickness of about 1 μm to about 20 μm .

[0090] Also, the first buffer layer 130 and the second buffer layer 220 function to prevent permeation of oxygen or moisture into organic films provided in the organic light emitting array and serve as barriers that prevent permeation of exterior air or moisture injected from a lower part.

[0091] The first buffer layer 130 and the second buffer layer 220 include a plurality of inorganic films. For example, the inorganic films may be formed by continuously or alternatively laminating SiNx or SiO_2 . It can be seen from experimentation that, when two or more layers are laminated to a thickness of about 5,000 Å to 6,500 Å as the first and second buffer layers 130 and 220, permeation of exterior air or moisture can be prevented. A total thickness of the first and second buffer layers 130 and 220 is 1 μm or less, which does not increase the thickness of the touchscreen-integrated display device.

[0092] As shown in FIG. 4, the touch electrode array 230 includes a first transparent channel electrode 2331 and a second transparent channel electrode 2332 that intersect each other, and a touch pad 2351b (provided in a touch pad portion 2350) to transfer a signal to the first and second transparent channel electrodes 2331 and 2332. The touch pad 2351b may be connected to a dummy pad (see FIG. 10a) formed in the thin film transistor array. A thin film transistor array 140 including the dummy pad is shown in FIG. 3 and a touch electrode layer is shown in the form of a single layer including the touch pad, and the first and second transparent channel electrodes 2331 and 2332, but these layers are patterned according to respective electrodes.

[0093] Here, the first and second transparent channel electrodes 2331 and 2332 are formed of a transparent electrode, the touch pad 2351b includes a metal pad layer that has high conductivity and superior light-shielding properties (the same layer as the metal bridge 231), and a transparent electrode pattern (represented by 235a in FIG. 6A) which is the same layer as the transparent electrode constituting the first and second transparent channel electrodes 2331 and 2332. Also, the first and second transparent channel electrodes 2331 and 2332 may be disposed in the same layer or different layers. For example, as shown in the drawing, when the first and second transparent channel electrodes 2331 and 2332 are present in the same layer, a separate metal bridge 231 that contacts the first transparent channel electrodes 2331 or the second transparent channel electrodes 2332 adjacent to other layers is provided at the intersection between the first and second transparent channel electrodes 2331 and 2332, to prevent short-circuit between the first and second transparent channel electrodes 2331 and 2332. Meanwhile, not-described reference numeral "2332c" represents an electrode connection portion that passes through the first transparent channel electrodes 2331 spaced from one another and connects the upper and lower second transparent channel electrodes 2332 in an integrated form.

[0094] FIG. 5 is an enlarged plan view of one touch pad of FIG. 4. FIG. 6A is a sectional view taken along the III-III' line of FIG. 5. FIG. 6B is an SEM image showing a side of a contact hole of FIG. 6A.

[0095] A plurality of touch pads 2351b provided in the touch pad portion 2350, as shown in FIGs. 5 and 6A, includes a metal pad layer 231a and a transparent electrode pad layer 235a connected to each other via an insulating film 2300 including a plurality of first contact holes 2350A between the layers.

[0096] Here, a plurality of first contact holes 2350A formed in one touch pad 2351b are spaced from one another and are arrayed in m and n lines and first contact holes arrayed in odd and even lines are disposed at alternate positions. The width of each first contact hole 2350A is smaller than a diameter of each conductive ball 455, and contact areas and number of contact sites between the conductive ball 455 and the touch pad 2351b are preferably increased according to the first contact holes 2350A of each conductive ball 455.

[0097] Here, the reason for the first contact holes 2350A provided in the touch pad 2351b is that the conductive ball 455 secures more contact sites and large contact areas, as compared to flat surface when pressurized during a bonding process. Also, the pressure is distributed through the first contact holes 2350A during the bonding process, thereby preventing breakage or cracking of the relatively soft and weak transparent electrode pad layer. In particular, as shown in FIG. 6A, the conductive ball 455 side-contacts the sidewall of the respective first contact holes 2350A and thus has electric contact sites in addition to plane contact sites. In particular, when the first contact hole 2350A is arrayed in plural, there is a high probability of such contact.

[0098] Also, the first contact holes 2350A may be alternately disposed in even and odd lines. In such alternate disposition, in preparation of a case in which the first contact holes 2350A are disposed at the same position in respective lines, a probability of the first contact hole 2350A contacting the conductive ball 455 is high, although the conductive ball 455 moves.

[0099] Meanwhile, here, the insulating film 2300 may have a mono- or multi-layer structure and may include at least one organic film.

[0100] FIG. 6B is an SEM image showing a sidewall of the first contact hole 2350A when tested under the conditions

that a width and a length of the first contact hole 2350A are 10 μm and 10 μm , respectively, and the distance between the first contact holes 2350A disposed in the same line, and the distance of the first contact holes 2350As disposed in the same row are 5 μm . In the SEM image, the insulating film 2300 which is thicker than the transparent electrode pad layer 235a is mainly observed on the sidewall.

[0101] Meanwhile, in the test, the sidewall has a tapered shape, forming an angle of about 28 degrees with the surface of the metal pad layer 231a, but the present invention is not necessarily limited thereto. Since side-contact of the conductive ball 455 should be possible in the first contact hole 2350A, regarding the shape of a predetermined part of the sidewall, a tapered shape is preferable to a vertical shape. For example, the sidewall that may be provided in the first contact hole 2350A is preferably a tapered shape forming an angle of 55 degrees or less with the surface of the second buffer layer 220.

[0102] Such a touch pad 2351b is formed through the same process as the touch electrode array 230.

[0103] FIG. 7 is a sectional view taken along the II-II' line of FIG. 4.

[0104] As shown in FIG. 7, the touch electrode array 230 includes a metal bridge 231 formed in the same layer as the metal pad layer 231a on the second buffer layer 220, a plurality of first transparent channel electrodes 2331 that are electrically connected to the metal bridge 231 while overlapping the metal bridge 231 and are spaced from one another in a first direction formed in the same layer as the transparent electrode pad layer 235a, and a connection portion 2332c that connects second transparent channel electrodes (represented by "2332" in FIG. 4) that traverse the metal bridge 231 and are formed in a second direction in an integrated form at the intersection of the metal bridge 231.

[0105] Also, the touch electrode array 230 may further include a common transparent electrode pattern 2335 covering the first and second transparent channel electrodes 2331 and 2332.

[0106] In this case, the touch electrode array 230 may further include a second insulating film 234 interposed between the first and second transparent channel electrodes 2331 and 2332, and the common transparent electrode pattern 2335.

[0107] If desired, the second insulating film 234 and the common transparent electrode pattern 2335 may be omitted. The common transparent electrode pattern 2335 functions to prevent effects of driving of the organic light emitting array (represented by "150" in FIG. 3) and thin film transistor array (represented by "140" in FIG. 3), when the touch electrode array 230 is adhered via an adhesive layer (represented by "400" in FIG. 3) to the organic light emitting diode (represented by "150" in FIG. 3) and the thin film transistor array (represented by "140" in FIG. 3). The common transparent electrode pattern 2335 covers the first and second transparent channel electrodes 2331 and 2332, and the connection portion of the second transparent channel electrode 2332c. In this case, the common transparent electrode pattern 2335 has a floating state.

[0108] Meanwhile, the touch electrode array 230 and the touch pad 2351b are disposed on the second buffer layer 220, and this configuration shows a state after the touch electrode array 230 is joined to the organic light emitting array 150. Substantially, formation of the touch electrode array 230 and the touch pad 2351b may be carried out in a state that the second substrate made of a glass component, including the touch electrode array 230 is not removed (described with reference to FIG. 2 above). The reason for this is that the second buffer layer 220 may be vulnerable to chemicals used for heating and etching processes during the array process. If desired, when the second buffer layer 220 is sufficiently resistant to heat and chemicals used, the second substrate may be omitted.

[0109] Hereinafter, preferred embodiments of a configuration of a touch pad including a plurality of first contact holes in an organic light emitting display according to the present invention will be described in detail.

[0110] FIGs. 8A to 8C illustrate touch pads of an organic light emitting display according to embodiments of the present invention.

[0111] As shown in FIG. 8A, the touch pad portion according to the first embodiment of the present invention is formed in accordance with the following process.

[0112] That is, the formation of the touch pad of the touch pad portion is carried out in accordance with the following processes. First, a metal pad layer 231a is formed on the second buffer layer 220. The metal pad layer 231a may be formed by etching the same metal in the same layer as the metal bridge 231 of FIG. 7.

[0113] Subsequently, a first insulating film 232 including a plurality of first contact holes 3350A is formed on the metal pad layer 231a.

[0114] Subsequently, a first transparent electrode pad layer 333a is formed on the first insulating film 232 such that it is connected through the first contact hole 3350A to the metal pad layer 231a. The first transparent electrode pad layer 333a may be formed in the same layer as the first and second transparent channel electrodes 2331 and 2332.

[0115] Subsequently, a second insulating film 234 is formed adjacent to a neighboring portion of the touch pad 2351b such that it exposes the first transparent electrode pad layer 333a.

[0116] Subsequently, a second transparent electrode pad layer 335a which is the same layer as the common transparent electrode pattern (represented by "2335" in FIG. 7) of the active region may be further formed on the first transparent electrode pad layer 333a. Depending on presence of the common transparent electrode pattern (represented by "2335" in FIG. 7), presence of the second transparent electrode pattern 335a may be determined.

[0117] As described above, when the organic light emitting display includes the first contact holes 3350A, contact

areas and contact sites of the conductive ball 455 corresponding to the touch pad 2351b are increased, electric properties between the thin film transistor array, and the dummy pad disposed in the same layer as the thin film transistor array which are electrically connected via the touch pad 2351b and the conductive ball 455 can be improved and as a result, resistance can be reduced.

[0118] Another embodiment exerting the same effects as the first embodiment will be described below.

[0119] FIG. 8B illustrates a touch pad according to a second embodiment of the present invention and the touch pad will be formed in accordance with the following process.

[0120] That is, the formation of the touch pad of the touch pad portion is carried out in accordance with the following processes. First, a metal pad layer 231a is formed on the second buffer layer 220. The metal pad layer 231a may be formed by etching the same metal in the same layer as the metal bridge 231 of FIG. 7.

[0121] Subsequently, a first insulating film 232 including a plurality of first contact holes 3350A is formed on the metal pad layer 231a.

[0122] Subsequently, a first transparent electrode pad layer 433a is formed on the first insulating film 232 such that it is connected through the first contact hole 4350A to the metal pad layer 231a. The first transparent electrode pad layer 333a may be formed in the same layer as the first and second transparent channel electrodes 2331 and 2332.

[0123] Subsequently, a second insulating film 234 is formed in a neighboring portion of the touch pad 2351b such that it exposes the first transparent electrode pad layer 433a.

[0124] Subsequently, a metal pattern 434 is formed in a predetermined region on the first transparent electrode pad layer 433a and in the first contact hole 4350A.

[0125] Subsequently, the second transparent electrode pad layer 435a that covers the metal pattern 434 and the exposed first transparent electrode pad layer 433a may be further formed in the same layer as the common transparent electrode pattern (represented by "2335" in FIG. 7) of the active region. Depending on presence of the common transparent electrode pattern (represented by "2335" in FIG. 7), presence of the second transparent electrode pattern 435a may be determined.

[0126] In this case, the metal pattern 434 having higher conductivity than that of the transparent electrode bypasses signals, thus reducing resistance of the touch pad, when the transparent electrode having low hardness is broken or shortcircuited due to the conductive ball 455 during the bonding process.

[0127] As shown in FIG. 8C, the touch pad portion according to the third embodiment of the present invention is formed in accordance with the following process.

[0128] That is, formation of the touch pad of the touch pad portion is carried out in accordance with the following processes. First, a metal pad layer 231a is formed on the second buffer layer 220. The metal pad layer 231a may be formed by etching the same metal in the same layer as the metal bridge 231 of FIG. 7.

[0129] Subsequently, a first insulating film 232 including a plurality of first contact holes 5350A is formed on the metal pad layer 231a.

[0130] Subsequently, a first transparent electrode pad layer 533a is formed on the first insulating film 232 such that it is connected through the first contact hole 5350A to the metal pad layer 231a. The first transparent electrode pad layer 533a may be formed in the same layer as the first and second transparent channel electrodes 2331 and 2332.

[0131] Subsequently, a second insulating film 234 is formed in a neighboring portion of the touch pad 2351b such that it exposes the first transparent electrode pad layer 533a.

[0132] Subsequently, a metal pattern 534 is formed in a predetermined region on the first transparent electrode pad layer 533a. In this case, the metal pattern 534 may be formed between the first contact holes 5350A.

[0133] Subsequently, the second transparent electrode pad layer 435a that covers the metal pattern 534 and the exposed first transparent electrode pad layer 533a may be further formed in the same layer as the common transparent electrode pattern (represented by "2335" in FIG. 7) of the active region. Depending on presence of the common transparent electrode pattern (represented by "2335" in FIG. 7), presence of the second transparent electrode pattern 535a may be determined.

[0134] In this case, the metal pattern 534 having higher conductivity than that of the transparent electrode bypasses signals, thus reducing resistance of the touch pad, when the transparent electrode having low hardness is broken or shortcircuited due to the conductive ball 555 during the bonding process.

[0135] FIG. 9 is a reference embodiment, compared with FIG. 8A to 8C.

[0136] Comparing with the touch pads according to the first to third embodiments, the reference embodiment including one first contact hole 2350B will be described.

[0137] As shown in FIG. 9, the reference embodiment is the same as in the first embodiment, except that the first insulating film 232 includes one first contact hole 2350B.

[0138] For the first to third embodiments and the reference embodiment, defect levels are evaluated after bonding using a sealant including conductive balls interposed between the touch pad portion and the dummy pad portion.

TABLE 1

Conditions	Touch pad			Number of defective channels (EA)	Total number of channels (EA)	Defect percentage (%)	REF
	Insulating film material	Presence of a plurality of first contact holes	Presence of metal pattern				
Reference embodiment	PA	X	X	130	510	25.5	7457
First embodiment	PA	O	X	30	570	5.3	8566
Second embodiment	PA	X	O	23	900	2.6	9175
Third embodiment	PA	O	O	26	690	3.8	9097

[0139] As can be seen from Table 1 above, when photoacryl (PA) is used as the insulating film (first and second insulating films) material, and conditions of presence of first contact holes and presence of metal patterns are changed, a ratio of the total number of channels to the number of defective channels is changed. This ratio of the total number of channels to the number of defective channels is defined as a defect percentage. The reference embodiment has a defect percentage of about 25.5%, which means that electric contact properties of the conductive balls are bad after bonding.

[0140] On the other hand, the first to third embodiments according to the present invention have a low defect percentage of 5.3% or less. This means that, like the touch pad of the present invention, a plurality of first contact holes are provided or a metal pattern is further formed between the metal pad layer and the transparent electrode pad layer in one touch pad, thus increasing a contact area and number of contact sites where the conductive balls contact the surface of the touch pad and improving electric connection.

[0141] Here, Ref is a conductivity simulated in respective sites and a defect percentage may be 20% or less, when Ref is about 8,000 or more.

[0142] FIG. 10A illustrates a thin film transistor dummy pad corresponding to the touch pad of an organic light emitting display according to the present invention. FIG. 10B is an embodiment modified from the embodiment of FIG. 10A.

[0143] Here, although not shown, a thin film transistor pad that applies a signal to the thin film transistor array is formed on the same plane on which the thin film transistor dummy pad is formed.

[0144] As shown in FIG. 10A, each dummy pad of the organic light emitting display according to the present invention includes a gate metal pad layer 1142 and a source pad layer 1144 connected to each other via the third insulating film 1143 including a plurality of second contact holes 1143A interposed therebetween on the first buffer layer 130.

[0145] Here, a gate insulating film 1141 may be further formed under the gate metal pad layer 1142 on the first buffer layer 130.

[0146] FIG. 10B illustrates a modified embodiment of the dummy pad according to the present invention. The number of contact holes formed in the third insulating film 1143 between the gate metal pad layer 1142 and the source pad layer 144 is only one.

[0147] The embodiments of FIGs. 10A and 10B can reduce contact defects after the bonding process, when the dummy pads correspond to the touch pads of the first to third embodiments of the present invention. As shown in FIG. 10A, when the second contact hole 1143A is present in plural, defect percentage can be further reduced.

[0148] Also, since the dummy pad formed in the first buffer layer 130 directly contacts conductive balls, the source pad layer 144, which is harder than the transparent electrode, is disposed in an upper part, the source pad layer 144 is not readily cracked, as compared to the touch pad, although pressure is applied by the conductive ball 455 during the bonding process. Accordingly, the dummy pad may be applied to both the embodiment of FIG. 10A and the embodiment of FIG. 10B.

[0149] FIG. 11 is a sectional view illustrating a pad portion, a neighboring portion and an active region of the organic light emitting display of the present invention.

[0150] As shown in FIG. 11, the organic light emitting display of the present invention includes a first buffer layer 130 and a second buffer layer 220 which include an active region and a dead region, and face each other, a thin film transistor array 140 including a thin film transistor in each of pixels defined in a matrix form in the active region of the first buffer layer 130, an organic light emitting array 150 including an organic light emitting diode connected to the thin film transistor

of each pixel, a protective layer 160 formed on the first buffer layer 130 such that it covers the thin film transistor array 140 and the organic light emitting array 150, a touch electrode array 230 formed in the active region of the second buffer layer 220, an adhesive layer 400, the top and bottom of which contact the protective layer 160 and the touch electrode array 230, respectively, a touch pad portion (represented by "2350" in FIG. 2) in a predetermined part of the dead region of the second buffer layer 220, a dummy pad portion formed in the dead region of the first buffer layer 130 such that it faces the touch pad portion, and a sealant 450 including a plurality of conductive balls 455, including interposed between the touch pad portion and the dummy pad portion.

[0151] Also, the touch pad portion includes a plurality of touch pads 2351b, and the dummy pad portion includes dummy electrodes 1400 corresponding to the touch pads 2351b.

[0152] Here, the distance between the outermost surface of the touch pad 2351b and the outermost surface of the dummy electrode 1400 in the pad portion is smaller than the distance in the neighboring portion. In the illustrated drawing, the distance in the pad electrode is "a+d" smaller than the distance in the pad electrode neighboring portion.

[0153] In this case, a first distance "a" represents a distance between the sealant 450 and an intermediate insulating film 143, as a result of removal of the source metal layer 144 from the pad electrode neighboring portion in the thin film transistor array 140 and a second distance "d" represents a distance between the second insulating film 234 and the sealant 450 in the pad electrode neighboring portion.

[0154] According to the present invention, a first interlayer insulating film 232 corresponding to the touch pad portion is further provided, although the second interlayer insulating film 234 included in the pad electrode neighboring portion adjacent thereto is thicker than the metal layer or transparent electrode layers, the first interlayer insulating film 232 having a similar thickness thereto is also provided in the touch pad 2351b, and the touch pad 2351b is formed to have a step higher than the neighboring portion.

[0155] That is, the touch pad portion includes a plurality of touch pads 2351b two-dimensionally spaced from one another, each touch pad 2351b includes the first interlayer insulating film 232 between the metal pad layer 231a and the first transparent electrode pad layer 233a, in a vertical structure, in addition to the metal pad layer 231a, the first transparent electrode pad layer 233a and the second transparent electrode pad layer 235a, thereby securing a sufficient step. In the illustrated drawing, only the first interlayer insulating film 232 is provided between the electrode layer and the transparent electrode pattern, but the present invention is not limited thereto. By further providing two or more interlayer insulating films, the step between the touch pad portion and the pad electrode neighboring portion may be maximized. Here, the interlayer insulating film included in the touch pad 2351b is formed during formation of the touch electrode array 230 and is a component that can be provided without an additional process.

[0156] Here, only a part of the touch pad 2351b is shown. The first contact hole 3350A is provided in a part of the first interlayer insulating film 232 between the metal pad layer 231a and the first transparent electrode pad layer 233a, to enable electric connection.

[0157] Meanwhile, the dummy electrode 1400 has a configuration in which a gate insulating film 141, a gate electrode layer 142, an intermediate insulating film 143 and a source metal layer 144 are laminated in this order on the first buffer layer 130.

[0158] The conductive ball 455 in the sealant 450 is connected to the touch pad 2351b and the dummy electrode 1400 disposed in the upper and lower parts even upon application of low pressure during the bonding process, since the touch pad neighboring portion has an "a+d" greater distance than the touch pad, thus improving contact characteristics. As a result, after the bonding process, the conductive ball 455 is pressed to a predetermined thickness between the touch pad portion and the dummy pad portion. This structure causes a decrease in contact resistance, improvement in contact characteristics and thus improvement in touch signal sensitivity.

[0159] In this case, a second distance "d" is present between the second interlayer insulating film 234 and the sealant 450 in the dead region of the touch pad portion neighboring portion, and a first distance "a" is present between the intermediate insulating film 143 and the sealant 450 in the dummy electrode neighboring portion.

[0160] Meanwhile, one or more interlayer insulating films 234 and 232 are preferably organic films. This aims at providing interlayer insulation between the electrode layer and the transparent electrode pattern in the touch electrode array 230 and securing a predetermined thickness between the metal layer and the transparent electrode pattern which are different layers.

[0161] A flat layer 145 may be further provided on the outermost surface of the thin film transistor array 140 in the active region.

[0162] Also, the touch electrode array 230 of the active region includes the metal bridge 231 formed in the same layer as the metal pad layer 231a on the second buffer layer, a plurality of first transparent channel electrodes (represented by "2331" in FIG. 10A) which are electrically connected to the metal bridge 231, while overlapping the metal bridge 231 and are spaced from one another in a first direction in the same layer as the transparent electrode pattern 233a, and a transparent metal layer 233 that includes a second transparent channel electrode 2332 that traverses the metal bridge and is formed in a second direction in the same layer as the first transparent channel electrode.

[0163] In the illustrated drawing, the transparent metal layer 233 constituting the first and second transparent channel

electrodes and a common transparent electrode 2335 overlapping the transparent metal layer 233 via the second interlayer insulating film 234 are present. If desired, the common transparent electrode 2335 may be omitted. The common transparent electrode 2335 is a floating state which functions to shield effects of driving signals of the opposite thin film transistor array or organic light emitting array on the touch electrode array 230.

[0164] In this case, the touch pad 2351a of the touch pad portion may also include a common transparent electrode pattern 235a that overlaps the transparent electrode pattern 233a and is connected to the transparent electrode pattern 233a.

[0165] Here, in the dead region of the touch pad portion neighboring portion, at least one interlayer insulating film (in the drawing, first interlayer insulating film) may be removed.

[0166] Meanwhile, non-described reference numeral "145" represents a passivation layer 145 formed on the outermost surface of the thin film transistor array 140 in the active region.

[0167] Also, the organic light emitting array 150 includes an anode 151, an organic light emitting layer 152 and a cathode 153. This configuration is a minimal unit. A bank (not shown) may be included between pixels in order to isolate the organic light emitting layer 152 into pixel units, and an organic layer may be added or changed in order to improve luminous efficacy between the anode 151 and the cathode 153.

[0168] Also, first and second etching stopper films 120 and 210 may be formed on the bottom of the first buffer layer 130 and the second buffer layer 220, respectively. The first etching stopper film 120 and the second etching stopper film 210 may be formed of polyimide or photoacryl.

[0169] In this case, after the bonding process, a film substrate (represented by "1000" in FIG. 2) may be further formed on the bottom of the first etching stopper film 120. Here, the film substrate 1000 may be formed of a plastic insulating film for realization of thinness and flexibility.

[0170] Also, after removal of the substrate (glass), a cover glass (represented by "3000" in FIG. 2) may be further formed on the second etching stopper film 210.

[0171] Meanwhile, the first buffer layer 130 and the second buffer layer 220 may have a laminate structure including a plurality of inorganic films.

[0172] Also, the protective layer 160 includes an inorganic film 161, an organic film 162 and an inorganic film 163 which are laminated in this order. Based on the structure including organic and inorganic films which are alternately laminated, the protective layer 160 primarily functions to prevent permeation of moisture into the organic light emitting array 150.

[0173] Also, not-described reference numerals "205" and "110" represent a nitride layer and an amorphous semiconductor layer, respectively, to protect arrays. These layers may be removed together with the adjacent substrate during removal of the glass after the bonding process.

[0174] The organic light emitting display of the present invention includes an in-cell touch electrode array in a lower part of the cover glass. For this purpose, the touch pad prepared to drive the touch electrode array faces the first buffer layer including the organic light emitting array. Also, FPBC bonding is performed by connecting the dummy pad and the touch pad formed in the first buffer layer through the sealant including the conductive ball.

[0175] In this case, in order to improve contact characteristics between the dummy pad and the touch pad and yield, the contact hole included in the metal pad layer of the touch pad and the transparent electrode pad layer is provided in plural, thereby increasing a contact area and the number of contact portions when the conductive ball faces the touch pad. Through this structure change, although a high pressure is applied by the conductive balls during a bonding process, the pressure can be distributed to the plurality of contact holes, thereby preventing breakage of transparent electrode pad layer having a lower hardness. The metal pattern can bypass electric signals by providing a metal pattern between the transparent electrode pad layer and the metal pad layer, although the transparent electrode pad layer is partially broken by the pressure, thus preventing an increase of resistance of contact portion. As a result, touch sensitivity can be improved.

[0176] The organic light emitting display and the method for manufacturing the same according to the present invention has the following advantages.

[0177] The organic light emitting display of the present invention includes an in-cell touch electrode array in a lower part of the cover glass. For this purpose, the touch pad provided to drive the touch electrode array faces the first buffer layer including the organic light emitting array. Also, FPBC bonding is performed by connecting the dummy pad formed in the first buffer layer and the touch pad via the sealant including the conductive ball. In this case, in order to improve contact characteristics between the dummy pad and the touch pad and yield, the contact hole included in the metal pad layer of the touch pad and the transparent electrode pad layer is provided in plural, thereby increasing a contact area and the number of contact portions when the conductive ball faces the touch pad.

[0178] Through this structure change, although a high pressure is applied by the conductive ball during a bonding process, the pressure can be distributed on the plurality of contact holes, thereby preventing breakage of transparent electrode pad layer having a lower hardness. The metal pattern can by-pass electric signals by providing a metal pattern between the transparent electrode pad layer and the metal pad layer, although the transparent electrode pad layer is

partially broken by the pressure, thus preventing an increase of resistance of a contact portion.

[0179] As a result, touch sensitivity can be improved.

[0180] Also, the touch pad portion is provided inside of the cover glass, the touch pad portion is connected to the thin film transistor pad portion via the conductive ball, and all of the touch electrode array, the thin film transistor array, and the organic light emitting array can transfer signals through one chip included in the thin film transistor pad portion. One chip is connected to one flexible printed board, thus simplifying a pad portion and circuit configurations of the organic light emitting display. As a result, slimness and reduction in cost can be realized.

[0181] Also, the organic light emitting display according to the present invention has an in-cell structure in which the touch electrode array is included in the cover glass, thus requiring no additional process for attaching a touchscreen, enabling slimness and realizing displays manufactured in a simple process.

[0182] It will be apparent to those skilled in the art that various modifications and variations can be made in the present invention without departing from the spirit or scope of the inventions. Thus, it is intended that the present invention covers the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

Claims

1. An organic light emitting display comprising a transistor-organic light emitting diode array and a touch electrode array on a first buffer layer and a second buffer layer, respectively, that have an active region and a dead region and face each other, the organic light emitting display comprising:

a touch pad portion formed in a part of the dead region of the second buffer layer;
 a plurality of touch pads spaced from one another in the touch pad portion, each of the touch pads including a metal pad layer and a transparent electrode pad layer connected to the metal pad layer via a plurality of first contact holes in a first insulating film;
 a dummy pad portion formed in the dead region of the first buffer layer, the dummy pad portion comprising a plurality of dummy pads, each dummy pad corresponding to each touch pad; and
 a sealant comprising a plurality of conductive balls between the touch pad portion and the dummy pad portion.

2. The organic light emitting display according to claim 1, wherein the plurality of first contact holes formed in one touch pad are spaced from one another and are arrayed in m and n lines, and the plurality of first contact holes arrayed in odd and even lines are alternately disposed.

3. The organic light emitting display according to claim 1 or 2, wherein at least one of the plurality of conductive balls side-contact inside at least one of the plurality of first contact holes, wherein preferably a width of each first contact hole is smaller than a diameter of each conductive ball, and the plurality of first contact holes correspond to one conductive ball.

4. The organic light emitting display according to any one of claims 1 to 3, wherein the metal pad layer of the touch pad is directly formed on the second buffer layer, the first insulating film including the first contact holes is formed on the metal pad layer, and the transparent electrode pad layer is connected to the metal pad layer through the first contact hole and is formed on the first insulating film, wherein preferably the transparent electrode pad layer comprises a first transparent electrode pad layer and a second transparent electrode pad layer, wherein further preferably the touch pad further comprises a metal pattern between the first contact holes, wherein still further preferably the metal pattern is disposed between the first transparent electrode pad layer and the second transparent electrode pad layer.

5. The organic light emitting display according to any one of claims 1 to 4, wherein the first insulating film comprises at least one organic film.

6. The organic light emitting display according to any one of claims 1 to 5, wherein each dummy pad comprises a gate metal pad layer and a source pad layer connected to the gate metal pad layer via a plurality of second contact holes in a third insulating film including , on the first buffer layer.

7. The organic light emitting display according to any one of claims 1 to 6, wherein the first insulating film includes a

plurality of first contact hole sidewalls having a taper, the taper forming an angle of 55 degree or less to a surface of the second buffer layer.

8. The organic light emitting display according to any one of claims 1 to 7, wherein the transistor-organic light emitting diode array comprises:

a thin film transistor array including a thin film transistor in each of pixels defined in a matrix form in the active region of the first buffer layer;
an organic light emitting diode connected to the thin film transistor of each pixel; and
a protective layer formed on the first buffer layer such that the protective layer covers the organic light emitting diode.

9. The organic light emitting display according to any one of claims 4 to 8, wherein the touch electrode array comprises:

a metal bridge formed in the same layer as the metal pad layer on the second buffer layer;
a plurality of first transparent channel electrodes formed in the same layer as the transparent electrode pad layer, the first transparent channel electrodes being electrically connected to the metal bridge while overlapping the metal bridge, and being spaced from one another in a first direction; and
a plurality of second transparent channel electrodes formed in the same layer as the first transparent channel electrode, the second transparent channel electrodes traversing the metal bridge and being formed in a second direction; and
preferably a common transparent electrode pattern covering the first and second transparent channel electrodes; and
further preferably a third insulating film formed between the first and second transparent channel electrodes, and the common transparent electrode pattern.

10. The organic light emitting display according to any one of claims 1 to 9, further comprising:

first and second etching stopper films on the rear surfaces of the first buffer layer and the second buffer layer, respectively, wherein preferably the first etching stopper film and the second etching stopper film comprise polyimide or photoacryl;
preferably the organic light emitting display still further comprising:

a film substrate attached to the rear surface of the first etching stopper film, wherein preferably the film substrate is a plastic insulating film;
further preferably the organic light emitting display still further comprising:

a cover glass formed on the upper surface of the second etching stopper film.

11. The organic light emitting display according to any one of claims 1 to 10, wherein the first buffer layer and the second buffer layer comprise a laminate including a plurality of inorganic films.

12. A method for manufacturing an organic light emitting display comprising:

forming a first etching stopper film and a first buffer layer on a first substrate, and forming a transistor-organic light emitting diode array having a transistor in each of pixels defined in a matrix form and an organic light emitting diode connected to the thin film transistor in an active region of the first buffer layer;
forming a second etching stopper film and a second buffer layer on a second substrate and forming a touch electrode array in the active region of the second buffer layer;
forming a touch pad portion in a part of the dead region of the second buffer layer, wherein the touch pad portion comprises a plurality of touch pads and each of the touch pads comprises a metal pad layer and a transparent electrode pad layer connected to each other via a plurality of first contact holes in a first insulating film;
forming a dummy pad portion in the dead region of the first buffer layer, wherein the dummy pad portion comprises a plurality of dummy pads, each dummy pad corresponding to each touch pad; and
applying a sealant including a conductive ball to the touch pad portion or the dummy pad portion, attaching an adhesive layer to the touch electrode array or the transistor-organic light emitting diode array and joining the first substrate to the second substrate.

13. The method according to claim 12,
 wherein at least one of the plurality of conductive balls side-contact inside at least one of the plurality of first contact
 holes,
 wherein preferably a diameter of the first contact hole is smaller than a diameter of the conductive ball and the
 plurality of first contact holes correspond to one conductive ball.

14. The method according to claim 13, wherein the forming each touch pad of the touch pad portion comprises:

forming a metal pad layer on the second buffer layer;
 forming a first insulating film comprising a plurality of first contact holes on the metal pad layer;
 forming a transparent electrode pad layer on the first insulating film such that the transparent electrode pad
 layer is connected to the metal pad layer through the first contact hole,
 wherein preferably the transparent electrode pad layer comprises a first transparent electrode pad layer and a
 second transparent electrode pad layer which are disposed in different layers,
 wherein further preferably the forming each touch pad comprises: horizontally disposing a plurality of metal
 patterns between the first contact hole and vertically disposing the plurality of metal patterns between the first
 transparent electrode pad layer and the second transparent electrode pad layer.

15. The method according to any one of claims 12 to 14, wherein the forming the dummy pad of the dummy pad portion
 comprises:

forming a gate metal pad layer on the first buffer layer;
 forming a third insulating film including a plurality of second contact holes on the gate metal pad layer; and
 forming a source pad layer on the third insulating film such that the source pad layer is connected through the
 second contact holes to the gate metal pad layer.

16. The method according to any one of claims 12 to 15,
 wherein, after joining, the conductive ball is compressed to a predetermined thickness between the touch pad
 portion and the dummy pad portion,
 wherein preferably, after joining, the dead region of the touch pad portion neighboring portion is spaced from the
 sealant by a predetermined distance.

17. The method according to any one of claims 12 to 16, further comprising:

removing the first substrate and the second substrate; and
 adhering a film substrate to an exposed surface of the first etching stopper film,
 wherein preferably the removing the first substrate and the second substrate is carried out by etching or laser-
 irradiating the first substrate and the second substrate.

FIG. 1 RELATED ART

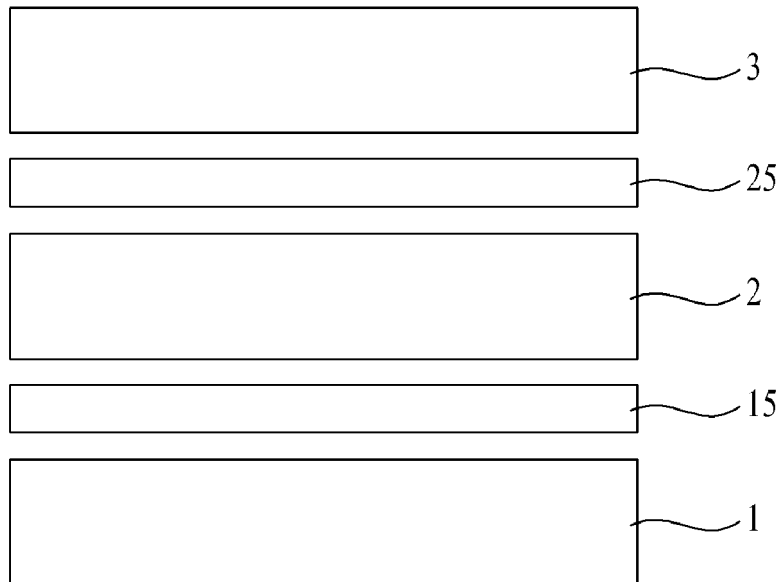


FIG. 2

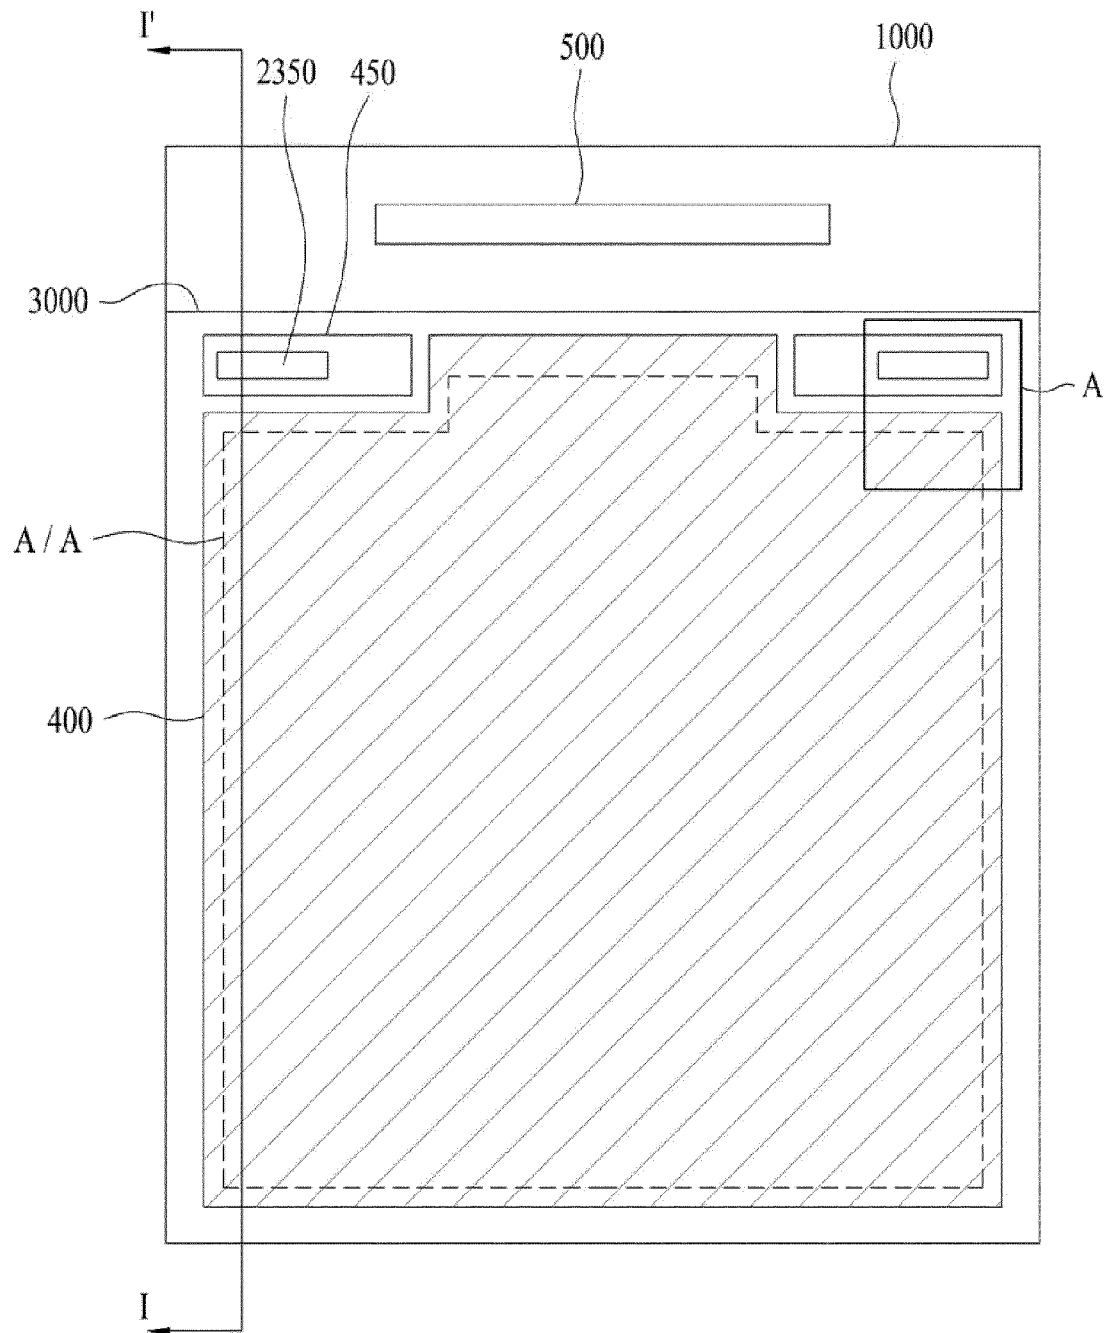


FIG. 3

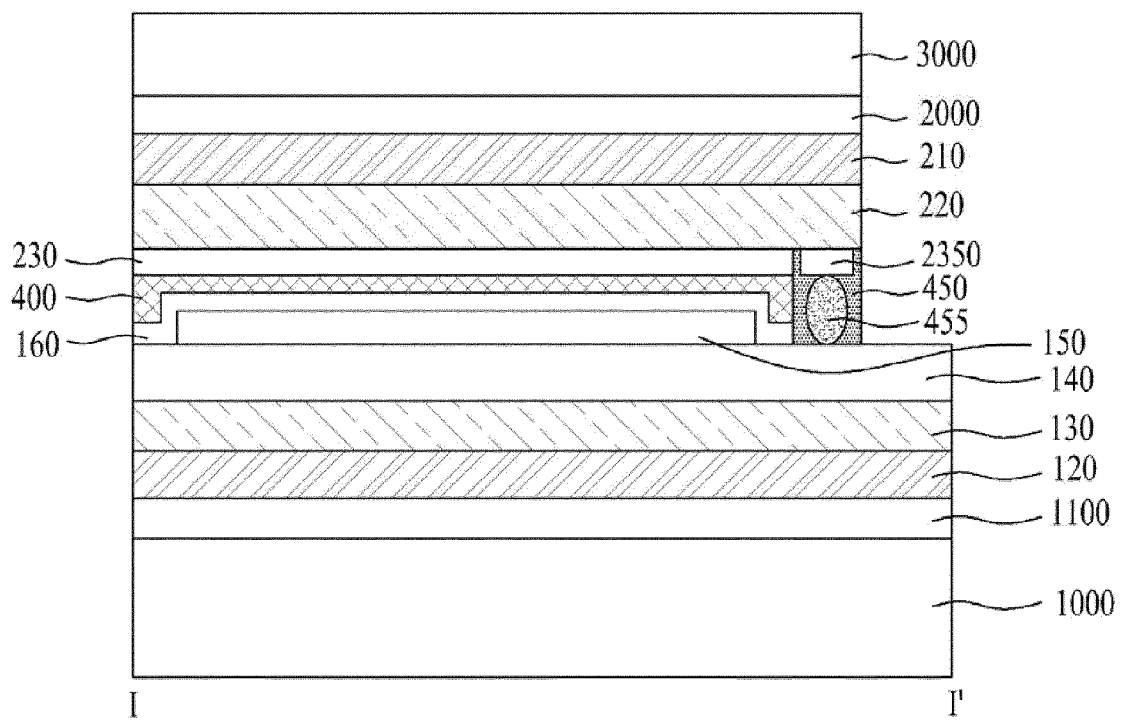


FIG. 4

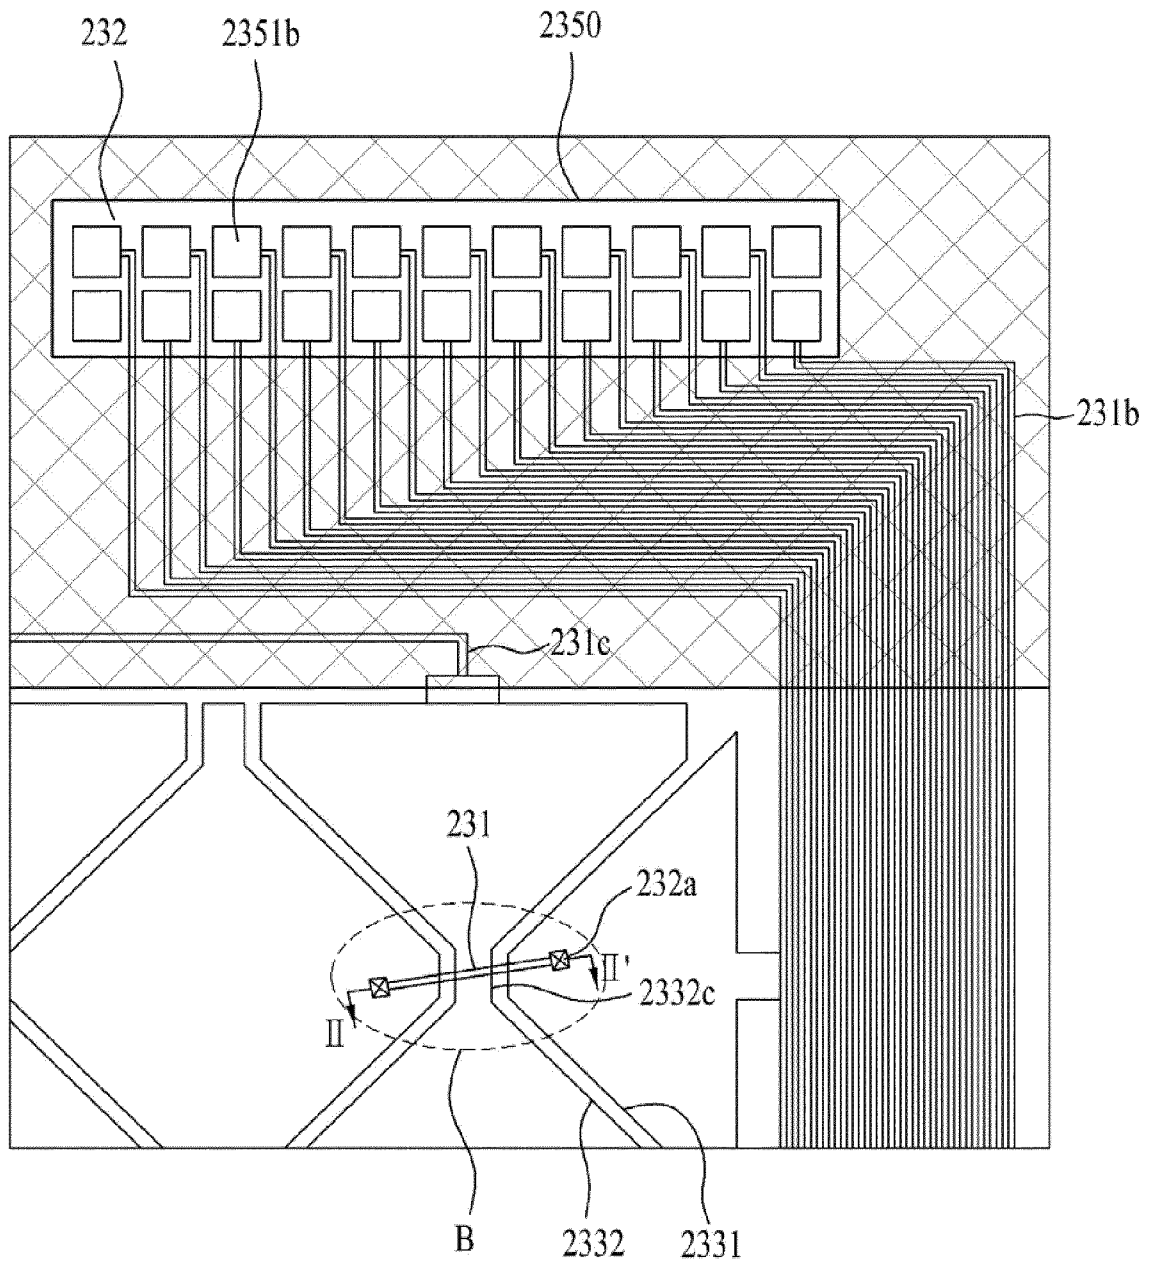


FIG. 5

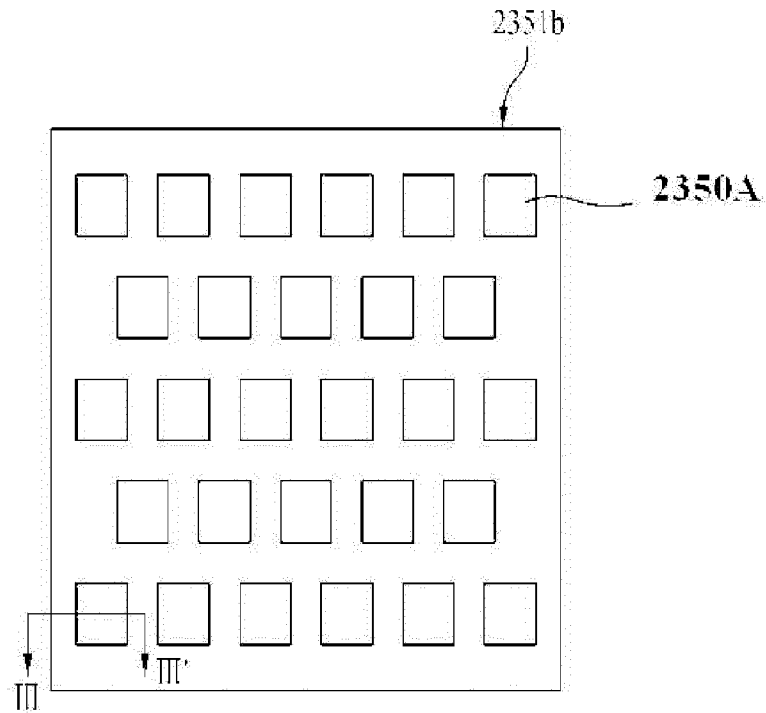


FIG. 6A

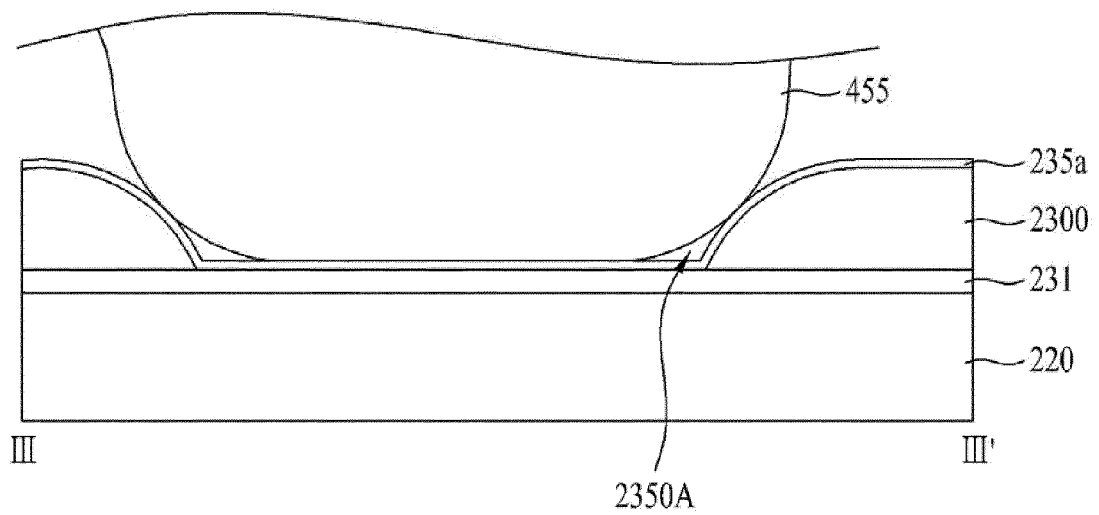


FIG. 6B

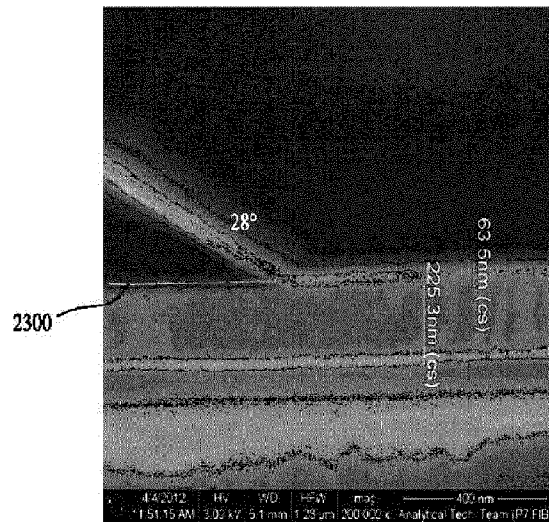


FIG. 7

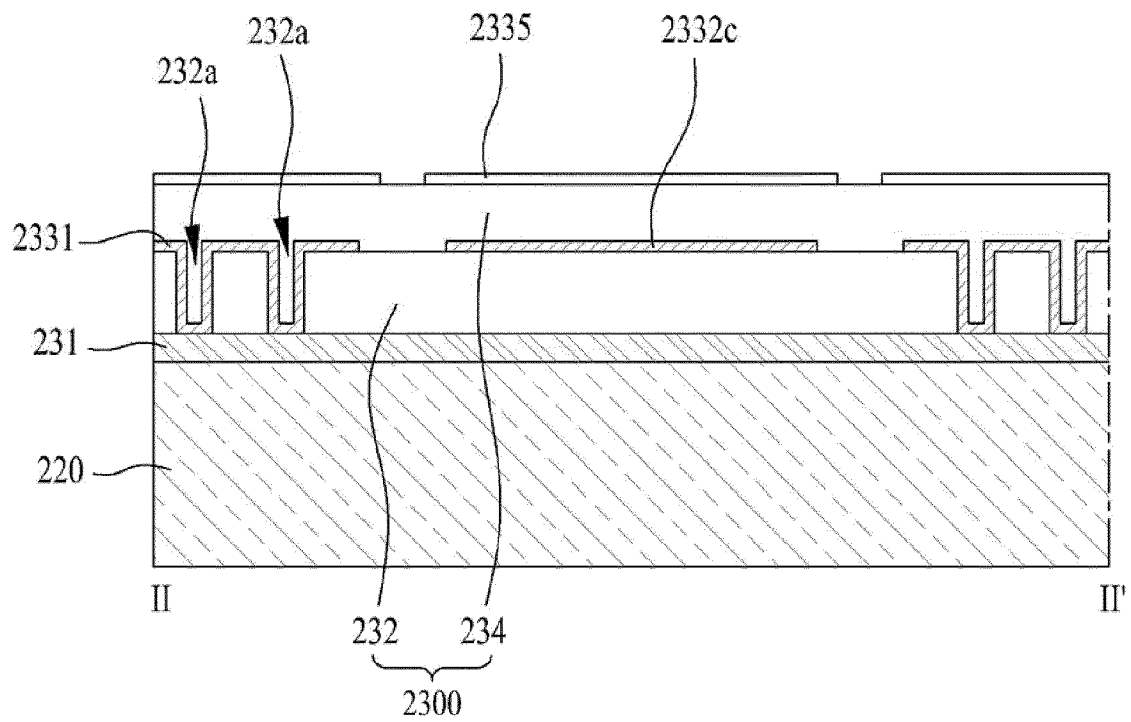


FIG. 8A

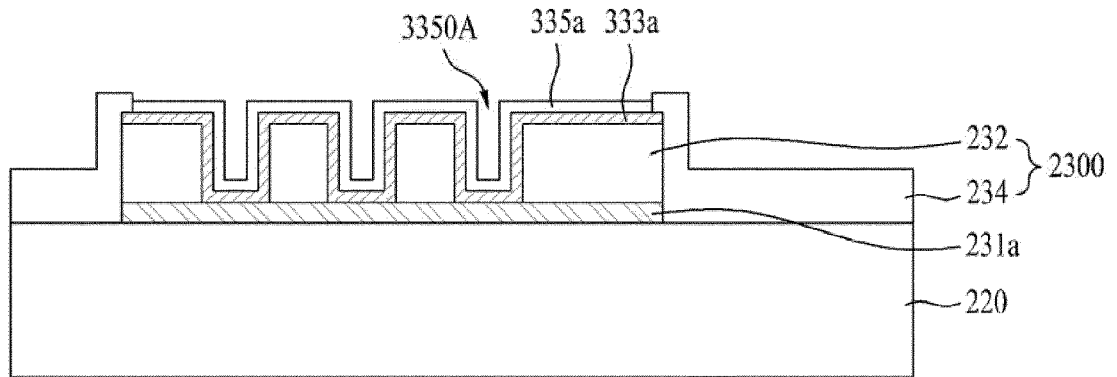


FIG. 8B

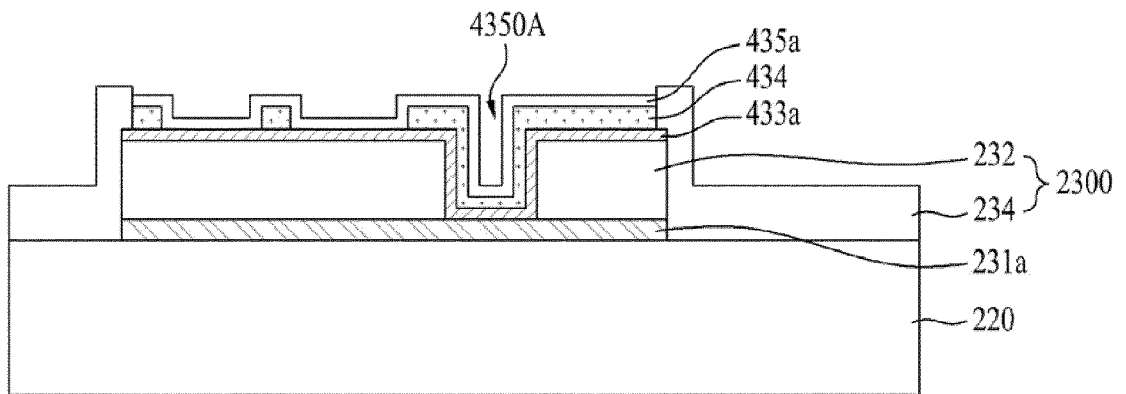


FIG. 8C

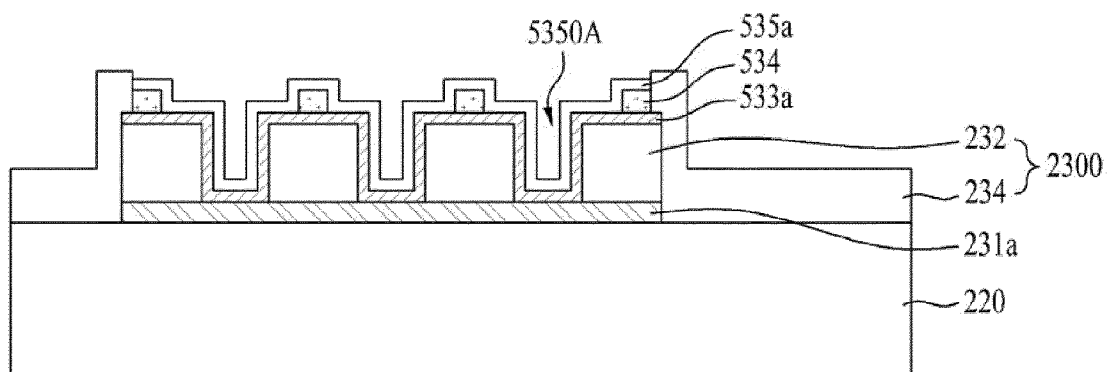


FIG. 9

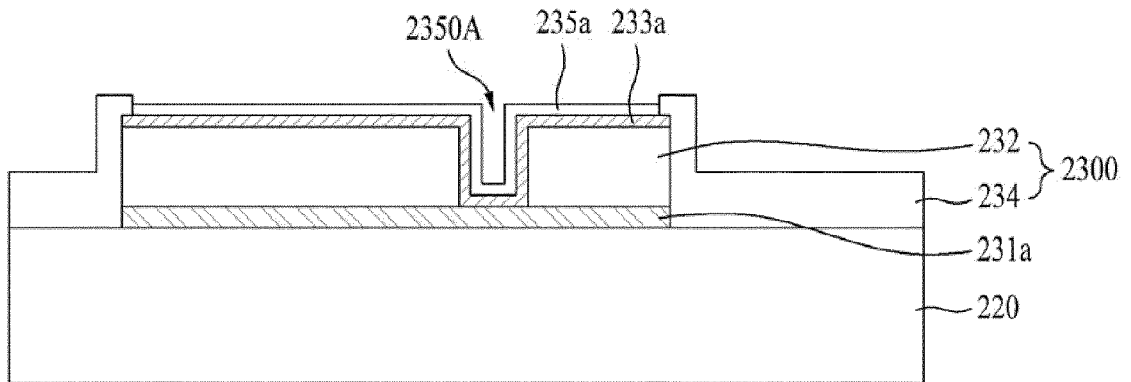


FIG. 10A

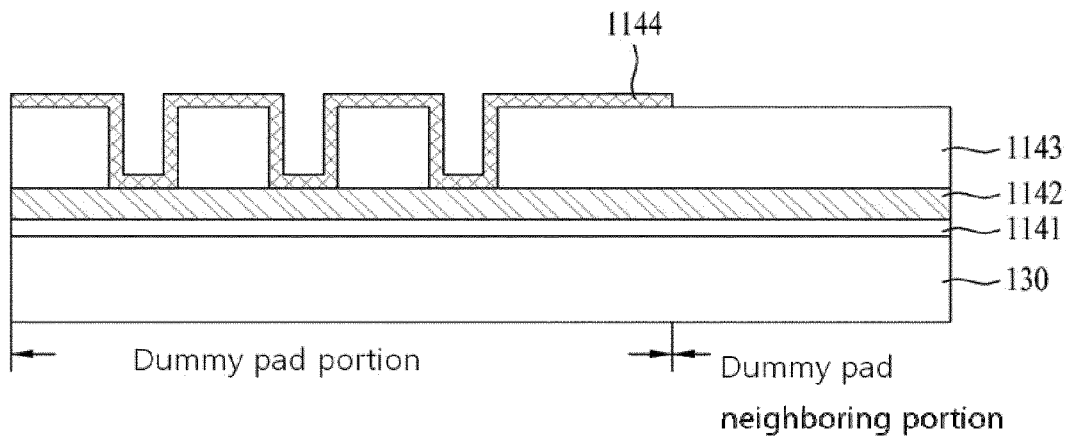


FIG. 10B


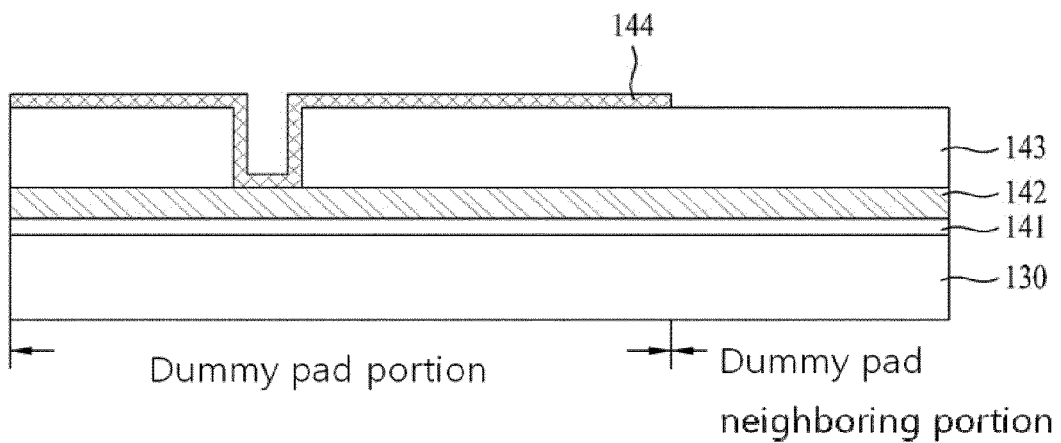


FIG. 11



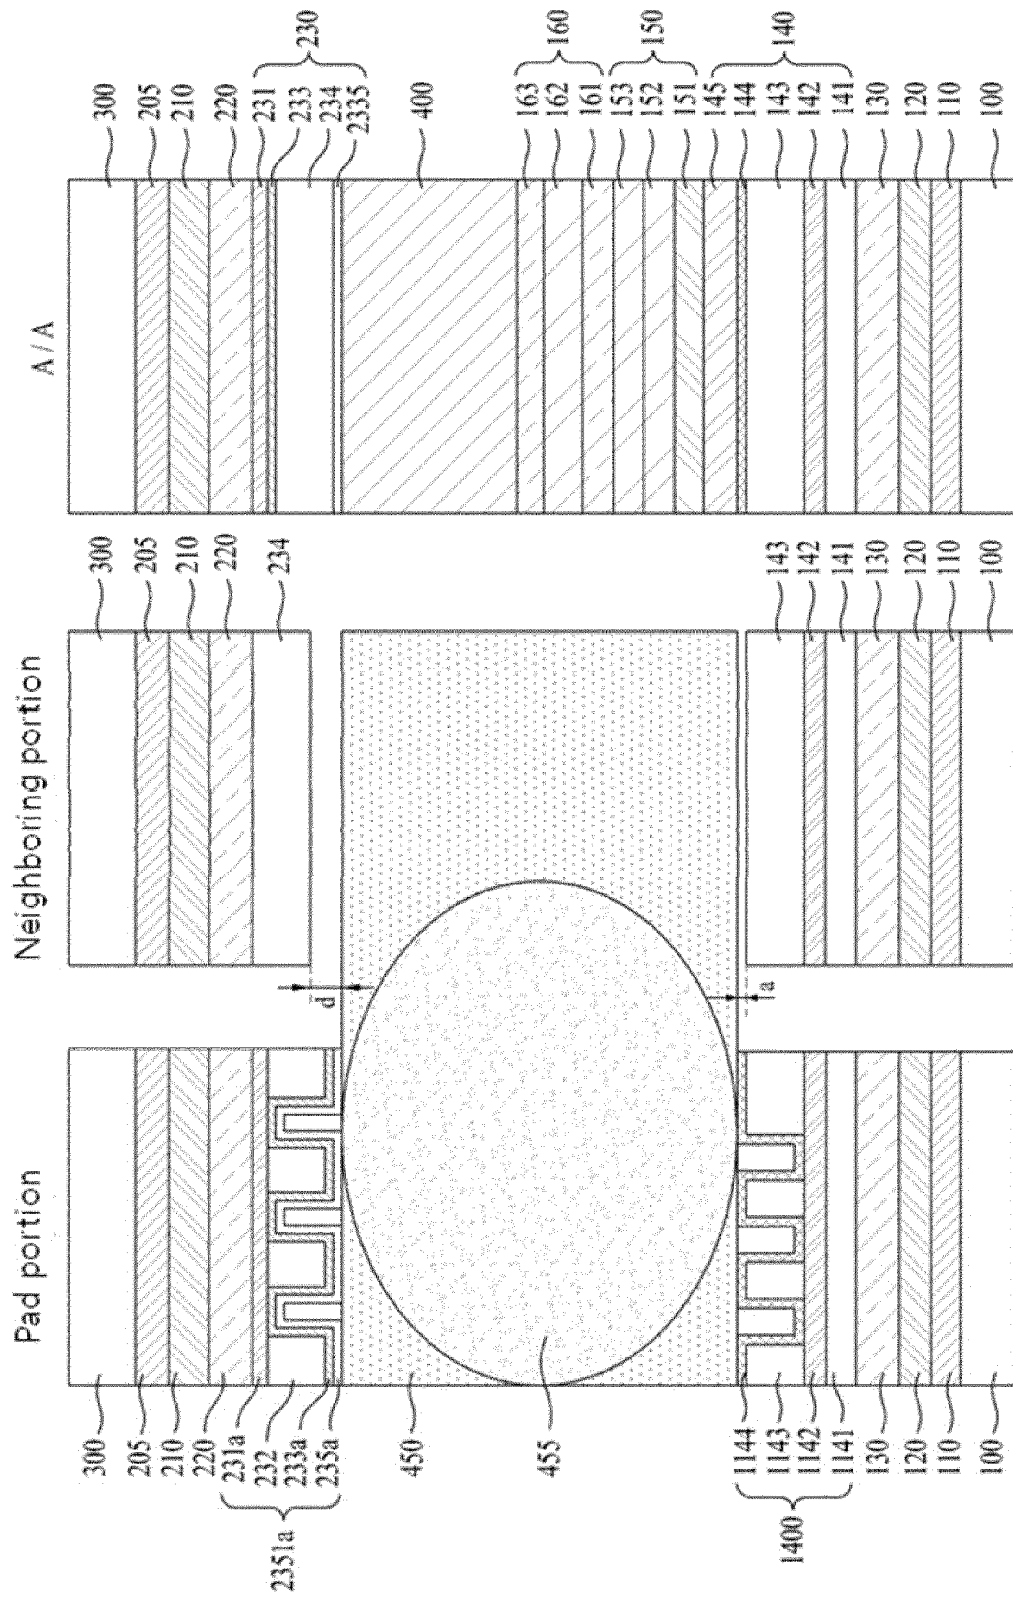

EUROPEAN SEARCH REPORT

Application Number
EP 12 19 6643

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 2008/278070 A1 (KIM HYEONG-GWON [KR]) 13 November 2008 (2008-11-13)	1,2, 4-12,14, 15,17	INV. H01L27/32 G06F3/041
Y	* page 5, paragraph 71 - page 6, paragraph 74; claims 1-10; figures 9,10 * * page 3, paragraph 43 *	3,13,16	
Y	----- EP 2 221 712 A1 (KYOCERA CORP [JP]) 25 August 2010 (2010-08-25) * figure 4 *	3,13,16	
A	----- US 2010/316790 A1 (LI DE-JIUN [CN]) 16 December 2010 (2010-12-16) * the whole document *	1-17	
A	----- EP 1 557 891 A2 (LG ELECTRONICS INC [KR]) 27 July 2005 (2005-07-27) * the whole document *	1-17	
			TECHNICAL FIELDS SEARCHED (IPC)
			H01L G06F
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 16 December 2013	Examiner Parashkov, Radoslav
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

1
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 12 19 6643

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-12-2013

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008278070 A1	13-11-2008	KR 20080099684 A US 2008278070 A1	13-11-2008 13-11-2008

EP 2221712 A1	25-08-2010	CN 101889257 A EP 2221712 A1 JP 5123952 B2 TW 200945140 A US 2010289771 A1 WO 2009078391 A1	17-11-2010 25-08-2010 23-01-2013 01-11-2009 18-11-2010 25-06-2009

US 2010316790 A1	16-12-2010	CN 101713877 A US 2010316790 A1 WO 2010040289 A1	26-05-2010 16-12-2010 15-04-2010

EP 1557891 A2	27-07-2005	CN 1645978 A EP 1557891 A2 JP 2005209651 A US 2005179368 A1	27-07-2005 27-07-2005 04-08-2005 18-08-2005

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 1020120095260 [0001]

专利名称(译)	有机发光显示器及其制造方法		
公开(公告)号	EP2704197A1	公开(公告)日	2014-03-05
申请号	EP2012196643	申请日	2012-12-12
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	CHOI HO WON KIM SEUNG HYUN		
发明人	CHOI, HO-WON KIM, SEUNG-HYUN		
IPC分类号	H01L27/32 G06F3/041		
CPC分类号	G06F3/0412 G06F3/044 G06F2203/04103 G06F2203/04111 G09G3/32 H01L27/323 H01L2924/0002 H01L33/62 H01L2924/00 B32B2457/206 G06F3/041 H01L51/56		
审查员(译)	PARASHKOV , 拉多斯拉夫		
优先权	1020120095260 2012-08-29 KR		
其他公开文献	EP2704197B1		
外部链接	Espacenet		

摘要(译)

公开了一种有机发光显示器，其能够实现薄膜形状和柔性，并且基于改进的结构显示出优异的接触性能，以及制造该有机发光显示器的方法，所述有机发光显示器包括多个与所述间隔开的触摸垫。在触摸板部分中的每一个，每个触摸板包括金属焊盘层和透明电极焊盘层，其通过第一绝缘膜中的多个第一接触孔连接到金属焊盘层，虚设焊盘部分形成在第一绝缘膜中。第一缓冲层的死区，虚设焊盘部分包括与触摸板对应的多个虚设焊盘，以及包括在触摸板部分和虚设焊盘部分之间的多个导电球的密封剂。

FIG. 1 RELATED ART

