



(11) **EP 2 799 515 A1**

(12) **EUROPEAN PATENT APPLICATION**
published in accordance with Art. 153(4) EPC

(43) Date of publication:
05.11.2014 Bulletin 2014/45

(51) Int Cl.:
C09K 11/06^(2006.01) C07D 307/91^(2006.01)
H01L 51/50^(2006.01)

(21) Application number: **12863091.0**

(86) International application number:
PCT/KR2012/011040

(22) Date of filing: **18.12.2012**

(87) International publication number:
WO 2013/100467 (04.07.2013 Gazette 2013/27)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

(30) Priority: **30.12.2011 KR 20110147392**

(71) Applicant: **Cheil Industries Inc.**
Gumi-si, Gyeongsangbuk-do 730-030 (KR)

(72) Inventors:
• **HONG, Jin-Seok**
Uiwang-si
Gyeonggi-do 437-711 (KR)
• **JO, Young-Kyoung**
Uiwang-si
Gyeonggi-do 437-711 (KR)
• **RYU, Dong-Wan**
Uiwang-si
Gyeonggi-do 437-711 (KR)


• **LEE, Nam-Heon**
Uiwang-si
Gyeonggi-do 437-711 (KR)
• **LEE, Han-Il**
Uiwang-si
Gyeonggi-do 437-711 (KR)
• **JUNG, Sung-Hyun**
Uiwang-si
Gyeonggi-do 437-711 (KR)
• **CHAE, Mi-Young**
Uiwang-si
Gyeonggi-do 437-711 (KR)
• **HUH, Dal-Ho**
Uiwang-si
Gyeonggi-do 437-711 (KR)

(74) Representative: **Michalski, Stefan**
Michalski Hüttermann & Partner
Patentanwälte
Speditionstraße 21
40221 Düsseldorf (DE)

(54) **COMPOUND FOR ORGANIC OPTOELECTRIC DEVICE, ORGANIC LIGHT-EMITTING DIODE INCLUDING SAME, AND DISPLAY DEVICE INCLUDING ORGANIC LIGHT-EMITTING DIODE**

(57) Disclosed are a compound for an organic optoelectronic device, an organic light emitting diode including the same, and a display device including the organic light emitting diode. The compound for an organic optoelectronic device represented by a combination of the following Chemical Formula 1 and Chemical Formula 2 provides an organic light emitting diode having life-span characteristics due to excellent electrochemical and thermal stability, and high luminous efficiency at a low driving voltage.

FIG. 1

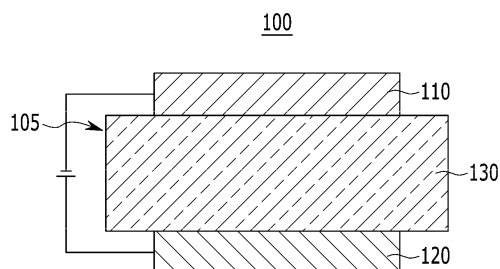

Description**[Technical Field]**

5 **[0001]** A compound for an organic optoelectronic device being capable of providing an organic optoelectronic device having excellent life-span, efficiency, electrochemical stability, and thermal stability, an organic light emitting diode including the compound, and a display device including the organic light emitting diode are disclosed.

[Background Art]

10 **[0002]** An organic optoelectronic device is a device requiring a charge exchange between an electrode and an organic material by using holes or electrons.

15 **[0003]** An organic optoelectronic device may be classified as follows in accordance with its driving principles. A first organic optoelectronic device is an electronic device driven as follows: excitons are generated in an organic material layer by photons from an external light source; the excitons are separated into electrons and holes; and the electrons and holes are transferred to different electrodes as a current source (voltage source).

[0004] A second organic optoelectronic device is an electronic device driven as follows: a voltage or a current is applied to at least two electrodes to inject holes and/or electrons into an organic material semiconductor positioned at an interface of the electrodes, and the device is driven by the injected electrons and holes.

20 **[0005]** Examples of an organic optoelectronic device include an organic photoelectric device, an organic light emitting diode, an organic solar cell, an organic photo conductor drum, an organic transistor, and the like, which require a hole injecting or transport material, an electron injecting or transport material, or a light emitting material.

[0006] Particularly, an organic light emitting diode (OLED) has recently drawn attention due to an increase in demand for flat panel displays. In general, organic light emission refers to conversion of electrical energy into photo-energy.

25 **[0007]** Such an organic light emitting diode converts electrical energy into light by applying current to an organic light emitting material. It has a structure in which a functional organic material layer is interposed between an anode and a cathode. The organic material layer includes a multi-layer including different materials, for example a hole injection layer, a hole transport layer, an emission layer, an electron transport layer, and an electron injection layer, in order to improve efficiency and stability of an organic light emitting diode.

30 **[0008]** In such an organic light emitting diode, when a voltage is applied between an anode and a cathode, holes from the anode and electrons from the cathode are injected to an organic material layer and recombined to generate excitons having high energy. The generated excitons generate light having certain wavelengths while shifting to a ground state.

35 **[0009]** Recently, it has become known that a phosphorescent light emitting material may be used for a light emitting material of an organic light emitting diode in addition to the fluorescent light emitting material. Such a phosphorescent material emits lights by transporting the electrons from a ground state to an excited state, non-radiance transiting of a singlet exciton to a triplet exciton through intersystem crossing, and transiting a triplet exciton to a ground state to emit light.

[0010] As described above, in an organic light emitting diode, an organic material layer includes a light emitting material and a charge transport material, for example a hole injection material, a hole transport material, an electron transport material, an electron injection material, and the like.

40 **[0011]** The light emitting material is classified as blue, green, and red light emitting materials according to emitted colors, and yellow and orange light emitting materials to emit colors approaching natural colors.

[0012] When one material is used as a light emitting material, a maximum light emitting wavelength is shifted to a long wavelength or color purity decreases because of interactions between molecules, or device efficiency decreases because of a light emitting quenching effect. Therefore, a host/dopant system is included as a light emitting material in order to improve color purity and increase luminous efficiency and stability through energy transfer.

45 **[0013]** In order to implement excellent performance of an organic light emitting diode, a material constituting an organic material layer, for example a hole injection material, a hole transport material, a light emitting material, an electron transport material, an electron injection material, and a light emitting material such as a host and/or a dopant, should be stable and have good efficiency. However, development of an organic material layer forming material for an organic light emitting diode has thus far not been satisfactory and thus there is a need for a novel material. This material development is also required for other organic optoelectronic devices.

[0014] The low molecular organic light emitting diode is manufactured as a thin film in a vacuum deposition method and can have good efficiency and life-span performance. A polymer organic light emitting diode is manufactured in an inkjet or spin coating method has an advantage of low initial cost and being large-sized.

55 **[0015]** Both low molecular organic light emitting and polymer organic light emitting diodes have an advantage of self-light emitting, high speed response, wide viewing angle, ultra-thin, high image quality, durability, large driving temperature range, and the like. In particular, they have good visibility due to self-light emitting characteristics compared with a conventional LCD (liquid crystal display) and have an advantage of decreasing thickness and weight of LCD up to a

third, because they do not need a backlight.

[0016] In addition, since they have a response speed 1000 time faster microsecond unit than LCD, they can realize a perfect motion picture without after-image. Based on these advantages, they have been remarkably developed to have 80 times efficiency and more than 100 times life-span since they come out for the first time in the late 1980s. Recently,

they keep being rapidly larger such as a 40-inch organic light emitting diode panel. **[0017]** They are simultaneously required to have improved luminous efficiency and life-span in order to be larger. Herein, their luminous efficiency need smooth combination between holes and electrons in an emission layer. However, since an organic material in general has slower electron mobility than hole mobility, it has a drawback of inefficient combination between holes and electrons. Accordingly, while increasing electron injection and mobility from a cathode and simultaneously preventing movement of holes is required.

[0018] In order to improve life-span, a material crystallization caused by Joule heats generated during device operating is required to be prevented. Accordingly, there has been a strong need for an organic compound having excellent electron injection and mobility, and high electrochemical stability.

[DISCLOSURE]

[Technical Problem]


[0019] A compound for an organic optoelectronic device that may act as a hole injection and transport material or an electron injection and transport material, and also act as a light emitting host along with an appropriate dopant is provided.

[0020] An organic light emitting diode having excellent life-span, efficiency, driving voltage, electrochemical stability, and thermal stability and a display device including the same are provided.


[Technical Solution]

[0021] In one embodiment of the present invention, a compound for an organic optoelectronic device represented by a combination of the following Chemical Formula 1 and Chemical Formula 2 is provided.

[Chemical Formula 1]

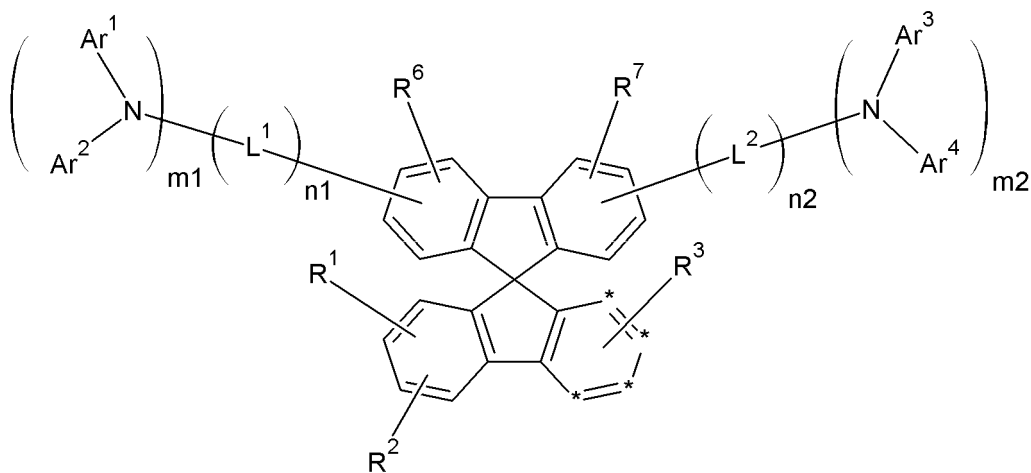

[Chemical Formula 2]




EP 2 799 515 A1

[0022] In the above Chemical Formulae 1 and 2, X is -O-, -S-, -S(O)- or -S(O)₂-, Ar¹ to Ar⁴ are independently a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group, L¹ and L² are independently a single bond, a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group, m1 and m2 are independently integers of 0 or 1, one of m1 and m2 is 1, n1 and n2 are independently integers ranging from 0 to 3, R¹ to R⁷ are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group, and two *s of the above Chemical Formula 2 are bonded with the adjacent two *s of the above Chemical Formula 1 to form a fused ring.

[0023] The above Chemical Formula 1 may be represented by the following Chemical Formula 3.


[Chemical Formula 3]

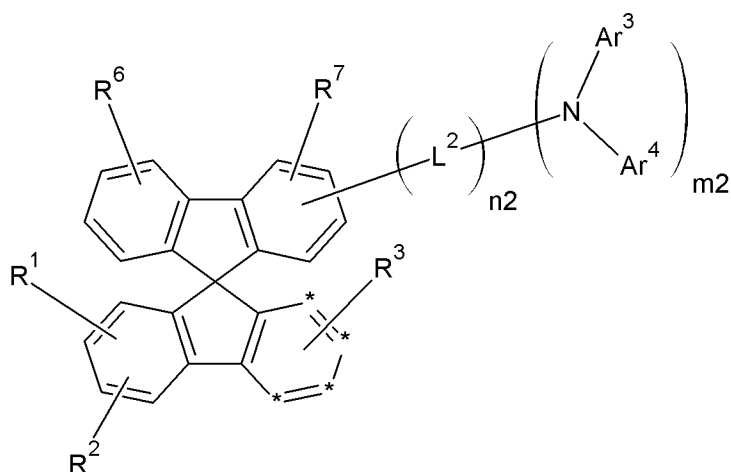

[0024] In the above Chemical Formula 3, Ar³ and Ar⁴ are independently a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group, L² is a single bond, a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group, m₂ is 1, n₂ is an integer ranging from 0 to 3, R¹ to R³, R⁶ or R⁷ are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group, and two *s of the above Chemical Formula 2 are bonded with the adjacent two *s of the above Chemical Formula 3 to form a fused ring.

[0025] The compound for an organic optoelectronic device may be represented by the following Chemical Formula 4.


[Chemical Formula 4]

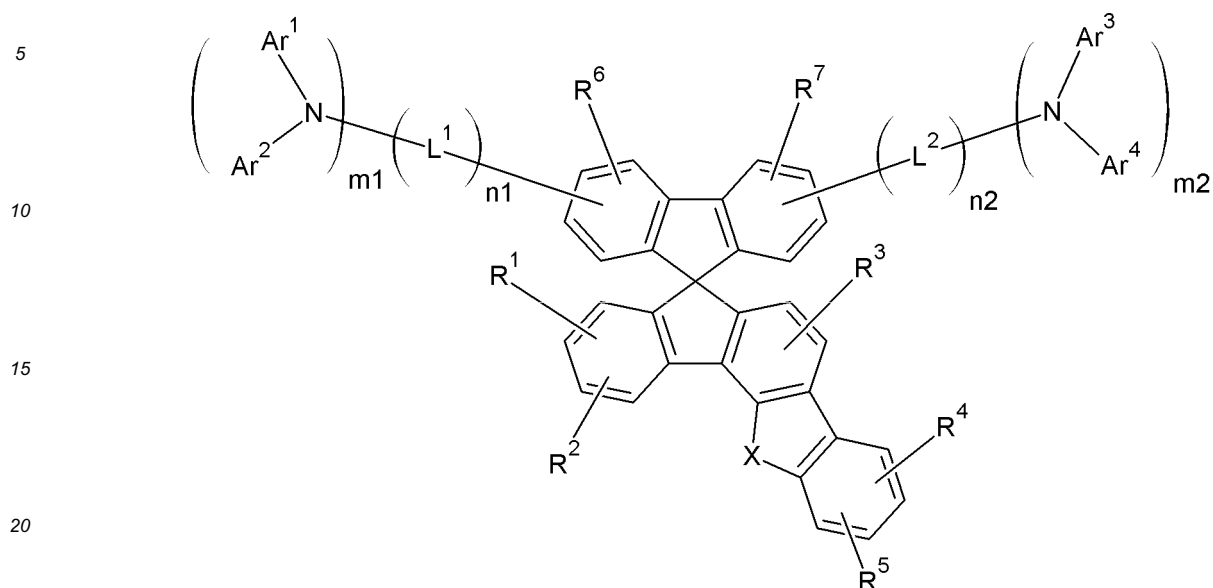

25 **[0026]** In the above Chemical Formula 4, X is -O-, -S-, -S(O)- or -S(O)₂-, Ar¹ to Ar⁴ are independently a substituted or unsubstituted C₆ to C₃₀ aryl group, or a substituted or unsubstituted C₂ to C₃₀ heteroaryl group, L¹ and L² are independently a single bond, a substituted or unsubstituted C₂ to C₁₀ alkenylene group, a substituted or unsubstituted C₂ to C₁₀ alkynylene group, a substituted or unsubstituted C₆ to C₃₀ arylene group, or a substituted or unsubstituted C₂ to C₃₀ heteroarylene group, m₁ and m₂ are independently integers of 0 or 1, one of m₁ and m₂ is 1, n₁ and n₂ are independently integers ranging from 0 to 3, and R¹ to R⁷ are independently hydrogen, deuterium, a substituted or unsubstituted C₁ to C₁₀ alkyl group, a substituted or unsubstituted C₆ to C₃₀ aryl group, or a substituted or unsubstituted C₂ to C₃₀ heteroaryl group.

30 **[0027]** The compound for an organic optoelectronic device may be represented by the following Chemical Formula 5.

[Chemical Formula 5]

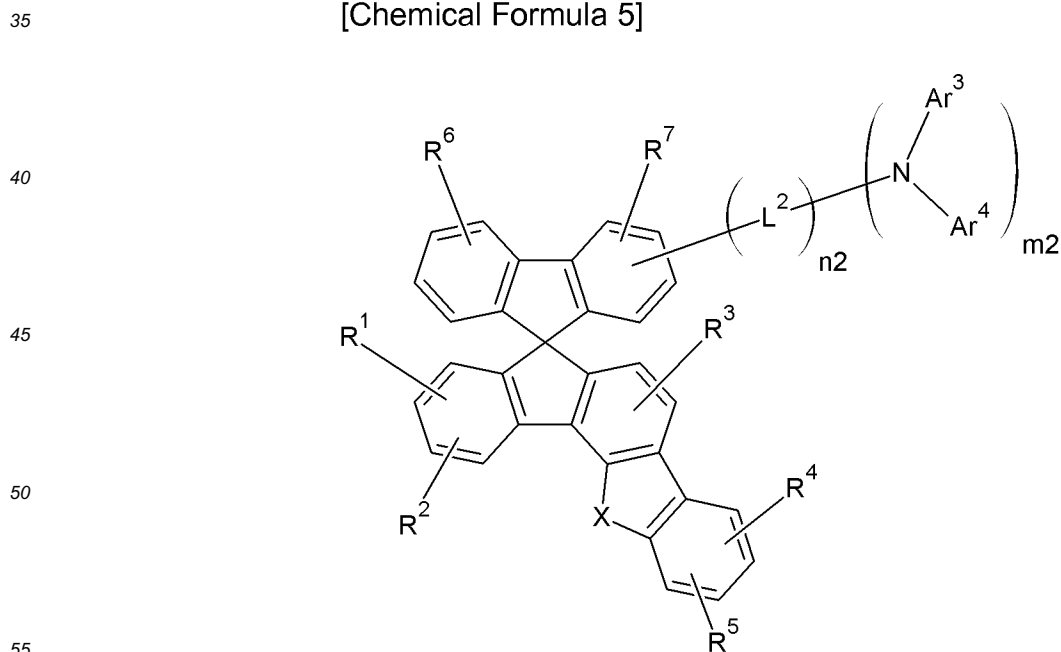

[0028] In the above Chemical Formula 5, Ar³ and Ar⁴ are independently a substituted or unsubstituted C₆ to C₃₀ aryl group, or a substituted or unsubstituted C₂ to C₃₀ heteroaryl group, L² is a single bond, a substituted or unsubstituted


C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group, m2 is 1, n2 is an integer ranging from 0 to 3, and R¹ to R⁷ are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group.

[0029] The Ar¹ to Ar⁴ may be independently a substituted or unsubstituted phenyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted anthracenyl group, a substituted or unsubstituted phenanthryl group, a substituted or unsubstituted naphthacenyl group, a substituted or unsubstituted pyrenyl group, a substituted or unsubstituted biphenyl group, a substituted or unsubstituted p-terphenyl group, a substituted or unsubstituted m-terphenyl group, a substituted or unsubstituted chrysenyl group, a substituted or unsubstituted triphenylenyl group, a substituted or unsubstituted perylenyl group, a substituted or unsubstituted indenyl group, a substituted or unsubstituted furanyl group, a substituted or unsubstituted thiophenyl group, a substituted or unsubstituted pyrrolyl group, a substituted or unsubstituted pyrazolyl group, a substituted or unsubstituted imidazolyl group, a substituted or unsubstituted triazolyl group, a substituted or unsubstituted oxazolyl group, a substituted or unsubstituted thiazolyl group, a substituted or unsubstituted oxadiazolyl group, a substituted or unsubstituted thiadiazolyl group, a substituted or unsubstituted pyridyl group, a substituted or unsubstituted pyrimidinyl group, a substituted or unsubstituted pyrazinyl group, a substituted or unsubstituted triazinyl group, a substituted or unsubstituted benzofuranyl group, a substituted or unsubstituted benzothiophenyl group, a substituted or unsubstituted benzimidazolyl group, a substituted or unsubstituted indolyl group, a substituted or unsubstituted quinolinyl group, a substituted or unsubstituted isoquinolinyl group, a substituted or unsubstituted quinazoliny group, a substituted or unsubstituted quinoxaliny group, a substituted or unsubstituted naphthyridinyl group, a substituted or unsubstituted benzoxazinyl group, a substituted or unsubstituted benzthiazinyl group, a substituted or unsubstituted acridinyl group, a substituted or unsubstituted phenazinyl group, a substituted or unsubstituted phenothiazinyl group, a substituted or unsubstituted phenoxazinyl group, or a combination thereof.

[0030] The compound for an organic optoelectronic device may be represented by one of the following Chemical Formulae A-1 to A-72.


[Chemical Formula A-1] [Chemical Formula A-2] [Chemical Formula A-3]

[Chemical Formula A-4]

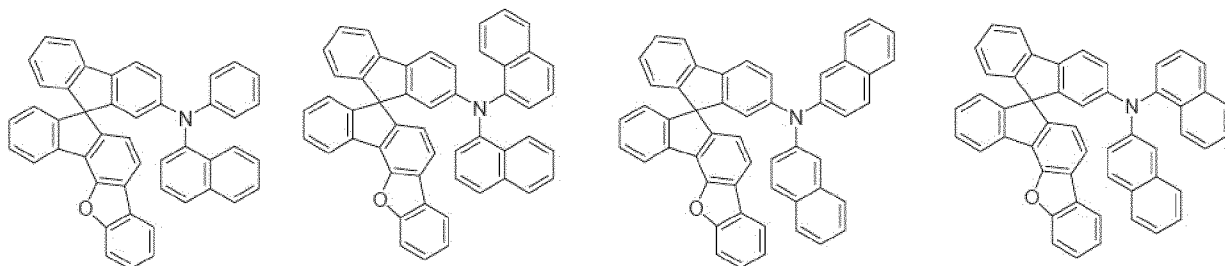


[Chemical Formula A-5] [Chemical Formula A-6] [Chemical Formula A-7]

[Chemical Formula A-8]

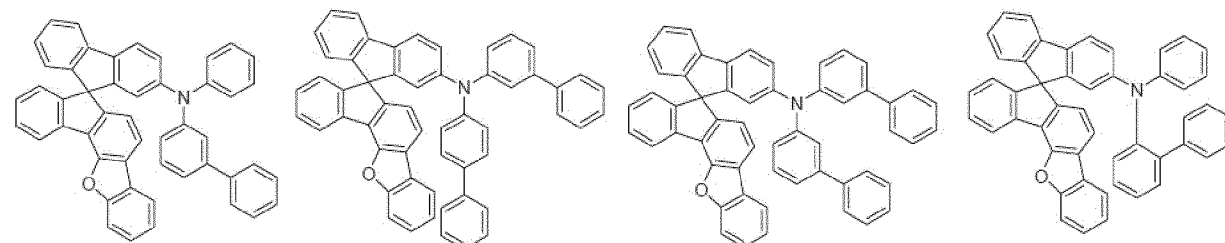


[Chemical Formula A-9] [Chemical Formula A-10] [Chemical Formula A-11]

[Chemical Formula A-12]

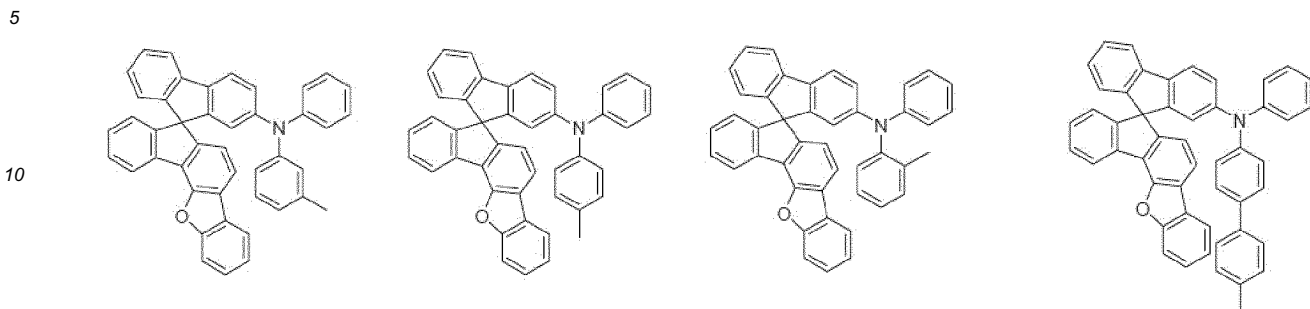


[Chemical Formula A-13] [Chemical Formula A-14] [Chemical Formula A-15]

[Chemical Formula A-16]

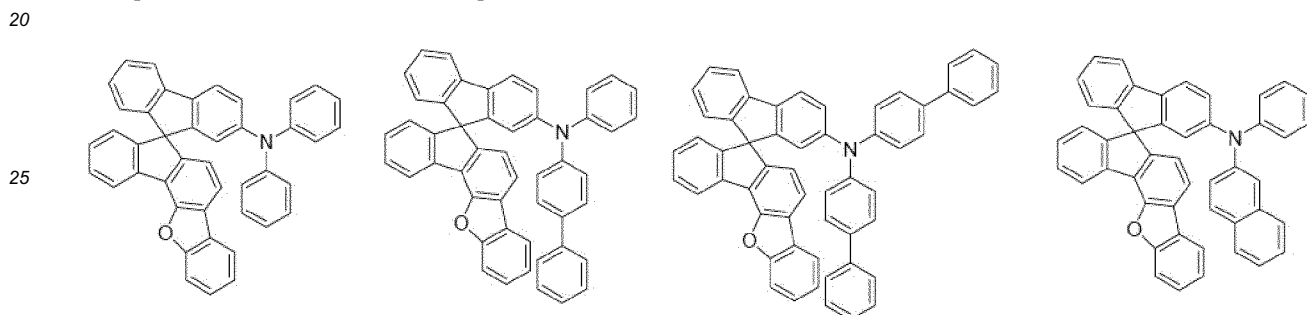


[Chemical Formula A-17] [Chemical Formula A-18] [Chemical Formula A-19]

[Chemical Formula A-20]

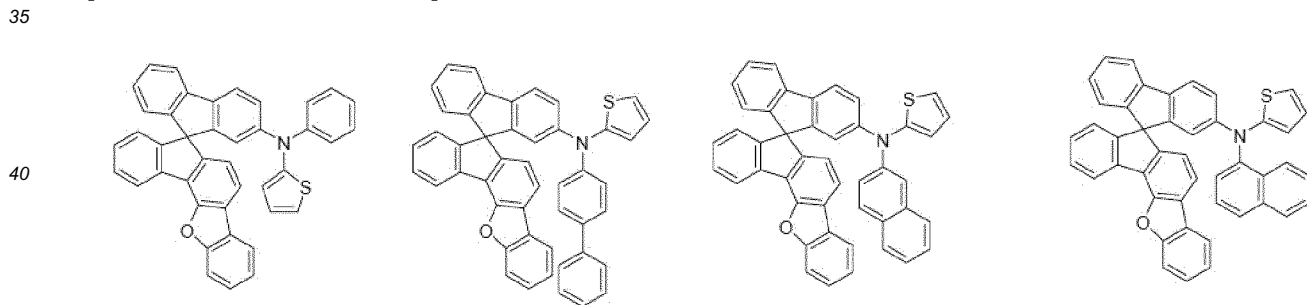


[Chemical Formula A-21] [Chemical Formula A-22] [Chemical Formula A-23]

[Chemical Formula A-24]

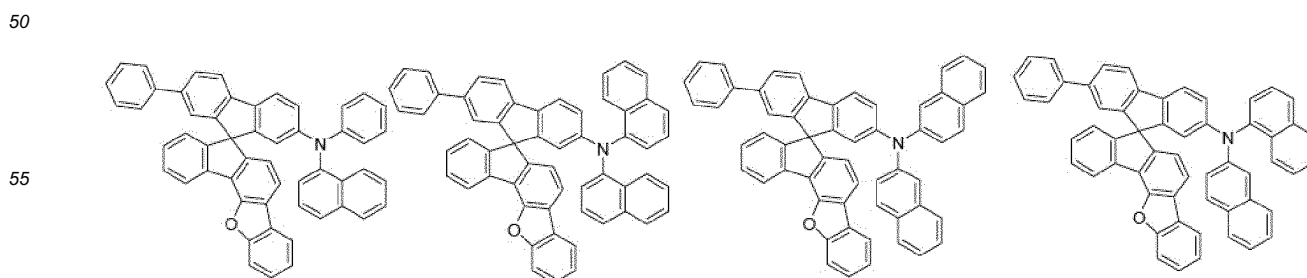


[Chemical Formula A-25] [Chemical Formula A-26] [Chemical Formula A-27]

[Chemical Formula A-28]

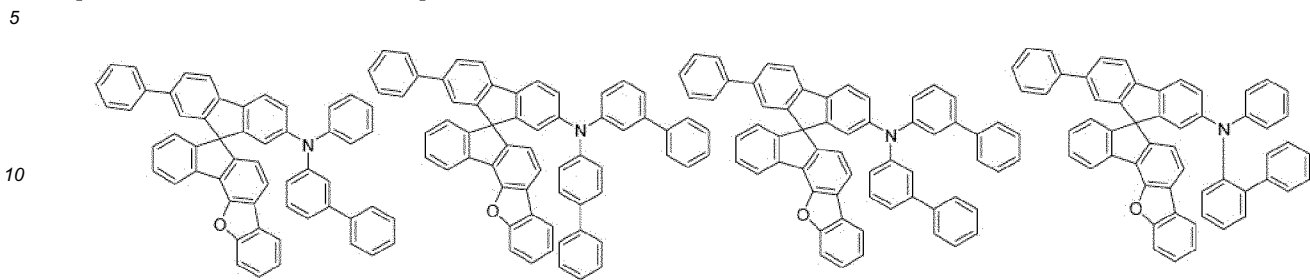


[Chemical Formula A-29] [Chemical Formula A-30] [Chemical Formula A-31]

[Chemical Formula A-32]

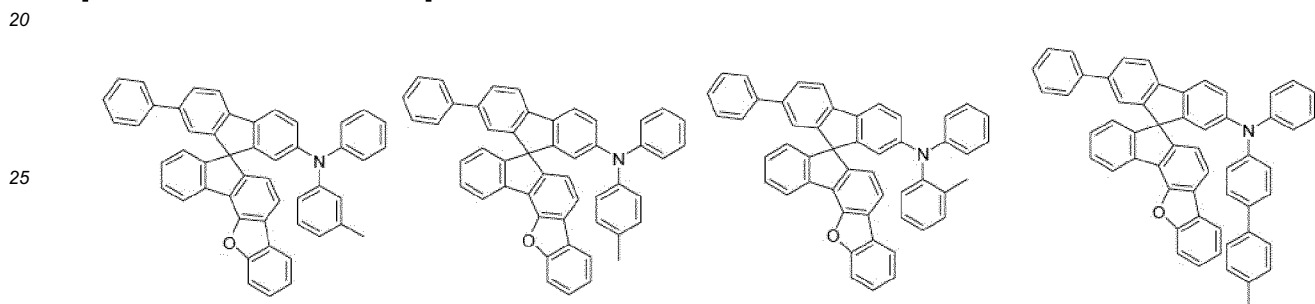

[Chemical Formula A-33] [Chemical Formula A-34] [Chemical Formula A-35]

[Chemical Formula A-36]

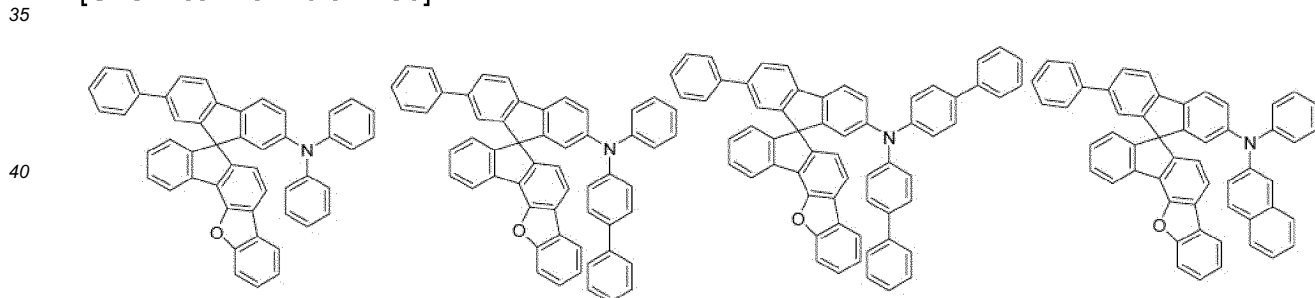

50

55


[Chemical Formula A-37] [Chemical Formula A-38] [Chemical Formula A-39]

[Chemical Formula A-40]

5

10

15

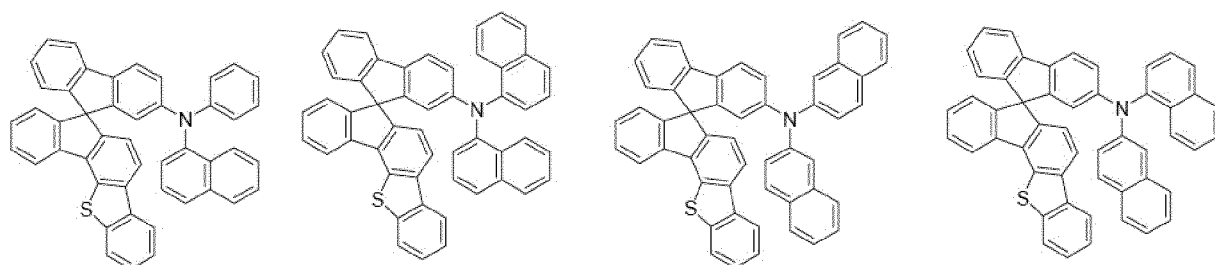


[Chemical Formula A-41] [Chemical Formula A-42] [Chemical Formula A-43]

[Chemical Formula A-44]

20

25

30

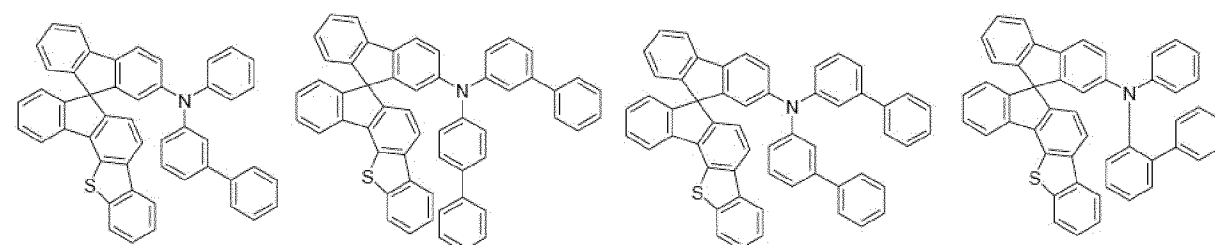

[Chemical Formula A-45] [Chemical Formula A-46] [Chemical Formula A-47]

[Chemical Formula A-48]


35

40

45


50

55

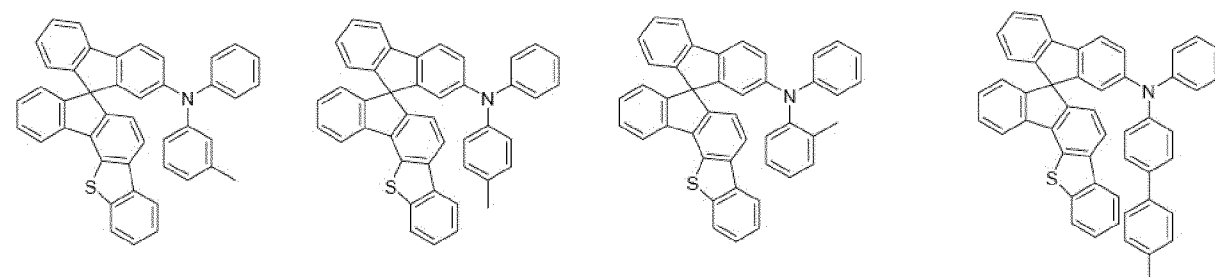


[Chemical Formula A-49] [Chemical Formula A-50] [Chemical Formula A-51]

[Chemical Formula A-52]

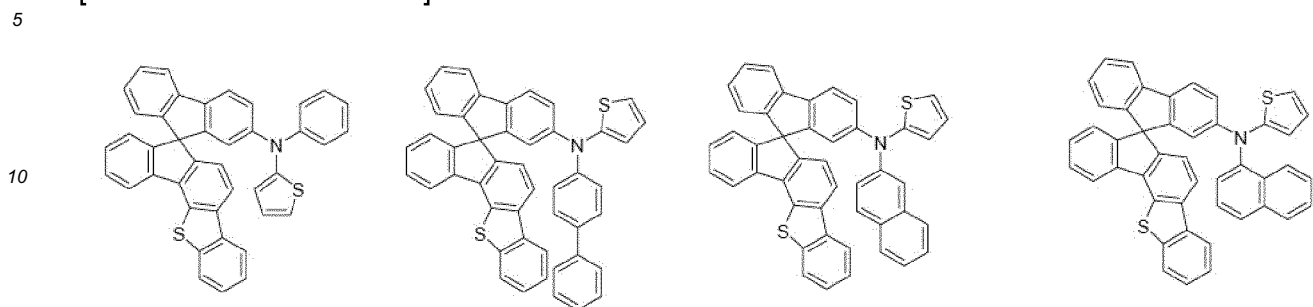


[Chemical Formula A-53] [Chemical Formula A-54] [Chemical Formula A-55]

[Chemical Formula A-56]

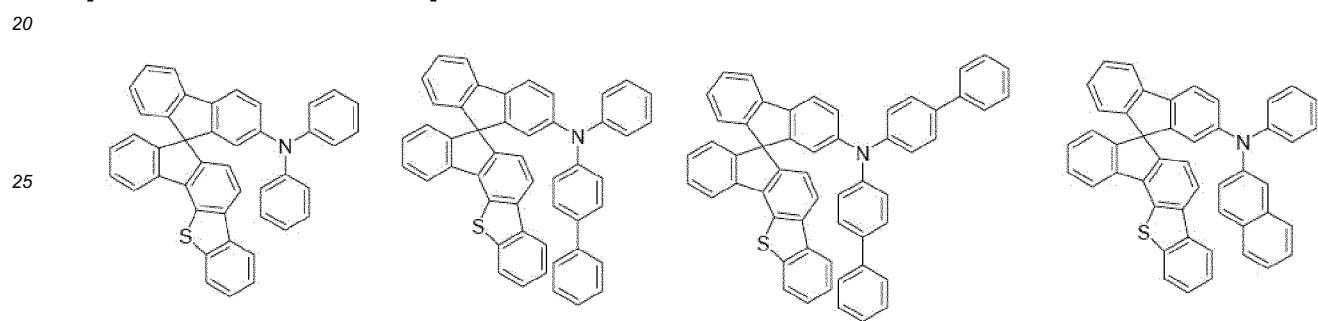


[Chemical Formula A-57] [Chemical Formula A-58] [Chemical Formula A-59]

[Chemical Formula A-60]

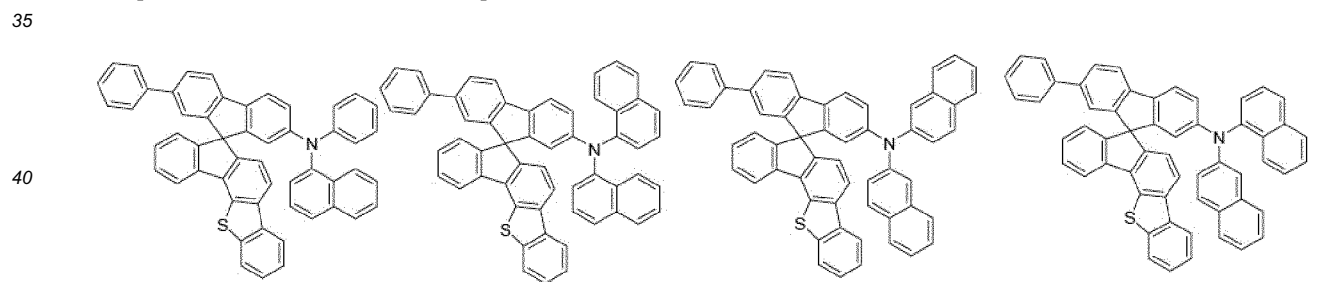

[Chemical Formula A-61] [Chemical Formula A-62] [Chemical Formula A-63]


[Chemical Formula A-64]

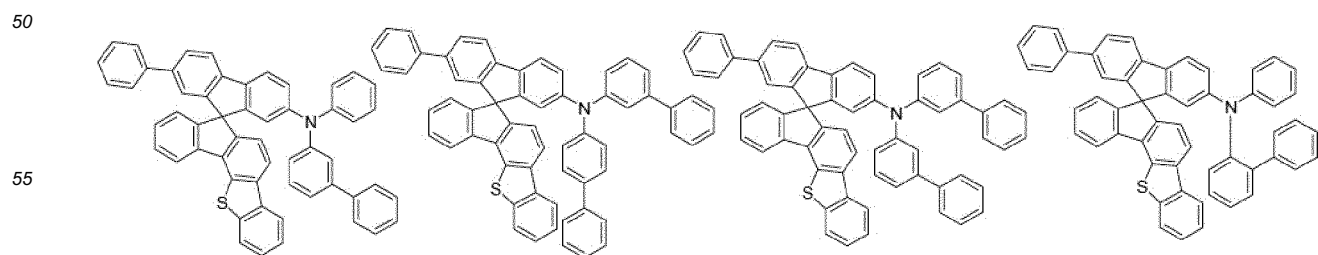

[Chemical Formula A-65] [Chemical Formula A-66] [Chemical Formula A-67]

[Chemical Formula A-68]


5

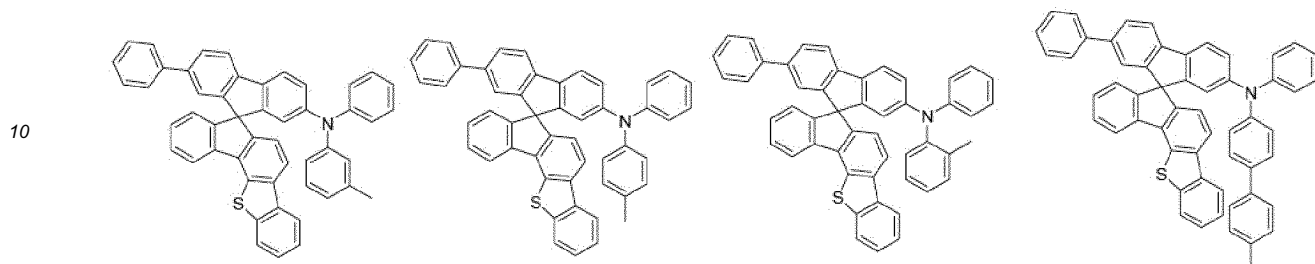

[Chemical Formula A-69] [Chemical Formula A-70] [Chemical Formula A-71]

[Chemical Formula A-72]

20

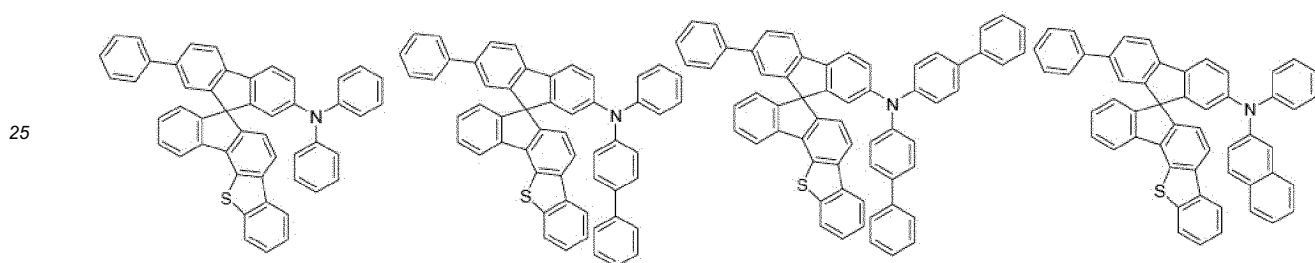


[0031] The compound for an organic optoelectronic device may be represented by one of the following Chemical Formulae B-1 to B-40.

[Chemical Formula B-1] [Chemical Formula B-2] [Chemical Formula B-3]

[Chemical Formula B-4]

35

40

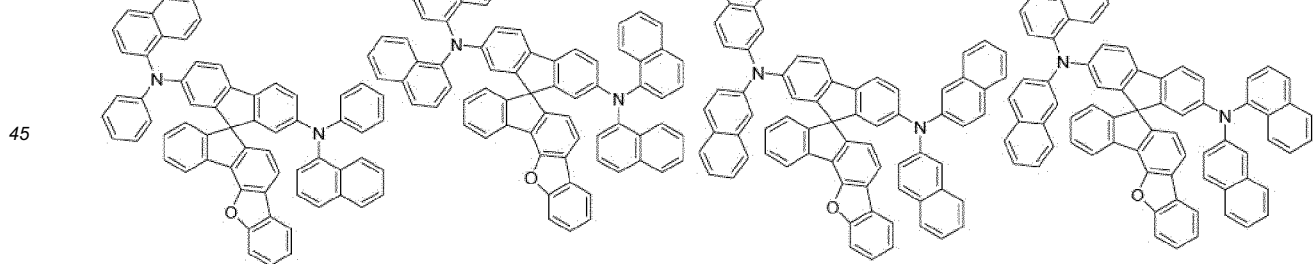


50


55

[Chemical Formula B-5] [Chemical Formula B-6] [Chemical Formula B-7]


5



10

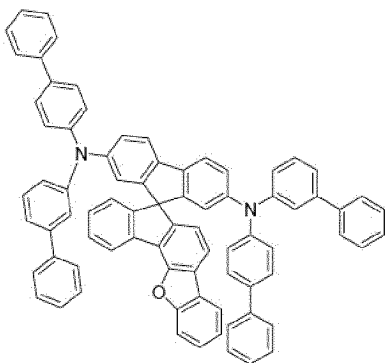


15




[Chemical Formula B-8] [Chemical Formula B-9] [Chemical Formula B-10]


20



25

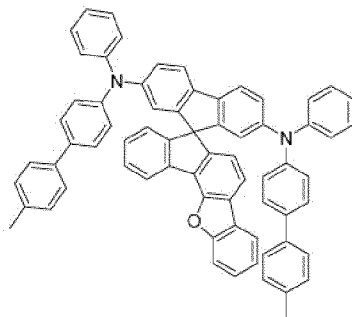


30




[Chemical Formula B-11] [Chemical Formula B-12] [Chemical Formula B-13]


35



40




45



50


55

[Chemical Formula B-14] [Chemical Formula B-15] [Chemical Formula B-16]

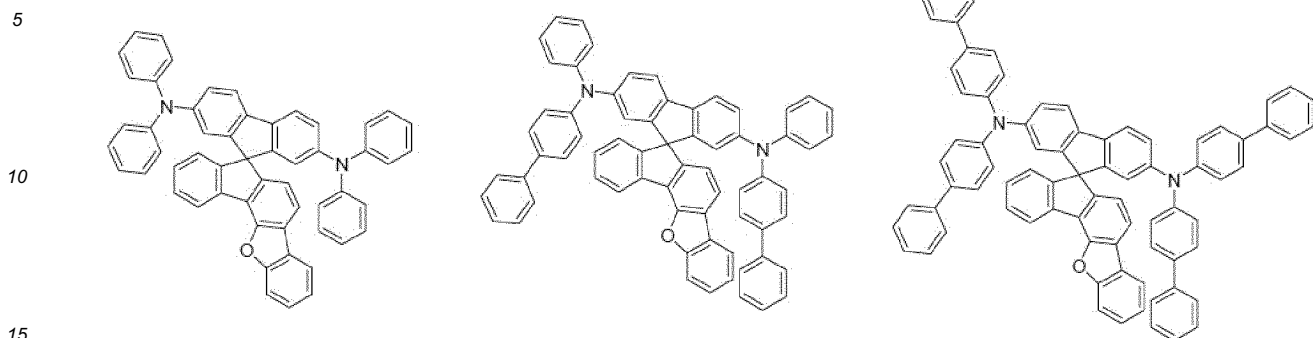


[Chemical Formula B-17] [Chemical Formula B-18] [Chemical Formula B-19]

20 [Chemical Formula B-20]

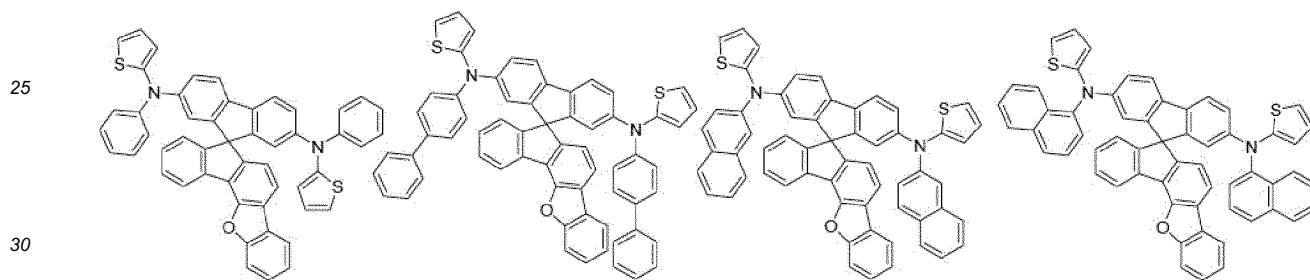

[Chemical Formula B-21] [Chemical Formula B-22] [Chemical Formula B-23]


35 [Chemical Formula B-24]

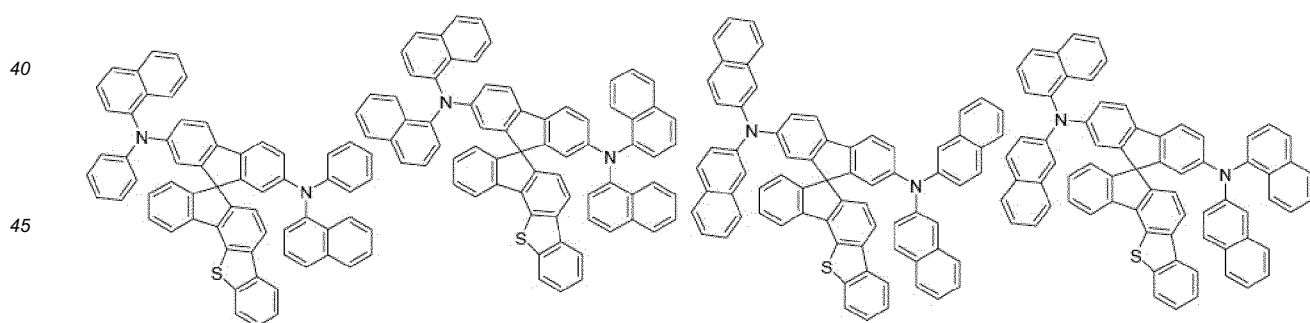


50

55


[Chemical Formula B-25] [Chemical Formula B-26] [Chemical Formula B-27]

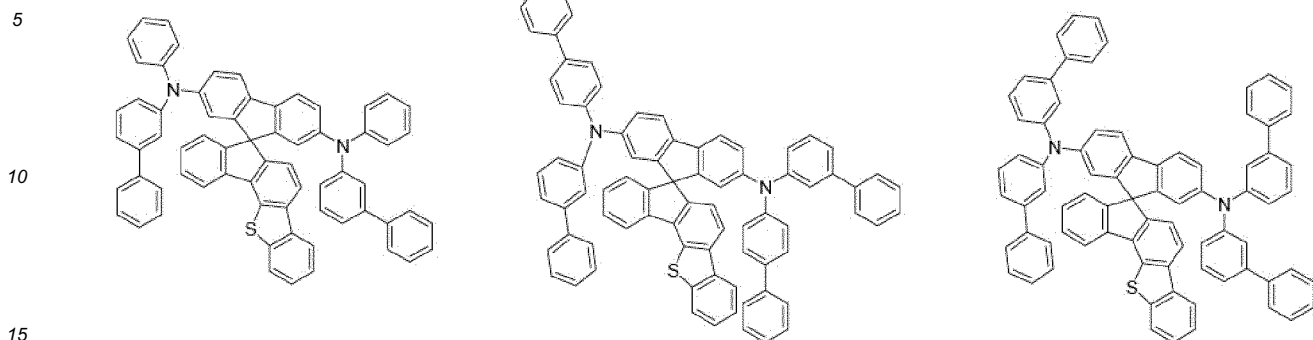


[Chemical Formula B-28] [Chemical Formula B-29] [Chemical Formula B-30]

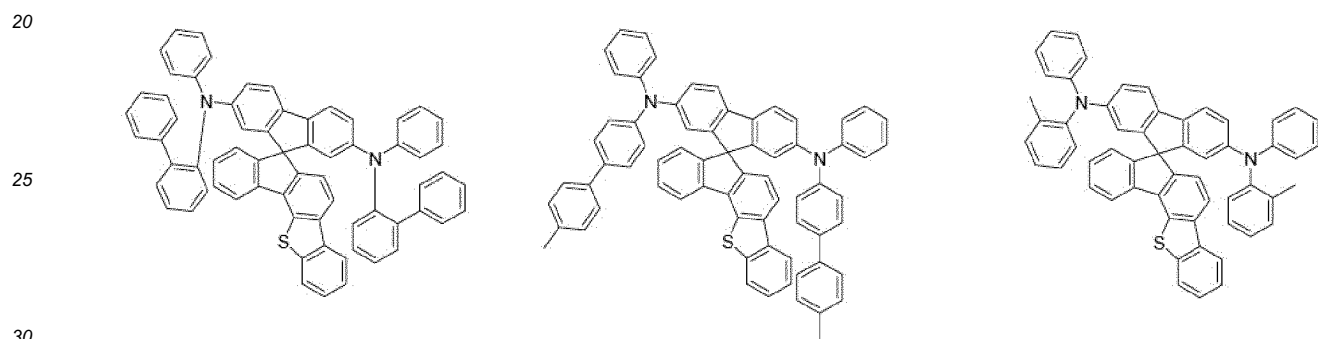

[Chemical Formula B-31] [Chemical Formula B-32] [Chemical Formula B-33]

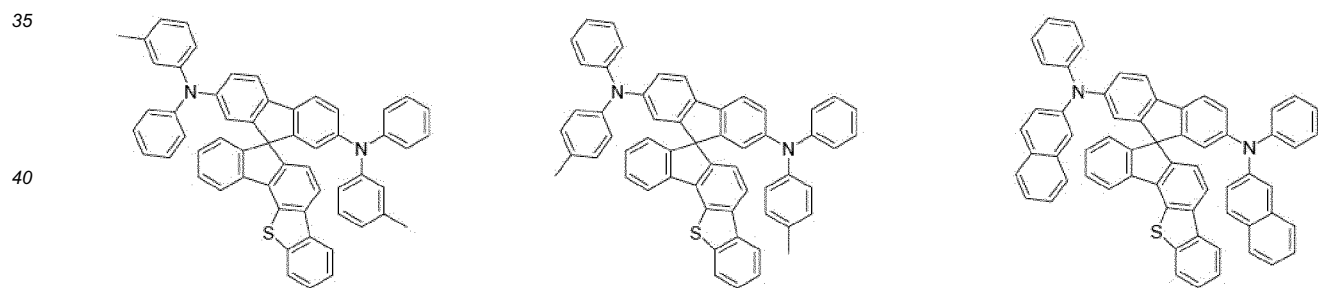


[Chemical Formula B-34] [Chemical Formula B-35] [Chemical Formula B-36]

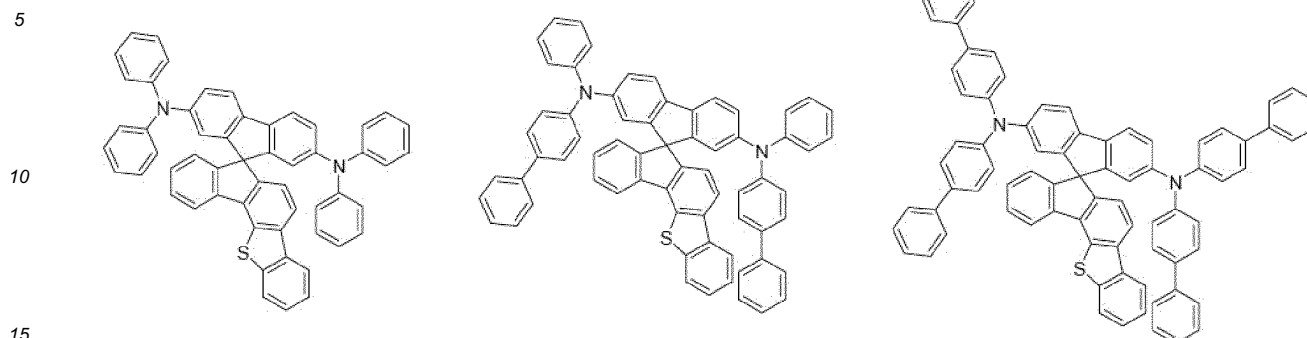

[Chemical Formula B-37] [Chemical Formula B-38] [Chemical Formula B-39]

20 [Chemical Formula B-40]

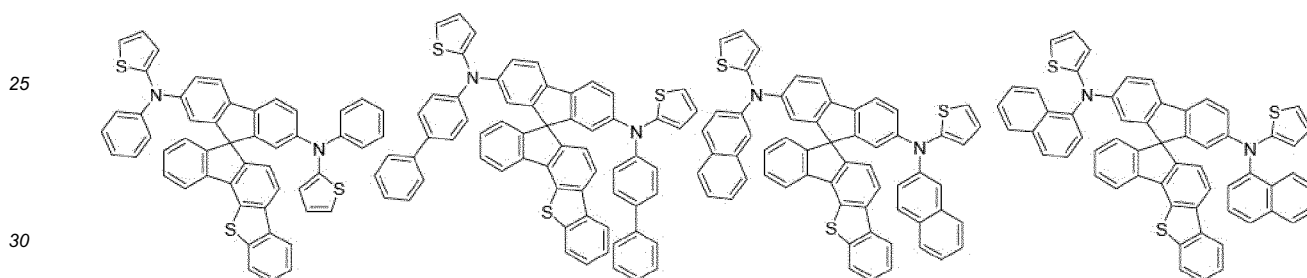

[0032] The compound for an organic optoelectronic device may have triplet exciton energy (T1) of greater than or equal to about 2.0 eV.

35 [0033] The organic optoelectronic device may be selected from an organic photoelectric device, an organic light emitting diode, an organic solar cell, an organic transistor, an organic photo-conductor drum, and an organic memory device.

[0034] In another embodiment of the present invention, provided is an organic light emitting diode including an anode, a cathode, and at least one organic thin layer interposed between the anode and cathode, wherein at least one of the organic thin layers includes the above compound for an organic optoelectronic device.

40 [0035] The organic thin layer may be selected from an emission layer, a hole transport layer, a hole injection layer, an electron transport layer, an electron injection layer, a hole blocking layer, and a combination thereof.

[0036] The compound for an organic optoelectronic device may be included in a hole transport layer (HTL) or a hole injection layer (HIL).

45 [0037] The compound for an organic optoelectronic device may be included in an emission layer.

[0038] The compound for an organic optoelectronic device may be used as a phosphorescent or fluorescent host material in an emission layer.

[0039] In yet another embodiment of the present invention, a display device including the above organic light emitting diode is provided.

50

[Advantageous Effects]

[0040] A compound having high hole or electron transport properties, film stability, thermal stability, and high triplet exciton energy may be provided.

55 [0041] Such a compound may be used as a hole injection/transport material, host material, or electron injection/transport material of an emission layer. An organic optoelectronic device using the same has improved life-span characteristic high luminous efficiency at a low driving voltage due to excellent electrochemical and thermal stability.

[Description of the Drawings]

[0042] FIGS. 1 to 5 are cross-sectional views showing organic light emitting diodes according to various embodiments of the present invention including the compound for an organic optoelectronic device according to one embodiment of the present invention.

100 : organic light emitting diode	110 : cathode
120 : anode	105 : organic thin film
130 : emission layer	140 : hole transport layer (HTL)
150 : electron transport layer (ETL)	160 : electron injection layer (EIL)
170 : hole injection layer (HIL)	230 : emission layer + electron transport layer (ETL)

[Mode for Invention]

[0043] Hereinafter, embodiments of the present invention are described in detail. However, these embodiments are exemplary, and this disclosure is not limited thereto.

[0044] As used herein, when a definition is not otherwise provided, the term "substituted" refers to one substituted with a substituent selected from deuterium, a halogen, a hydroxy group, an amino group, a substituted or unsubstituted C1 to C30 amine group, a nitro group, a substituted or unsubstituted C3 to C40 silyl group, a C1 to C30 alkyl group, a C1 to C10 alkylsilyl group, a C3 to C30 cycloalkyl group, a C6 to C30 aryl group, a C1 to C20 alkoxy group, a fluoro group, a C1 to C10 trifluoroalkyl group such as a trifluoromethyl group and the like, or a cyano group, instead of at least one hydrogen of a substituent or a compound.

[0045] The two adjacent substituent selected from the substituted a halogen, hydroxy group, amino group, substituted or unsubstituted C1 to C20 amine group, nitro group, substituted or unsubstituted C3 to C40 silyl group, C1 to C30 alkyl group, C1 to C10 alkylsilyl group, C3 to C30 cycloalkyl group, C6 to C30 aryl group, C1 to C20 alkoxy group, fluoro group, C1 to C10 trifluoroalkyl group such as trifluoromethyl group and the like, or cyano group may be fused to form a ring.

[0046] In the present specification, when specific definition is not otherwise provided, "hetero" refers to one including 1 to 3 hetero atoms selected from N, O, S, and P, and remaining carbons in one compound or substituent.

[0047] In the present specification, when a definition is not otherwise provided, the term "combination thereof" refers to at least two substituents bound to each other by a linker, or at least two substituents condensed to each other.

[0048] In the present specification, when a definition is not otherwise provided, "alkyl group" refers to an aliphatic hydrocarbon group. The alkyl group may be "a saturated alkyl group" without any double bond or triple bond. The alkyl group may be branched, linear or cyclic.

[0049] The "alkenylene group" refers to a functional group of at least one carbon-carbon double bond of at least two carbons, and the "alkynylene group" refers to a functional group of at least one carbon-carbon triple bond of at least two carbons.

[0050] The alkyl group may be a C1 to C20 alkyl group. More specifically, the alkyl group may be a C1 to C10 alkyl group or a C1 to C6 alkyl group.

[0051] For example, a C1 to C4 alkyl group may have 1 to 4 carbon atoms in an alkyl chain which may be selected from methyl, ethyl, propyl, iso-propyl, n-butyl, iso-butyl, sec-butyl, and t-butyl.

[0052] Specific examples of the alkyl group may be a methyl group, an ethyl group, a propyl group, an isopropyl group, a butyl group, an isobutyl group, a t-butyl group, a pentyl group, a hexyl group, a cyclopropyl group, a cyclobutyl group, a cyclopentyl group, a cyclohexyl group, and the like.

[0053] "Aromatic group" refers to a cyclic functional group where all elements have p-orbitals, and these p-orbitals forms conjugation. Specific examples are aryl group and a heteroaryl group.

[0054] "Aryl group" includes monocyclic or fused ring polycyclic (i.e., rings sharing adjacent pairs of carbon atoms) groups.

[0055] "Heteroaryl group" refers to aryl group including 1 to 3 hetero atoms selected from N, O, S, and P, and remaining carbons. When the heteroaryl group is a fused ring, each ring may include 1 to 3 hetero atoms.

[0056] As used herein, the carbazole-based derivative may refer to a substituted structure where a nitrogen atom of a substituted or unsubstituted carbazolyl group is substituted with a hetero atom except nitrogen, or carbon. Specific examples may be dibenzofuran (dibenzofuranyl group), dibenzothiophene (dibenzothiophenyl group), fluorene (fluorenyl group), and the like.

[0057] In the present specification, hole characteristics refer to characteristics that holes formed in the anode is easily injected into the emission layer and transported in the emission layer due to conductive characteristics according to HOMO level.

[0058] Electron characteristics refer to characteristics that electron formed in the cathode is easily injected into the

emission layer and transported in the emission layer due to conductive characteristics according to LUMO level.

[0059] A compound for an organic optoelectronic device according to one embodiment of the present invention may have a structure that at least one amine group is combined with a bifluorene core having a spiro structure.

[0060] In addition, a part of the core having a spiro structure may be a fused ring.


[0061] The core structure may be used as a light emitting material, a hole injection material, or a hole transport material for an organic optoelectronic device. Particularly, the core structure may be more appropriate for a hole injection material or a hole transport material.

[0062] The compound for an organic optoelectronic device includes a core part and various substituents for a substituent for substituting the core part and thus may have various energy bandgaps.


[0063] When the compound having an appropriate energy level depending on a substituent is used to manufacture an organic optoelectronic device, the compound reinforces hole transport capability or electron transport capability and thus, brings about excellent effects in terms of efficiency and a driving voltage, and also, has excellent electrochemical and thermal stability and thus, may improve life-span characteristics of the organic optoelectronic device.

[0064] In one embodiment of the present invention, a compound for an organic optoelectronic device represented by a combination of the following Chemical Formula 1 and Chemical Formula 2 is provided.

[Chemical Formula 1]

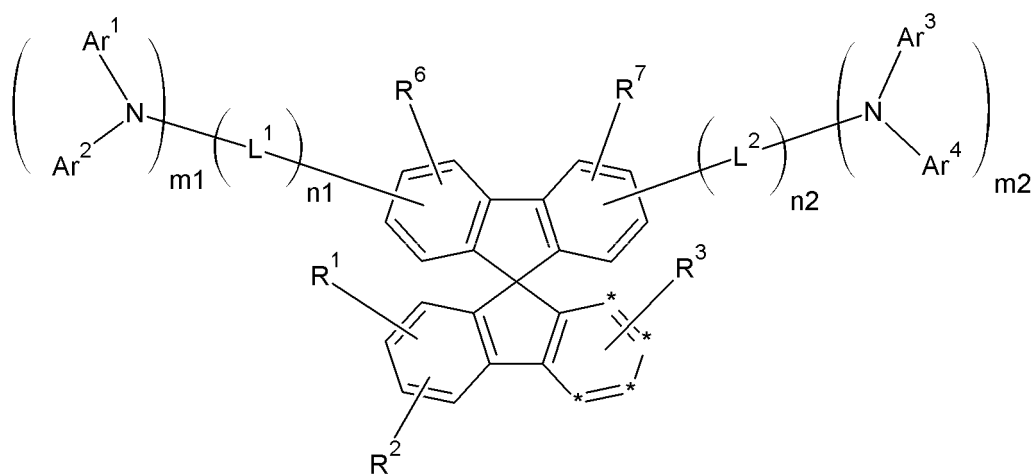

[Chemical Formula 2]



[0065] In the above Chemical Formulae 1 and 2, X is -O-, -S-, -S(O)- or -S(O)₂-, Ar¹ to Ar⁴ are independently a substituted or unsubstituted C₆ to C₃₀ aryl group, or a substituted or unsubstituted C₂ to C₃₀ heteroaryl group, L¹ and L² are independently a single bond, a substituted or unsubstituted C₂ to C₁₀ alkenylene group, a substituted or unsubstituted C₂ to C₁₀ alkynylene group, a substituted or unsubstituted C₆ to C₃₀ arylene group, or a substituted or unsubstituted C₂ to C₃₀ heteroarylene group, m₁ and m₂ are independently integers of 0 or 1, one of m₁ and m₂ is 1, n₁ and n₂ are independently integers ranging from 0 to 3, R¹ to R⁷ are independently hydrogen, deuterium, a substituted or unsubstituted C₁ to C₁₀ alkyl group, a substituted or unsubstituted C₆ to C₃₀ aryl group, or a substituted or unsubstituted C₂ to C₃₀ heteroaryl group, and two *s of the above Chemical Formula 2 are bonded with the adjacent two *s of the above Chemical Formula 1 to form a fused ring.

[0066] The X may be -O-, -S-, -S(O)- or -S(O)₂-. Since the -O-, -S-, -S(O)- or -S(O)₂- has a polar group and thus, is able to interact with an electrode, charges may be easily injected.


[0067] When the arylamine group (or a heteroarylamine group) is combined with a fluorene group of the core having a spiro structure, charge mobility may be increased, and thus, a driving voltage of a device may be deteriorated.

[0068] In addition, the compound has steric hindrance and thus, may be suppressed from crystallization due to low interaction among molecules. Accordingly, a yield of manufacturing a device may be improved. In addition, life-span characteristics of the device may be improved.

[0069] Furthermore, the compound has a relatively large molecular weight and thus, may be suppressed from decomposition during the deposition.

[0070] More specifically, the above Chemical Formula 1 may be represented by the following Chemical Formula 3.


[Chemical Formula 3]

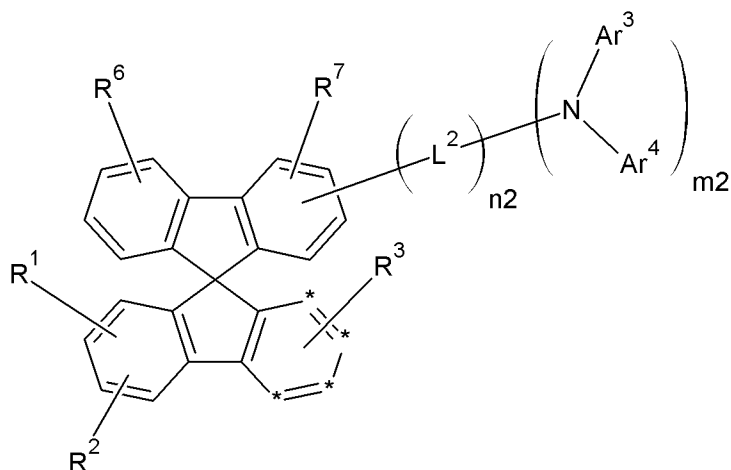

[0071] In the above Chemical Formula 3, Ar³ and Ar⁴ are independently a substituted or unsubstituted C₆ to C₃₀ aryl group, or a substituted or unsubstituted C₂ to C₃₀ heteroaryl group, L² is a single bond, a substituted or unsubstituted C₂ to C₁₀ alkenylene group, a substituted or unsubstituted C₂ to C₁₀ alkynylene group, a substituted or unsubstituted C₆ to C₃₀ arylene group, or a substituted or unsubstituted C₂ to C₃₀ heteroarylene group, m₂ is 1, n₂ is an integer ranging from 0 to 3, R¹ to R³, R⁶ or R⁷ are independently hydrogen, deuterium, a substituted or unsubstituted C₁ to C₁₀ alkyl group, a substituted or unsubstituted C₆ to C₃₀ aryl group, or a substituted or unsubstituted C₂ to C₃₀ heteroaryl group, and two *s of the above Chemical Formula 2 are bonded with the adjacent two *s of the above Chemical Formula 3 to form a fused ring.

[0072] More specifically, the compound for an organic optoelectronic device may be represented by the following Chemical Formula 4. When a fused ring is positioned as shown in the following Chemical Formula 4, high T_g may be obtained like spiro fluorene, and introduction of a dibenzofuran group may increase mobility of the compound and hole mobility.


[Chemical Formula 4]

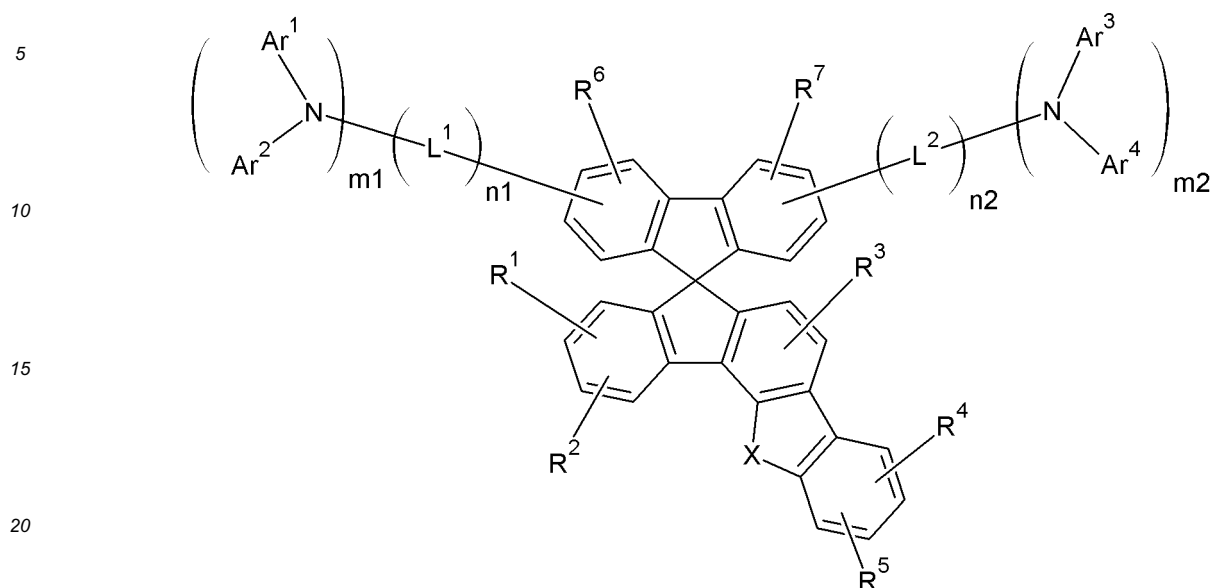

25 **[0073]** In the above Chemical Formula 4, X is -O-, -S-, -S(O)- or -S(O)₂-, Ar¹ to Ar⁴ are independently a substituted or unsubstituted C₆ to C₃₀ aryl group, or a substituted or unsubstituted C₂ to C₃₀ heteroaryl group, L¹ and L² are independently a single bond, a substituted or unsubstituted C₂ to C₁₀ alkenylene group, a substituted or unsubstituted C₂ to C₁₀ alkynylene group, a substituted or unsubstituted C₆ to C₃₀ arylene group, or a substituted or unsubstituted C₂ to C₃₀ heteroarylene group, m₁ and m₂ are independently integers of 0 or 1, one of m₁ and m₂ is 1, n₁ and n₂ are independently integers ranging from 0 to 3, and R¹ to R⁷ are independently hydrogen, deuterium, a substituted or unsubstituted C₁ to C₁₀ alkyl group, a substituted or unsubstituted C₆ to C₃₀ aryl group, or a substituted or unsubstituted C₂ to C₃₀ heteroaryl group.

30 **[0074]** More specifically, the compound for an organic optoelectronic device may be represented by the following Chemical Formula 5.

[Chemical Formula 5]

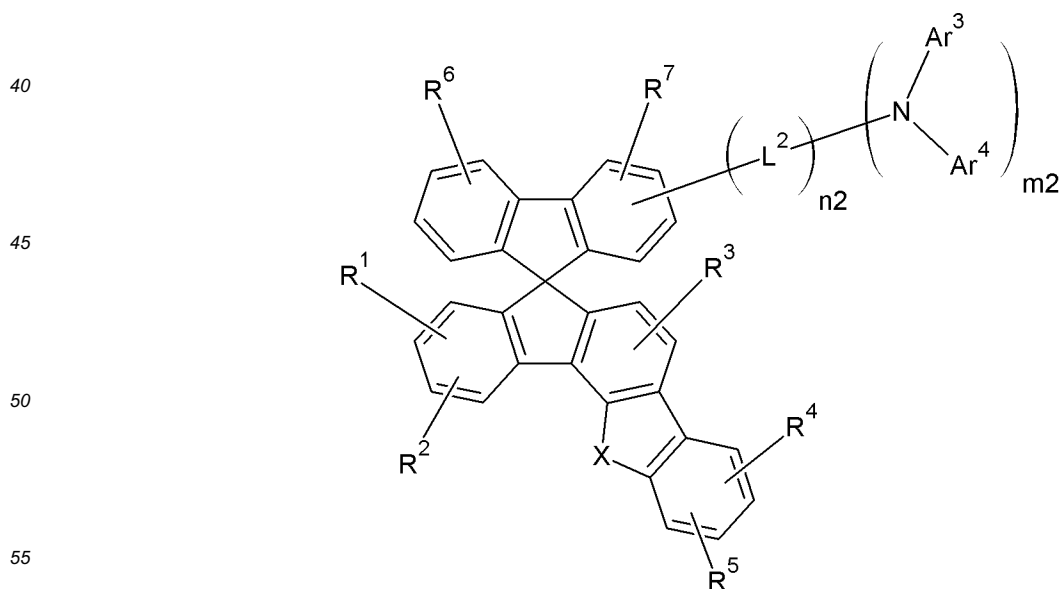

[0075] In the above Chemical Formula 5, Ar³ and Ar⁴ are independently a substituted or unsubstituted C₆ to C₃₀ aryl

group, or a substituted or unsubstituted C2 to C30 heteroaryl group, L² is a single bond, a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group, m₂ is 1, n₂ is an integer ranging from 0 to 3, and R¹ to R⁷ are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group.

[0076] The L¹ and L² may be selectively adjusted to determine the entire conjugation length of the compound, and thereby energy level may be adjusted and T_g may be increased.

[0077] Specific examples of the L¹ and L² may be a substituted or unsubstituted phenylene group, a substituted or unsubstituted biphenylene group, a substituted or unsubstituted terphenylene group, a substituted or unsubstituted naphthylene group, a substituted or unsubstituted anthracenylene group, a substituted or unsubstituted phenanthrylene group, a substituted or unsubstituted pyrenylene group, a substituted or unsubstituted fluorenylene group, a thiophenylene group, a furan group, a vinyl group, and the like.


[0078] The Ar¹ to Ar⁴ may be independently a substituted or unsubstituted phenyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted anthracenyl group, a substituted or unsubstituted phenanthryl group, a substituted or unsubstituted naphthacenyl group, a substituted or unsubstituted pyrenyl group, a substituted or unsubstituted biphenyl group, a substituted or unsubstituted p-terphenyl group, a substituted or unsubstituted m-terphenyl group, a substituted or unsubstituted chrysenyl group, a substituted or unsubstituted triphenylenyl group, a substituted or unsubstituted perylenyl group, a substituted or unsubstituted indenyl group, a substituted or unsubstituted furanyl group, a substituted or unsubstituted thiophenyl group, a substituted or unsubstituted pyrrolyl group, a substituted or unsubstituted pyrazolyl group, a substituted or unsubstituted imidazolyl group, a substituted or unsubstituted triazolyl group, a substituted or unsubstituted oxazolyl group, a substituted or unsubstituted thiazolyl group, a substituted or unsubstituted oxadiazolyl group, a substituted or unsubstituted thiadiazolyl group, a substituted or unsubstituted pyridyl group, a substituted or unsubstituted pyrimidinyl group, a substituted or unsubstituted pyrazinyl group, a substituted or unsubstituted triazinyl group, a substituted or unsubstituted benzofuranyl group, a substituted or unsubstituted benzothiophenyl group, a substituted or unsubstituted benzimidazolyl group, a substituted or unsubstituted indolyl group, a substituted or unsubstituted quinolinyl group, a substituted or unsubstituted isoquinolinyl group, a substituted or unsubstituted quinazolinyl group, a substituted or unsubstituted quinoxalinyl group, a substituted or unsubstituted naphthyridinyl group, a substituted or unsubstituted benzoxazinyl group, a substituted or unsubstituted benzthiazinyl group, a substituted or unsubstituted acridinyl group, a substituted or unsubstituted phenazinyl group, a substituted or unsubstituted phenothiazinyl group, a substituted or unsubstituted phenoxazinyl group, or a combination thereof, but is not limited thereto.

[0079] The compound for an organic optoelectronic device may have light emission, hole or electron characteristics; film stability; thermal stability, and high triplet exciton energy (T₁) due to the substituent.

[0080] More specifically, the compound for an organic optoelectronic device may be represented by one of the following Chemical Formulae A-1 to A-72, but is not limited thereto.

[Chemical Formula A-1] [Chemical Formula A-2] [Chemical Formula A-3]

[Chemical Formula A-4]

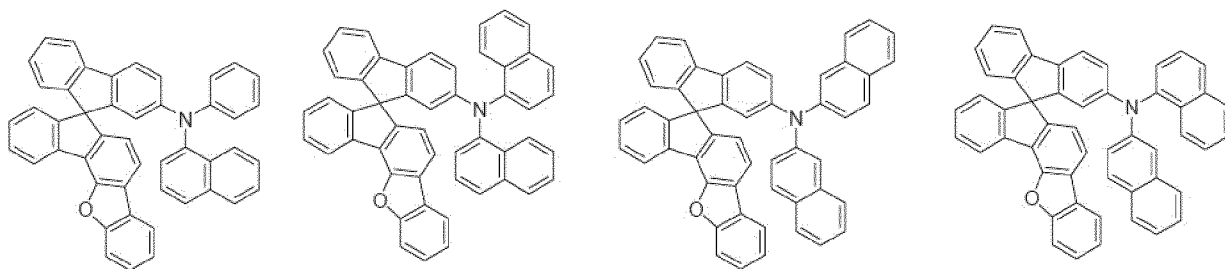


[Chemical Formula A-5] [Chemical Formula A-6] [Chemical Formula A-7]

[Chemical Formula A-8]

5

10

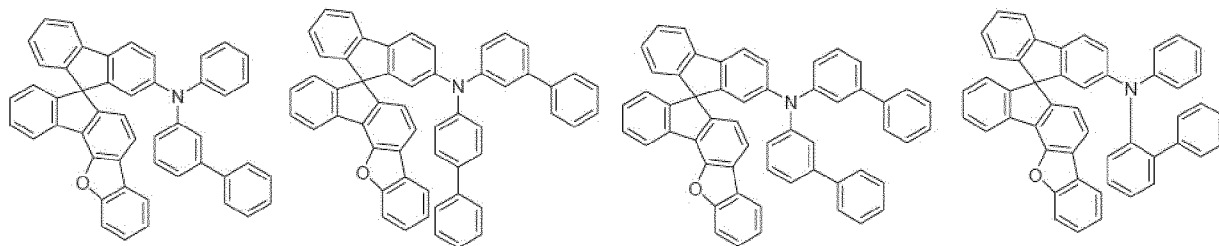


15

[Chemical Formula A-9] [Chemical Formula A-10] [Chemical Formula A-11]

[Chemical Formula A-12]

20

25

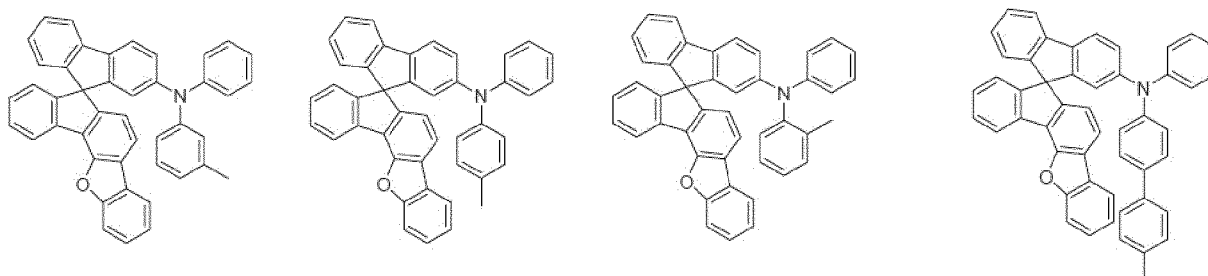

30


[Chemical Formula A-13] [Chemical Formula A-14] [Chemical Formula A-15]

[Chemical Formula A-16]

35

40

45

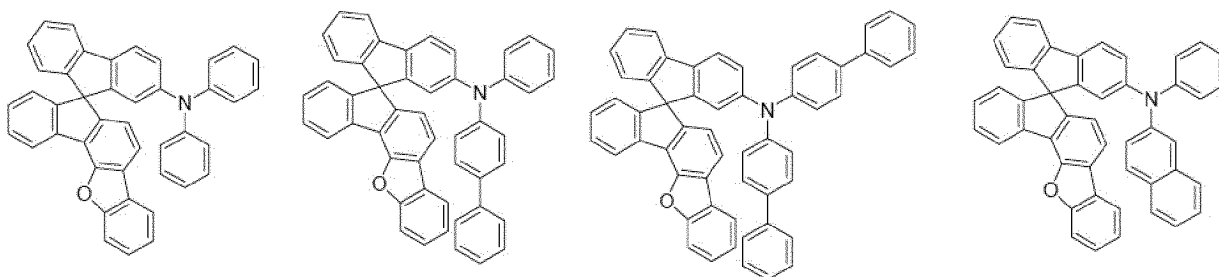

50

55


[Chemical Formula A-17] [Chemical Formula A-18] [Chemical Formula A-19]

[Chemical Formula A-20]

5

10

15

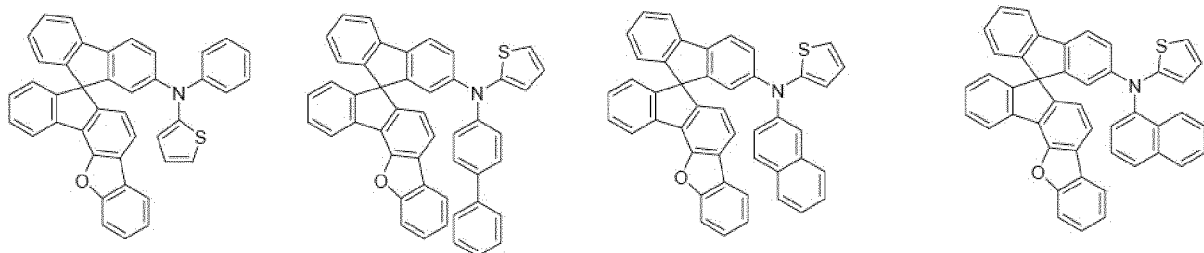


[Chemical Formula A-21] [Chemical Formula A-22] [Chemical Formula A-23]

[Chemical Formula A-24]

20

25

30

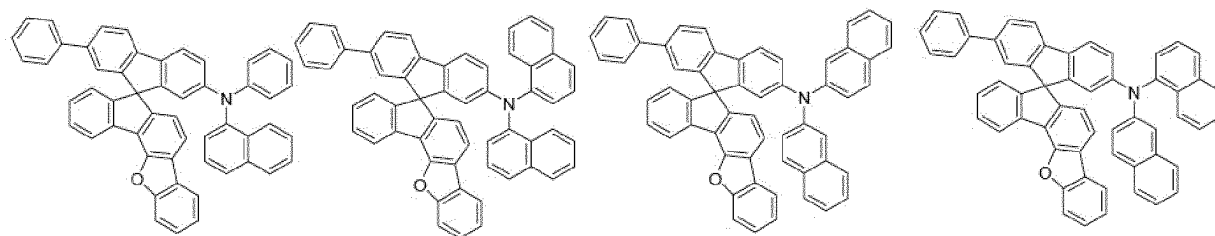

[Chemical Formula A-25] [Chemical Formula A-26] [Chemical Formula A-27]

[Chemical Formula A-28]


35

40

45


50

55

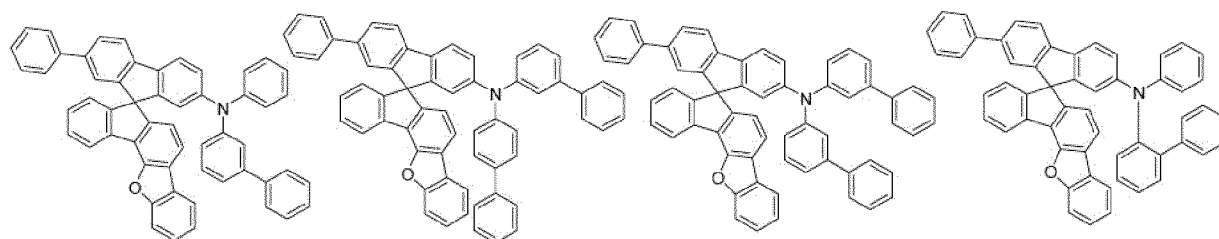


[Chemical Formula A-29] [Chemical Formula A-30] [Chemical Formula A-31]

[Chemical Formula A-32]

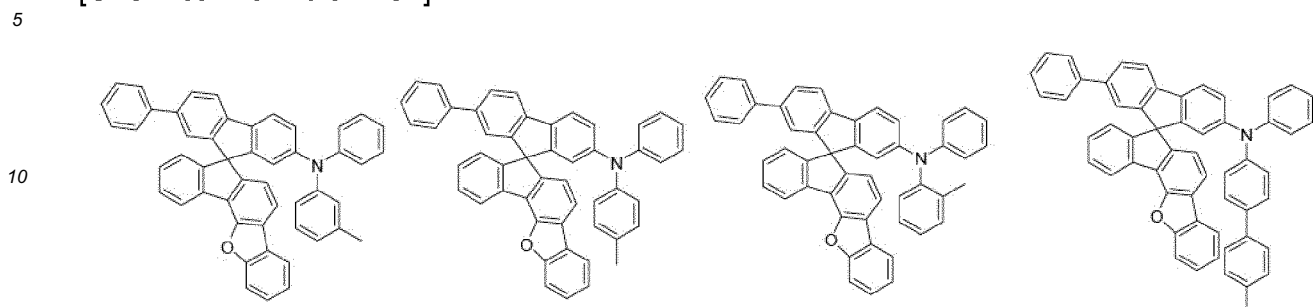


[Chemical Formula A-33] [Chemical Formula A-34] [Chemical Formula A-35]

[Chemical Formula A-36]

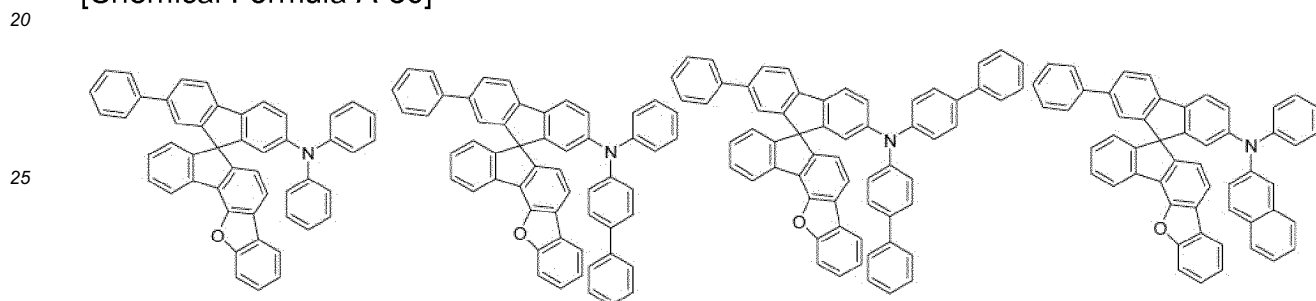


[Chemical Formula A-37] [Chemical Formula A-38] [Chemical Formula A-39]

[Chemical Formula A-40]

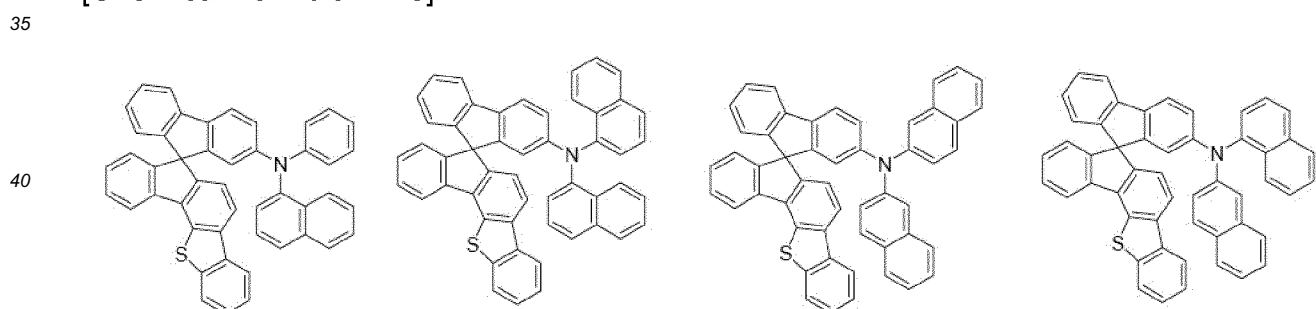

[Chemical Formula A-41] [Chemical Formula A-42] [Chemical Formula A-43]

[Chemical Formula A-44]

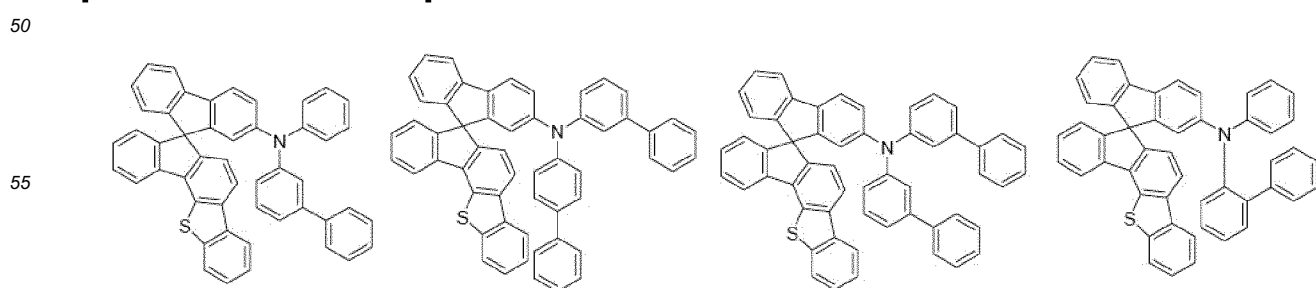


[Chemical Formula A-45] [Chemical Formula A-46] [Chemical Formula A-47]

[Chemical Formula A-48]

5

10

15

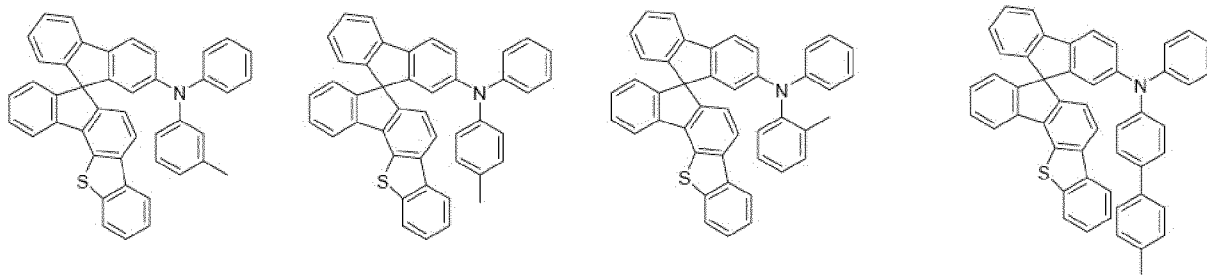


[Chemical Formula A-49] [Chemical Formula A-50] [Chemical Formula A-51]

[Chemical Formula A-52]

20

25

30

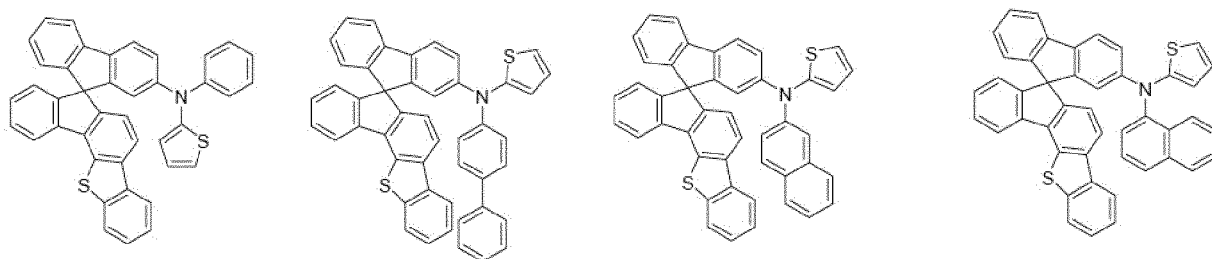

[Chemical Formula A-53] [Chemical Formula A-54] [Chemical Formula A-55]

[Chemical Formula A-56]


35

40

45

50

55

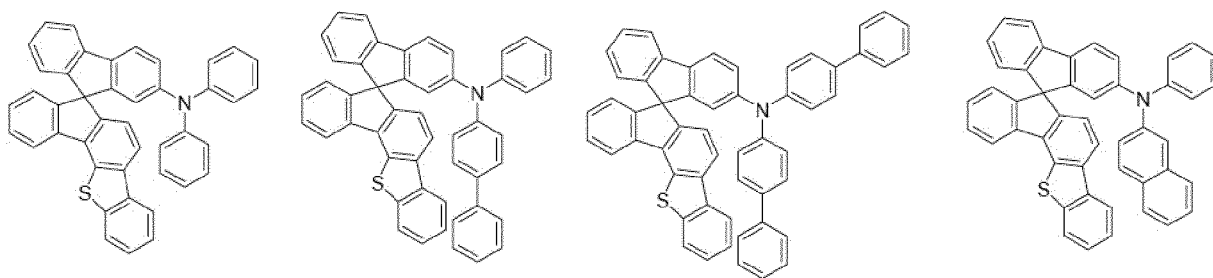


[Chemical Formula A-57] [Chemical Formula A-58] [Chemical Formula A-59]

[Chemical Formula A-60]

5

10

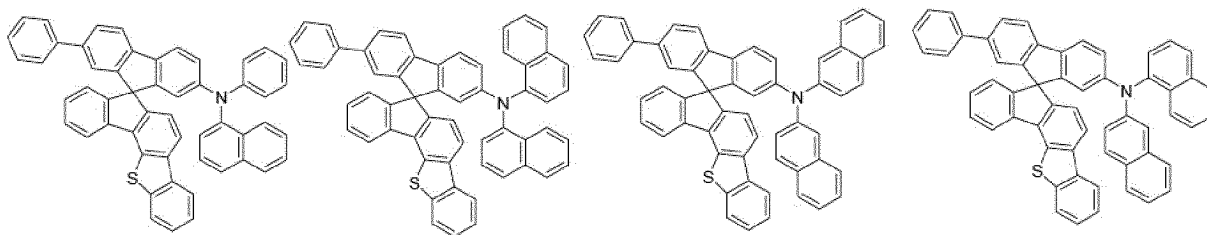


15

[Chemical Formula A-61] [Chemical Formula A-62] [Chemical Formula A-63]

[Chemical Formula A-64]

20

25

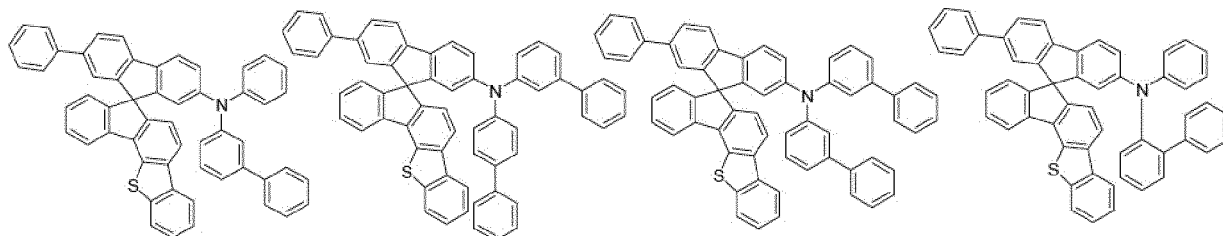


30

[Chemical Formula A-65] [Chemical Formula A-66] [Chemical Formula A-67]

[Chemical Formula A-68]

35

40

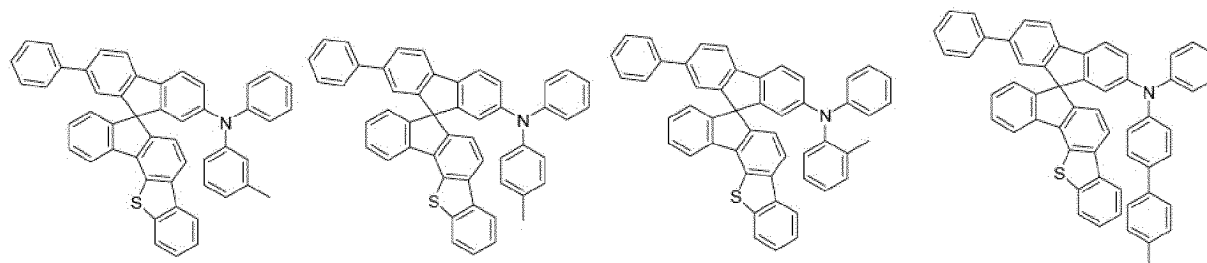


45

[Chemical Formula A-69] [Chemical Formula A-70] [Chemical Formula A-71]

50

55


[Chemical Formula A-72]

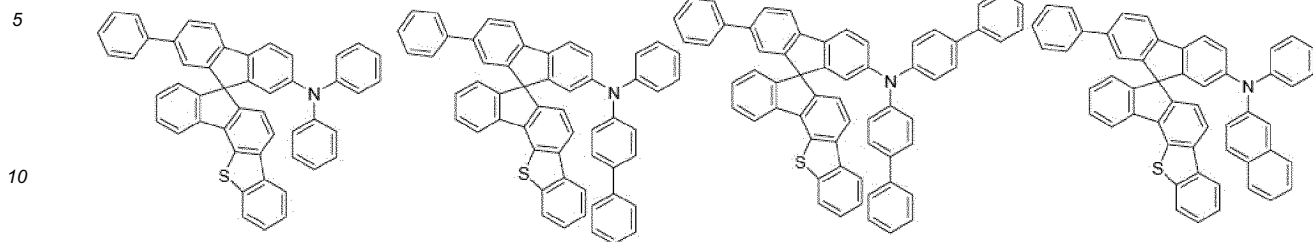


15 **[0081]** More specifically, the compound for an organic optoelectronic device may be represented by one of the following Chemical Formulae B-1 to B-40, but is not limited thereto.

[Chemical Formula B-1] [Chemical Formula B-2] [Chemical Formula B-3]

20 [Chemical Formula B-4]



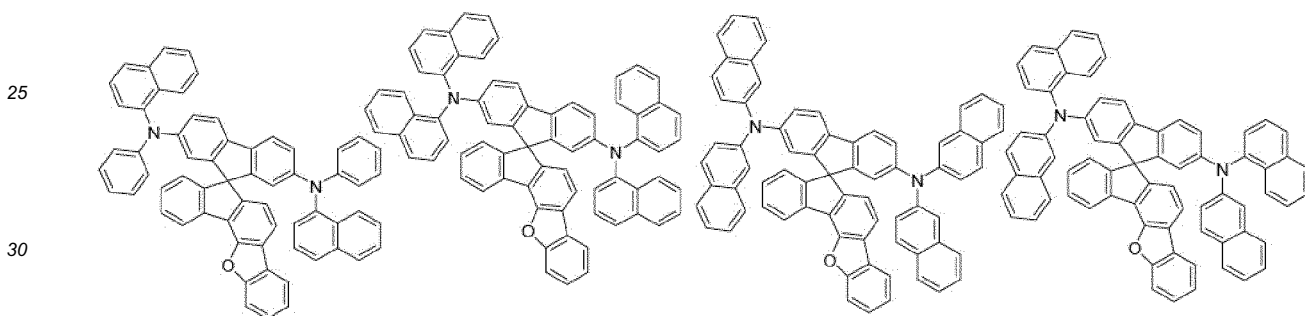


35 [Chemical Formula B-5] [Chemical Formula B-6] [Chemical Formula B-7]



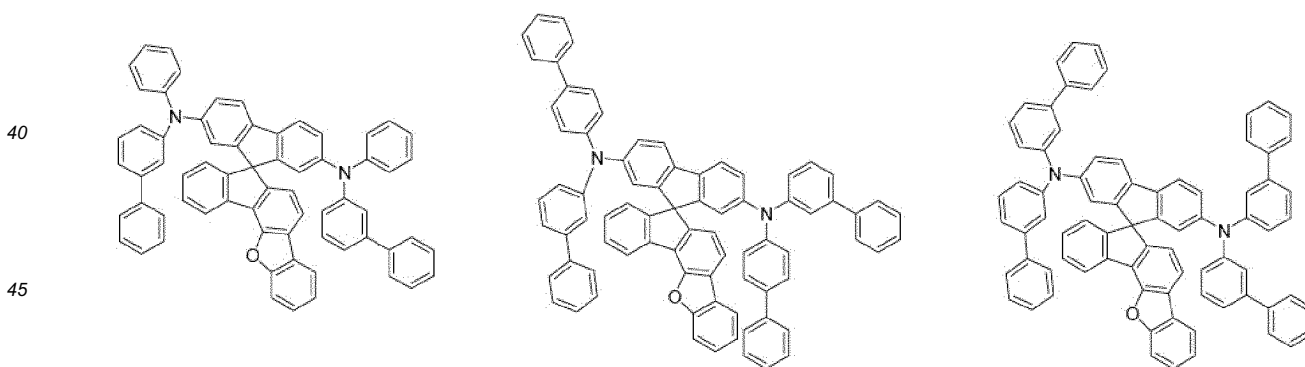


50 [Chemical Formula B-8] [Chemical Formula B-9] [Chemical Formula B-10]




55

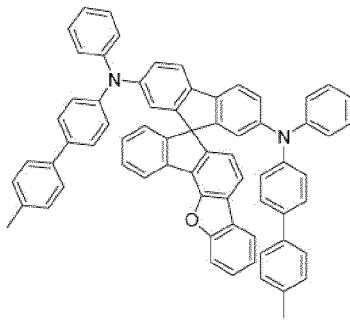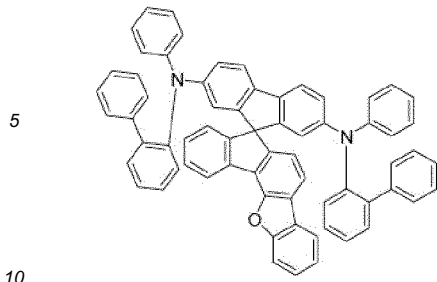

[Chemical Formula B-11] [Chemical Formula B-12] [Chemical Formula B-13]




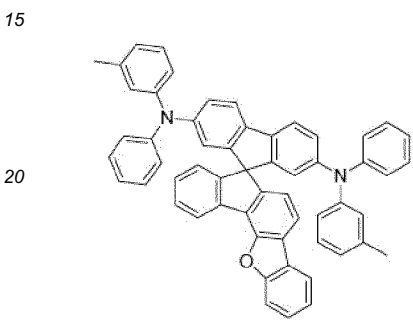


[Chemical Formula B-14] [Chemical Formula B-15] [Chemical Formula B-16]

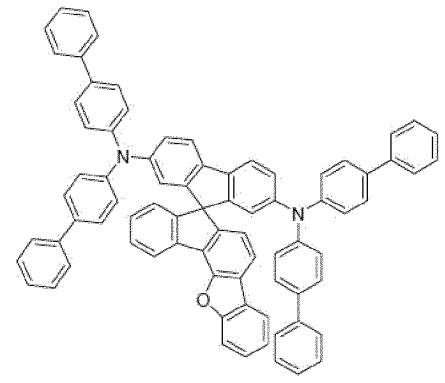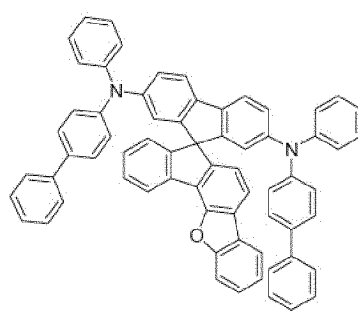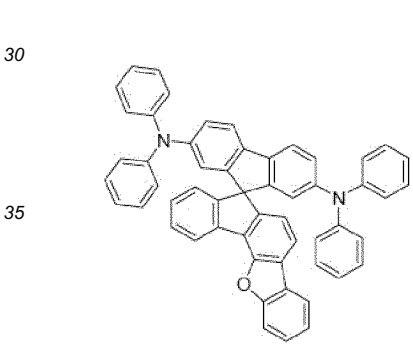


[Chemical Formula B-17] [Chemical Formula B-18] [Chemical Formula B-19]

[Chemical Formula B-20]

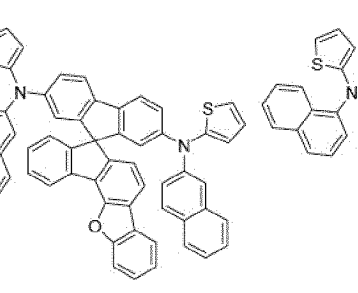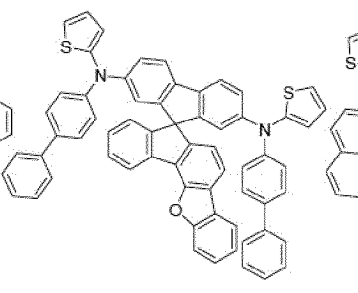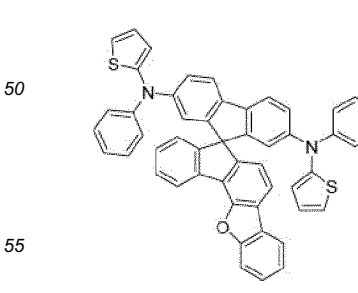


[Chemical Formula B-21] [Chemical Formula B-22] [Chemical Formula B-23]


[Chemical Formula B-24]

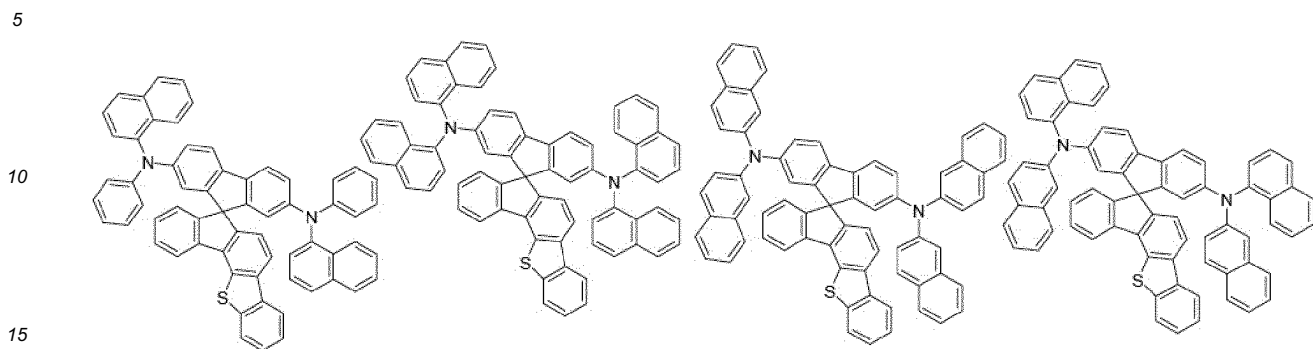

[Chemical Formula B-25] [Chemical Formula B-26] [Chemical Formula B-27]



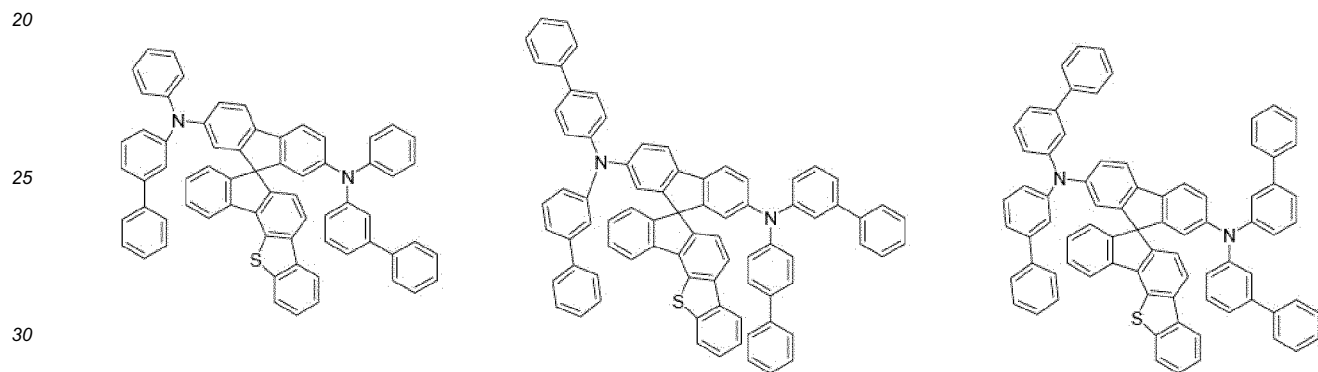


[Chemical Formula B-28] [Chemical Formula B-29] [Chemical Formula B-30]

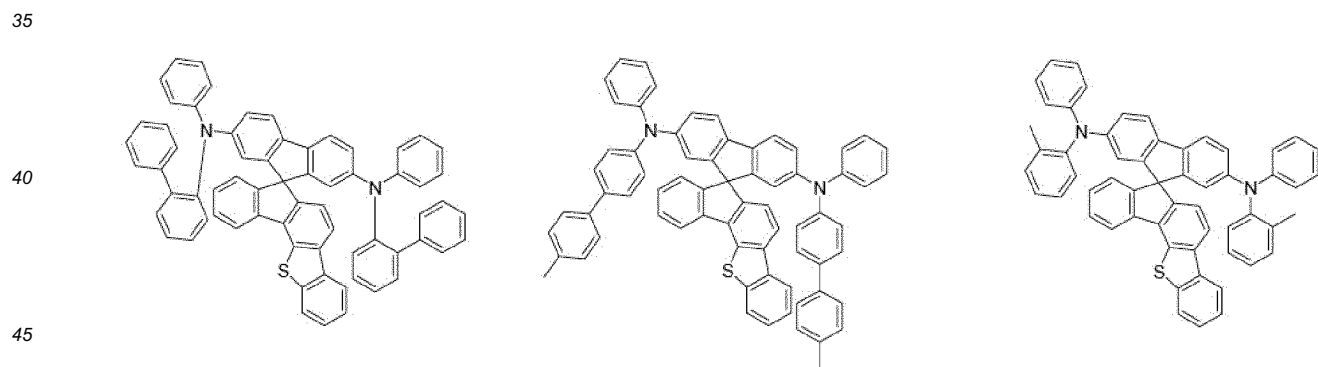




[Chemical Formula B-31] [Chemical Formula B-32] [Chemical Formula B-33]



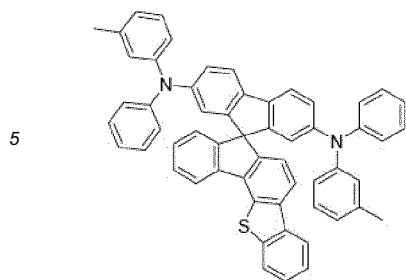

10

[Chemical Formula B-34] [Chemical Formula B-35] [Chemical Formula B-36]

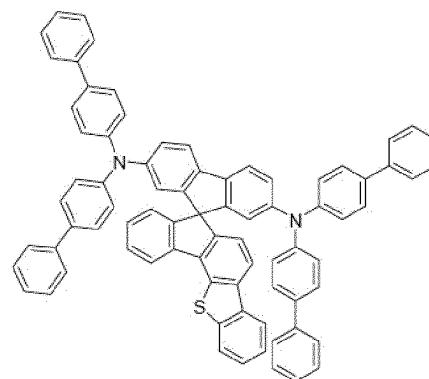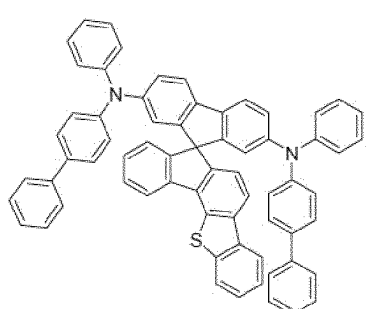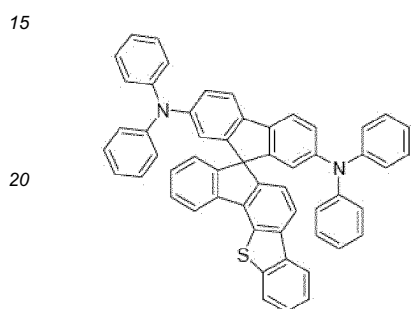




20

25

[Chemical Formula B-37] [Chemical Formula B-38] [Chemical Formula B-39]

[Chemical Formula B-40]

30

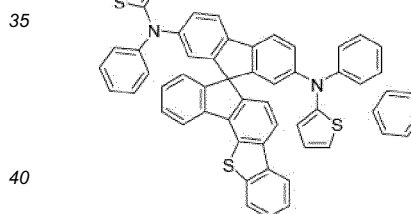

40

[0082] When the above compound according to one embodiment of the present invention requires both electron and hole characteristics, the functional group having electron characteristics may be introduced to effectively improve life-span of an organic light emitting diode and decreasing its driving voltage.

45

[0083] The above compound for an organic optoelectronic device according to one embodiment of the present invention shows a maximum light emitting wavelength in a range of about 320 to about 500 nm, high triplet exciton energy (T1) of greater than equal to about 2.0 eV and specifically, about 2.0 to about 4.0 eV and thus, has an advantage of increasing luminous efficiency of a dopant by well transporting charges of a host having high triplet exciton energy to the dopant and decreasing a driving voltage by freely adjusting HOMO and LUMO energy levels and accordingly, may be used as a host material or a charge transport material.

50

[0084] In addition, the compound for an organic optoelectronic device has optical and electrical activity and thus, may be used as a non-linear optical material, an electrode material, an electrochromic material, an optical switch, a sensor, a module, a wave guide, an organic transistor, a laser, an optical absorbing material, a dielectric material, and a material for a separation membrane and the like.

55

[0085] The compound for an organic optoelectronic device including the above compounds has a glass transition temperature of greater than or equal to about 90 °C and a thermal decomposition temperature of greater than or equal to about 400 °C, indicating improved thermal stability. Thereby, it is possible to produce an organic optoelectronic device

having a high efficiency.

[0086] The compound for an organic optoelectronic device including the above compounds may play a role for emitting light or injecting and/or transporting electrons, and also act as a light emitting host with an appropriate dopant. In other words, the compound for an organic optoelectronic device may be used as a phosphorescent or fluorescent host material, a blue light emitting dopant material, or an electron transport material.

[0087] The compound for an organic optoelectronic device according to one embodiment of the present invention is used for an organic thin layer, and it may improve the life-span characteristics, efficiency characteristics, electrochemical stability, and thermal stability of an organic optoelectronic device and decrease the driving voltage.

[0088] Therefore, according to another embodiment, an organic optoelectronic device that includes the compound for an organic optoelectronic device is provided. The organic optoelectronic device may include an organic photoelectric device, an organic light emitting diode, an organic solar cell, an organic transistor, an organic photo-conductor drum, an organic memory device, and the like. For example, the compound for an organic optoelectronic device according to one embodiment may be included in an electrode or an electrode buffer layer in the organic solar cell to improve the quantum efficiency, and it may be used as an electrode material for a gate, a source-drain electrode, or the like in the organic transistor.

[0089] Hereinafter, an organic light emitting diode is specifically described.

[0090] An organic light emitting diode according to another embodiment of the present invention includes an anode, a cathode, and at least one or more organic thin layer between the anode and the cathode, and at least one of the organic thin layers may include the compound for an organic optoelectronic device according to one embodiment of the present invention.

[0091] The organic thin layer including the compound for an organic optoelectronic device may include a layer selected from an emission layer, a hole transport layer, a hole injection layer, an electron transport layer, an electron injection layer, a hole blocking layer, and a combination thereof. The at least one layer includes the compound for an organic optoelectronic device according to one embodiment. Particularly, the compound for an organic optoelectronic device according to one embodiment may be included in an electron transport layer or electron injection layer. In addition, when the compound for an organic optoelectronic device is included in the emission layer, the compound for an organic optoelectronic device may be included as a phosphorescent or fluorescent host, and particularly, as a fluorescent blue dopant material.

[0092] FIGS. 1 to 5 are cross-sectional views showing organic light emitting diodes including the compound for an organic optoelectronic device according to one embodiment of the present invention.

[0093] Referring to FIGS. 1 to 5, organic light emitting diodes 100, 200, 300, 400, and 500 according to one embodiment include at least one organic thin layer 105 interposed between an anode 120 and a cathode 110.

[0094] The anode 120 includes an anode material having a large work function to help hole injection into an organic thin layer. Specific examples of the anode material include: a metal such as nickel, platinum, vanadium, chromium, copper, zinc, and gold, or alloys thereof; a metal oxide such as zinc oxide, indium oxide, indium tin oxide (ITO), and indium zinc oxide (IZO); a combined metal and oxide such as ZnO:Al or SnO₂:Sb; or a conductive polymer such as poly(3-methylthiophene), poly[3,4-(ethylene-1,2-dioxy)thiophene] (PEDT), polypyrrole, and polyaniline, but is not limited thereto. It is preferable to include a transparent electrode including indium tin oxide (ITO) as an anode.

[0095] The cathode 110 includes a cathode material having a small work function to help electron injection into an organic thin layer. Specific examples of the cathode material include: a metal such as magnesium, calcium, sodium, potassium, titanium, indium, yttrium, lithium, gadolinium, aluminum, silver, tin, and lead, or alloys thereof; or a multi-layered material such as LiF/Al, Liq/Al, LiO₂/Al, LiF/Ca, LiF/Al, and BaF₂/Ca, but is not limited thereto. It is preferable to include a metal electrode including aluminum as a cathode.

[0096] First, referring to FIG. 1, the organic light emitting diode 100 includes an organic thin layer 105 including only an emission layer 130.

[0097] Referring to FIG. 2, a double-layered organic light emitting diode 200 includes an organic thin layer 105 including an emission layer 230 including an electron transport layer (ETL), and a hole transport layer (HTL) 140. As shown in FIG. 2, the organic thin layer 105 includes a double layer of the emission layer 230 and hole transport layer (HTL) 140. The emission layer 130 also functions as an electron transport layer (ETL), and the hole transport layer (HTL) 140 layer has an excellent binding property with a transparent electrode such as ITO or an excellent hole transport capability.

[0098] Referring to FIG. 3, a three-layered organic light emitting diode 300 includes an organic thin layer 105 including an electron transport layer (ETL) 150, an emission layer 130, and a hole transport layer (HTL) 140. The emission layer 130 is independently installed, and layers having an excellent electron transport capability or an excellent hole transport capability are separately stacked.

[0099] As shown in FIG. 4, a four-layered organic light emitting diode 400 includes an organic thin layer 105 including an electron injection layer (EIL) 160, an emission layer 130, a hole transport layer (HTL) 140, and a hole injection layer (HIL) 170 for adherence with the cathode of ITO.

[0100] As shown in FIG. 5, a five-layered organic light emitting diode 500 includes an organic thin layer 105 including

an electron transport layer (ETL) 150, an emission layer 130, a hole transport layer (HTL) 140, and a hole injection layer (HIL) 170, and further includes an electron injection layer (EIL) 160 to achieve a low voltage.

[0101] In FIGS. 1 to 5, the organic thin layer 105 including at least one selected from the group consisting of an electron transport layer (ETL) 150, an electron injection layer (EIL) 160, emission layers 130 and 230, a hole transport layer (HTL) 140, a hole injection layer (HIL) 170, and combinations thereof includes the compound for an organic optoelectronic device. The compound for an organic optoelectronic device may be used for an electron transport layer (ETL) 150 including the electron transport layer (ETL) 150 or electron injection layer (EIL) 160. When it is used for the electron transport layer (ETL), it is possible to provide an organic light emitting diode having a more simple structure because it does not require an additional hole blocking layer (not shown).

[0102] Furthermore, when the compound for an organic optoelectronic device is included in the emission layers 130 and 230, the compound for an organic optoelectronic device may be included as a phosphorescent or fluorescent host or a fluorescent blue dopant.

[0103] The organic light emitting diode may be manufactured by: forming an anode on a substrate; forming an organic thin layer in accordance with a dry coating method such as evaporation, sputtering, plasma plating, and ion plating or a wet coating method such as spin coating, dipping, and flow coating; and providing a cathode thereon.

[0104] Another embodiment of the present invention provides a display device including the light emitting diode according to the above embodiment.


[0105] Hereinafter, the embodiments are illustrated in more detail with reference to examples. These examples, however, should not in any sense be interpreted as limiting the scope of the present invention.

(Preparation of Compound for Organic Optoelectronic Device)

Example 1: Preparation of Compound A-14

[0106] A compound represented by the above Chemical Formula A-14 as specific examples of a compound for an organic optoelectronic device according to one embodiment of the present invention was synthesized through the following Reaction Scheme 1.

[Reaction Scheme 1]

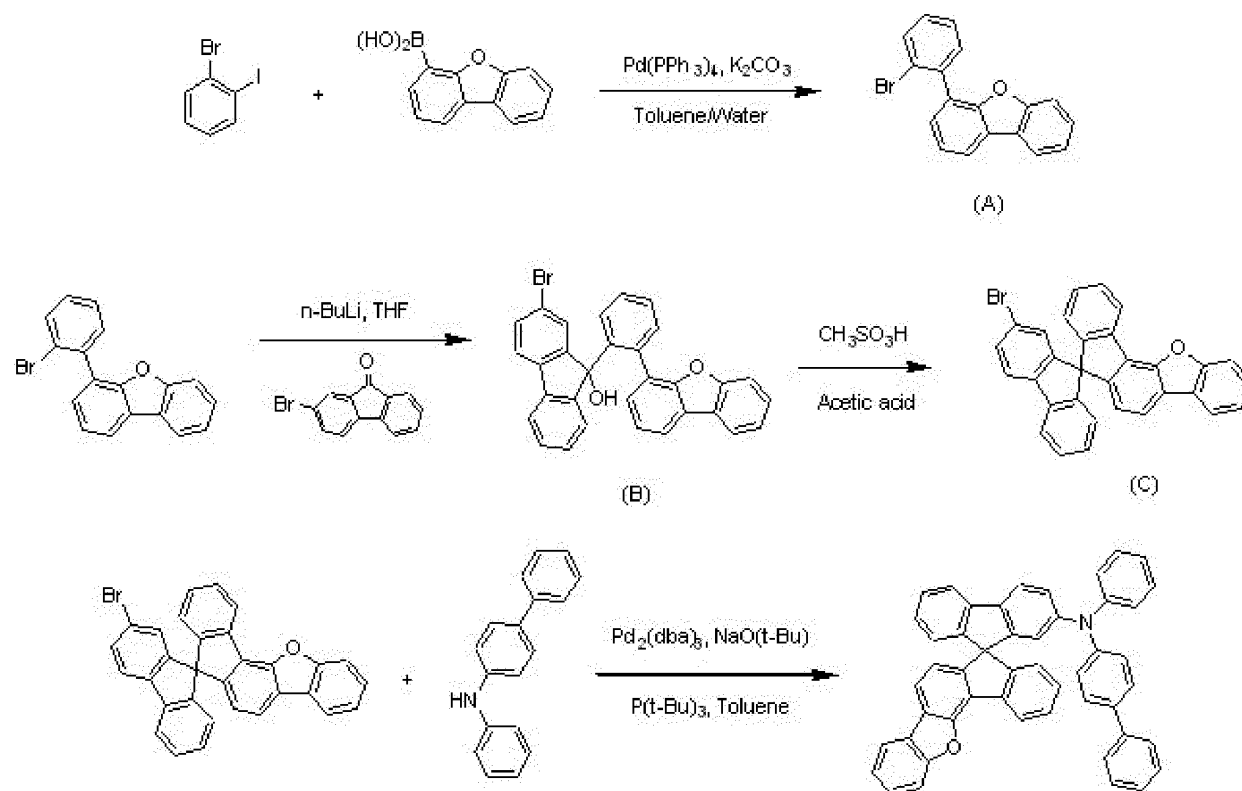

EP 2 799 515 A1

First Step: Synthesis of Intermediate Product (A)

5 [0107] 17.04 g (80.34 mmol) of 4-dibenzofuran boronic acid, 25.0 g (88.37 mmol) of 2-bromoiodobenzene, 22.21 g (160.67 mmol) of potassium carbonate, and 0.93 g (0.80 mmol) of tetrakis-(triphenylphosphine)palladium (0) were suspended in 250 ml of toluene and 200 ml of distilled water, and the suspended solution was refluxed and agitated for 12 hours. When the reaction was complete, the reaction solution was extracted with dichloromethane and filtered with extract silica gel and then, distilled under a reduced pressure distillation and silica-columned, obtaining 18.6 g of an intermediate product A (a yield : 65 %).

Second Step: Synthesis of Intermediate Product (B)

10 [0108] 27.3 g (84.47 mmol) of the intermediate product (A) synthesized according to Example 1 and 150 mL of tetrahydrofuran were suspended, and 63.35 mL (101.37 mmol) of n-BuLi was slowly added thereto at -78 ° C. The mixture was agitated at -78 ° C for 2 hours, 24.08 g (92.92 mol) of 2-bromofluorenone was slowly added thereto, and the mixture was agitated for 24 hours. When the reaction was complete, the resultant was quenched with an ammonium chloride aqueous solution and extracted with dichloromethane, and an organic layer obtained therefrom was filtered with silica gel. After removing an organic solution therefrom, silica gel column was performed with hexane : ethylacetate = 7 : 3 (v/v), obtaining 33.0 g of an intermediate product (B) (a yield : 79 %).

Third Step: Synthesis of Intermediate Product (C)

20 [0109] 33.0 g (65.6 mmol) of the intermediate product (B) was suspended in 350 mL of acetic acid, and 12.8 mL (196.8 mmol) of $\text{CH}_3\text{SO}_3\text{H}$ was slowly added thereto at room temperature. The mixture was agitated for 24 hours. When the reaction was complete, the resultant was quenched with 200 mL of a sodium bicarbonate aqueous solution, a solid produced therein was filtered, extraction was performed with dichloromethane and distilled water, and an organic layer was filtered with silica gel. After removing an organic solution therefrom, silica gel column was performed with hexane : dichloromethane = 6 : 4 (v/v), obtaining 29.3 g of an intermediate product (D) (a yield : 92 %).

Fourth Step: Synthesis of Compound A-14

30 [0110] 15.0 g (30.9 mmol) of the intermediate compound (C), 8.34 g (34.0 mmol) of biphenylphenylamine, 4.45 g (46.36 mmol) of NaO(t-Bu), and 0.28 g (0.31 mmol) of $\text{Pd}_2(\text{dba})_3$ were suspended in 300 ml of toluene, 0.45 mL (1.85 mmol) of P(t-Bu)₃ was added thereto, and the mixture was refluxed and agitated for 12 hours. The agitated mixture was extracted with dichloromethane and distilled water, and an organic layer obtained therefrom was filtered with silica gel. After removing an organic solution therefrom, silica gel column was performed with hexane : dichloromethane = 7 : 3 (v/v) to obtain a solid product, the solid product was recrystallized with dichloromethane and n-hexane, obtaining 17.4 g of a compound represented by Chemical Formula 1 (a yield : 87 %).

Example 2: Synthesis of Compound A-15


40 [0111] 15.0 g (30.9 mmol) of the intermediate compound (C), 10.93 g (34.0 mmol) of bisbiphenylamine, 4.45 g (46.36 mmol) of NaO(t-Bu), and 0.28 g (0.31 mmol) of $\text{Pd}_2(\text{dba})_3$ were suspended in 300 ml of toluene, 0.45 mL (1.85 mmol) of P(t-Bu)₃ was added thereto, and the mixture was refluxed and agitated for 12 hours. Dichloromethane and distilled water were used to perform extraction, and an organic layer obtained therefrom was filtered with silica gel. After removing an organic solution therefrom, silica gel column was performed by using hexane : dichloromethane = 7 : 3 (v/v), and a solid product was recrystallized with dichloromethane and acetone, obtaining 18.1 g of a compound represented by Chemical Formula 1 (a yield : 81 %).

Example 3: Synthesis of Compound A-16

50 [0112] 15.0 g (30.9 mmol) of the intermediate compound (C), 7.45 g (34.0 mmol) of naphthylphenylamine, 4.45 g (46.36 mmol) of NaO(t-Bu), and 0.28 g (0.31 mmol) of $\text{Pd}_2(\text{dba})_3$ were suspended in 300 ml of toluene, 0.45 mL (1.85 mmol) of P(t-Bu)₃ was added thereto, and the mixture was refluxed and agitated for 12 hours. Dichloromethane and distilled water was used to perform extraction, and an organic layer obtained therefrom was filtered with silica gel. After removing an organic solution therefrom, silica gel column was performed with hexane : dichloromethane = 7 : 3 (v/v), a solid product was recrystallized with dichloromethane and n-hexane, obtaining 15.2 g of a compound represented by Chemical Formula 1 (a yield : 79 %).

Example 4: Synthesis of Compound B-14

[0113] A compound represented by the above Chemical Formula B-14 as specific examples of a compound for an organic optoelectronic device according to one embodiment of the present invention was synthesized through three steps in the following Reaction Scheme 2.

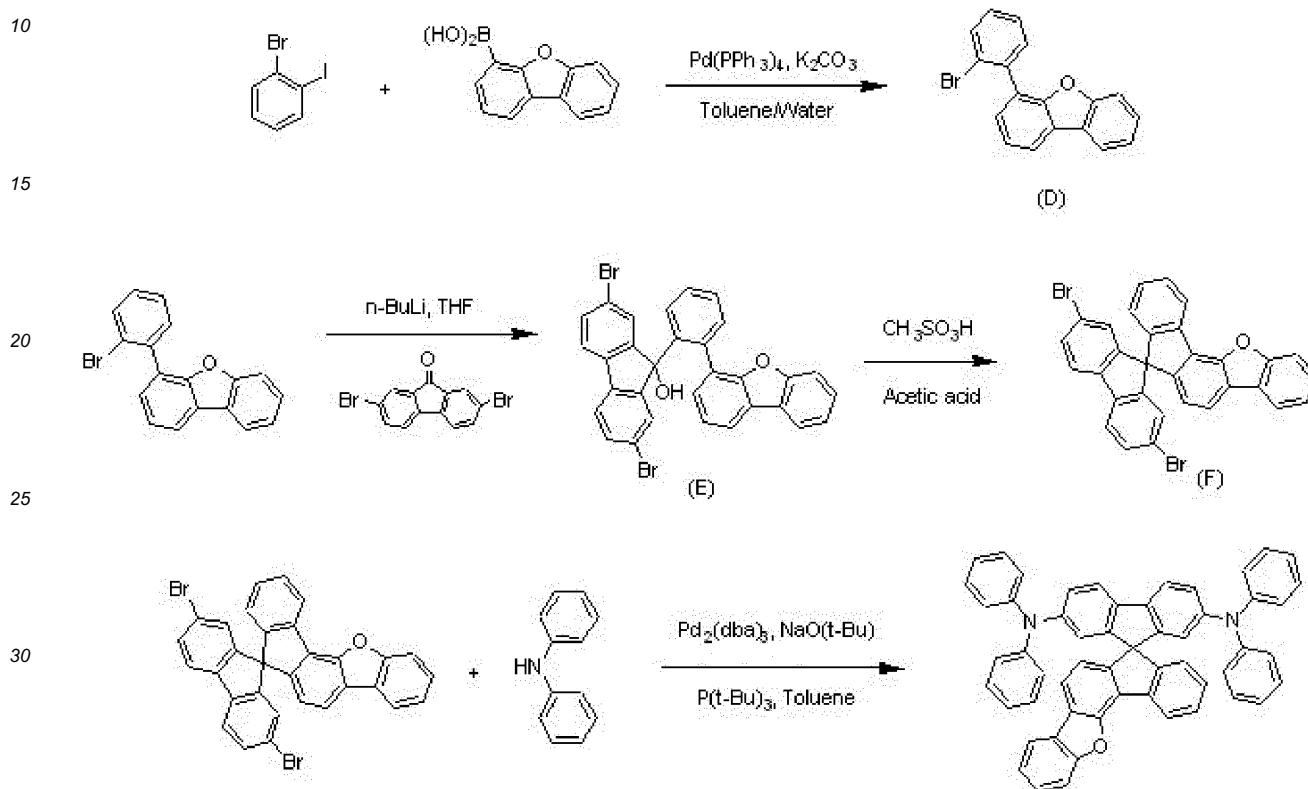[Reaction Scheme 2]**First step: Synthesis of Intermediate Product (E)**

[0114] 8.2 g (25.37 mmol) of the intermediate product (A) synthesized in Example 1 was suspended in 150 mL of tetrahydrofuran, and 19.04 mL (30.45 mmol) of n-BuLi was slowly added thereto at -78°C . The mixture was agitated at -78°C for 2 hours, 9.43 g (27.91 mol) of 2,7-dibromofluorenone was slowly added thereto, and the mixture was agitated for 24 hours. When the reaction was complete, the resultant was quenched with an ammonium chloride aqueous solution and extracted with dichloromethane, and an organic layer obtained therefrom was filtered with silica gel. After removing an organic solution therefrom, silica gel column was performed with hexane : ethylacetate = 7 : 3 (v/v), obtaining 11.8 g of an intermediate product (E) (a yield : 80 %).

Second Step: Synthesis of Intermediate Product (F)

[0115] 11.8 g (20.27 mmol) of the intermediate product (E) was suspended in 200 mL of acetic acid, and 27 mL of $\text{CH}_3\text{SO}_3\text{H}$ was slowly added thereto at room temperature. The mixture was agitated for 24 hours. When the reaction was complete, the resultant was quenched with 200 mL of a sodium bicarbonate aqueous solution, a solid product was filtered and extracted with dichloromethane and distilled water, and then, an organic layer obtained therefrom was filtered with silica gel. After removing an organic solution therefrom, silica gel column was performed with hexane : dichloromethane = 6 : 4 (v/v), obtaining 9.5 g of an intermediate product (F) (a yield : 83 %).

Third Step: Synthesis of Chemical Formula 2 compound

[0116] 9.43 g (16.71 mmol) of the intermediate compound (F), 6.22 g (36.77 mmol) of diphenylamine, 4.82 g (50.14 mmol) of $\text{NaO}(\text{t-Bu})$, and 0.31 g (0.33 mmol) of $\text{Pd}_2(\text{dba})_3$ were suspended in 100 ml of toluene, 0.80 mL (3.34 mmol)

EP 2 799 515 A1

of P(t-Bu)₃ was added thereto, and the mixture was refluxed and agitated for 12 hours. Dichloromethane and distilled water were used to perform extraction, and an organic layer obtained therefrom was filtered with silica gel. After removing an organic solution, silica gel column was performed by using hexane : dichloromethane = 7 : 3 (v/v), and a solid product obtained therefrom was recrystallized with dichloromethane and ethylacetate, obtaining 10.33 g of a compound represented by Chemical Formula 2 (a yield : 83 %).

Example 5: Synthesis of Compound B-15

[0117] 10.0 g (17.72 mmol) of the intermediate compound (F), 12.53 g (38.99 mmol) of biphenylphenylamine, 5.11 g (53.16 mmol) of NaO(t-Bu), and 0.32 g (0.35 mmol) of Pd₂(dba)₃ were suspended in 100 ml of toluene, 0.86 mL (3.54 mmol) of P(t-Bu)₃ was added thereto, and the mixture was refluxed and agitated for 12 hours. Dichloromethane and distilled water were used to perform extraction, and an organic layer obtained therefrom was filtered with silica gel. After removing an organic solution therefrom, the resultant was silica gel columned with hexane : dichloromethane = 7 : 3 (v/v), and a solid product was recrystallized with dichloromethane and ethylacetate, obtaining 10.96 g of a compound represented by Chemical Formula 2 (a yield : 83 %).

Example 6: Synthesis of Compound B-21

[0118] 10.0 g (17.72 mmol) of the intermediate compound (F), 8.55 g (38.99 mmol) of naphthylphenylamine, 5.11 g (53.16 mmol) of NaO(t-Bu), and 0.32 g (0.35 mmol) of Pd₂(dba)₃ were suspended in 100 ml of toluene, 0.86 mL (3.54 mmol) of P(t-Bu)₃ was added thereto, and the mixture was refluxed and agitated for 12 hours. Dichloromethane and distilled water were used to perform extraction, and an organic layer obtained therefrom was filtered with silica gel. After removing an organic solution therefrom, silica gel column was performed by using hexane : dichloromethane = 7 : 3 (v/v), and a solid product was recrystallized with dichloromethane and ethylacetate, obtaining 9.95 g of a compound represented by Chemical Formula 2 (a yield : 67 %).

(Manufacture of Organic Light Emitting Diode)

Example 7: Manufacture of Organic Light Emitting Diode

[0119] ITO (indium tin oxide) was coated to be 1500 Å thick on a glass substrate, and the coated glass substrate was washed with distilled water and an ultrasonic wave. When the washing with distilled water was complete, the substrate was washed with an ultrasonic wave by using a solvent such as isopropyl alcohol, acetone, methanol, and the like and dried, then, moved to a plasma cleaner, cleaned by using oxygen plasma for 5 minute, and moved to a vacuum depositor. This ITO transparent electrode was used as an anode, and a 600 Å-thick hole injection layer (HIL) was formed thereon by vacuum-depositing 4,4'-bis[N-[4-{N,N-bis(3-methylphenyl)amino}-phenyl]-N-phenylamino]biphenyl (DNTPD). Subsequently, the compound according to Example 1 was vacuum-deposited thereon to form a 300 Å-thick hole transport layer (HTL). On the hole transport layer (HTL), a 250 Å-thick emission layer was formed by using 9,10-di-(2-naphthyl)anthracene (ADN) as a host and doping it with 3 wt% of 2,5,8,11-tetra(tert-butyl)perylene (TBPe) as a dopant. Subsequently, on the emission layer, Alq₃ was vacuum-deposited to form a 250 Å-thick electron transport layer (ETL). On the electron transport layer (ETL), a cathode was formed by sequentially vacuum-depositing LiF to be 10 Å thick and Al to be 1000 Å thick, manufacturing an organic light emitting diode.

Example 8

[0120] An organic light emitting diode was manufactured according to the same method as Example 7 except for using the compound according to Example 2 instead of the compound according to Example 1 to form the hole transport layer (HTL).

Example 9

[0121] An organic light emitting diode was manufactured according to the same method as Example 7 except for using the compound according to Example 3 instead of the compound according to Example 1 to form the hole transport layer (HTL).

Example 10

[0122] An organic light emitting diode was manufactured according to the same method as Example 7 except for using

the compound according to Example 4 instead of the compound according to Example 2 to form the hole transport layer (HTL).

Example 11

[0123] An organic light emitting diode was manufactured according to the same method as Example 7 except for using the compound according to Example 5 instead of the compound according to Example 2 to form the hole transport layer (HTL).

Example 12

[0124] An organic light emitting diode was manufactured according to the same method as Example 7 except for using the compound according to Example 6 instead of the compound according to Example 2 to form the hole transport layer (HTL).

Comparative Example 1

[0125] An organic light emitting diode was manufactured according to the same method as Example 7 except for using NPB instead of the compound according to Example 2 to form the hole transport layer (HTL).

(Performance Measurement of Organic Light Emitting Diode)

[0126] Current density change, luminance change, and luminous efficiency of each organic light emitting diode according to Examples 7 to 12 and Comparative Example 1 depending on a voltage were measured. Specific measurement methods are as follows, and the results are shown in the following Table 1.

(1) Measurement of Current Density Change Depending on Voltage Change

[0127] The obtained organic light emitting diodes were measured for current value flowing in the unit device while increasing the voltage from 0 V to 10 V using a current-voltage meter (Keithley 2400), and the measured current value was divided by area to provide the result.

(2) Measurement of Luminance Change Depending on Voltage Change

[0128] Luminance was measured by using a luminance meter (Minolta Cs-1000A), while the voltage of the organic light emitting diodes was increased from 0 V to 10 V.

(3) Measurement of Luminous Efficiency

[0129] The luminance, current density, and voltage obtained from the (1) and (2) were used to calculate current efficiency (cd/A) and power efficiency (lm/W) at the same luminance (1,000 cd/m²).

[Table 1]

Device	Compound used in hole transport layer (HTL)	Voltage (V)	Color (EL color)	Efficiency (cd/A)	Efficiency (lm/W)
Example 7	A-14	5.8	Blue	6.2	3.4
Example 8	A-15	5.6	Blue	6.4	3.6
Example 9	A-16	5.5	Blue	6.1	3.5
Example 10	B-14	5.2	Blue	6.5	3.9
Example 11	B-15	5.0	Blue	6.0	3.8
Example 12	B-21	5.1	Blue	6.1	3.8

(continued)

Device	Compound used in hole transport layer (HTL)	Voltage (V)	Color (EL color)	Efficiency (cd/A)	Efficiency (lm/W)
Comparative Example 1	NPB	7.1	Blue	4.9	2.2
Current density: 10 mA/cm ²					

[0130] All the organic light emitting diodes according to Examples 7 to 12 decreased a driving voltage and improved luminance and efficiency compared with the organic light emitting diode according to Comparative Example 1.


[0131] Accordingly, an organic light emitting diode having a low voltage, high efficiency, high luminance, and long life-span as well as excellent electron injection and transportation capability may be manufactured.

[0132] While this invention has been described in connection with what is presently considered to be practical exemplary embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims. Therefore, the aforementioned embodiments should be understood to be exemplary but not limiting the present invention in any way.


Claims

1. A compound for an organic optoelectronic device represented by a combination of the following Chemical Formula 1 and Chemical Formula 2:

[Chemical Formula 1]

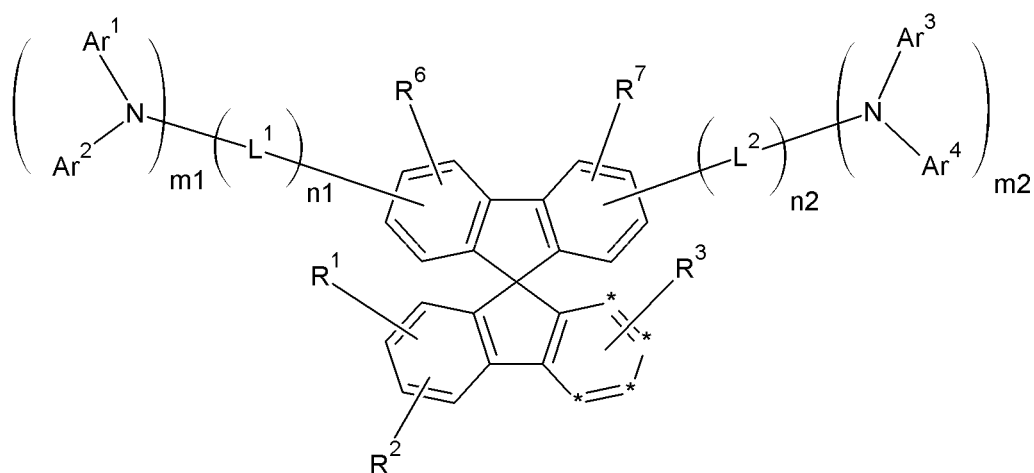

[Chemical Formula 2]



wherein, in the above Chemical Formulae 1 and 2,

X is -O-, -S-, -S(O)-, or -S(O)₂-,

Ar¹ to Ar⁴ are independently a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group,

L¹ and L² are independently a single bond, a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group,


m1 and m2 are independently integers of 0 or 1, one of m1 and m2 is 1,

n1 and n2 are independently integers ranging from 0 to 3,

R¹ to R⁷ are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group, and two *s of the above Chemical Formula 2 are bonded with the adjacent two *s of the above Chemical Formula 1 to form a fused ring.

2. The compound for an organic optoelectronic device of claim 1, wherein the above Chemical Formula 1 is represented by the following Chemical Formula 3:

[Chemical Formula 3]

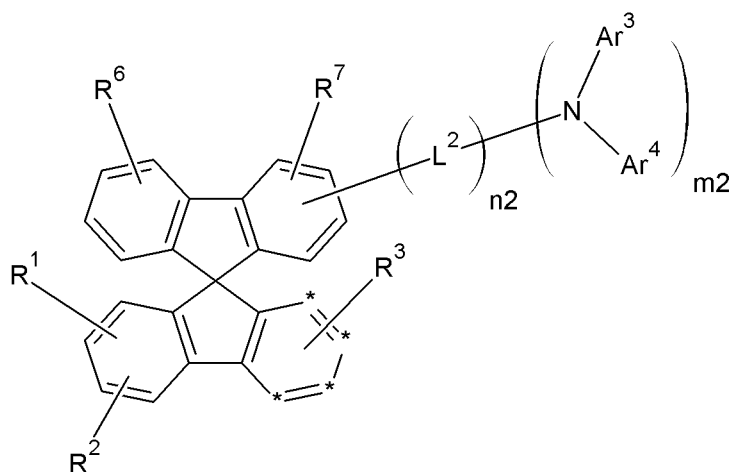

wherein, in the above Chemical Formula 3,

Ar³ and Ar⁴ are independently a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group,

L² is a single bond, a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group,

m₂ is 1,


n₂ is an integer ranging from 0 to 3,

R¹ to R³, R⁶ or R⁷ are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group, and

two *s of the above Chemical Formula 2 are bonded with the adjacent two *s of the above Chemical Formula 3 to form a fused ring.

3. The compound for an organic optoelectronic device of claim 1, wherein the compound for an organic optoelectronic device is represented by the following Chemical Formula 4:

[Chemical Formula 4]

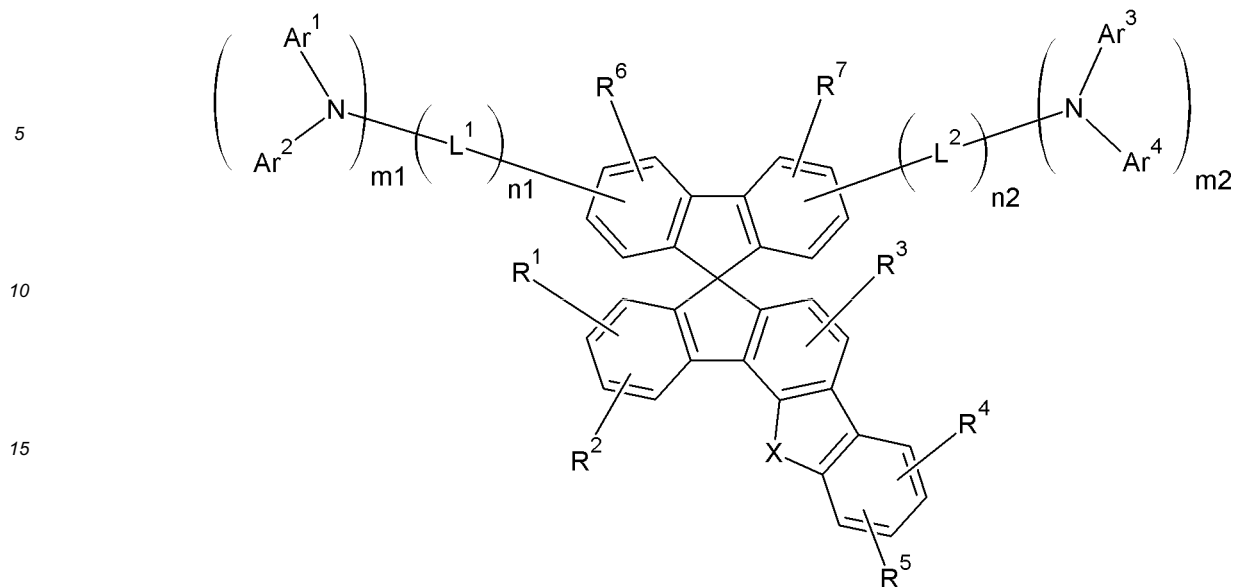

wherein, in the above Chemical Formula 4,

X is -O-, -S-, -S(O)-, or -S(O)₂-,

Ar¹ to Ar⁴ are independently a substituted or unsubstituted C₆ to C₃₀ aryl group, or a substituted or unsubstituted C₂ to C₃₀ heteroaryl group,

L¹ and L² are independently a single bond, a substituted or unsubstituted C₂ to C₁₀ alkenylene group, a substituted or unsubstituted C₂ to C₁₀ alkynylene group, a substituted or unsubstituted C₆ to C₃₀ arylene group, or a substituted or unsubstituted C₂ to C₃₀ heteroarylene group,


m₁ and m₂ are independently integers of 0 or 1, one of m₁ and m₂ is 1,

n₁ and n₂ are independently integers ranging from 0 to 3, and

R¹ to R⁷ are independently hydrogen, deuterium, a substituted or unsubstituted C₁ to C₁₀ alkyl group, a substituted or unsubstituted C₆ to C₃₀ aryl group, or a substituted or unsubstituted C₂ to C₃₀ heteroaryl group.

4. The compound for an organic optoelectronic device of claim 1, wherein the compound for an organic optoelectronic device is represented by the following Chemical Formula 5:

[Chemical Formula 5]

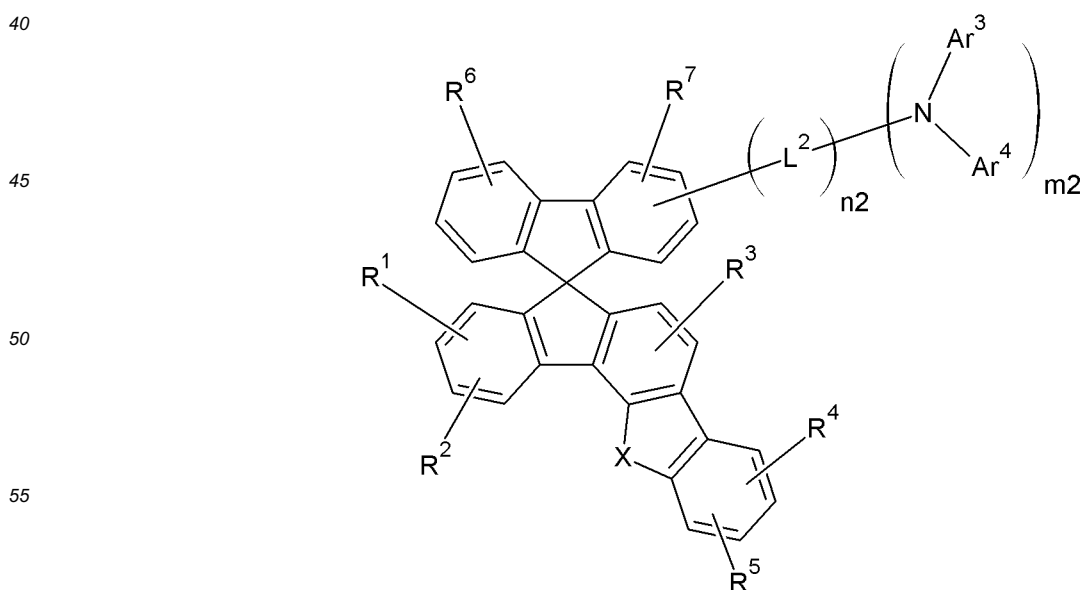

wherein, in the above Chemical Formula 5,

Ar³ and Ar⁴ are independently a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group,

L² is a single bond, a substituted or unsubstituted C2 to C10 alkenylene group, a substituted or unsubstituted C2 to C10 alkynylene group, a substituted or unsubstituted C6 to C30 arylene group, or a substituted or unsubstituted C2 to C30 heteroarylene group,

m₂ is 1,


n₂ is an integer ranging from 0 to 3, and

R¹ to R⁷ are independently hydrogen, deuterium, a substituted or unsubstituted C1 to C10 alkyl group, a substituted or unsubstituted C6 to C30 aryl group, or a substituted or unsubstituted C2 to C30 heteroaryl group.

5. The compound for an organic optoelectronic device of claim 1, wherein the Ar¹ to Ar⁴ are independently substituted or unsubstituted phenyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted anthracenyl group, a substituted or unsubstituted phenanthryl group, a substituted or unsubstituted naphthacenyl group, a substituted or unsubstituted pyrenyl group, a substituted or unsubstituted biphenyl group, a substituted or unsubstituted p-terphenyl group, a substituted or unsubstituted m-terphenyl group, a substituted or unsubstituted chrysenyl group, a substituted or unsubstituted triphenylenyl group, a substituted or unsubstituted perylenyl group, a substituted or unsubstituted indenyl group, a substituted or unsubstituted furanyl group, a substituted or unsubstituted thiophenyl group, a substituted or unsubstituted pyrrolyl group, a substituted or unsubstituted pyrazolyl group, a substituted or unsubstituted imidazolyl group, a substituted or unsubstituted triazolyl group, a substituted or unsubstituted oxazolyl group, a substituted or unsubstituted thiazolyl group, a substituted or unsubstituted oxadiazolyl group, a substituted or unsubstituted thiadiazolyl group, a substituted or unsubstituted pyridyl group, a substituted or unsubstituted pyrimidinyl group, a substituted or unsubstituted pyrazinyl group, a substituted or unsubstituted triazinyl group, a substituted or unsubstituted benzofuranyl group, a substituted or unsubstituted benzothiophenyl group, a substituted or unsubstituted benzimidazolyl group, a substituted or unsubstituted indolyl group, a substituted or unsubstituted quinolinyl group, a substituted or unsubstituted isoquinolinyl group, a substituted or unsubstituted quinazolinyl group, a substituted or unsubstituted quinoxalinyl group, a substituted or unsubstituted naphthyridinyl group, a substituted or unsubstituted benzoxazinyl group, a substituted or unsubstituted benzthiazinyl group, a substituted or unsubstituted acridinyl group, a substituted or unsubstituted phenazinyl group, a substituted or unsubstituted phenothiazinyl group, a substituted or unsubstituted phenoxazinyl group, or a combination thereof.
6. The compound for an organic optoelectronic device of claim 1, wherein the compound for an organic optoelectronic device is represented by one of the following Chemical Formulae A-1 to A-72:

[Chemical Formula A-1] [Chemical Formula A-2] [Chemical Formula A-3]


[Chemical Formula A-4]

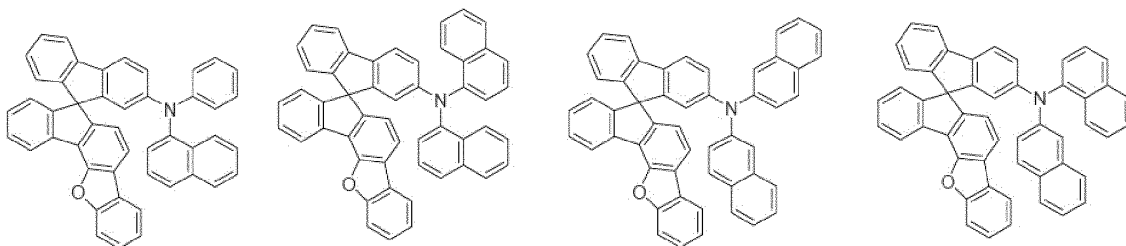

[Chemical Formula A-5] [Chemical Formula A-6] [Chemical Formula A-7]

[Chemical Formula A-8]

5

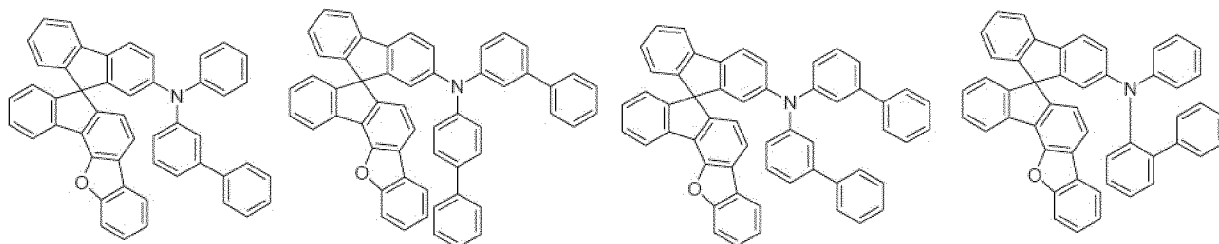


10

[Chemical Formula A-9] [Chemical Formula A-10] [Chemical Formula A-

11] [Chemical Formula A-12]

15

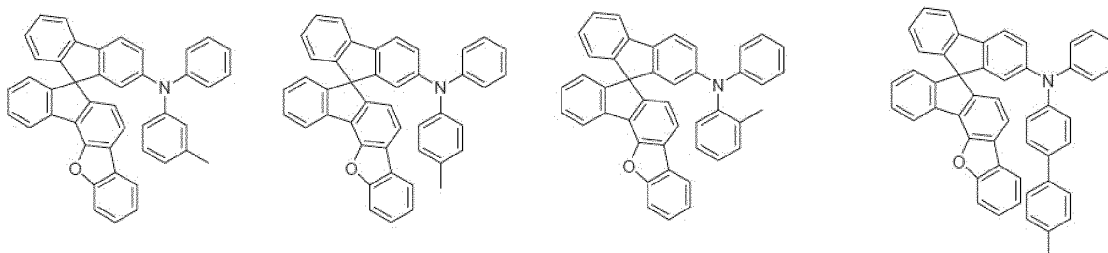


20

25

[Chemical Formula A-13] [Chemical Formula A-14] [Chemical Formula

A-15] [Chemical Formula A-16]

30

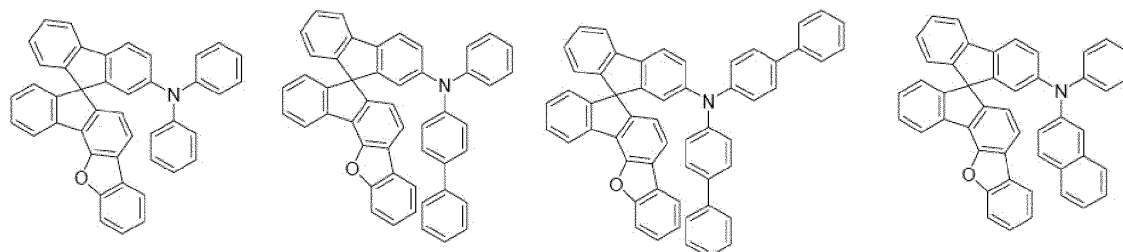


35

40

[Chemical Formula A-17] [Chemical Formula A-18] [Chemical Formula

A-19] [Chemical Formula A-20]

45

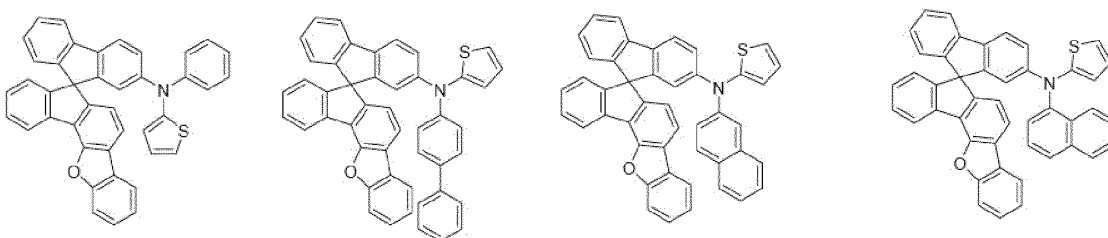


50

55

[Chemical Formula A-21] [Chemical Formula A-22] [Chemical Formula

A-23] [Chemical Formula A-24]

5

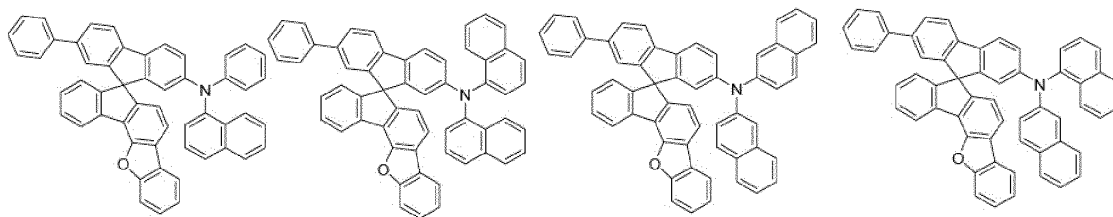


10

[Chemical Formula A-25] [Chemical Formula A-26] [Chemical Formula

A-27] [Chemical Formula A-28]

15

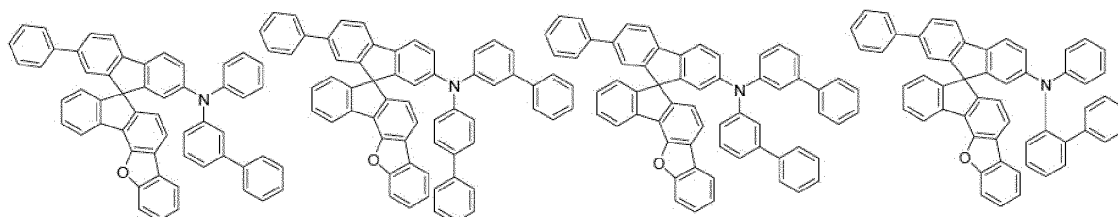


20

25

[Chemical Formula A-29] [Chemical Formula A-30] [Chemical Formula

A-31] [Chemical Formula A-32]

30

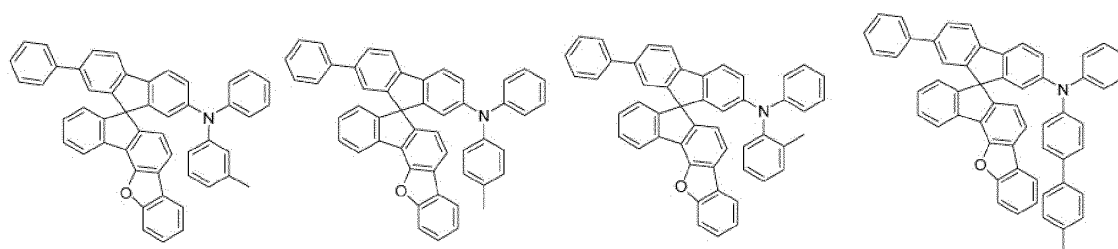


35

40

[Chemical Formula A-33] [Chemical Formula A-34] [Chemical Formula

A-35] [Chemical Formula A-36]

45

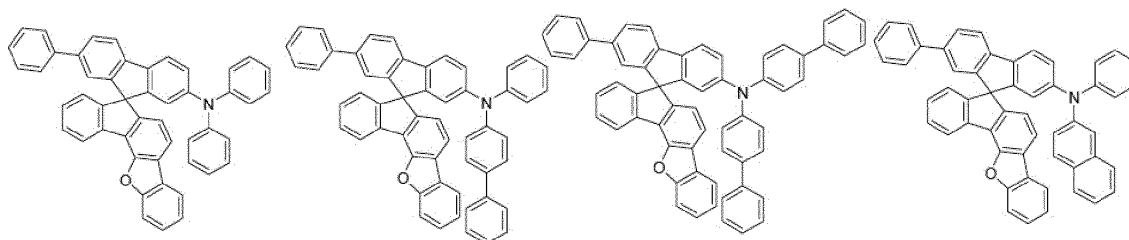

50


55

[Chemical Formula A-37] [Chemical Formula A-38] [Chemical Formula

A-39] [Chemical Formula A-40]

5

10

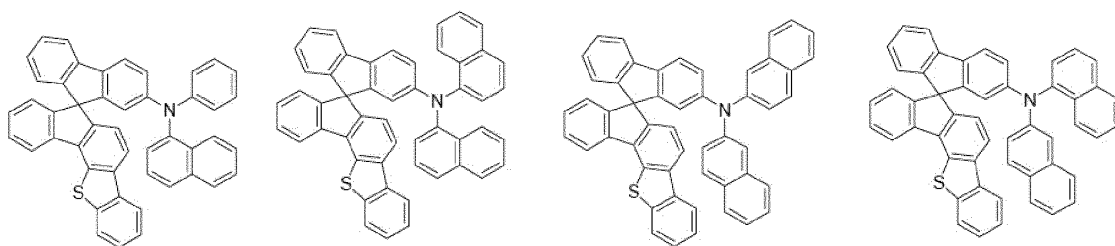


15

[Chemical Formula A-41] [Chemical Formula A-42] [Chemical Formula

A-43] [Chemical Formula A-44]

20

25

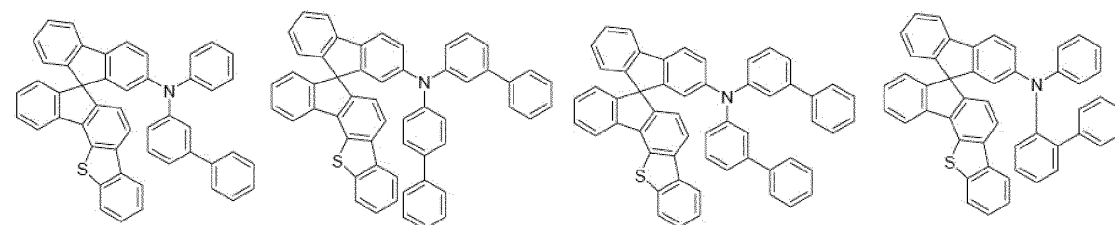


30

[Chemical Formula A-45] [Chemical Formula A-46] [Chemical Formula

A-47] [Chemical Formula A-48]

35

40

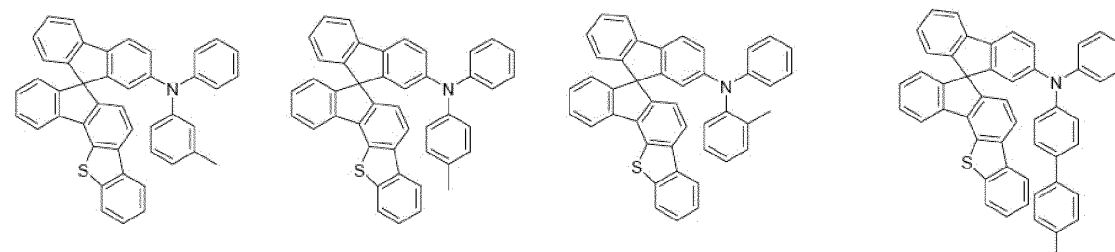


45

[Chemical Formula A-49] [Chemical Formula A-50] [Chemical Formula

A-51] [Chemical Formula A-52]

50

55

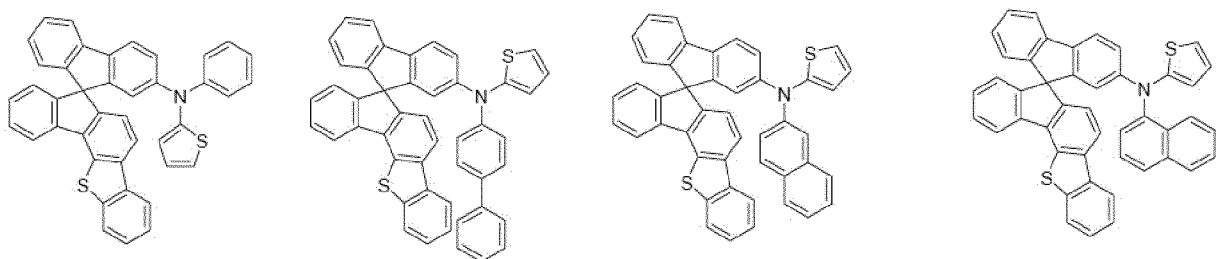


[Chemical Formula A-53] [Chemical Formula A-54] [Chemical Formula A-55] [Chemical Formula A-56]

5

10

15

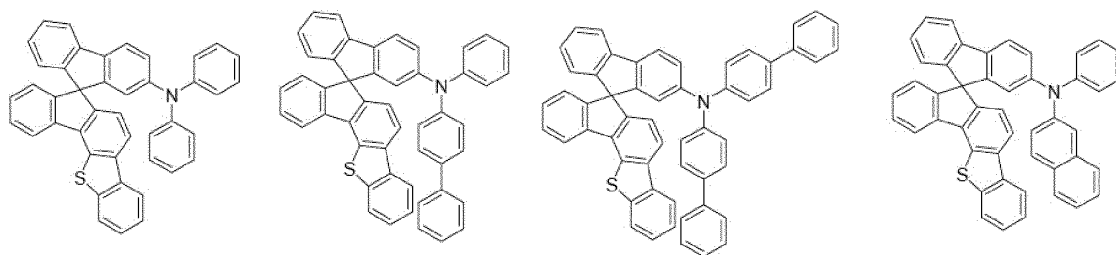


[Chemical Formula A-57] [Chemical Formula A-58] [Chemical Formula A-59] [Chemical Formula A-60]

20

25


30

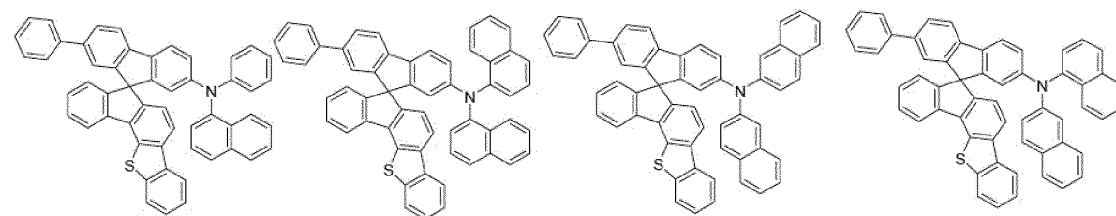

[Chemical Formula A-61] [Chemical Formula A-62] [Chemical Formula A-63] [Chemical Formula A-64]

35

40

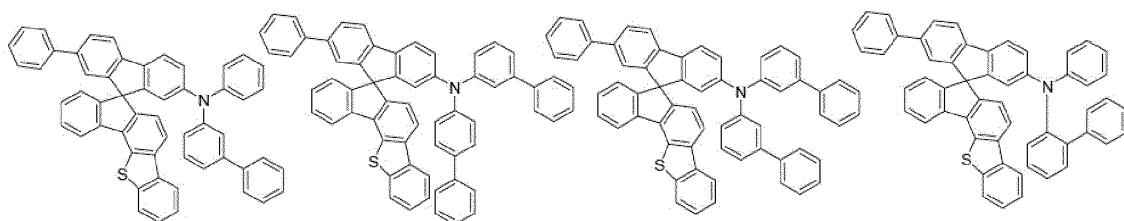


[Chemical Formula A-65] [Chemical Formula A-66] [Chemical Formula A-67] [Chemical Formula A-68]

45

50

55

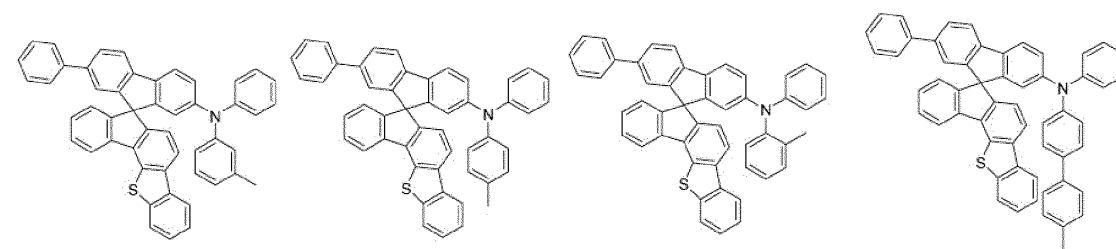

[Chemical Formula A-69] [Chemical Formula A-70] [Chemical Formula

A-71] [Chemical Formula A-72]

5

10

15

7. The compound for an organic optoelectronic device of claim 1, wherein the compound for an organic optoelectronic device is represented by one of the following Chemical Formulae B-1 to B-40:

[Chemical Formula B-1] [Chemical Formula B-2] [Chemical Formula B-3]

20

[Chemical Formula B-4]

25

30

35




[Chemical Formula B-5] [Chemical Formula B-6] [Chemical Formula B-7]

40

45

50

55

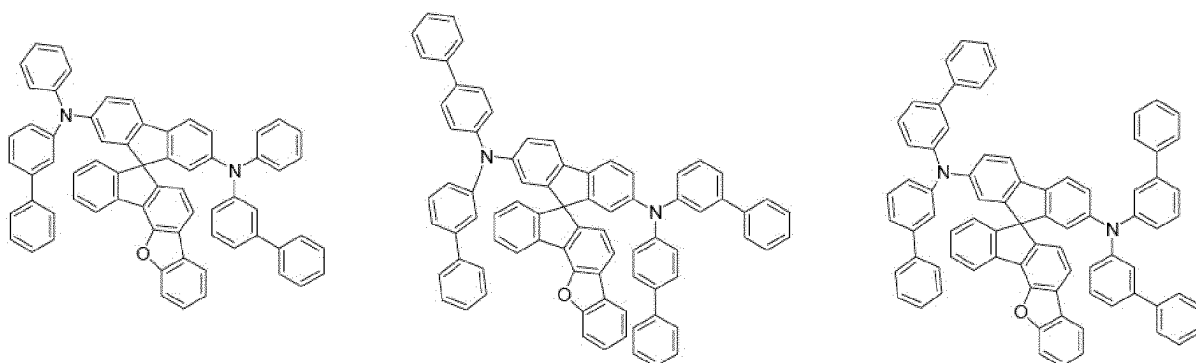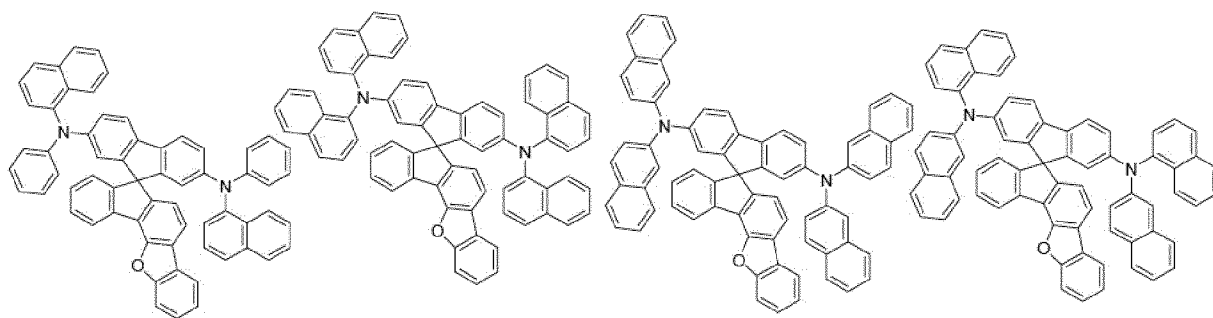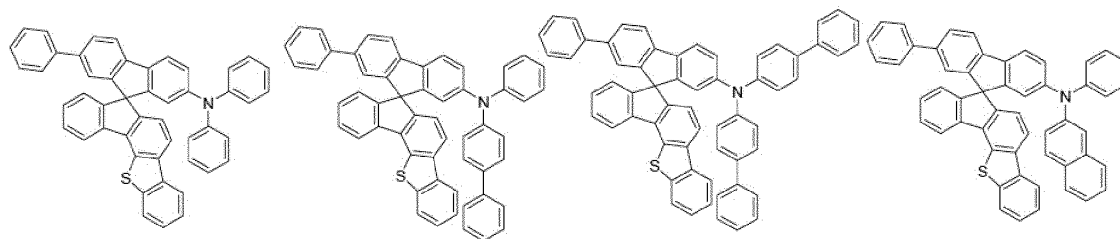




[Chemical Formula B-8] [Chemical Formula B-9] [Chemical Formula B-

10]

5

10

15






[Chemical Formula B-11] [Chemical Formula B-12] [Chemical Formula

20

B-13]

25

30



[Chemical Formula B-14] [Chemical Formula B-15] [Chemical Formula

35




B-16]

40

45

50

55

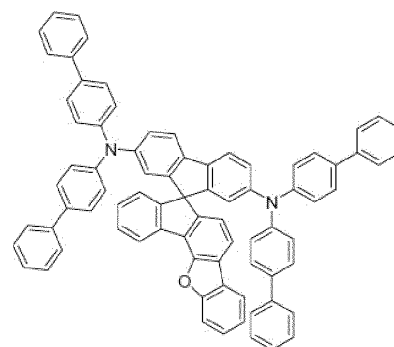


[Chemical Formula B-17] [Chemical Formula B-18] [Chemical Formula

B-19] [Chemical Formula B-20]

5

10

15

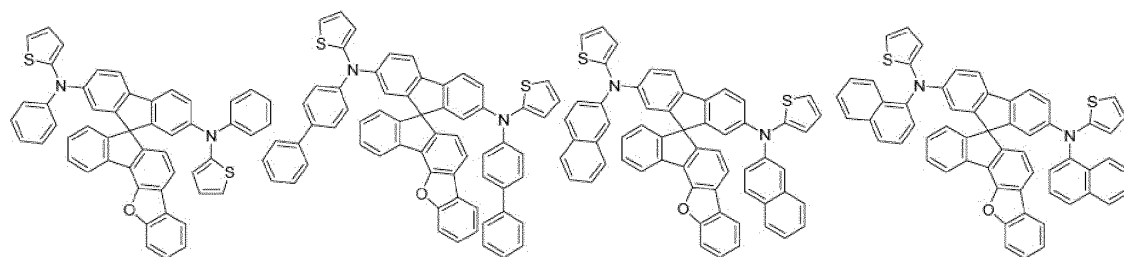


[Chemical Formula B-21] [Chemical Formula B-22] [Chemical Formula

B-23] [Chemical Formula B-24]

20

25

30

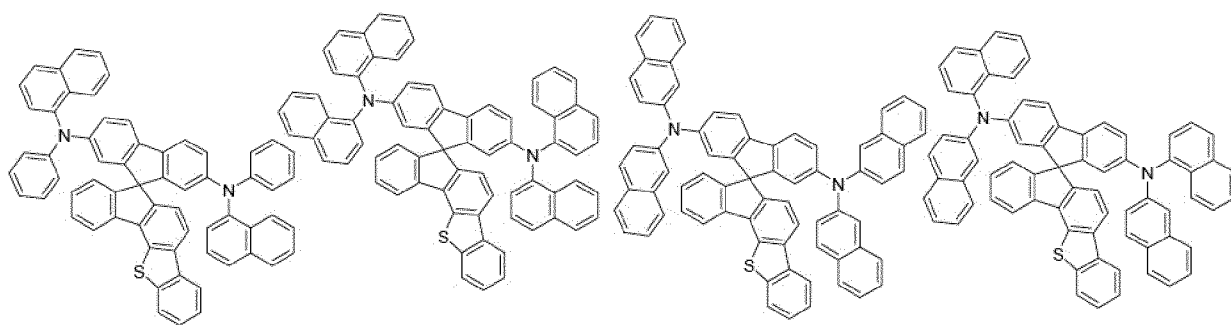

[Chemical Formula B-25] [Chemical Formula B-26] [Chemical Formula

B-27]


35

40

45

50

55

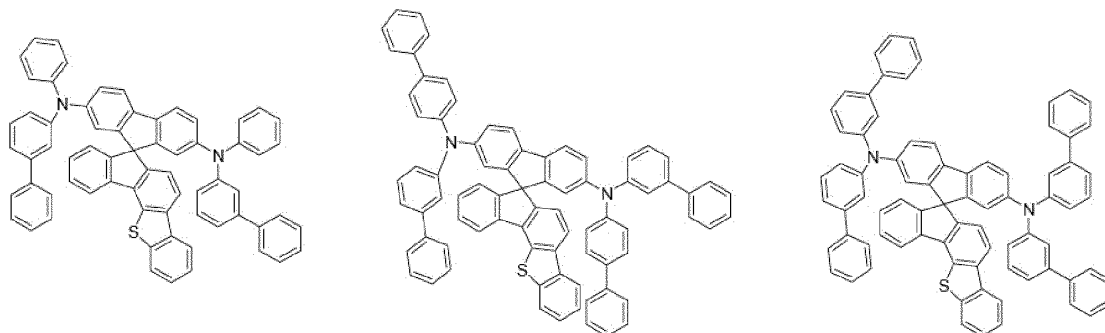




[Chemical Formula B-28] [Chemical Formula B-29] [Chemical Formula

B-30]

5

10

15






[Chemical Formula B-31] [Chemical Formula B-32] [Chemical Formula

20

B-33]

25

30



[Chemical Formula B-34] [Chemical Formula B-35] [Chemical Formula

35




B-36]

40

45


50

55

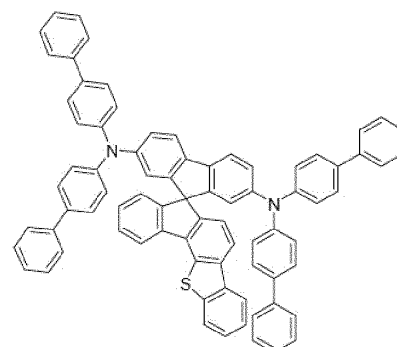

[Chemical Formula B-37] [Chemical Formula B-38] [Chemical Formula

B-39] [Chemical Formula B-40]

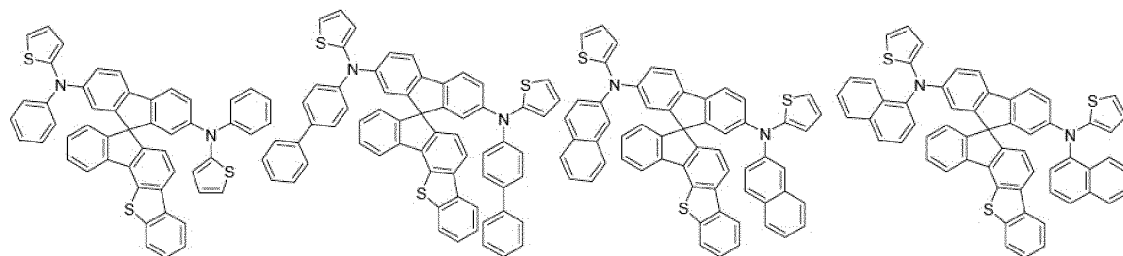

8. The compound for an organic optoelectronic device of claim 1, wherein the compound for an organic optoelectronic device has triplet exciton energy (T1) of greater than or equal to about 2.0 eV.
9. The compound for an organic optoelectronic device of claim 1, wherein the organic optoelectronic device is selected from an organic photoelectric device, an organic light emitting diode, an organic solar cell, an organic transistor, an organic photo-conductor drum, and an organic memory device.
10. An organic light emitting diode, comprising an anode, a cathode, and at least one organic thin layer interposed between the anode and cathode, wherein at least one of the organic thin layers comprises the above compound for an organic optoelectronic device of claim 1.
11. The organic light emitting diode of claim 10, wherein the organic thin layer is selected from an emission layer, a hole transport layer, a hole injection layer, an electron transport layer, an electron injection layer, a hole blocking layer, and a combination thereof.
12. The organic light emitting diode of claim 11, wherein the compound for an organic optoelectronic device is included in a hole transport layer (HTL) or a hole injection layer (HIL).
13. The organic light emitting diode of claim 11, wherein the compound for an organic optoelectronic device is included in an emission layer.
14. The organic light emitting diode of claim 13, wherein the compound for an organic optoelectronic device is used as a phosphorescent or fluorescent host material in an emission layer.
15. A display device comprising the above organic light emitting diode of claim 10.

FIG. 1

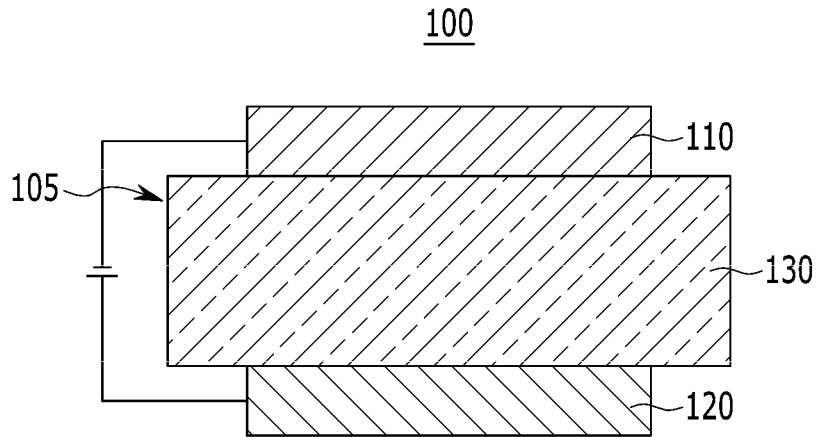


FIG. 2

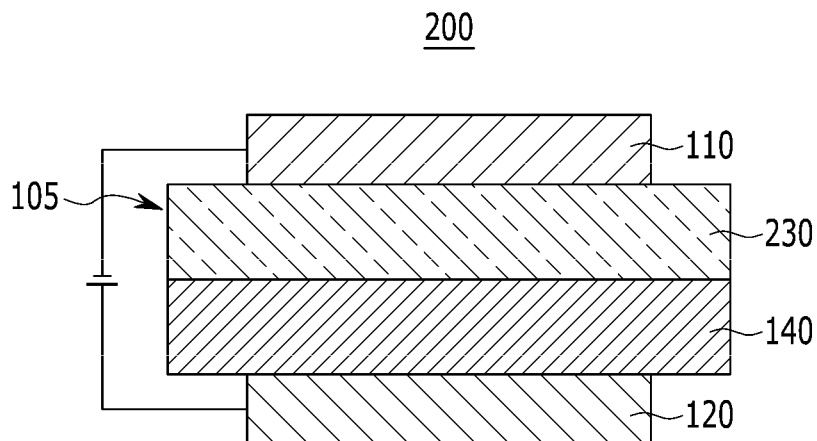


FIG. 3

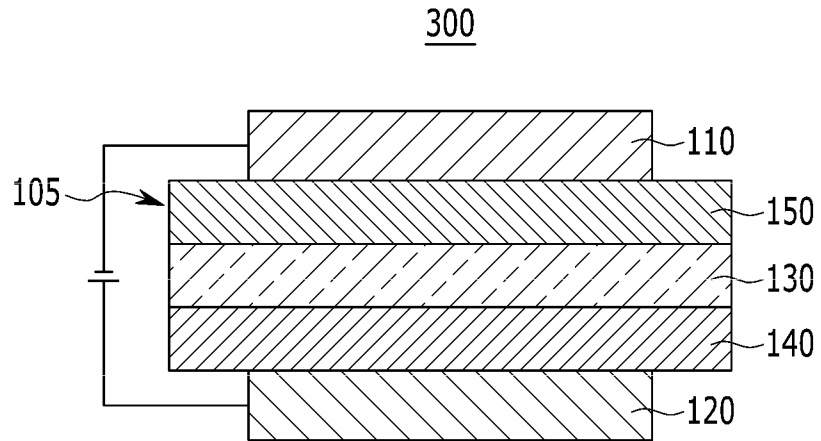


FIG. 4


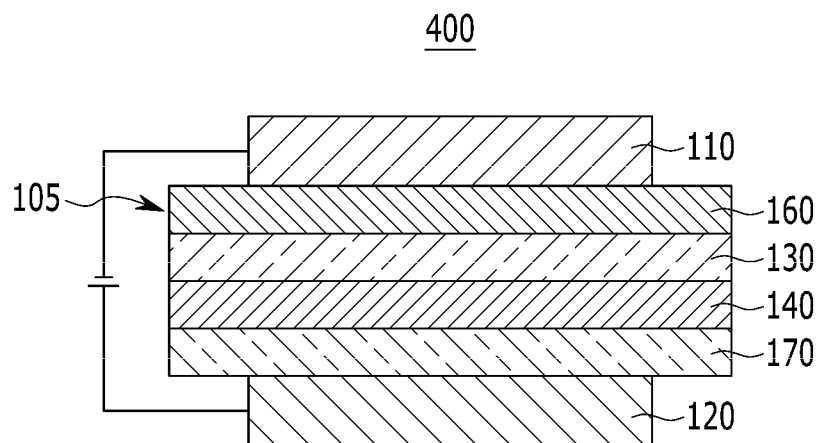


FIG. 5

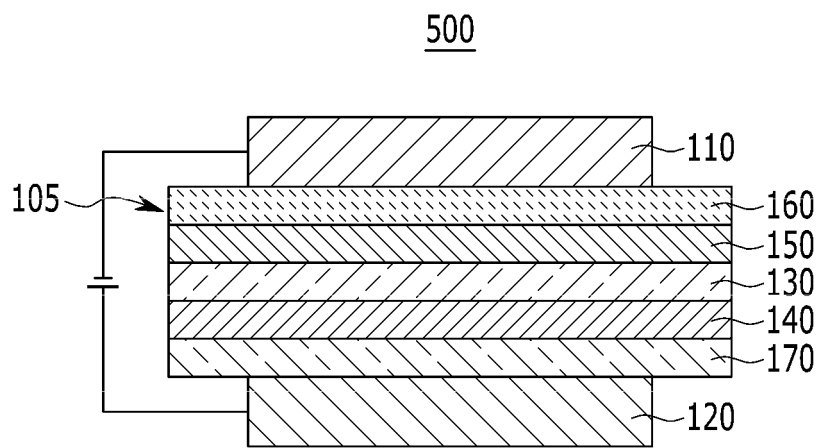

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR2012/011040

A. CLASSIFICATION OF SUBJECT MATTER

C09K 11/06(2006.01)i, C07D 307/91(2006.01)i, H01L 51/50(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C09K 11/06; C07D 487/04; C07D 235/08; H01L 51/54; C09B 57/00; C07D 209/86

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Utility models and applications for Utility models: IPC as above

Japanese Utility models and applications for Utility models: IPC as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS (KIPO internal) & Keywords: organic optoelectric device, OLED, organic light emitting diode, spiro fluorene.

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2011-000455 A1 (MERCK PATENT GMBH) 06 January 2011 See pages 19-32.	1-15
A	WO 2009-124627 A1 (MERCK PATENT GMBH) 15 October 2009 See formula (1).	1-15
A	WO 2009-057978 A2 (CHEIL INDUSTRIES INC.) 07 May 2009 See the entire document.	1-15
PA	KR 10-2012-0060611 A (CHEIL INDUSTRIES INC.) 12 June 2012 See [chemical formula d-3], [chemical formula d-4].	1-15

 Further documents are listed in the continuation of Box C.
 See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family


Date of the actual completion of the international search

26 MARCH 2013 (26.03.2013)

Date of mailing of the international search report

28 MARCH 2013 (28.03.2013)

Name and mailing address of the ISA/KR


 Korean Intellectual Property Office
 Government Complex-Daejeon, 189 Seonsa-ro, Daejeon 302-701,
 Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

Telephone No.

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/KR2012/011040

Patent document cited in search report	Publication date	Patent family member	Publication date
WO 2011-000455 A1	06.01.2011	CN 102471602 A	23.05.2012
		DE 102009031021 A1	05.01.2011
		KR 10-2012-0103551 A	19.09.2012
		TW 201127811 A	16.08.2011
		US 2012-0097899 A1	26.04.2012
WO 2009-124627 A1	15.10.2009	CN 101983190 A	02.03.2011
		DE 102008017591 A1	08.10.2009
		EP 2260023 A1	15.12.2010
		EP 2260023 B1	25.04.2012
		JP 2011-521894 A	28.07.2011
		KR 10-2010-0133467 A	21.12.2010
		TW 201004904 A	01.02.2010
		US 2011-0037027 A1	17.02.2011
		US 8361638 B2	29.01.2013
WO 2009-057978 A2	07.05.2009	CN 101809117 A	18.08.2010
		KR 10-0957620 B1	13.05.2010
		KR 10-2009-0044752 A	07.05.2009
		US 2010-0213826 A1	26.08.2010
		US 2012-0012830 A1	19.01.2012
		US 8120243 B2	21.02.2012
WO 2009-057978 A3	04.06.2009		
KR 10-2012-0060611 A	12.06.2012	WO 2012-074210 A2	07.06.2012
		WO 2012-074210 A3	26.07.2012

Form PCT/ISA/210 (patent family annex) (July 2009)

专利名称(译)	用于有机光电装置的化合物，包括其的有机发光二极管，以及包括有机发光二极管的显示装置		
公开(公告)号	EP2799515A4	公开(公告)日	2015-08-12
申请号	EP2012863091	申请日	2012-12-18
[标]申请(专利权)人(译)	第一毛织株式会社		
申请(专利权)人(译)	第一毛织INC.		
当前申请(专利权)人(译)	第一毛织INC.		
[标]发明人	HONG JIN SEOK JO YOUNG KYOUNG RYU DONG WAN LEE NAM HEON LEE HAN ILL JUNG SUNG HYUN CHAE MI YOUNG HUH DAL HO		
发明人	HONG, JIN-SEOK JO, YOUNG-KYOUNG RYU, DONG-WAN LEE, NAM-HEON LEE, HAN-ILL JUNG, SUNG-HYUN CHAE, MI-YOUNG HUH, DAL-HO		
IPC分类号	C09K11/06 C07D307/91 H01L51/50 H01L51/46 H01L51/54		
CPC分类号	H01L51/0058 C07D307/91 C09K11/06 C09K2211/1011 C09K2211/1014 C09K2211/1022 C09K2211/1088 C09K2211/1092 H01L51/0055 H01L51/0059 H01L51/006 H01L51/0061 H01L51/0073 H01L51/0074 H01L51/5012 H01L51/5048 H01L51/5056 H01L51/5072 H01L51/5088 H01L51/5092 H01L51/5096 H05B33/14 Y02E10/549 Y02P70/521		
代理机构(译)	MICHALSKI , STEFAN		
优先权	1020110147392 2011-12-30 KR		
其他公开文献	EP2799515A1 EP2799515B1		
外部链接	Espacenet		

摘要(译)

本发明公开了一种用于有机光电子器件的化合物，包括该化合物的有机发光二极管，以及包括该有机发光二极管的显示装置。由以下化学式1和化学式2的组合表示的用于有机光电子器件的化合物提供了由于优异的电化学和热稳定性而具有寿命特性的有机发光二极管，以及在低驱动电压下的高发光效率。

