



(11) **EP 2 863 446 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
01.02.2017 Bulletin 2017/05

(51) Int Cl.:
H01L 51/52^(2006.01) H01L 27/32^(2006.01)

(21) Application number: **14188721.6**

(22) Date of filing: **14.10.2014**

(54) **Flexible organic light emitting diode display and manufacturing method thereof**

Flexible organische lichtemittierende Diodenanzeige und Herstellungsverfahren dafür

Affichage à diodes électroluminescentes organiques flexibles et procédé de fabrication correspondant

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **15.10.2013 KR 20130122869
19.09.2014 KR 20140125183**

(43) Date of publication of application:
22.04.2015 Bulletin 2015/17

(73) Proprietor: **Samsung Display Co., Ltd.
Gyeonggi-do (KR)**

(72) Inventor: **Ahn, Chi Wook
Hwaseong-si (KR)**

(74) Representative: **Gulde & Partner
Patent- und Rechtsanwaltskanzlei mbB
Wallstraße 58/59
10179 Berlin (DE)**

(56) References cited:
**EP-A1- 2 445 028 CN-A- 103 022 354
US-A1- 2007 196 682**

EP 2 863 446 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description**BACKGROUND****1. Field**

[0001] The described technology relates generally to a flexible organic light emitting diode display and a manufacturing method thereof, and more particularly, to a flexible organic light emitting diode display having a thin film encapsulation layer structure including a plurality of inorganic and organic layers.

2. Description of the Related Art

[0002] An organic light emitting diode (OLED) display includes organic light emitting diodes (OLEDs), each of which includes a hole injection electrode, an organic emission layer, and an electron injection electrode.

[0003] Each OLED emits light using (utilizing) energy generated when electrons and holes are combined to create excitons in the organic emission layer and the excitons fall from an excited state to a ground state.

[0004] When a substrate of an OLED display including OLEDs is formed of a flexible film (such as a polyimide or the like), the OLED display can be easily bendable and is advantageous in forming a slim structure.

[0005] When the flexible OLED display is bent, stress occurs, specifically, tensile stress occurs at its convex outer side and compressive stress occurs at its concave inner side, and a neutral plane NP at which no stress occurs is present in an intermediate region therebetween.

[0006] A picture abnormality does not occur in the OLED display when (e.g., only when) the OLEDs are positioned at (e.g., in) the neutral plane.

[0007] However, when the thickness of the organic light emitting diode display is increased by internal and external films such as a polarizing film and a passivation film attached to the organic light emitting diode display, the tensile stress and the compressive stress are increased such that the neutral plane becomes narrow, thereby making it difficult to position the organic light emitting element at the neutral plane.

[0008] Further, the OLED display has a structure in which composite materials are layered and thus asymmetry of strains occurs due to a difference between tensile stress and compressive stress that are applied to outer and inner sides of a bent portion. Accordingly, it is difficult to position the OLED at the neutral plane, thereby causing display defects.

[0009] In addition, when the OLED display is bent, a moisture permeation path may be created in a display area through cracks formed due to excessive stress. Also, deformation of organic and inorganic layers forming a thin film encapsulation layer may cause deformation of the display area or other defects. EP 2 445 028 A1 concerns an opto-electric device having a lateral diffusion layer comprising a patterned inorganic layer and organic material deposited on the patterned inorganic layer.

SUMMARY

[0010] An aspect of an embodiment of the described technology has been made in an effort to provide a flexible organic light emitting diode (OLED) display having advantages of preventing or reducing cracks from being generated at inorganic layers of a thin film encapsulation layer and/or preventing or reducing moisture permeation into the display area from the thin film encapsulation layer when the flexible OLED display is bent or folded.

[0011] A flexible organic light emitting diode (OLED) display according to an exemplary embodiment includes: a substrate; an organic light emitting diode (OLED) layer provided on the substrate; and a thin film encapsulation layer provided on the OLED layer. The thin film encapsulation layer includes: a plurality of laminated inorganic layers, at least one inorganic layer of the plurality of inorganic layers including a plurality of inorganic layer patterns that are disposed to be spaced apart from each other on a plane; and an organic layer formed between the plurality of inorganic layer patterns.

[0012] In the flexible OLED display, the at least one inorganic layer, the plurality of inorganic layer patterns, and the organic layer are respectively a first inorganic layer, first inorganic layer patterns, and a first organic layer, and a second inorganic layer is disposed on the first organic layer and include a plurality of second inorganic layer patterns that are disposed between the first inorganic layer patterns to be spaced apart from each other.

[0013] The flexible OLED display further includes: a second organic layer disposed between the plurality of second inorganic layer patterns; and a third inorganic layer disposed on the second organic layer and including a plurality of third inorganic layer patterns that are disposed between the second inorganic layer patterns to be spaced apart from each other.

[0014] The first and second inorganic layer patterns partially contact each other.

[0015] The plurality of inorganic layers may be disposed above an organic emission layer of the organic light emitting

diode layer.

[0016] The plurality of inorganic layers may contact each other through the inorganic layer patterns of the inorganic layers of the respective different layers.

[0017] The plurality of inorganic layer patterns may be formed in a matrix form in which a square shape is repeatedly disposed on a plane.

[0018] The plurality of inorganic layer patterns may be formed in a matrix form in which a circular shape is repeatedly disposed on a plane.

[0019] The plurality of inorganic layer patterns may be formed in a matrix form in which a rectangular shape is repeatedly disposed on a plane.

[0020] The plurality of inorganic layer patterns may be arranged in a direction along which the substrate is bendable.

[0021] The plurality of inorganic layer patterns may be formed in a matrix form in which a triangular pyramidal shape is repeatedly disposed.

[0022] The plurality of inorganic layer patterns may respectively have different sizes in a bending region where the substrate is bent and in an unbending region where the substrate is not bent.

[0023] A manufacturing method of a flexible OLED display according to the exemplary embodiment includes: forming an OLED layer including an anode coupled to a transistor, an organic emission layer on the anode, and a cathode on the organic emission layer, on a substrate, and forming a thin film encapsulation layer on the OLED layer. The forming of the thin film encapsulation layer includes: a first deposition act of depositing a first inorganic layer on the OLED layer; a first etching act of patterning the first inorganic layer to include a plurality of first inorganic layer patterns that are disposed to be spaced apart from each other; a second deposition act of depositing a first organic layer between the patterned first inorganic layer patterns using (utilizing) a first mask; a third deposition act of depositing a second inorganic layer on the first organic layer; and a second etching act of patterning the second inorganic layer to include a plurality of second inorganic layer patterns that are disposed between the first inorganic layer patterns to be spaced apart from each other.

[0024] The manufacturing method of the flexible OLED display according to the exemplary embodiment may further include, after the second etching act: a fourth deposition act of depositing a second organic layer between the patterned second inorganic layer patterns; a fifth deposition act of depositing a third inorganic layer on the second organic layer; and a third etching act of patterning the third inorganic layer to include a plurality of third inorganic layer patterns that are disposed to be spaced apart from each other.

[0025] According to the exemplary embodiments, when the flexible OLED display is bent or folded, the stress of the inorganic layers are alleviated by the inorganic layer patterns of the inorganic layers of the thin film encapsulation layer, thereby preventing the cracks from being generated at the inorganic layer and/or the moisture permeation into the display area from the thin film encapsulation layer.

BRIEF DESCRIPTION OF THE DRAWINGS

[0026]

FIG. 1 is a layout view of a pixel structure of a flexible organic light emitting diode (OLED) display according to an exemplary embodiment.

FIG. 2 is a drawing showing a cross-section of the OLED display taken along the line II-II of FIG. 1.

FIG. 3 is a schematic cross-sectional view of the OLED display according to the exemplary embodiment.

FIG. 4 is a schematic cross-sectional view of one example of a substrate according to an exemplary embodiment of the present invention.

FIG. 5 is a schematic cross-sectional view of a thin film encapsulation layer according to a further exemplary embodiment.

FIG. 6 is a schematic top plan view of a thin film encapsulation layer of FIG. 3.

FIG. 7 is a schematic top plan view of the thin film encapsulation layer of FIG. 5.

FIG. 8 is a schematic cross-sectional view of a thin film encapsulation layer according to a further exemplary embodiment.

FIG. 9 is a schematic cross-sectional view of a thin film encapsulation layer according to a further exemplary embodiment.

FIG. 10 is a schematic top plan view of the thin film encapsulation layer of FIG. 8.

FIG. 11 is a schematic top plan view of the thin film encapsulation layer of FIG. 9.

FIG. 12 is a schematic cross-sectional view of a thin film encapsulation layer according to a further exemplary embodiment.

FIG. 13 is a schematic top plan view of the thin film encapsulation layer of FIG. 12.

FIG. 14 is a schematic cross-sectional view of a thin film encapsulation layer according to a further exemplary

embodiment.

FIG. 15 is a schematic top plan view of the thin film encapsulation layer of FIG. 14.

FIG. 16 is a schematic cross-sectional view of a thin film encapsulation layer according to a further exemplary embodiment.

FIG. 17 is a schematic top plan view of the thin film encapsulation layer of FIG. 16.

FIG. 18 is a schematic cross-sectional view of a thin film encapsulation layer according to a further exemplary embodiment.

DETAILED DESCRIPTION

[0027] The present invention will be described more fully hereinafter with reference to the accompanying drawings, in which exemplary embodiments of the invention are shown.

[0028] As those skilled in the art would realize, the described embodiments may be modified in various different ways, all without departing from the scope of the present invention as set forth in the claims.

[0029] Further, in exemplary embodiments, since like reference numerals designate like elements having the same configuration, a first exemplary embodiment is representatively described, and in other exemplary embodiments, only different configurations from the first exemplary embodiment will be described.

[0030] The drawings are schematic and are not illustrated in accordance with a scale.

[0031] The relative sizes and ratios of the parts in the drawings are exaggerated or reduced for clarity and convenience, and the arbitrary sizes are only exemplary and are not limiting.

[0032] The same structures, elements, or parts illustrated in no less than two drawings are denoted by the same reference numerals in order to represent similar characteristics.

[0033] When a part is referred to as being "on" another part, it can be directly on the other part or one or more intervening parts may also be present. In contrast, when an element or layer is referred to as being "directly on", there are no intervening elements or layers present.

[0034] Exemplary embodiments specifically show one exemplary embodiment. As a result, various modifications of the drawings are anticipated.

[0035] It will be understood that, although the terms "first", "second", "third", etc., may be used herein to describe various elements, components, regions, layers and/or sections, these elements, components, regions, layers and/or sections should not be limited by these terms. These terms are only used to distinguish one element, component, region, layer or section from another element, component, region, layer or section. Thus, a first element, component, region, layer or section discussed below could be termed a second element, component, region, layer or section, without departing from the scope of the inventive concept as set forth in the claims.

[0036] Spatially relative terms, such as "beneath", "below", "lower", "under", "above", "upper" and the like, may be used herein for ease of description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. It will be understood that the spatially relative terms are intended to encompass different orientations of the device in use or in operation, in addition to the orientation depicted in the figures. For example, if the device in the figures is turned over, elements described as "below" or "beneath" or "under" other elements or features would then be oriented "above" the other elements or features. Thus, the example terms "below" and "under" can encompass both an orientation of above and below. The device may be otherwise oriented (e.g., rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein should be interpreted accordingly. In addition, it will also be understood that when a layer is referred to as being "between" two layers, it can be the only layer between the two layers, or one or more intervening layers may also be present.

[0037] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the inventive concept. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof. As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items. Expressions such as "at least one of," when preceding a list of elements, modify the entire list of elements and do not modify the individual elements of the list. Further, the use of "may" when describing embodiments of the inventive concept refers to "one or more embodiments of the inventive concept." Also, the term "exemplary" is intended to refer to an example or illustration.

[0038] It will be understood that when an element or layer is referred to as being "connected to", "coupled to", or "adjacent to" another element or layer, it can be directly connected to, coupled to, or adjacent to the other element or layer, or one or more intervening elements or layers may be present. In contrast, when an element or layer is referred to as being "directly connected to", "directly coupled to", or "immediately adjacent to" another element or layer, there are no intervening elements or layers present.

[0039] As used herein, the term "substantially," "about," and similar terms are used as terms of approximation and not as terms of degree, and are intended to account for the inherent deviations in measured or calculated values that would be recognized by those of ordinary skill in the art.

[0040] Accordingly, the exemplary embodiments are not limited to certain forms of the regions illustrated, but may include forms that are modified through manufacturing, for example.

[0041] A flexible organic light emitting diode (OLED) display according to an exemplary embodiment will now be described with reference to FIGS. 1 to 4.

[0042] FIG. 1 is a layout view of a pixel structure of a flexible organic light emitting diode (OLED) display according to an exemplary embodiment, and FIG. 2 is a drawing showing a cross-section of the OLED display taken along the line II-II of FIG. 1.

[0043] Referring to FIG. 1 and 2, the OLED display includes a pixel circuit and an organic light emitting diode (OLED) that are formed in each pixel.

[0044] In one embodiment, each pixel circuit includes a switching thin film transistor 50, a driving thin film transistor 60, and a capacitor 70.

[0045] In addition, the flexible OLED display includes: a gate line 81 that extends along a first direction; and a data line 82 and a driving voltage line 83 that are insulated from the gate line 81 and extend along a second direction crossing the first direction.

[0046] In this case, one pixel may be defined by a boundary of the gate line 81, the data line 82, and the driving voltage line 83, but it is not necessarily limited thereto.

[0047] Each pixel is a basic unit for displaying an image, and the flexible OLED display displays the image using (utilizing) a plurality of pixels.

[0048] In FIGS. 1 and 2, an active matrix flexible display device having a 2Tr-1 Cap structure where two thin film transistors 50 and 60 and one capacitor 70 are provided in one pixel is illustrated, but the structure of the flexible OLED display is not limited to the illustrated example.

[0049] The flexible OLED display may include three or more thin film transistors and two or more capacitors, and additional wires may be further formed therein to have various suitable structures.

[0050] The OLED includes an anode 91, an organic emission layer 92, and a cathode 93.

[0051] One of the anode 91 and the cathode 93 is a hole injection electrode, and the other is an electron injection electrode.

[0052] Light is emitted when electrons and holes are injected into the organic emission layer 92 from the anode 91 and the cathode 93 and excitons in which holes and electrons are combined fall from an excited state to a ground state.

[0053] The anode 91 may be formed of a metal having high reflectance, and the cathode 93 may be formed of a transparent conductive layer.

[0054] In this case, light of the organic emission layer 92 is reflected by the anode 91, and passes through the cathode 93 and a thin film encapsulation layer 30 to be emitted outside.

[0055] The capacitor 70 includes a pair of capacitor electrodes 71 and 72 that are disposed while interposing an interlayer insulating layer 85 therebetween as a dielectric material.

[0056] Capacitance of the capacitor 70 is determined by charges stored in the capacitor 70 and a voltage between the capacitor electrodes 71 and 72.

[0057] The switching thin film transistor 50 includes a switching semiconductor layer 51, a switching gate electrode 52, a switching source electrode 53, and a switching drain electrode 54.

[0058] The driving thin film transistor 60 includes a driving semiconductor layer 61, a driving gate electrode 62, a driving source electrode 63, and a driving drain electrode 64.

[0059] The switching thin film transistor 50 is used (utilized) as a switching element for selecting pixels that are desired to emit light.

[0060] The gate electrode 52 is coupled to the gate line 81.

[0061] The switching source electrode 53 is coupled to the data line 82, and the switching drain electrode 54 is coupled to one capacitor electrode (i.e., the capacitor electrode 71).

[0062] The driving thin film transistor 60 applies a driving power for allowing the organic emission layer 92 of the selected pixel to emit light to the anode 91.

[0063] The driving gate electrode 62 is coupled to the capacitor electrode 71 that is coupled to the switching drain electrode 54.

[0064] The driving source electrode 63 and the other capacitor electrode 72 are coupled to the driving voltage line 83.

[0065] The driving drain electrode 64 is coupled to the anode 91 of the OLED through a contact opening (e.g., hole).

[0066] The switching thin film transistor 50 is operated by a gate voltage that is applied to the gate line 81, and transmits a data voltage applied to the data line 82 to the driving thin film transistor 60.

[0067] A voltage corresponding to a difference between a common voltage applied to the driving thin film transistor 60 from the driving voltage line 83 and the data voltage provided from the switching thin film transistor 50 is stored in

the capacitor 70, and a current corresponding to the voltage stored in the capacitor 70 flows into the OLED through the driving thin film transistor 60, thereby allowing the organic emission layer 92 to emit light.

[0068] FIG. 3 is a schematic cross-sectional view of the OLED display according to the exemplary embodiment.

[0069] Referring to FIG. 3, the flexible OLED display may include the thin film encapsulation layer 30 above an organic light emitting diode (OLED) layer 20.

[0070] The thin film encapsulation layer 30 includes a plurality of laminated inorganic layers 35 and 37, at least one of the plurality of inorganic layers 35 and 37 includes a plurality of inorganic layer patterns that are disposed to be spaced apart from each other on a plane, and an organic layer 36 may be formed between the plurality of inorganic layer patterns.

[0071] The thin film encapsulation layer 30 covering the OLED layer 20 prevents (or blocks) external oxygen and moisture from flowing into the OLED to protect it.

[0072] Each inorganic layer may be a single layer or laminated layers (stacked in a thickness direction) including a metal oxide or a metal nitride.

[0073] For example, the inorganic layer may be formed of a ceramic material such as a SiNx, a SiOx, a SiOxNy, etc., and/or may be formed of a transparent material such as Al₂O₃, TiO₂, MgO, CrO, etc.

[0074] In addition, the organic layer may be formed of a polymer, and may be, for example, a single layer or laminated layers formed of any one of polyethylene terephthalate, polyimide, polycarbonate, epoxy, polyethylene, and polyacrylate.

[0075] Also, a functional layer 25 may be further provided between the OLED layer 20 and the thin film encapsulation layer 30, and the functional layer 25 may be further included as a capping layer for protecting the OLED layer 20 or controlling light efficiency, and/or as a lithium fluoride (LiF) layer for preventing plasma damage by ions and/or controlling light efficiency.

[0076] A halogenated metal layer including lithium fluoride may prevent or protect the organic emission layer from being damaged when the inorganic layers 35 and 37 are formed using (utilizing) a sputtering method and/or a plasma deposition method.

[0077] Specifically and referring also to FIG. 6, the thin film encapsulation layer 30 includes a first inorganic layer 35 provided above the OLED layer 20 and including a plurality of first inorganic layer patterns 35' that are disposed to be spaced apart from each other, a first organic layer 36 disposed between the plurality of first inorganic layer patterns 35', and a second inorganic layer 37 disposed on the first organic layer 36 and including a plurality of second inorganic layer patterns 37' that are disposed to be spaced apart from each other.

[0078] That is, the thin film encapsulation layer 30 may consist of two inorganic layers 35 and 37 and one organic layer 36.

[0079] The organic layer 36 may be formed by filling an organic material such as an epoxy, an acryl, a PI-based material, etc. between the first inorganic layer patterns 35'.

[0080] In addition, the first and second inorganic layer patterns 35' and 37' may be disposed above the organic emission layer of the OLED layer, that is, in a display area.

[0081] FIG. 6 is a schematic top plan view of the thin film encapsulation layer of FIG. 3.

[0082] Referring to FIGS. 3 and 6, the first and second inorganic layer patterns 35' and 37' may partially contact each other in vertical and horizontal directions.

[0083] That is, edge portions of the first and second inorganic layer patterns 35' and 37' contact each other in the vertical direction (thickness direction) and partially overlap each other in the horizontal direction.

[0084] Accordingly, the first and second inorganic layer patterns 35' and 37' are configured such that they are coupled to each other through the inorganic layer patterns of the inorganic layers of the respective different layers.

[0085] In FIGS. 3 and 6, the inorganic layer consisting of two layers is exemplarily illustrated, but an inorganic layer consisting of three or more layers may be possible.

[0086] In addition, the first and second inorganic layer patterns 35' and 37' may be formed as a matrix form in which an overall square shape (e.g., a square hexahedral) is repeatedly disposed on a plane.

[0087] Also, the flexible substrate 10 may include a flexible plastic material, but is not limited thereto. The flexible substrate 10 may include a metallic substrate formed of stainless steel or the like, or various flexible materials may be used (utilized).

[0088] The flexible substrate 10 may include a plastic material with excellent thermal resistance and durability such as polyethylene ether phthalate, polyethylene naphthalate, polycarbonate, polyarylate, polyetherimide, polyether sulfone, polyimide, etc.

[0089] FIG. 4 is a schematic cross-sectional view of one example of the substrate according to the present invention.

[0090] Referring to FIG. 4, the substrate 10 according to an embodiment of the present invention includes, below a low temperature polysilicon (LTPS) layer 9, inorganic barrier layers 7 and 8, organic layers (e.g., polyimide layers) 3 and 6, and an amorphous silicon layer 5.

[0091] Specifically, the OLED layer 20 may be formed on the LTPS layer 9, and the inorganic layers such as SiNx and SiOx may be formed as the barrier layers 7 and 8.

[0092] Below the barrier layers 7 and 8, the organic layer 6 such as polyimide, the amorphous silicon layer 5, a SiOx

layer 4, and the polyimide layer 3 may be sequentially downwardly laminated (i.e., downwardly stacked in a thickness direction).

[0093] In addition, a lower protection film 2 may be attached to a bottom of the polyimide layer 3.

[0094] FIG. 5 is a schematic cross-sectional view of a thin film encapsulation layer according to a further exemplary embodiment, and FIG. 7 is a schematic top plan view of the thin film encapsulation layer of FIG. 5.

[0095] Referring to FIGS. 5 and 7, a second organic layer 38 and a third inorganic layer 39 may be further included in the thin film encapsulation layer structure of FIG. 3.

[0096] The second organic layer 38 is disposed between the plurality of second inorganic layer patterns 37', and the third inorganic layer 39 may include a plurality of third inorganic layer patterns 39' that are disposed on the second organic layer 38 and between the second inorganic layer patterns 37' to be spaced apart from each other.

[0097] Like the exemplary embodiment of FIG. 3, the second and third inorganic layer patterns 37' and 39' may partially contact each other in vertical and horizontal structures.

[0098] In addition, the second and third inorganic layer patterns 37' and 39' may be formed in a matrix form in which overall square shapes are repeatedly disposed on a plane.

[0099] FIG. 8 is a schematic cross-sectional view of a thin film encapsulation layer according to a further exemplary embodiment, and FIG. 10 is a schematic top plan view of the thin film encapsulation layer of FIG. 8.

[0100] Referring to FIGS. 8 and 10, first inorganic layer patterns 135' and second inorganic layer patterns 137' may be formed in a matrix form in which a circular shape (e.g., a circular semispherical shape) is repeatedly disposed on a plane.

[0101] In addition, the first and second inorganic layer patterns 135' and 137' may have a substantially semicircular shape in a vertical direction (thickness direction).

[0102] Similarly, the first and second inorganic layer patterns 135' and 137' may partially contact each other and may be formed in a matrix form in which they are repeatedly disposed on a plane.

[0103] FIGS. 9 and 11 are drawings schematically showing the thin film encapsulation layer structure in which a third inorganic layer with third inorganic layer patterns 139' are further included in the structure of FIGS. 8 and 10.

[0104] Referring to FIGS. 9 and 11, a second organic layer 138 and a third inorganic layer 139 may be further included in the thin film encapsulation layer structure of FIG. 8.

[0105] The second organic layer 138 is disposed between the plurality of second inorganic layer patterns 137', and the third inorganic layer 139 may include the plurality of third inorganic layer patterns 139' that are disposed on the second organic layer 138 and between the second inorganic layer patterns 137' to be spaced apart from each other.

[0106] Like the aforementioned exemplary embodiment, the second and third inorganic layer patterns 137' and 139' may partially contact each other, and may be formed in a matrix form in which they are repeatedly disposed on a plane.

[0107] FIG. 12 is a schematic cross-sectional view of a thin film encapsulation layer according to a further exemplary embodiment, and FIG. 13 is a schematic top plan view of the thin film encapsulation layer of FIG. 12.

[0108] Referring to FIGS. 12 and 13, the thin film encapsulation layer may include: a first inorganic layer 235 including a plurality of first inorganic layer patterns 235' that are disposed to be spaced apart from each other; a first organic layer 236 disposed between a plurality of first inorganic layer patterns 235'; and a second inorganic layer 237 disposed on the first organic layer 236 and including a plurality of second inorganic layer patterns 237' that are disposed between the first inorganic layer patterns 235' to be spaced apart from each other.

[0109] The first and second inorganic layer patterns 235' and 237' may be formed in a matrix form in which a rectangular shape (e.g., a rectangular hexahedral) is repeatedly disposed on a plane.

[0110] In addition, the plurality of first and second inorganic layer patterns 235' and 237' may be arranged in a direction along which the substrate 10 is bendable.

[0111] Since the inorganic layer patterns 235' and 237' are repeatedly disposed on the plane in a horizontal direction, cracks of the inorganic layers of the thin film encapsulation layer can be prevented or reduced when the flexible OLED display is bent or folded in the horizontal direction.

[0112] Like the aforementioned exemplary embodiments, the first and second inorganic layer patterns 235' and 237' may partially contact each other in vertical and horizontal directions.

[0113] Though not illustrated, a second organic layer and a third inorganic layer may be further included in the thin film encapsulation layer structure of FIG. 12.

[0114] The second organic layer is disposed between a plurality of second inorganic layer patterns, and the third inorganic layer may include a plurality of third inorganic layer patterns that are disposed on the second organic layer and between the second inorganic layer patterns to be spaced apart from each other.

[0115] FIG. 14 is a schematic cross-sectional view of a thin film encapsulation layer according to a further exemplary embodiment, and FIG. 15 is a schematic top plan view of the thin film encapsulation layer of FIG. 14.

[0116] Referring to FIGS. 14 and 15, the thin film encapsulation layer structure is similar to those of the aforementioned exemplary embodiments, but is different in that shapes of first and second inorganic layer patterns 335' and 337' may have a triangular pyramidal shape. Since the first and second inorganic layer patterns 335' and 337' may partially contact

each other in vertical and horizontal structures, they may have an isosceles triangular shape in the vertical direction and may be formed as a matrix form on a plane in which an overall square shape is repeatedly disposed in the horizontal direction.

[0117] Referring to FIGS. 16 and 17, the thin film encapsulation layer may further include a second organic layer 338 and a third inorganic layer 339 in the thin film encapsulation layer structure of FIG. 14.

[0118] The second organic layer 338 is disposed between the plurality of second inorganic layer patterns 337', and the third inorganic layer 339 includes a plurality of third inorganic layer patterns 339' that are disposed on the second organic layer 338 and between the second inorganic layer patterns 337' to be spaced apart from each other.

[0119] Like the aforementioned exemplary embodiments, the second and third inorganic layer patterns 337' and 339' may partially contact each other, and may be formed as a matrix form in which they are repeatedly disposed on a plane.

[0120] Shapes of the inorganic layer patterns are not limited to square, rectangular, circular, and triangular pyramidal shapes according to the exemplary embodiments, and may be formed to have various other shapes.

[0121] FIG. 18 is a schematic cross-sectional view of a thin film encapsulation layer according to a further exemplary embodiment.

[0122] Referring to FIG. 18, the flexible substrate 10 may be differentiated into a bending region B that is bendable and an unbending region A that is not bendable.

[0123] The thin film encapsulation layer includes a first inorganic layer 435 provided above the OLED layer and including a plurality of first inorganic layer patterns 435' that are disposed to be spaced apart from each other, a first organic layer 436 disposed between the plurality of first inorganic layer patterns 435', and a second inorganic layer 437 disposed on the first organic layer 436 and including a plurality of second inorganic layer patterns 437' that are disposed between the first inorganic layer patterns 435' to be spaced apart from each other.

[0124] However, in the present exemplary embodiment, sizes of the first and second inorganic layer patterns 435' and 437' may be reduced in a bending region B, and the sizes of the first and second inorganic layer patterns 435' and 437' may be increased in an unbending region A. That is, the first and second inorganic layer patterns 435' and 437' in the bending region B may be smaller in size than that of the first and second inorganic layer patterns 435' and 437' in the unbending region A.

[0125] In regions where much stress is generated due to a large bending angle of the substrate 10, the sizes of the inorganic layer patterns 435' and 437' are reduced such that a large number of the inorganic layer patterns 435' and 437' are formed in a unit area, thereby further reducing propagation of shocks and cracks caused by the generated stress.

[0126] In this case, the bending region B may be a non-active area, and the unbending region A may be an active area.

[0127] In addition, the bending region and the unbending region are not strictly differentiated, and the sizes of the inorganic layer patterns 435' and 437' and the number thereof per unit area can be controlled as necessary.

[0128] Also, a manufacturing method of a flexible OLED display according to an exemplary embodiment includes, on a substrate, forming an OLED layer including an anode coupled to a transistor, an organic emission layer formed on the anode, and a cathode formed on the organic emission layer, and forming a thin film encapsulation layer on the organic light emitting diode layer.

[0129] The forming of the thin film encapsulation layer may include: a first deposition act of depositing a first inorganic layer on the OLED layer; a first etching act of patterning the first inorganic layer to include a plurality of first inorganic layer patterns that are disposed to be spaced apart from each other; a second deposition act of depositing a first organic layer between the patterned first inorganic layer patterns utilizing a first mask; a third deposition act of depositing a second inorganic layer on the first organic layer; and a second etching act of patterning the second inorganic layer to include a plurality of second inorganic layer patterns that are disposed to be spaced apart from each other.

[0130] In addition, after the second etching act, the manufacturing method may further include: a fourth deposition act of depositing a second organic layer between the patterned second inorganic layer patterns utilizing a second mask; a fifth deposition act of depositing a third inorganic layer on the second organic layer; and a third etching act of patterning the third inorganic layer to include a plurality of third inorganic layer patterns that are disposed to be spaced apart from each other.

[0131] Also, after the forming of the OLED layer, the manufacturing method may further include forming a capping layer for protecting the cathode or controlling light efficiency on the cathode.

[0132] The manufacturing method may further include forming a lithium fluoride (LiF) layer for preventing plasma damage by ions and/or controlling light efficiency on the cathode.

[0133] As described above, according to the flexible OLED display according to the exemplary embodiments, when the flexible OLED display is bent or folded, the stress of the inorganic layers is alleviated by the inorganic layer patterns of the inorganic layers of the thin film encapsulation layer, thereby preventing or reducing the cracks generated at the inorganic layer and/or the moisture permeation into the display area from the thin film encapsulation layer.

[0134] While this disclosure has been described in connection with what is presently considered to be practical exemplary embodiments, it is to be understood that the invention is not limited to the disclosed embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the scope of the ap-

pending claims.

Description of Symbols

[0135]

10: substrate	30: thin film encapsulation layer
20: organic light emitting diode layer	36: first organic layer
35: first inorganic layer	38: second organic layer
37: second inorganic layer	35': first inorganic layer pattern
39: third inorganic layer	39': third inorganic layer pattern
37': second inorganic layer pattern	

Claims

1. A flexible organic light emitting diode (OLED) display comprising:

a substrate (10);
an organic light emitting diode (OLED) layer (20) on the substrate (10); and
a thin film encapsulation layer (30) on the OLED layer (20), the thin film encapsulation layer (30) comprising:

a plurality of laminated inorganic layers (35, 37, 39), at least one inorganic layer of the plurality of inorganic layers (35, 37, 39) comprising a plurality of inorganic layer patterns (35', 37', 39', 135', 137', 139', 235', 237', 239', 335', 337', 339', 435', 437', 439') spaced apart from each other on a plane, and
an organic layer (36, 38) between the plurality of inorganic layer patterns, wherein the at least one inorganic layer, the plurality of inorganic layer patterns, and the organic layer are respectively a first inorganic layer (35), first inorganic layer patterns (35', 135', 235', 335', 435'), and a first organic layer (36), and wherein a second inorganic layer (37) is further included on the first organic layer (36) and comprises a plurality of second inorganic layer patterns (37', 137', 237', 337', 437') disposed between the first inorganic layer patterns (35', 135', 235', 335', 435') to be spaced apart from each other **characterized in that** the first and second inorganic layer patterns (35', 135', 235', 335', 435', 37', 137', 237', 337', 437') partially contact each other.

2. The flexible OLED display of claim 1, further comprising:

a second organic layer (38) between the plurality of second inorganic layer patterns (37', 137', 237', 337', 437');
and
a third inorganic layer (39) on the second organic layer (38) and comprising a plurality of third inorganic layer patterns (39', 139', 239', 339', 439') disposed between the second inorganic layer patterns (37', 137', 237', 337', 437') to be spaced apart from each other.

3. The flexible OLED display of one of the preceding claims, wherein the plurality of inorganic layers are above an organic emission layer of the organic light emitting diode layer (20).

4. The flexible OLED display of one of the preceding claims, wherein the plurality of inorganic layers contact each other through the inorganic layer patterns of the inorganic layers of the respective different layers.

5. The flexible OLED display of one of the preceding claims, wherein the plurality of inorganic layer patterns (35, 37, 39) are formed in a matrix form in which a square shape is repeatedly disposed on a plane.

6. The flexible OLED display of one of claims 1 - 4, wherein the plurality of inorganic layer patterns (135', 137', 139') are formed in a matrix form in which a circular shape is repeatedly disposed on a plane.

7. The flexible OLED display of one of claims 1 - 4, wherein the plurality of inorganic layer patterns (235', 237', 239') are formed in a matrix form in which a rectangular shape is repeatedly disposed on a plane.

8. The flexible OLED display of claim 7, wherein the plurality of inorganic layer patterns are arranged in a direction along which the substrate (10) is bendable.

9. The flexible OLED display of one of claims 1 - 5, wherein the plurality of inorganic layer patterns (335', 337', 339') are formed in a matrix form in which a triangular pyramidal shape is repeatedly disposed.

10. The flexible OLED display of one of the preceding claims, wherein the plurality of inorganic layer patterns respectively have different sizes in a bending region where the substrate (10) is bent and in an unbending region where the substrate (10) is not bent.

11. The flexible OLED display of claim 10, wherein the inorganic layer patterns in the bending region are smaller in size than that of the inorganic layer patterns in the unbending region.

12. A manufacturing method of a flexible OLED display, the method comprising:

forming an OLED layer comprising an anode coupled to a transistor, an organic emission layer on the anode, and a cathode on the organic emission layer, on a substrate (10); and
forming a thin film encapsulation layer (30) on the OLED layer, the forming of the thin film encapsulation layer (30) comprising:

a first deposition act of depositing a first inorganic layer (35) on the OLED layer;
a first etching act of patterning the first inorganic layer (35) to include a plurality of first inorganic layer patterns (35') spaced apart from each other;
a second deposition act of depositing a first organic layer (36) between the patterned first inorganic layer patterns (35') utilizing a first mask;
a third deposition act of depositing a second inorganic layer (37) on the first organic layer (36); and
a second etching act of patterning the second inorganic layer (37) to include a plurality of second inorganic layer patterns (37') disposed between the first inorganic layer patterns and spaced apart from each other, **characterized in that** the first and second inorganic layer patterns (35', 135', 235', 335', 435', 37', 137', 237', 337', 437') partially contact each other.

13. The manufacturing method of claim 12, after the second etching act, the method further comprising:

a fourth deposition act of depositing a second organic layer (38) between the patterned second inorganic layer patterns (37');
a fifth deposition act of depositing a third inorganic layer (39) on the second organic layer (38); and
a third etching act of patterning the third inorganic layer (39) to include a plurality of third inorganic layer patterns (39') spaced apart from each other.

Patentansprüche

1. Flexible organische lichtemittierende Dioden (OLED)-Anzeige, aufweisend:

ein Substrat (10);
eine organische lichtemittierende Dioden (OLED)-Schicht (20) auf dem Substrat (10); und
eine Dünnschichtverpackungsschicht (30) auf der OLED-Schicht (20), wobei die Dünnschichtverpackungsschicht (30) aufweist:

eine Vielzahl laminierter anorganischer Schichten (35, 37, 39), wobei zumindest eine anorganische Schicht der Vielzahl der anorganischen Schichten (35, 37, 39) eine Vielzahl anorganischer Schichtmuster (35', 37', 39', 135', 137', 139', 235', 237', 239', 335', 337', 339', 435', 437', 439'), die in einer Ebene voneinander beabstandet sind, aufweist, und
eine organische Schicht (36, 38) zwischen der Vielzahl der anorganischen Schichtmuster, wobei die zumindest eine anorganische Schicht, die Vielzahl der anorganischen Schichtmuster und die organische Schicht jeweils eine erste anorganische Schicht (35), erste anorganische Schichtmuster (35', 135', 235', 335', 435') und eine erste organische Schicht (36) sind, und wobei eine zweite anorganische Schicht (37) ferner auf der ersten organischen Schicht (36) enthalten ist und eine Vielzahl zweiter anorganischer Schicht-

muster (37', 137', 237', 337', 437'), die zwischen den ersten anorganischen Schichtmustern (35', 135', 235', 335', 435') angeordnet sind, um voneinander beabstandet zu sein, aufweist, **dadurch gekennzeichnet, dass** die ersten und zweiten anorganischen Schichtmuster (35', 135', 235', 335', 435', 37', 137', 237', 337', 437') teilweise miteinander in Kontakt stehen.

2. Flexible OLED-Anzeige nach Anspruch 1, ferner aufweisend:

eine zweite organische Schicht (38) zwischen der Vielzahl der zweiten anorganischen Schichtmuster (37', 137', 237', 337', 437'); und

eine dritte anorganische Schicht (39) auf der zweiten organischen Schicht (38), die eine Vielzahl dritter anorganischer Schichtmuster (39', 139', 239', 339', 439'), die zwischen den zweiten anorganischen Schichtmustern (37', 137', 237', 337', 437') angeordnet sind, um voneinander beabstandet zu sein, aufweist.

3. Flexible OLED-Anzeige nach einem der vorhergehenden Ansprüche, wobei die Vielzahl der anorganischen Schichten über einer organischen Emissionsschicht der organischen lichtemittierenden Diodenschicht (20) ist.

4. Flexible OLED-Anzeige nach einem der vorhergehenden Ansprüche, wobei die Vielzahl der anorganischen Schichten durch die anorganischen Schichtmuster der anorganischen Schichten der jeweiligen verschiedenen Schichten miteinander in Kontakt steht.

5. Flexible OLED-Anzeige nach einem der vorhergehenden Ansprüche, wobei die Vielzahl der anorganischen Schichtmuster (35, 37, 39) in einer Matrixform, in der eine Quadratform wiederholt in einer Ebene angeordnet ist, ausgebildet ist.

6. Flexible OLED-Anzeige nach einem der Ansprüche 1-4, wobei die Vielzahl der anorganischen Schichtmuster (135', 137', 139') in einer Matrixform, in der eine Kreisform wiederholt in einer Ebene angeordnet ist, ausgebildet ist.

7. Flexible OLED-Anzeige nach einem der Ansprüche 1-4, wobei die Vielzahl der anorganischen Schichtmuster (235', 237', 239') in einer Matrixform, in der eine Rechteckform wiederholt in einer Ebene angeordnet ist, ausgebildet ist.

8. Flexible OLED-Anzeige nach Anspruch 7, wobei die Vielzahl der anorganischen Schichtmuster in einer Richtung, entlang derer das Substrat (10) biegsam ist, angeordnet ist.

9. Flexible OLED-Anzeige nach einem der Ansprüche 1-5, wobei die Vielzahl der anorganischen Schichtmuster (335', 337', 339') in einer Matrixform, in der eine dreieckige Pyramidenform wiederholt angeordnet ist, ausgebildet ist.

10. Flexible OLED-Anzeige nach einem der vorhergehenden Ansprüche, wobei die Vielzahl der anorganischen Schichtmuster in einem Biegebereich, in dem das Substrat (10) gebogen ist, und in einem Nicht-Biegebereich, in dem das Substrat (10) nicht gebogen ist, jeweils verschiedene Größen aufweist.

11. Flexible OLED-Anzeige nach Anspruch 10, wobei die anorganischen Schichtmuster im Biegebereich eine kleinere Größe aufweisen als die anorganischen Schichtmuster im Nicht-Biegebereich.

12. Herstellungsverfahren einer flexiblen OLED-Anzeige, wobei das Verfahren aufweist:

Ausbilden einer OLED-Schicht, die eine Anode, die mit einem Transistor gekoppelt ist, eine organische Emissionsschicht auf der Anode und eine Kathode auf der organischen Emissionsschicht aufweist, auf einem Substrat (10); und

Ausbilden einer Dünnschichtverpackungsschicht (30) auf der OLED-Schicht, wobei das Ausbilden der Dünnschichtverpackungsschicht (30) aufweist:

einen ersten Abscheidungsverfahren des Abscheidens einer ersten anorganischen Schicht (35) auf der OLED-Schicht;

einen ersten Ätzen des Strukturierens der ersten anorganischen Schicht (35), so dass sie eine Vielzahl erster anorganischer Schichtmuster (35'), die voneinander beabstandet sind, aufweist;

einen zweiten Abscheidungsverfahren des Abscheidens einer ersten organischen Schicht (36) zwischen den strukturierten ersten anorganischen Schichtmustern (35') unter Verwendung einer ersten Maske;

einen dritten Abscheidungsverfahren des Abscheidens einer zweiten anorganischen Schicht (37) auf der

ersten organischen Schicht (36); und
einen zweiten Ätzzvorgang des Strukturierens der zweiten anorganischen Schicht (37), so dass sie eine
Vielzahl zweiter anorganischer Schichtmuster (37'), die zwischen den ersten anorganischen Schichtmustern
angeordnet und voneinander beabstandet sind, aufweist,

dadurch gekennzeichnet, dass die ersten und zweiten anorganischen Schichtmuster (35', 135', 235', 335', 435',
37', 137', 237', 337', 437') teilweise miteinander in Kontakt stehen.

13. Herstellungsverfahren nach Anspruch 12, wobei das Verfahren nach dem zweiten Ätzzvorgang ferner aufweist:

einen vierten Abscheidungsverfahren des Abscheidens einer zweiten organischen Schicht (38) zwischen den
strukturierten zweiten anorganischen Schichtmustern (37');
einen fünften Abscheidungsverfahren des Abscheidens einer dritten anorganischen Schicht (39) auf der zweiten
organischen Schicht; und
einen dritten Ätzzvorgang des Strukturierens der dritten anorganischen Schicht (39), so dass sie eine Vielzahl
dritter anorganischer Schichtmuster (39'), die voneinander beabstandet sind, aufweist.

Revendications

1. Écran à diode électroluminescente organique flexible (OLED) comprenant :

un substrat (10) ;
une couche de diode électroluminescente organique (OLED) (20) sur le substrat (10) ; et
une couche d'encapsulation de film mince (30) sur la couche OLED (20), la couche d'encapsulation de film
mince (30) comprenant :

une pluralité de couches inorganiques stratifiées (35, 37, 39), au moins une couche inorganique de la
pluralité de couches inorganiques (35, 37, 39) comprenant une pluralité de motifs de couche inorganique
(35', 37', 39', 135', 137', 139', 235', 237', 239', 335', 337', 339', 435', 437', 439') espacés les uns des autres
sur un plan, et
une couche organique (36, 38) entre la pluralité de motifs de couche inorganique,

dans lequel la au moins une couche inorganique, la pluralité de motifs de couche inorganique, et la couche organique
sont respectivement une première couche inorganique (35), des motifs de première couche inorganique (35', 135',
235', 335', 435'), et une première couche organique (36), et dans lequel une deuxième couche inorganique (37)
est en outre incluse sur la première couche organique (36) et comprend une pluralité de motifs de deuxième couche
inorganique (37', 137', 237', 337', 437') disposés entre les motifs de première couche inorganique (35', 135', 235',
335', 435') en étant espacés les uns des autres, **caractérisé en ce que** les motifs de première et deuxième couche
inorganique (35', 135', 235', 335', 435', 37', 137', 237', 337', 437') se touchent partiellement.

2. Écran OLED flexible selon la revendication 1, comprenant en outre :

une seconde couche organique (38) entre la pluralité de motifs de deuxième couche inorganique (37', 137',
237', 337', 437') ; et
une troisième couche inorganique (39) sur la seconde couche organique (38) et comprenant une pluralité de
motifs de troisième couche inorganique (39', 139', 239', 339', 439') disposés entre les motifs de deuxième
couche inorganique (37', 137', 237', 337', 437') et espacés les uns des autres.

3. Écran OLED flexible selon l'une des revendications précédentes, dans lequel la pluralité de couches inorganiques
se trouve au-dessus d'une couche d'émission organique de la couche de diode électroluminescente organique (20).

4. Écran OLED flexible selon l'une des revendications précédentes, dans lequel la pluralité de couches inorganiques
se touche par le biais des motifs de couche inorganique des couches inorganiques des différentes couches res-
pectives.

5. Écran OLED flexible selon l'une des revendications précédentes, dans lequel la pluralité de motifs de couche
inorganique (35, 37, 39) est formée sous forme de matrice dans laquelle une forme carrée est disposée de manière

répétée sur un plan.

6. Écran OLED flexible selon l'une des revendications 1 à 4, dans lequel la pluralité de motifs de couche inorganique (135', 137', 139') est formée sous forme de matrice dans laquelle une forme circulaire est disposée de manière répétée sur un plan.

7. Écran OLED flexible selon l'une des revendications 1 à 4, dans lequel la pluralité de motifs de couche inorganique (235', 237', 239') est formée sous forme de matrice dans laquelle une forme rectangulaire est disposée de manière répétée sur un plan.

8. Écran OLED flexible selon la revendication 7, dans lequel la pluralité de motifs de couche inorganique est disposée dans une direction dans laquelle le substrat (10) peut être cintré.

9. Écran OLED flexible selon l'une des revendications 1 à 5, dans lequel la pluralité de motifs de couche inorganique (335', 337', 339') est formée sous forme de matrice dans laquelle une forme pyramidale triangulaire est disposée de manière répétée.

10. Écran OLED flexible selon l'une des revendications précédentes, dans lequel la pluralité de motifs de couche inorganique possède respectivement différentes tailles dans une zone de cintrage dans laquelle le substrat (10) est cintré, et dans une zone de non-cintrage dans laquelle le substrat (10) n'est pas cintré.

11. Écran OLED flexible selon la revendication 10, dans lequel les motifs de couche inorganique dans la zone de cintrage sont plus petits en taille que les motifs de couche inorganique dans la zone de non-cintrage.

12. Procédé de fabrication d'un écran OLED flexible, le procédé comprenant :

la formation d'une couche OLED comprenant une anode reliée à un transistor, une couche d'émission organique sur l'anode, et une cathode sur la couche d'émission organique, sur un substrat (10) ; et

la formation d'une couche d'encapsulation de film mince (30) sur la couche OLED, la formation de la couche d'encapsulation de film mince (30) comprenant :

un premier acte de dépôt qui consiste à déposer une première couche inorganique (35) sur la couche OLED ;
un premier acte de gravure qui consiste à graver la première couche inorganique (35) afin d'inclure une pluralité de motifs de première couche inorganique (35') espacés les uns des autres ;

un deuxième acte de dépôt qui consiste à déposer une première couche organique (36) entre les motifs gravés de première couche inorganique (35') à l'aide d'un premier masque ;

un troisième acte de dépôt qui consiste à déposer une deuxième couche inorganique (37) sur la première couche organique (36) ; et

un deuxième acte de gravure qui consiste à graver la deuxième couche inorganique (37) afin d'inclure une pluralité de motifs de deuxième couche inorganique (37') disposés entre les motifs de première couche inorganique et espacés les uns des autres,

caractérisé en ce que les motifs de première et de deuxième couches inorganiques (35', 135', 235', 335', 435', 37', 137', 237', 337', 437') se touchent partiellement.

13. Procédé de fabrication selon la revendication 12, après le deuxième acte de gravure, le procédé comprenant en outre :

un quatrième acte de dépôt qui consiste à déposer une seconde couche organique (38) entre les motifs gravés de deuxième couche inorganique (37') ;

un cinquième acte de dépôt qui consiste à déposer une troisième couche inorganique (39) sur la seconde couche organique (38) ; et

un troisième acte de gravure qui consiste à graver la troisième couche inorganique (39) afin d'inclure une pluralité de motifs de troisième couche inorganique (39') espacés les uns des autres.

FIG. 1

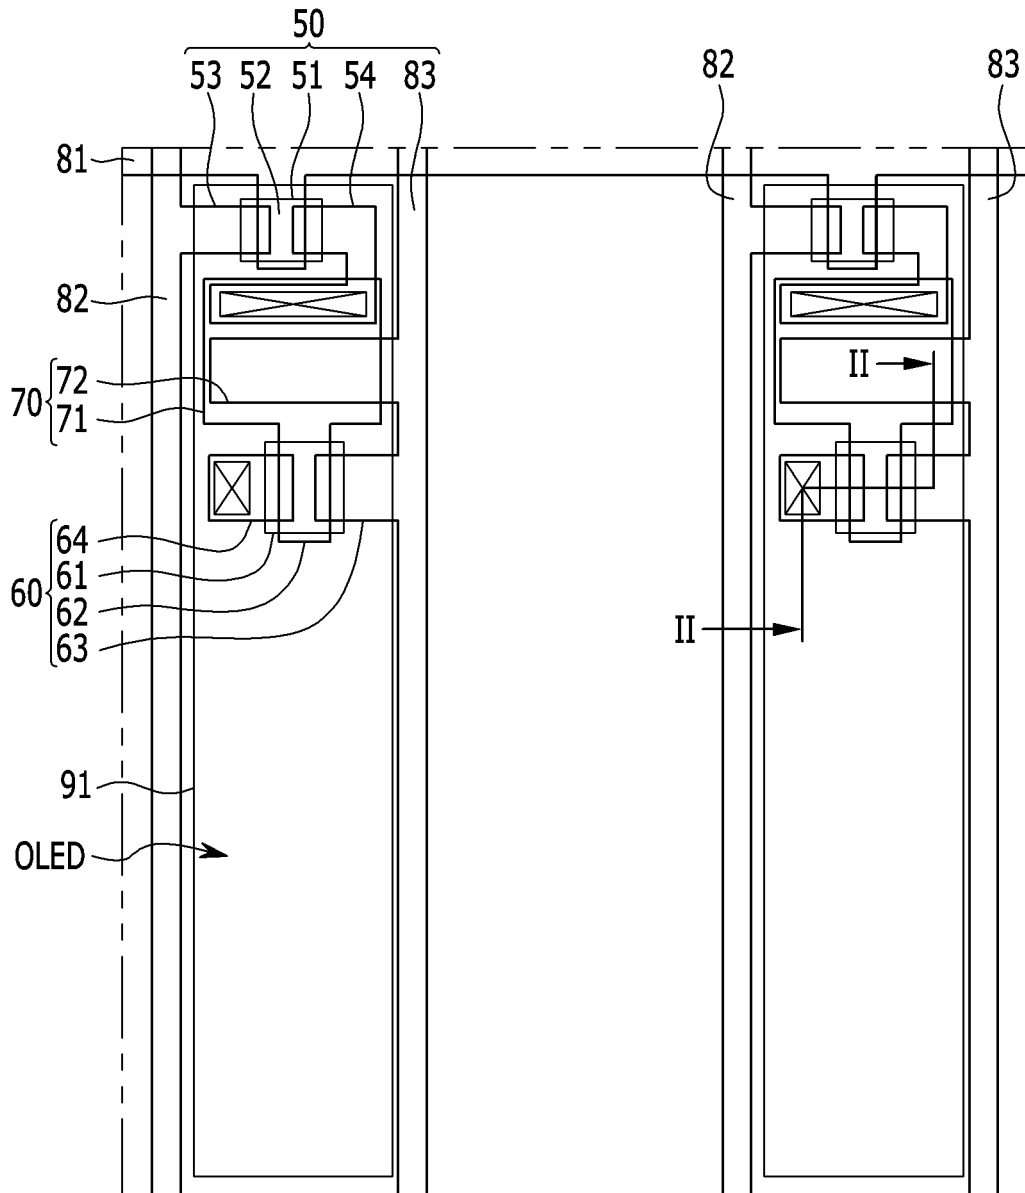


FIG. 2

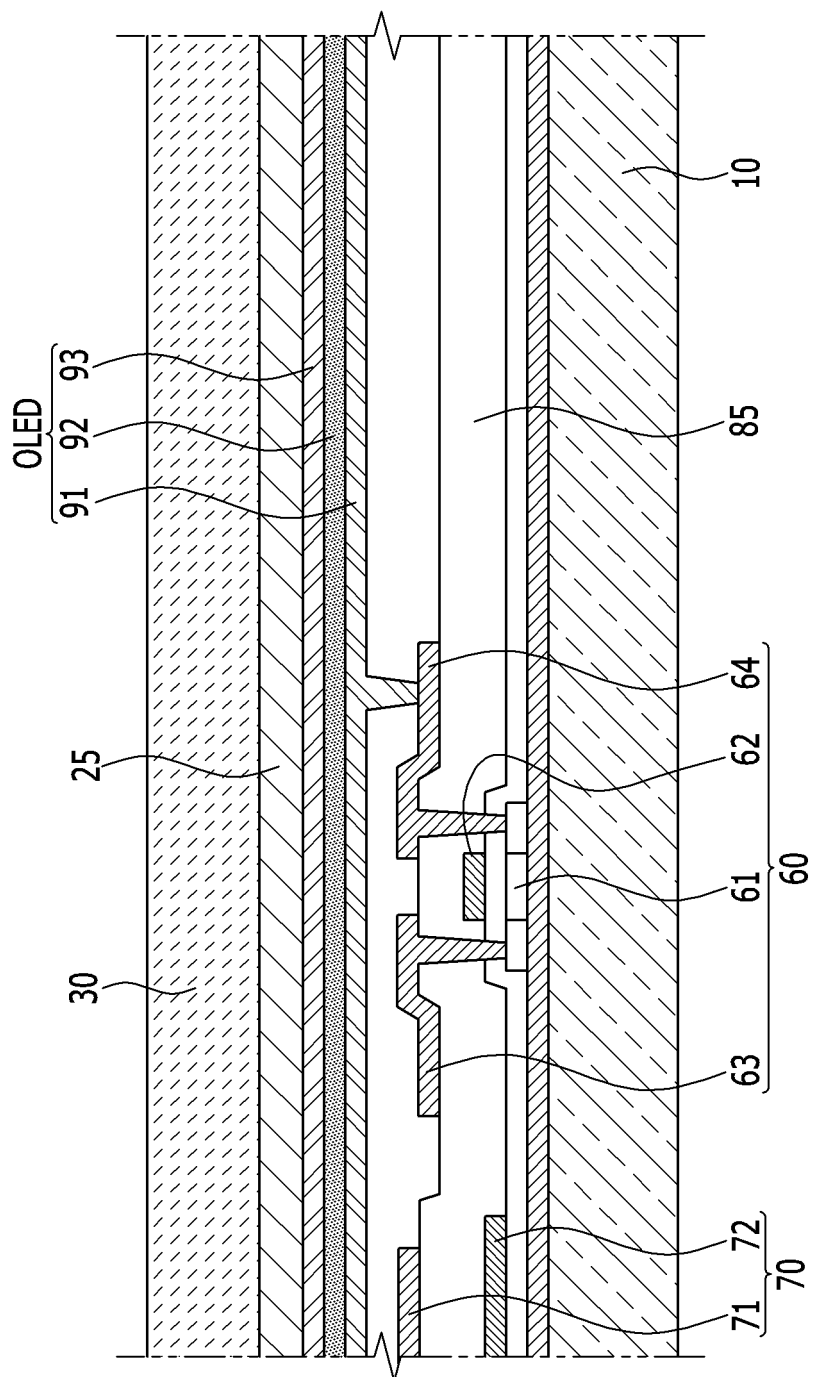


FIG. 3

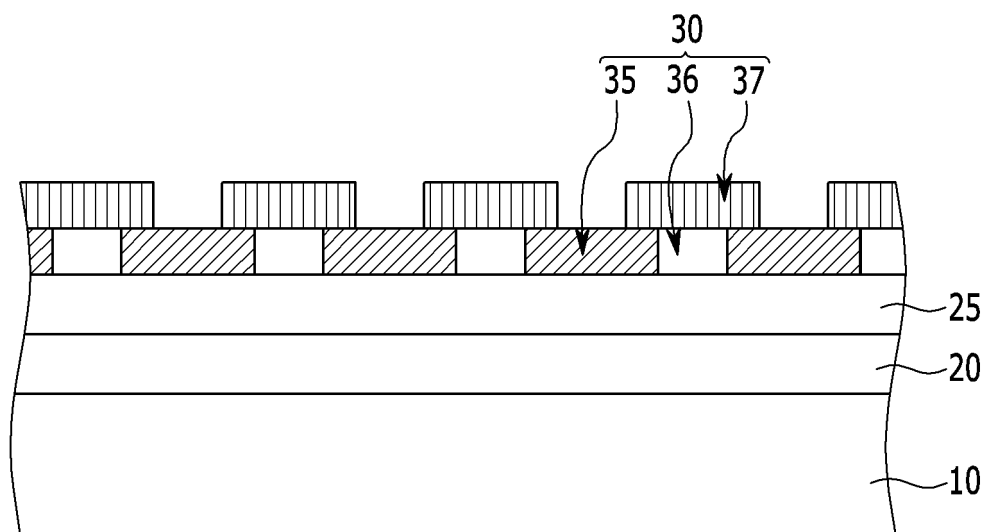


FIG. 4

10

LTPS	9
SiNx	8
SiOx	7
PI	6
a-Si	5
SiOx	4
PI	3
Protection Film	2

FIG. 5

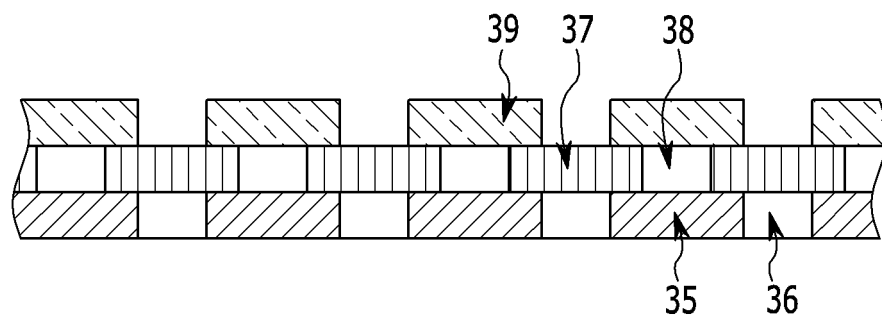


FIG. 6

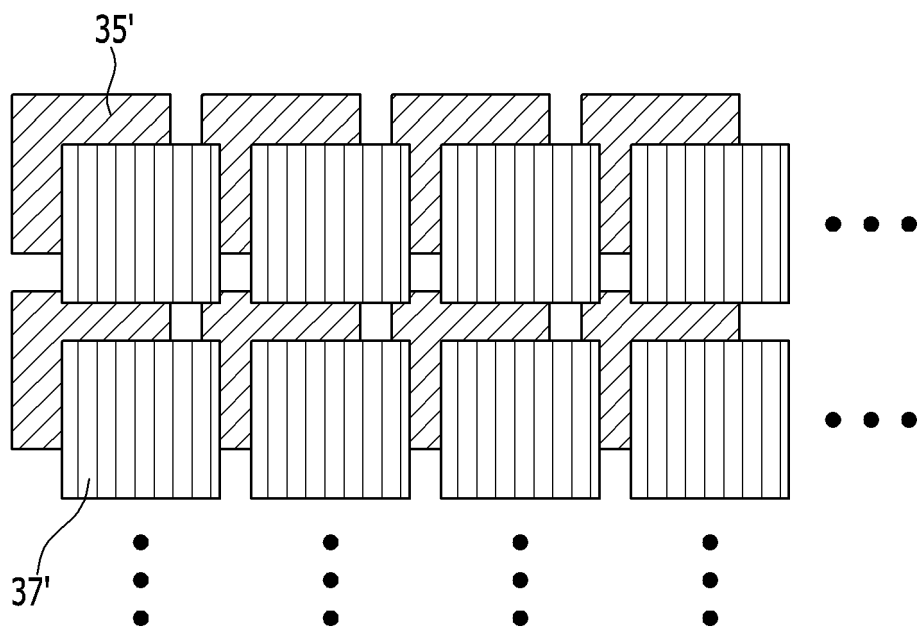


FIG. 7

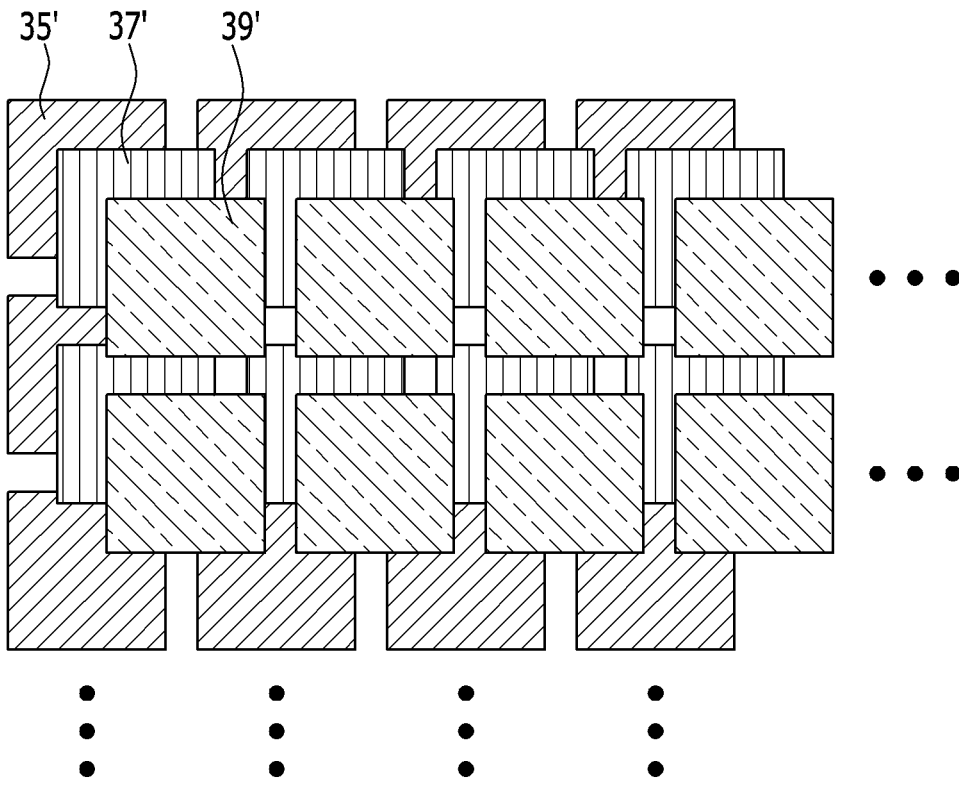


FIG. 8

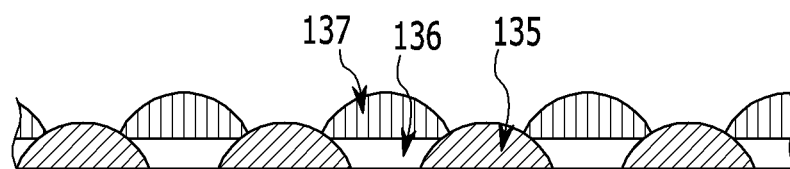


FIG. 9

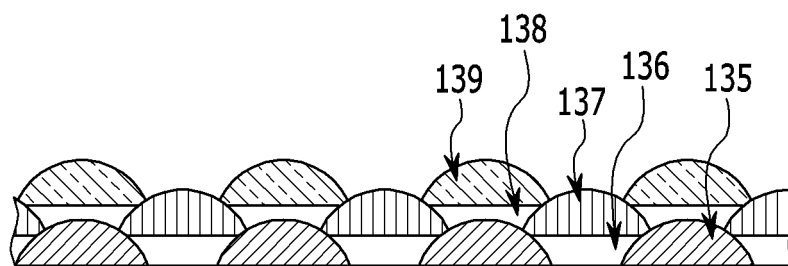


FIG. 10

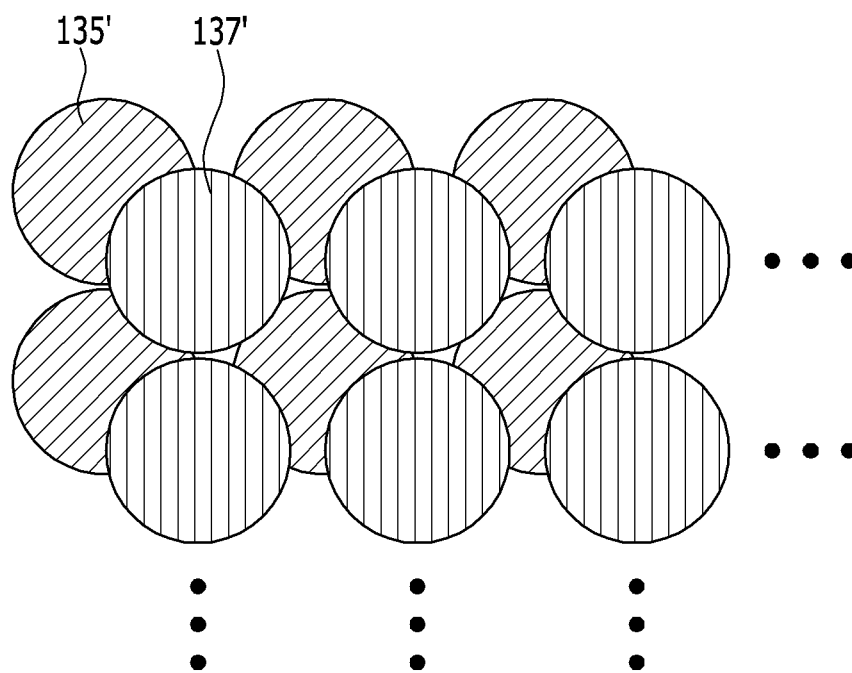


FIG. 11

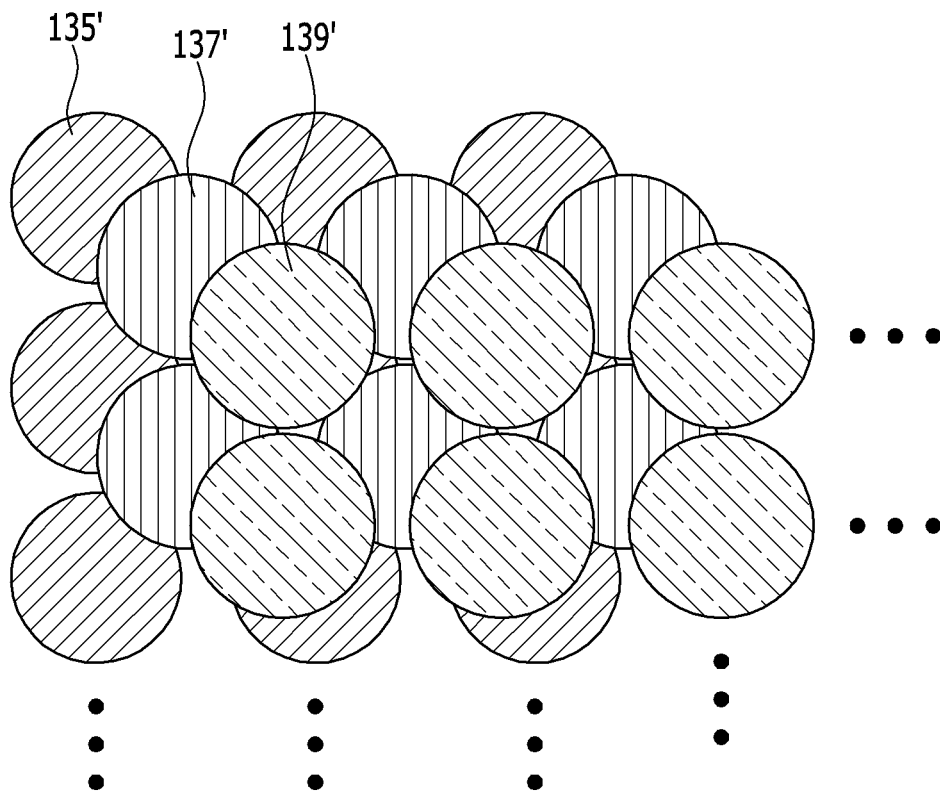


FIG. 12

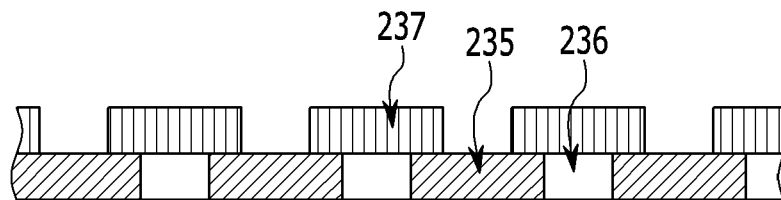


FIG. 13

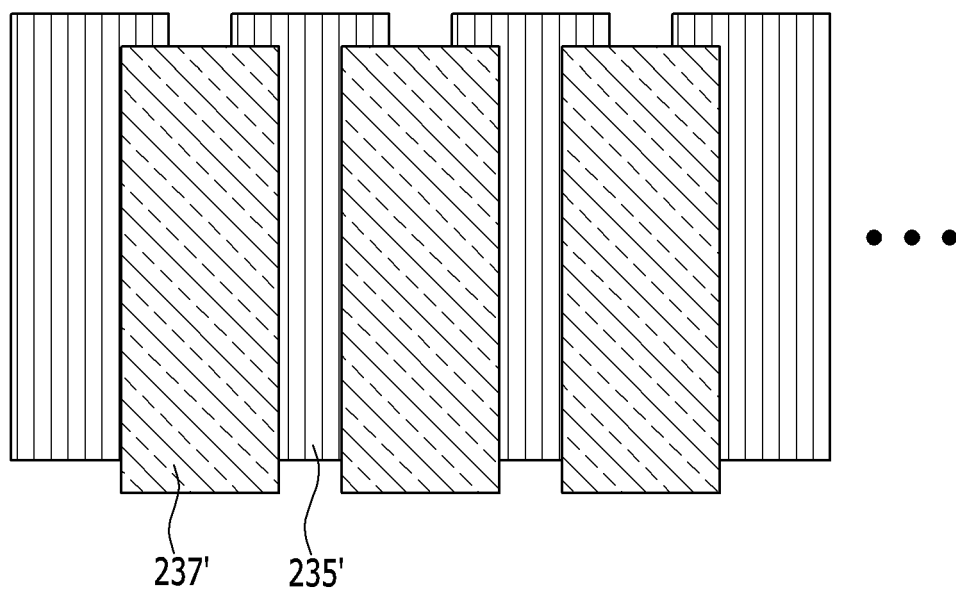


FIG. 14

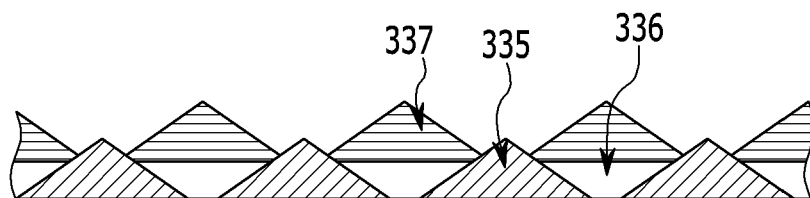


FIG. 15

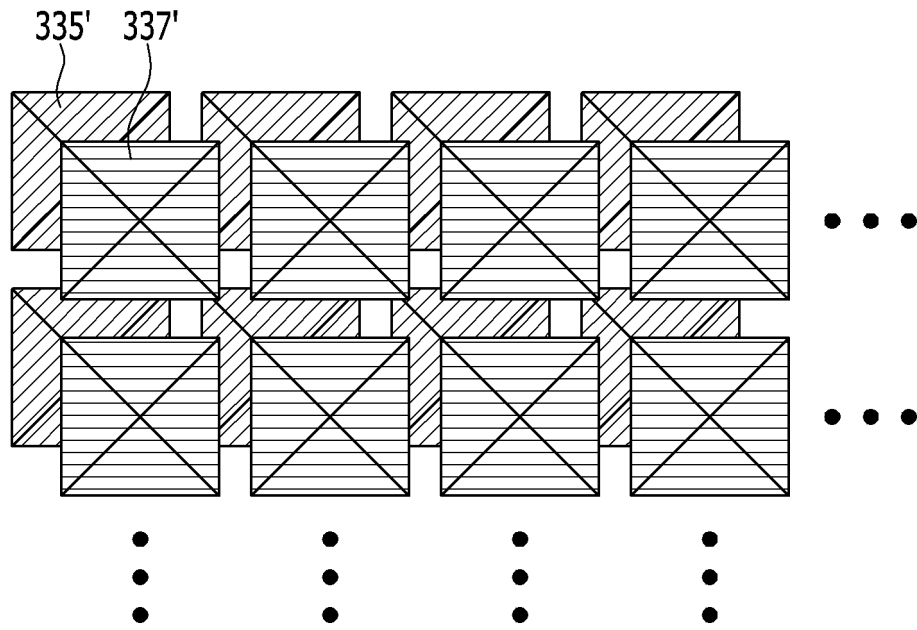


FIG. 16

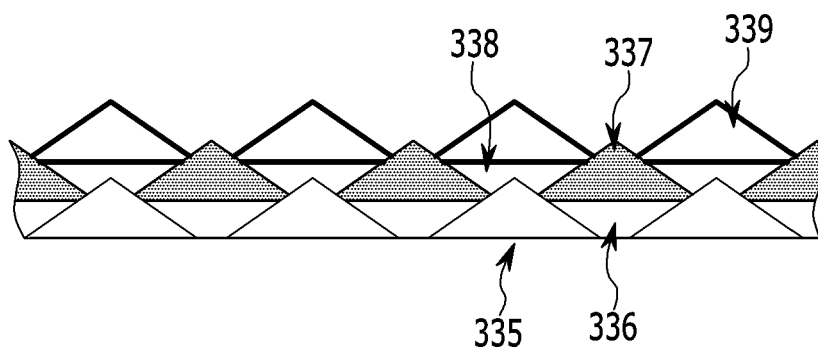


FIG. 17


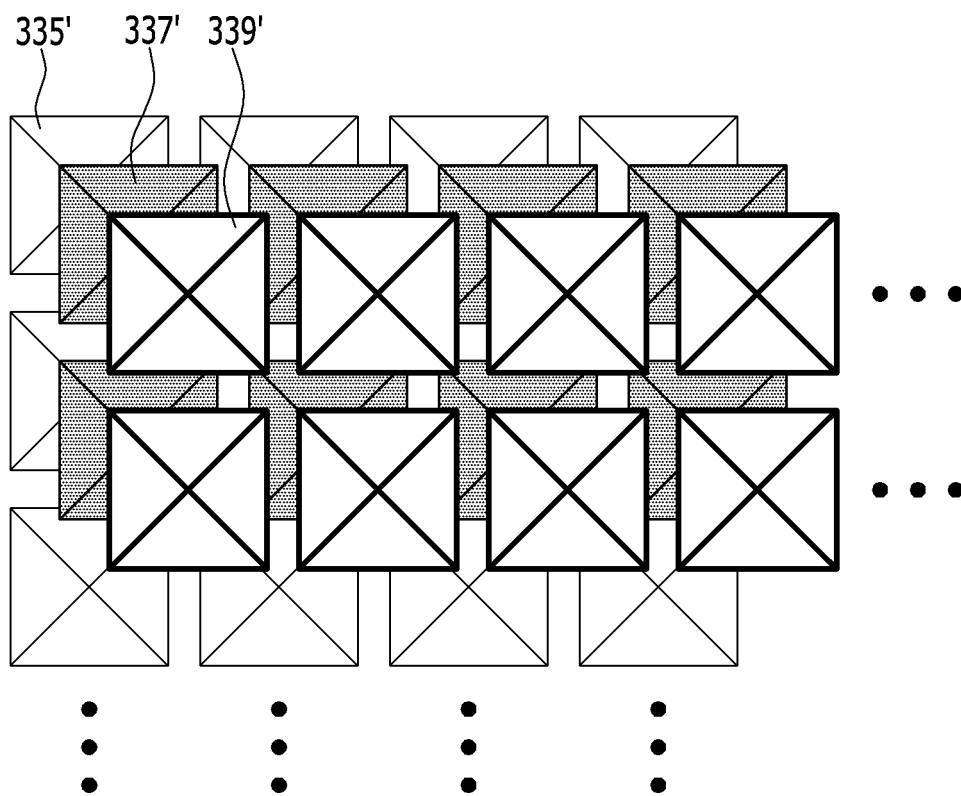


FIG. 18

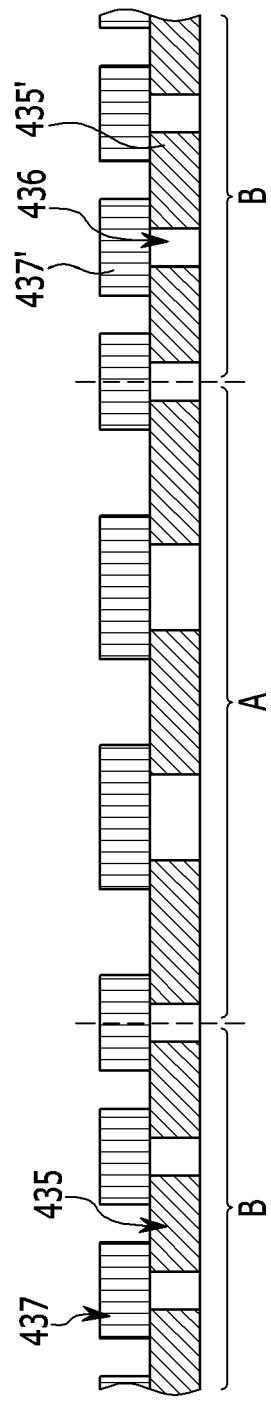

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2445028 A1 [0009]

专利名称(译)	柔性有机发光二极管显示器及其制造方法		
公开(公告)号	EP2863446B1	公开(公告)日	2017-02-01
申请号	EP2014188721	申请日	2014-10-14
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	AHN CHI WOOK		
发明人	AHN, CHI WOOK		
IPC分类号	H01L51/52 H01L27/32		
CPC分类号	H01L51/5253 H01L27/3241 H01L27/3244 H01L51/0097 H01L51/5256 H01L51/56 H01L2251/5338		
优先权	1020140125183 2014-09-19 KR 1020130122869 2013-10-15 KR		
其他公开文献	EP2863446A3 EP2863446A2		
外部链接	Espacenet		

摘要(译)

根据示例性实施例的柔性有机发光二极管 (OLED) 显示器包括：基板 (10) ;设置在基板 (10) 上的有机发光二极管 (OLED) 层;以及设置在 OLED层上的薄膜封装层 (30)。薄膜封装层 (30) 包括多个层压无机层 (35,37,39)，多个无机层 (35,37,39) 中的至少一个无机层包括多个无机层图案 (35) ； 37； 39；) 设置成在平面上彼此间隔开，并且在多个无机层图案 (35； 37； 39；) 之间形成有机层 (36,38)。

