



(11)

EP 3 267 433 A1

(12)

EUROPEAN PATENT APPLICATION
published in accordance with Art. 153(4) EPC

(43) Date of publication:
10.01.2018 Bulletin 2018/02

(51) Int Cl.:
G09G 3/32 (2016.01)

(21) Application number: **15831204.1**

(86) International application number:
PCT/CN2015/089762

(22) Date of filing: **16.09.2015**

(87) International publication number:
WO 2016/138756 (09.09.2016 Gazette 2016/36)

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA

(30) Priority: **02.03.2015 CN 201510093162**


(71) Applicant: **BOE Technology Group Co., Ltd.**
Beijing 100015 (CN)

(72) Inventors:
• **LI, Yongqian**
Beijing 100176 (CN)
• **LI, Quanhui**
Beijing 100176 (CN)

(74) Representative: **Cohausz & Florack**
Patent- & Rechtsanwälte
Partnerschaftsgesellschaft mbB
Bleichstraße 14
40211 Düsseldorf (DE)

(54) **OLED PIXEL UNIT, DRIVING METHOD THEREFOR AND OLED DISPLAY DEVICE**

(57) The present invention relates to an OLED pixel unit and a method of driving the same, and an OLED display device. The OLED pixel unit comprises driving modules, a selecting module and a light emitting module. The number of the driving modules is M, the light emitting module comprises N light emitting units, wherein $M < N$. The N light emitting units emit N colors of light capable of achieving full color display, respectively. Each driving module generates at most one driving current in a frame of picture so as to drive one light emitting unit to emit light, and at least one driving module generates the driving current in each of a plurality of frames of pictures so as to drive different light emitting units to emit light in the plurality of frames of pictures, so that the M driving modules drive the N light emitting units to emit light in n frames of pictures, wherein $2 \leq n \leq N$. The selecting module is configured to perform gating so that the light emitting unit about to emit light in each frame of picture is connected with the corresponding driving module.

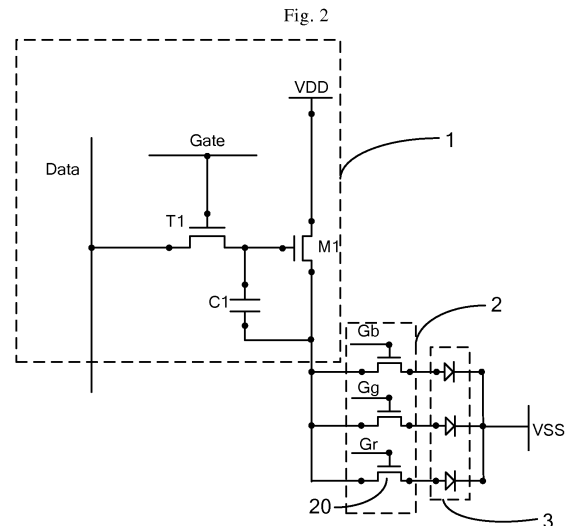

EP 3 267 433 A1

Description

FIELD OF THE INVENTION

[0001] The present invention relates to the field of display technology, and particularly to an OLED pixel unit and a method of driving the same, and an OLED display device.

BACKGROUND OF THE INVENTION

[0002] In an OLED display device, each of pixel units generally comprises three subpixels. Each subpixel comprises an OLED that is driven by a driving module to emit a corresponding color of light. The OLED display device allows each pixel unit to display different luminance and colors by controlling parameters such as brightness and color saturation of the light emitted from the OLED in each subpixel.

[0003] Generally, the driving module comprises a plurality of transistors and at least one capacitor. Fig. 1 illustrates a driving module that comprises a small number of transistors and a capacitor. As shown in Fig. 1, the driving module comprises a switching transistor T1, a driving transistor M1 and a storage capacitor C1. In the driving module shown in Fig. 1, a current for driving the OLED to emit light is expressed as:

$$I = \frac{\beta}{2} (V_{gs} - V_{th})^2,$$

where V_{gs} indicates a voltage difference between a gate and a source of the driving transistor M1, β indicates a parameter in connection with a process parameter and a feature size of the driving transistor M1, and V_{th} indicates a threshold voltage of the driving transistor M1.

[0004] Generally, in the existing OLED display device, the OLEDs in the subpixels are driven by individual driving modules and emit light simultaneously. Such a configuration causes the number of the driving modules to be equal to that of the subpixels in each pixel unit, so that the number of the driving modules is relatively large, resulting in that large numbers of transistors, storage capacitors and signal lines are required to be provided in each pixel unit and a large area is occupied by each pixel unit, which counts against improvement of the pixel density of the OLED display device.

SUMMARY OF THE INVENTION

[0005] In order to solve at least above technical problem existing in the prior art, embodiments of the present invention provide an OLED pixel unit, a method of driving the OLED pixel unit and an OLED display device, which may reduce the number of the driving modules, thereby reducing the area occupied by each OLED pixel unit, which facilitates improvement of the pixel density of the

OLED display device.

[0006] An embodiment of the present invention provides an OLED pixel unit, comprising driving modules, a selecting module and a light emitting module. The number of the driving modules is M, the light emitting module comprises N light emitting units, wherein $M < N$. The N light emitting units emit N colors of light capable of achieving full color display, respectively. Each driving module generates at most one driving current in a frame of picture so as to drive one light emitting unit to emit light, and at least one driving module generates the driving current in each of a plurality of frames of pictures so as to drive different light emitting units to emit light in the plurality of frames of pictures, so that the M driving modules drive the N light emitting units to emit light in n frames of pictures, wherein $2 \leq n \leq N$. The selecting module is configured to perform gating so that the light emitting unit about to emit light in each frame of picture is connected with the corresponding driving module.

[0007] The plurality of light emitting units may be connected in parallel, and the selecting module may comprise switching devices provided on branches where the respective light emitting units are located.

[0008] The switching device may be a thin film transistor, a control electrode of the thin film transistor is connected with a control voltage terminal, and a first electrode and a second electrode of the thin film transistor are connected with the driving module and the light emitting unit, respectively.

[0009] The light emitting unit may further be connected with a low voltage terminal.

[0010] The light emitting unit may be an OLED.

[0011] The number of the driving modules may be one.

[0012] The number of the light emitting units may be three.

[0013] The three light emitting units may emit red light, green light and blue light, respectively.

[0014] Each driving module may comprise a switching transistor, a driving transistor and a storage capacitor. A control electrode of the switching transistor is connected with a gate line, a first electrode of the switching transistor is connected with a data line, and a second electrode of the switching transistor is connected with a control electrode of the driving transistor and a first terminal of the storage capacitor. A first electrode of the driving transistor is connected with a high voltage terminal, and a second electrode of the driving transistor is connected with the selecting module and a second terminal of the storage capacitor.

[0015] Another embodiment of the present invention provides a method of driving the above OLED pixel unit. In the method, the driving modules generate N driving currents in the n frames of pictures so as to drive the N light emitting units to emit light, so that the OLED pixel unit displays one pixel in the n frames of pictures, a time interval between a light-emitting time of the first light emitting unit to emit light and a light-emitting time of the last light emitting unit to emit light is controlled to be within a

human visual persistence time.

[0016] In the method, the number of the driving modules may be one, the driving module generates N driving currents corresponding to the N light emitting units in N frames of pictures, and the driving module is connected with one light emitting unit in each frame of picture through the selecting module so as to drive the light emitting unit to emit light.

[0017] In the method, the light emitting module may comprise a red light emitting unit, a green light emitting unit and a blue light emitting unit. In the first frame of picture, the driving module generates a first driving current so as to drive the red light emitting unit to emit red light. In the second frame of picture, the driving module generates a second driving current so as to drive the green light emitting unit to emit green light. In the third frame of picture, the driving module generates a third driving current so as to drive the blue light emitting unit to emit blue light.

[0018] Yet another embodiment of the present invention provides an OLED display device, comprising the above OLED pixel unit.

[0019] In the OLED pixel unit according to the embodiment of the present invention, at least one of the M driving modules generates the driving current in each of the plurality of frames of pictures, so as to drive different light emitting units to emit light in the plurality of frames of pictures, so that the number of the light emitting units emitting light in each frame of picture is less than N, and the number of the driving modules in the OLED pixel unit may be less than that of the light emitting units. Compared with the prior art, such a configuration reduces the area occupied by each OLED pixel unit, thereby facilitating improvement of the pixel density of the OLED display device.

[0020] In the method of driving the OLED pixel unit according to the embodiment, at least one driving module generates the driving current in each of the plurality of frames of pictures and drives different light emitting units to emit light in the plurality of frames of pictures, so that the number of the light emitting units emitting light in each frame of picture is less than N, and the number of the driving modules in the OLED pixel unit may be less than that of the light emitting units. Compared with the prior art, such a configuration reduces the number of the driving modules, which may reduce the area occupied by each OLED pixel unit, thereby facilitating improvement of the pixel density of the OLED display device.

[0021] The OLED display device according to the embodiment utilizes the above OLED pixel unit, the area occupied by each OLED pixel unit may be reduced, thereby facilitating improvement of the pixel density of the OLED display device.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] The accompanying drawings which constitute

a part of the description are used for providing further understanding of the present invention and for explaining the present invention in conjunction with the following specific embodiments, rather than limiting the present invention. In the accompanying drawings:

Fig. 1 is a circuit diagram of a driving module in the prior art;

Fig. 2 is a schematic diagram of an OLED pixel unit according to an embodiment of the present invention; and

Fig. 3 is a timing diagram of control signals for allowing light emitting units in an OLED pixel unit to emit light according to an embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

[0023] Hereinafter, specific embodiments of the present invention will be described in detail with reference to the accompanying drawings. It should be understood that the embodiments described herein are only employed for illustrating and explaining the present invention, rather than limiting the present invention.

[0024] Fig. 2 is a schematic diagram of an OLED (organic light emitting diode) pixel unit according to an embodiment of the present invention. As shown in Fig. 2, in the present embodiment, the OLED pixel unit comprises a driving module 1, a selecting module 2 and a light emitting module 3. The OLED pixel unit of the embodiment comprises one driving module 1, the light emitting module 3 comprises three light emitting units for emitting three colors of light capable of achieving full color display (e.g., red light, green light and blue light), the light emitting unit is an OLED. The driving module 1 generates a driving current in a frame of picture, so as to drive one light emitting unit to emit light, and the selecting module 2 is configured to perform gating so that the light emitting unit about to emit light in each frame of picture is connected with the driving module 1. In the embodiment, one driving module is provided for three light emitting units, and light emissions of three light emitting units constituting one pixel are completed in three frames of pictures. Compared with the prior art, the number of the driving modules 1 in each OLED pixel unit may be reduced in the embodiment, which facilitates improvement of the pixel density of the OLED display device.

[0025] It should be understood that, the OLED pixel unit of the present invention is not limited to the embodiment shown in Fig. 2, the OLED pixel unit may comprise M driving modules 1, the light emitting module 3 may comprise N light emitting units, the light emitting module may be an OLED, wherein $M < N$. The N light emitting units emit N colors of light capable of achieving full color display, respectively. Each driving module 1 generates at most one driving current in a frame of picture so as to drive one light emitting unit to emit light, and at least one driving module 1 generates the driving current in each of

a plurality of frames of pictures so as to drive different light emitting units to emit light in the plurality of frames of pictures, so that the M driving modules 1 drive the N light emitting units to emit light in n frames of pictures, wherein $2 \leq n \leq N$. The selecting module 2 is configured to perform gating so that the light emitting unit about to emit light in each frame of picture is connected with the driving module 1.

[0026] In the OLED pixel unit of the embodiment, $M < N$, i.e., the number of the driving modules 1 is smaller than that of the light emitting units included in the light emitting module 3. Compared with the prior art, the number of the driving modules 1 in the OLED pixel unit of the embodiment is smaller, so that the area occupied by each OLED pixel unit may be reduced, which facilitates improvement of the pixel density of the OLED display device.

[0027] Specifically, in the embodiment, at least one driving module 1 generates the driving current in each of the plurality of frames of pictures to drive different light emitting units to emit light in the plurality of frames of pictures, thereby allowing the M driving modules generate N driving currents in the n frames of pictures so as to drive the N light emitting units to emit light, i.e., achieving a technical solution in which the N light emitting units are driven by the M driving modules 1 so that the OLED pixel unit displays N color components of one pixel in the n frames of pictures. For example, when $N=3$ and $M=2$, one of two driving modules 1 is configured to generate the driving current in each of two frames of pictures so as to drive two light emitting units to emit light in the two frames of pictures, while the other driving module 1 may generate the driving current in the first frame of picture to drive another light emitting unit to emit light, and may not generate the driving current in the second frame of picture (alternatively, the other driving module 1 may generate the driving current in the second frame of picture, and may not generate the driving current in the first frame of picture).

[0028] In the embodiment, the OLED pixel unit displays one pixel through the n frames of picture. Therefore, compared with the technical solution of displaying one pixel in one frame of picture in the prior art, the OLED display device using the OLED pixel unit provided in the embodiment displays less frames of pictures when refresh rates of the display devices are equal. In this case, the refresh rate of the OLED display device may be increased to display more frames of pictures per unit time.

[0029] In the prior art, in one frame of picture, the light emitting units in the OLED pixel unit are driven by respective corresponding driving modules to emit light simultaneously, so that each OLED pixel unit displays corresponding color and luminance.

[0030] However, in the present embodiment, the light emissions of the N light emitting units in the OLED pixel unit are completed in the n frames of pictures, wherein $2 \leq n \leq N$. It could be understood that, in this case, if an image seen by a viewer has a corresponding color presented after mixing of various colors of light emitted from

the plurality of light emitting units, rather than colors of light individually emitted from the respective light emitting units, a time interval between light-emitting time of the first light emitting unit to emit light and light-emitting time of the last light emitting unit to emit light should be less than human visual persistence time.

[0031] It is known that, the OLED display device is different from the liquid crystal display device (LCD). In the LCD, each subpixel requires relatively long response time to display corresponding luminance. In the OLED display device, a response speed of light emission of the OLED is relatively high. In this case, in the OLED pixel unit of the embodiment, the time interval between the light-emitting time of the first light emitting unit to emit light and the light-emitting time of the last light emitting unit to emit light may be controlled within the human visual persistence time, so that the displayed image of the OLED pixel unit seen by the viewer has the corresponding color presented after mixing of various colors of light emitted from the plurality of light emitting units, rather than the colors of light individually emitted from the respective light emitting units.

[0032] For example, as shown in Fig. 2, the number of the driving modules 1 is one, such a configuration reduces the number of the driving modules 1 to the utmost extent and reduces the area occupied by each OLED pixel unit to the utmost extent, thereby improving the pixel density of the OLED display device to the utmost extent. In this case, the driving module 1 requires N frames of pictures to generate N driving currents, so as to drive N light emitting units to emit light, so that only by the N frames of pictures, can the OLED pixel unit display N color components of one pixel.

[0033] As shown in Fig. 2, the plurality of light emitting units are connected in parallel, and a switching device 20 is provided on a branch where each light emitting unit is located. The selecting module 2 comprises the switching devices 20 provided on the branches where the respective light emitting units are located. For example, the switching device 20 may be a thin film transistor, in this case, a control electrode of the thin film transistor is connected with a control voltage terminal, and a first electrode and a second electrode of the thin film transistor are connected with the driving module 1 and the light emitting unit, respectively.

[0034] In the embodiment, it is noted that the control electrodes of the thin film transistor described above and the transistors described later are gates, the first electrodes thereof are sources, and the second electrodes thereof are drains.

[0035] Generally, the number of the light emitting units in the OLED pixel unit is three, and the light emitting units emit red light, green light and blue light, respectively.

[0036] Hereinafter, a principle and a procedure of achieving display by the OLED pixel unit according to the embodiment will be described in detail by taking an example in which the OLED pixel unit comprises one driving module 1 and the light emitting module 3 comprises three

light emitting units (respectively emitting the red light, the green light and the blue light) with reference to a timing diagram of a control signal shown in Fig. 3.

[0037] Firstly, in a first frame of picture (R frame), the driving module 1 generates a first driving current, and meanwhile, the thin film transistor provided on the branch where the light emitting unit emitting the red light is located is turned on under the control of the control voltage terminal Gr, the first driving current is input into the light emitting unit emitting the red light so as to drive the light emitting unit to emit the red light.

[0038] Subsequently, in a second frame of picture (G frame), the driving module 1 generates a second driving current, and meanwhile, the thin film transistor provided on the branch where the light emitting unit emitting the green light is located is turned on under the control of the control voltage terminal Gg, the second driving current is input into the light emitting unit emitting the green light so as to drive the light emitting unit to emit the green light.

[0039] Next, in a third frame of picture (B frame), the driving module 1 generates a third driving current, and meanwhile, the thin film transistor provided on the branch where the light emitting unit emitting the blue light is located is turned on under the control of the control voltage terminal Gb, the third driving current is input into the light emitting unit emitting the blue light so as to drive the light emitting unit to emit the blue light.

[0040] In above procedure, the time interval between the time of the first light emitting unit to emit the red light and the time of the last light emitting unit to emit the blue light is controlled to be within the human visual persistence time, so that the viewer sees the color of light after mixing of the red light, the green light and the blue light emitted from the respective light emitting units.

[0041] Specifically, as shown in Fig. 2, each driving module 1 may comprise a switching transistor T1, a driving transistor M1 and a storage capacitor C1. The control electrode of the switching transistor T1 is connected with a gate line Gate, the first electrode of the switching transistor T1 is connected with a data line Data, and the second electrode of the switching transistor T1 is connected with the control electrode of the driving transistor M1 and a first terminal of the storage capacitor C1. The first electrode of the driving transistor M1 is connected with a high voltage terminal VDD, and the second electrode of the driving transistor M1 is connected with the selecting module 2 and a second terminal of the storage capacitor C1. Each light emitting unit is also connected with a low voltage terminal VSS.

[0042] Specifically, during a procedure of generating the driving currents by the driving module 1 shown in Fig. 2 (i.e., every frame of picture), a high-level signal is first input from the gate line Gate so that the switching transistor T1 is turned on, and in this case, the data line Data charges the control electrode of the driving transistor M1 and the first terminal of the storage capacitor C1, so that the voltages thereof become Vdata. Subsequently, a low-level signal is input from the gate line Gate so that the

switching transistor T1 is turned off, the voltage stored in the storage capacitor C1 allows the voltage of the control electrode of the driving transistor M1 to be maintained at Vdata and allows the driving transistor M1 to be turned on, so as to generate the driving current according to the voltages of the control electrode and the first electrode of the driving transistor M1, the driving current I may be expressed by the following equation:

$$I = K(V_{gs} - V_{th})^2 = K(V_{data} - V_{DD} - V_{th})^2.$$

[0043] While the above driving current is generated, the thin film transistor provided on the branch where one light emitting unit is located is turned on, so that the driving current may drive the light emitting unit to emit the corresponding color of light.

[0044] It should be noted that, in the embodiment, the structure of the driving module 1 is not limited to the structure of 2T1C (i.e., two transistors and one storage capacitor) shown in Fig. 2, the structure may also be any structure capable of driving the light emitting unit to emit light (e.g., a driving structure comprising more transistors and/or more storage capacitors).

[0045] In the OLED pixel unit according to the embodiment of the present invention, at least one of the M driving modules 1 generates the driving current in each of the plurality of frames of pictures, so as to drive different light emitting units to emit light in the plurality of frames of pictures, so that the number of the light emitting units emitting light in each frame of picture is less than N, and the number of the driving modules 1 in the OLED pixel unit may be less than that of the light emitting units. Compared with the prior art, such a configuration reduces the number of the driving modules 1, which may reduce the area occupied by each OLED pixel unit, thereby facilitating improvement of the pixel density of the OLED display device.

[0046] Another embodiment of the present invention provides a driving method of an OLED pixel unit, for driving the OLED pixel unit of the above embodiment of the present invention. In the embodiment, the driving modules generate N driving currents in n frames of pictures to drive N light emitting units to emit light, so that the OLED pixel unit displays one pixel in the n frames of pictures. In the driving method, at least one driving module generates the driving current in each of the plurality of frames of pictures, for driving different light emitting units to emit light in the plurality of frames of pictures.

[0047] In the driving method of the OLED pixel unit according to the embodiment, at least one driving module generates the driving current in each of the plurality of frames of pictures and drives different light emitting units to emit light in the plurality of frames of pictures, so that the number of the light emitting units emitting light in each frame of picture is less than N, and the number of the driving modules in the OLED pixel unit may be less than

that of the light emitting units. Compared with the prior art, such a configuration reduces the number of the driving modules, which may reduce the area occupied by each OLED pixel unit, thereby facilitating improvement of the pixel density of the OLED display device.

[0048] For example, the number of the driving modules in the OLED pixel unit is one, and in this case, the driving module generates N driving currents corresponding to N light emitting units in N frames of pictures, and the driving module is connected with one light emitting unit in each frame of picture through the selecting module so as to drive the light emitting unit to emit light. Such a configuration reduces the number of the driving modules to the utmost extent, and reduces the area occupied by each OLED pixel unit to the utmost extent, thereby improving the pixel density of the OLED display device to the utmost extent.

[0049] Another embodiment of the present invention provides an OLED display device. In the embodiment, the OLED display device comprises the OLED pixel unit of the above embodiment of the present invention.

[0050] The OLED display device according to the embodiment utilizes the OLED pixel unit of the above embodiment of the present invention, the area occupied by each OLED pixel unit may be reduced, thereby facilitating improvement of the pixel density of the OLED display device.

[0051] It should be understood that the above embodiments are only exemplary embodiments for illustrating the principle of the present invention, but the present invention is not limited thereto. Various variations and improvements can be made by the person of ordinary skill in the art without departing from the spirit and essence of the present invention, and these variations and improvements should also be considered to fall within the protection scope of the present invention.

Claims

1. An OLED pixel unit, comprising a selecting module, a light emitting module and M driving modules, wherein the light emitting module comprises N light emitting units, wherein $M < N$; the N light emitting units emit N colors of light capable of achieving full color display, respectively; each driving module generates at most one driving current in a frame of picture so as to drive one light emitting unit to emit light, and at least one driving module generates the driving current in each of a plurality of frames of pictures so as to drive different light emitting units to emit light in the plurality of frames of pictures, so that the M driving modules drive the N light emitting units to emit light in n frames of pictures, wherein $2 \leq n \leq N$; and the selecting module is configured to perform gating so that the light emitting unit about to emit light in

each frame of picture is connected with the corresponding driving module.

2. The OLED pixel unit of claim 1, wherein the plurality of light emitting units are connected in parallel, and the selecting module comprises switching devices provided on branches where the respective light emitting units are located.
3. The OLED pixel unit of claim 2, wherein the switching device is a thin film transistor, a control electrode of the thin film transistor is connected with a control voltage terminal, and a first electrode and a second electrode of the thin film transistor are connected with the driving module and the light emitting unit, respectively.
4. The OLED pixel unit of claim 3, wherein the light emitting unit is further connected with a low voltage terminal.
5. The OLED pixel unit of claim 1, wherein the light emitting unit comprises an OLED.
6. The OLED pixel unit of claim 1, wherein the number of the driving modules is one.
7. The OLED pixel unit of claim 1, wherein the number of the light emitting units is three.
8. The OLED pixel unit of claim 7, wherein the three light emitting units emit red light, green light and blue light, respectively.
9. The OLED pixel unit of any one of claims 1 to 8, wherein each driving module comprises a switching transistor, a driving transistor and a storage capacitor, a control electrode of the switching transistor is connected with a gate line, a first electrode of the switching transistor is connected with a data line, and a second electrode of the switching transistor is connected with a control electrode of the driving transistor and a first terminal of the storage capacitor, a first electrode of the driving transistor is connected with a high voltage terminal, and a second electrode of the driving transistor is connected with the selecting module and a second terminal of the storage capacitor.
10. A method of driving the OLED pixel unit of any one of claims 1 to 5, wherein the driving modules generate N driving currents in the n frames of pictures so as to drive the N light emitting units to emit light, so that the OLED pixel unit displays one pixel in the n frames of pictures, wherein a time interval between a light-emitting time of the first light emitting unit to emit light and a light-

emitting time of the last light emitting unit to emit light is controlled to be within a human visual persistence time.

11. The method of claim 10, wherein the number of the driving modules is one, the driving module generates N driving currents corresponding to the N light emitting units in N frames of pictures, and the driving module is connected with one light emitting unit in each frame of picture through the selecting module so as to drive the light emitting unit to emit light. 5 10
12. The method of claim 11, wherein the light emitting module comprises a red light emitting unit, a green light emitting unit and a blue light emitting unit, the driving module generates a first driving current so as to drive the red light emitting unit to emit red light in the first frame of picture, the driving module generates a second driving current so as to drive the green light emitting unit to emit green light in the second frame of picture, and the driving module generates a third driving current so as to drive the blue light emitting unit to emit blue light in the third frame of picture. 15 20 25
13. An OLED display device, comprising the OLED pixel unit of any one of claims 1 to 9. 30 35 40 45 50 55

Fig. 1

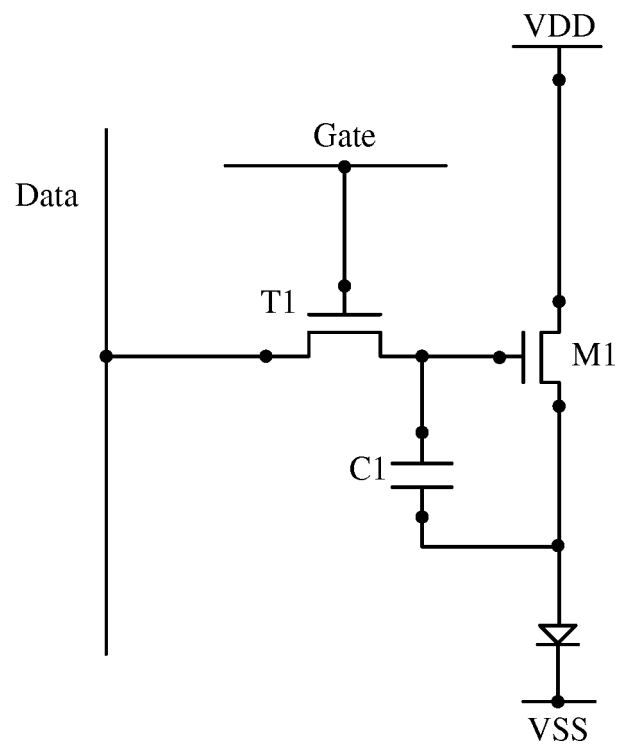


Fig. 2


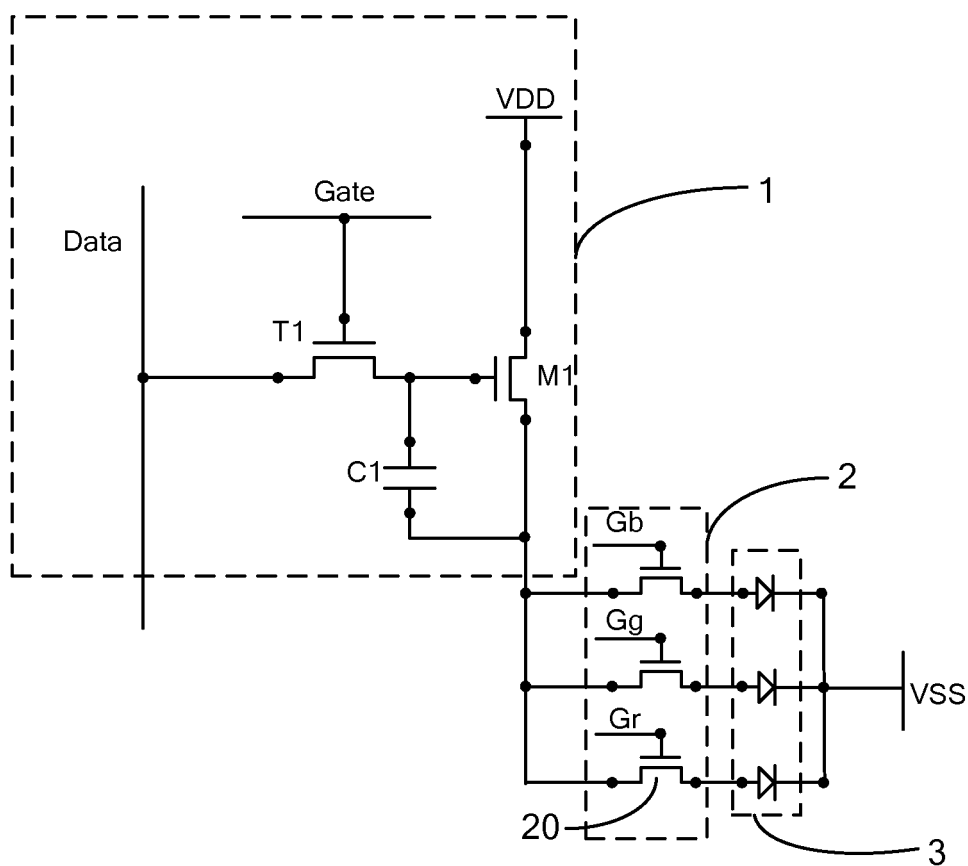


Fig. 3

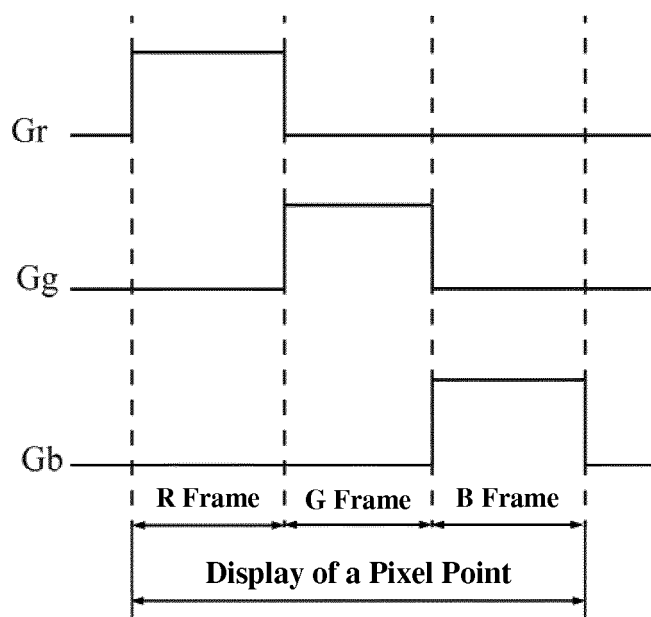

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/089762

A. CLASSIFICATION OF SUBJECT MATTER

G09G 3/32 (2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G09G 3/-

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNTXT, CNABS, TWABS, TWTXT, CNKI, WPI, EPODOC: OLED, pixel unit, luminescence, gating, drive current, picture, irradiance, irradiancy, drive, choice, choose, color, light+

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 104599641 A (BOE TECHNOLOGY GROUP CO., LTD.), 06 May 2015 (06.05.2015), claims 1-9	1-9
X	CN 1670800 A (SAMSUNG SDI CO., LTD.), 21 September 2005 (21.09.2005), claims 1 and 7, description, page 1, paragraph 3, page 5, line 10 to page 8, line 27, and page 17, penultimate paragraph, and figures 1-4	1-13
X	CN 1670804 A (SAMSUNG SDI CO., LTD.), 21 September 2005 (21.09.2005), claim 1, description, page 5, line 19 to page 7, line 8, and figures 1-4	1-13
X	US 2005242743 A1 (KWAK, W.K.), 03 November 2005 (03.11.2005), description, paragraphs 40-52, and figures 1-4	1-13
X	CN 1716366 A (SAMSUNG SDI CO., LTD.), 04 January 2006 (04.01.2006), claim 1, description, page 5, line 19 to page 7, line 24, and figures 1-6	1-13
A	CN 101471032 A (LG DISPLAY CO., LTD.), 01 July 2009 (01.07.2009), the whole document	1-13

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

16 November 2015 (16.11.2015)

Date of mailing of the international search report

26 November 2015 (26.11.2015)

Name and mailing address of the ISA/CN:
 State Intellectual Property Office of the P. R. China
 No. 6, Xitucheng Road, Jimenqiao
 Haidian District, Beijing 100088, China
 Facsimile No.: (86-10) 62019451

Authorized officer

LIU, Zihan

Telephone No.: (86-10) 010-82245816

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/089762

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2013/100545 A1 (SILICONFILE TECHNOLOGIES INC.), 04 July 2013 (04.07.2013), the whole document	1-13

Form PCT/ISA/210 (continuation of second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/CN2015/089762

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date
CN 104599641 A	06 May 2015	None	
CN 1670800 A	21 September 2005	JP 4102368 B2	18 June 2008
		KR 20050092208 A	21 September 2005
		EP 1577871 A1	21 September 2005
		US 2005200573 A1	15 September 2005
		CN 100474373 C	01 April 2009
		DE 602005010771 D1	18 December 2008
		JP 2005266770 A	29 September 2005
		KR 100560446 B1	13 March 2006
		US 7768482 B2	03 August 2010
		EP 1577871 B1	05 November 2008
CN 1670804 A	21 September 2005	US 7804466 B2	28 September 2010
		JP 2005266773 A	29 September 2005
		US 2005200617 A1	15 September 2005
		CN 100458901 C	04 February 2009
		KR 20050092207 A	21 September 2005
		KR 100560445 B1	13 March 2006
		JP 4105702 B2	25 June 2008
US 2005242743 A1	03 November 2005	KR 100560450 B1	13 March 2006
		KR 20050104585 A	03 November 2005
		US 7522133 B2	21 April 2009
CN 1716366 A	04 January 2006	KR 20060001479 A	06 January 2006
		KR 100649253 B1	24 November 2006
		JP 2006018223 A	19 January 2006
		CN 100583207 C	20 January 2010
		US 2006007073 A1	12 January 2006
		JP 4177823 B2	05 November 2008
		US 8547300 B2	01 October 2013
CN 101471032 A	01 July 2009	US 8130181 B2	06 March 2012
		US 2009167648 A1	02 July 2009
		KR 101407302 B1	13 June 2014
		KR 20090070371 A	01 July 2009
		CN 101471032 B	06 June 2012
WO 2013/100545 A1	04 July 2013	KR 20130078328 A	10 July 2013
		US 2015042694 A1	12 February 2015
		KR 101334100 B1	29 November 2013
		CN 104025177 A	03 September 2014
		JP 2015505075 A	16 February 2015

Form PCT/ISA/210 (patent family annex) (July 2009)

专利名称(译)	OLED像素单元，其驱动方法和OLED显示装置		
公开(公告)号	EP3267433A1	公开(公告)日	2018-01-10
申请号	EP2015831204	申请日	2015-09-16
[标]申请(专利权)人(译)	京东方科技集团股份有限公司		
申请(专利权)人(译)	京东方科技集团股份有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司.		
[标]发明人	LI YONGQIAN LI QUANHU		
发明人	LI, YONGQIAN LI, QUANHU		
IPC分类号	G09G3/32 G09G3/3233		
CPC分类号	G09G3/3233 G09G2300/0804 G09G2300/0814 G09G2300/0819 G09G2300/0842 G09G2310/0235 G09G3/2003 G09G3/3258 G09G2300/0426 G09G2320/0252 G09G2320/0646		
代理机构(译)	COHAUSZ & FLORACK		
优先权	201510093162.9 2015-03-02 CN		
其他公开文献	EP3267433A4		
外部链接	Espacenet		

摘要(译)

OLED像素单元及其驱动方法和OLED显示装置技术领域本发明涉及OLED像素单元及其驱动方法，以及OLED显示装置。OLED像素单元包括驱动模块，选择模块和发光模块。驱动模块的数量为M，发光模块包括N个发光单元，其中 $M < N$ 。N个发光单元分别发射能够实现全色显示的N种颜色的光。每个驱动模块在一帧图像中产生至多一个驱动电流，以驱动一个发光单元发光，并且至少一个驱动模块在多个图像帧的每一个中产生驱动电流，以便驱动不同的发光单元在多个图像帧中发光，使得M个驱动模块驱动N个发光单元以n帧图像发光，其中 $2 \leq n \leq N$ 。选择模块被配置为执行选通，使得即将在每帧图像中发光的发光单元与相应的驱动模块连接。

