



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
31.01.2018 Bulletin 2018/05

(51) Int Cl.:
H01L 51/50^(2006.01)

(21) Application number: **17183468.2**

(22) Date of filing: **27.07.2017**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME
Designated Validation States:
MA MD

(30) Priority: **29.07.2016 KR 20160097551**

(71) Applicant: **LG Display Co., Ltd.**
Seoul 150-721 (KR)

(72) Inventors:
• **KIM, Byung-Soo**
Paju-si, Gyeonggi-do 10845 (KR)
• **SEOK, Han-Byeol**
Paju-si, Gyeonggi-do 10845 (KR)
• **KIM, Seok-Hyun**
Paju-si, Gyeonggi-do 10845 (KR)


(74) Representative: **Viering, Jentschura & Partner mbB**
Patent- und Rechtsanwälte
Am Brauhaus 8
01099 Dresden (DE)

(54) **ORGANIC LIGHT EMITTING DEVICE AND ORGANIC LIGHT EMITTING DISPLAY USING THE SAME**

(57) Disclosed are an organic light emitting device and an organic light emitting display using the same. The organic light emitting device includes two or more pairs of hole injection layers (210a, 210b, ...) formed of a single

material and hole transport layers (220a, 220b, ...) formed of a single material, being alternately stacked, thereby achieving reduction in driving voltage and improvement in efficiency and lifespan.

FIG. 2

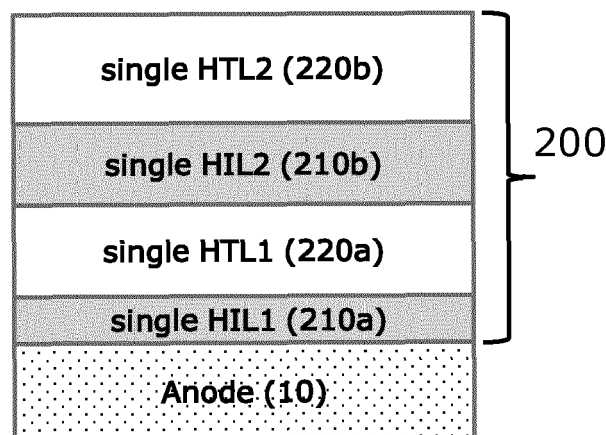

Description

[0001] This application claims the benefit of Korean Patent Application No. 10-2016-0097551, filed on July 29, 2016.

BACKGROUND OF THE INVENTION**Field of the Invention**

[0002] The present invention relates to an organic light emitting device, and more particularly, to an organic light emitting device, which changes configuration around an anode so as to facilitate hole injection at the anode, and an organic light emitting display using the same.

Discussion of the Related Art

[0003] As the information age has arrived, the field of displays visually expressing electrical information signals has rapidly developed and, in order to satisfy such a trend, various flat display devices having excellent performance, such as thin thickness, light weight and low power consumption have been researched as a substitute for a conventional cathode ray tube (CRT).

[0004] As representative examples of flat display devices, there are liquid crystal displays (LCDs), plasma display panels (PDPs), field emission displays (FEDs), and organic light emitting diode (OLED) displays, etc.

[0005] Thereamong, an organic light emitting diode display requires no separate light source and has been considered as an application having competitiveness so as to achieve compactness of a device and good color reproduction.

[0006] The organic light emitting diode display includes self-emissive elements, such as organic light emitting devices, in sub-pixels and each sub-pixel displays an image by operation of the organic light emitting device. Further, organic light emitting devices may be used as self-emissive elements, in a lighting apparatus as well as a display and, thus, development of organic light emitting devices has been spotlighted in the field of lighting recently. Moreover, organic light emitting devices do not require a separate light source unit and may be easily used in a flexible display device or a transparent display device.

[0007] The organic light emitting device includes an organic light emitting layer between an anode and a cathode. Holes and electrons from the anode and cathode are injected into the organic light emitting layer and are combined with each other in the organic light emitting layer, thus generating excitons. When the generated excitons are changed from an excited state to a ground state, the organic light emitting device emits light.

[0008] However, in a general organic light emitting device, holes from the anode are not sufficiently injected into a neighboring hole transport layer and thus driving voltage of the organic light emitting device may be high or efficiency of the organic light emitting device may be lowered, and holes remaining at interface between the anode and the neighboring hole transport layer in the organic light emitting device cause deterioration of the hole transport layer and may thus reduce lifespan of the organic light emitting device.

SUMMARY OF THE INVENTION

[0009] Accordingly, the present invention is directed to an organic light emitting device and an organic light emitting display using the same that substantially obviate one or more problems due to limitations and disadvantages of the related art.

[0010] An object of the present invention is to provide an organic light emitting device, which changes configuration of an organic layer adjacent to an anode so as to raise hole injection efficiency and increase lifespan, and an organic light emitting display using the same.

[0011] Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the invention may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0012] To achieve these objects and other advantages and in accordance with the purpose of the invention, as embodied and broadly described herein, an organic light emitting device according to claim 1 and an organic light emitting device according to claim 7 are provided. Further embodiments are described in the dependent claims. In one aspect of the present invention, an organic light emitting device includes an anode and a cathode disposed opposite each other, an organic light emitting layer provided between the anode and the cathode, and a hole transport unit provided between the anode and the organic light emitting layer and including two or more pairs of hole injection layers formed of a single hole injection material and hole transport layers formed of a single hole transport material, the hole injection layers and

the hole transport layers being alternately disposed.

[0013] A LUMO level of the hole injection layers may be lower than or equal to a HOMO level of the hole transport layers.

[0014] The LUMO level of the hole injection layers may be lower than the HOMO level of the hole transport layers by 0.01 eV to 1.00 eV.

[0015] The hole injection material may be any one of 7,7,8,8-tetracyano-2,3,5,6-tetrafluoroquinodimethane (F4TCNQ), fluorine-substituted 3,4,9,10-perylene-tetracarboxylic dianhydride (PTCDA), cyano-substituted PTCDA, 1,4,5,8-naphthalene-tetracarboxylic dianhydride (NTCDA), hexanitrile hexaazatriphenylene (HAT) and hexaazatriphenylene-hexacarbonitrile (HAT-CN), or a derivative thereof.

[0016] The hole transport material may be any one of N,N'-bis-(1-naphthalenyl)-N,N'-bis-phenyl-(1,1'-biphenyl)-4,4'-diamine (NPB, also referred to as N,N'-bis(naphthalene-1-yl)-N,N'-bis(phenyl)benzidine (NPD)), N,N'-bis(3-methylphenyl)-N,N'-diphenylbenzidine (TPD), s-TAD and 4,4',4"-tris(N-3-methylphenyl-N-phenyl-amino)-triphenylamine (MTDA-TA), or a derivative thereof.

[0017] The thickness of the hole injection layers may be smaller than the thickness of the hole transport layers, the thickness of the hole transport layers may be 10Å to 40Å, and the total thickness of the hole transport unit may be 150Å to 2500Å.

[0018] In another aspect of the present invention, an organic light emitting device includes an anode and a cathode disposed opposite each other, a charge generation layer located between the anode and the cathode so as to divide two or more stacks provided between the anode and the cathode, organic light emitting layers respectively provided on (in other words, included in) the two or more stacks, and a hole transport unit provided on (in other words, included in) any one of the two or more stacks, contacting the anode or the charge generation layer and including two or more pairs of hole injection layers formed of a single hole injection material and hole transport layers formed of a single hole transport material, the hole injection layers and the hole transport layers being alternately disposed.

[0019] A LUMO level of the hole injection layers may be lower than or equal to a HOMO level of the hole transport layers.

[0020] The above-described organic light emitting display of the present invention may be connected to a thin film transistor on a substrate and provided in each of sub-pixels, thus being capable of being applied to an organic light emitting display.

[0021] It is to be understood that both the foregoing general description and the following detailed description of the present invention are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the invention. In the drawings:

FIG. 1 is a cross-sectional view illustrating an organic light emitting device in accordance with one embodiment of the present invention;

FIG. 2 is a cross-sectional view illustrating a hole transport unit on an anode in accordance with one embodiment of the present invention;

FIG. 3 is a cross-sectional view illustrating a hole transport unit on an anode in accordance with another embodiment of the present invention;

FIG. 4 is a band diagram of a hole injection layer and a hole transport layer of a hole transport unit in accordance with the present invention;

FIG. 5 is a cross-sectional view illustrating an organic light emitting device in accordance with another embodiment of the present invention;

FIG. 6 is a graph comparatively showing lifespans of an organic light emitting device of comparative example 1, in which a hole transport unit includes a layer formed of a hole transport material and a hole injection material mixed with each other, and an organic light emitting device of comparative example 2, in which a hole transport unit includes a pair of a hole injection layer formed of a single material and a hole transport layer formed of a single material;

FIG. 7 is a graph comparatively showing lifespans of the organic light emitting device of comparative example 2 and the organic light emitting devices in accordance with the embodiments of the present invention;

FIG. 8 is a graph comparatively showing lifespans of organic light emitting devices of experimental examples, in which the same hole injection material and different hole transport materials are used;

FIG. 9 is a view illustrating a method of fabricating a hole transport unit of an organic light emitting device in accordance with the present invention; and

FIG. 10 is a cross-sectional view illustrating an organic light emitting display in accordance with the present invention.

DETAILED DESCRIPTION OF THE INVENTION

[0023] Reference will now be made in detail to the preferred embodiments of the present invention, examples of which are illustrated in the accompanying drawings. However, the disclosure of the invention is not limited to the embodiments set forth therein and may be variously modified. It should be understood, however, that there is no intent to limit the invention to the particular forms disclosed, but on the contrary, the invention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the claims.

[0024] Shapes, sizes, rates, angles, numbers, etc. illustrated in the drawings to describe the embodiments of the present invention are exemplary and thus are not limited to the drawings. In the drawings, the same or similar elements are denoted by the same reference numerals even though they are depicted in different drawings. In the following description of the present invention, a detailed description of known functions and configurations incorporated herein will be omitted when it may make the subject matter of the present invention rather unclear. In the following description of the embodiments, the terms "including", "having", "consisting of", etc. will be interpreted as indicating the presence of other elements, unless stated otherwise, and do not exclude presence of the corresponding elements. In addition, when a singular element is stated, the element may be provided in plural, unless state otherwise.

[0025] In interpretation of elements included in the embodiments of the present invention, the elements will be interpreted as having error ranges, unless stated otherwise.

[0026] It will be understood that when positional relations between two elements are described, for example, when an element is referred to as being "on", "above", "under" or "aside" another element, intervening elements may also be present between the two elements, unless the term "just" or "directly" is used.

[0027] Further, it will be understood that when temporal relations between incidents are described, for example, the temporal order, such as "after", "subsequent to", "next" or "before", is described, the incidents may not be continuous, unless the term "just" or "directly" is used.

[0028] It will be understood that, although the terms "first", "second", etc. may be used herein to describe various elements, these elements should not be limited by these terms. Therefore, in the following description of the embodiments, an element modified by the term "first" may be the same as an element modified by the term "second", unless stated otherwise.

[0029] Respective characteristics of the embodiments of the present invention may be partially or generally combined or mixed, or be technically interlocked and driven, and the embodiments may be independently executed or be executed together in connection with each other.

[0030] In the following description of the present invention, the Lowest Unoccupied Molecular Orbital (LUMO) level and the Highest Unoccupied Molecular Orbital (HUMO) level of a layer mean the LUMO level and the HUMO level of a material constituting a major weight ratio of the corresponding layer, unless they refer to the LUMO level and the HUMO level of a dopant material doping the corresponding layer.

[0031] In the following description of the present invention, a HOMO level may be an energy level measured through cyclic voltammetry (CV), in which an energy level is determined from a relative potential value to a reference electrode having a known potential value. For example, the HOMO level of a material may be measured using ferrocene having known oxidation potential value and reduction potential value.

[0032] In the following description of the present invention, the term "doped" means that a material having different properties from a material occupying a major weight ratio of a layer (for example, materials having different properties being N-type and P-type materials or an organic material and an inorganic material) is added thereto at a weight ratio of less than 10%. In other words, a "doped" layer means a layer in which a host material and a dopant material may be discriminated in consideration of weight ratios thereof. In addition, the term "undoped" means all cases except for the case corresponding to the term "doped". For example, if a layer is formed of a single material or is formed of a mixture of materials having similar properties, the layer may be an undoped layer. For example, if at least one of materials forming a layer is P-type and all of the materials forming the layer are not N-type, the layer is an undoped layer. For example, if at least one of materials forming a layer is an organic material and all of the materials forming the layer are not inorganic materials, the layer is an undoped layer. For example, if all of the materials forming a layer are organic materials and at least one of the materials forming the layer is N-type and at least another one of the materials is P-type, when the N-type material has a weight ratio of less than 10% or the P-type material has a weight ratio of less than 10%, the layer is a doped layer.

[0033] In the following description of the present invention, an electroluminescence (EL) spectrum is calculated by multiplying (1) a photoluminescence (PL) spectrum, in which intrinsic properties of a light emitting material, such as a dopant material or a host material included in an organic light emitting layer, are reflected, by (2) an out-coupling emittance spectrum curve which is determined by the structure and optical properties of an organic light emitting device including the thickness of organic layers, such as an electron transport layer.

[0034] In the following description of the present invention, a stack means a unit structure including a hole transport layer, or an organic layer including the hole transport layer, and an organic light emitting layer disposed between the

hole transport layer and an electron transport layer. The organic layer may further include a hole injection layer, an electron blocking layer, a hole blocking layer, an electron injection layer, etc., and the stack may further include other organic layers according to the structure and design of an organic light emitting device.

[0035] FIG. 1 is a cross-sectional view illustrating an organic light emitting device in accordance with one embodiment of the present invention.

[0036] As exemplarily shown in FIG. 1, the organic light emitting device in accordance with this embodiment of the present invention includes an anode 10 and a cathode 60 disposed opposite each other, an organic light emitting layer 30 provided between the anode 10 and the cathode 60, and a hole transport unit 200 provided between the anode 10 and the organic light emitting layer 30 and including two or more pairs of hole injection layers 210a, 210b, ... formed of a single hole injection material and hole transport layers 220a, 220b, ... formed of a single hole transport material, which are alternately disposed.

[0037] Further, as exemplarily shown in this figure, an electron transport layer 40 and an electron injection layer 50 may be further provided between the organic light emitting layer 30 and the cathode 60. However, the disclosure is not limited thereto and, as needed, the electron transport layer 40 and the electron injection layer 50 may be provided as one layer, or the organic light emitting layer 30 may include an electron transport material and thus the organic light emitting layer 30 and the electron transport layer 40 may be provided as one layer without an interface therebetween.

[0038] In the hole transport unit 200, the hole injection material has excellent electron affinity and thus reduces barriers at the interface between the anode 10 and the hole injection layer 210 adjacent to the anode 10 to facilitate injection of holes.

[0039] For example, the hole injection material may be any one of the hole injection material is any one of 7,7,8,8-tetracyano-2,3,5,6-tetrafluoroquinodimethane (F4TCNQ), fluorine-substituted 3,4,9,10-perylene-tetracarboxylic dianhydride (PTCDA), cyano-substituted PTCDA, 1,4,5,8-naphthalene-tetracarboxylic dianhydride (NTCDA), hexanitrile hexaazatriphenylene (HAT) and hexaazatriphenylene-hexacarbonitrile (HAT-CN), or a derivative thereof.

[0040] Further, the hole transport material may be a material which has excellent hole transportability in the organic layer and thus has high hole mobility.

[0041] For example, the hole transport material may be any one of N,N'-bis-(1-naphthalenyl)-N,N'-bis-phenyl-(1,1'-biphenyl)-4,4'-diamine (NPB, also referred to as N,N'-bis (naphthalene-1-yl)-N,N'-bis(phenyl)benzidine (NPD)), N,N'-bis(3-methylphenyl)-N,N'-diphenylbenzidine (TPD), s-TAD and 4,4',4"-tris(N-3-methylphenyl-N-phenyl-amino)-triphenylamine (MTDATA), or a derivative thereof.

[0042] FIG. 2 is a cross-sectional view illustrating a hole transport unit on an anode in accordance with one embodiment of the present invention, and FIG. 3 is a cross-sectional view illustrating a hole transport unit on an anode in accordance with another embodiment of the present invention. FIG. 4 is a band diagram of a hole injection layer and a hole transport layer of a hole transport unit in accordance with the present invention.

[0043] In the organic light emitting device of the present invention, the reason why the hole transport unit 200 includes the hole injection layers 210a, 210b, ... respectively formed of a single hole injection material and the hole transport layers 220a, 220b, ... respectively formed of a single hole transport material, as exemplarily shown in FIGS. 2 and 3, is that it is confirmed through experiments that performance of the hole transport unit 200 is lowered when a hole transport layer is doped with a hole injection material as a dopant material. That is, the organic light emitting device of the present invention includes the hole transport unit 200 including a plurality of layers formed by depositing different kinds of materials having different energy band gaps as different layers, thereby preventing lowering of performance due to mixing of different materials.

[0044] For example, if a method in which a hole injection material is mixed with a known hole transport layer is used, the hole injection material is combined with a material in the hole transport layer, changes overall physical properties of the hole transport layer or obstructs transport of holes of the hole transport layer and thus serves as a barrier in movement of the holes to the organic light emitting layer. Here, it is estimated that performance degradation is observed. Such experimental details will be described later with reference to the accompanying drawings.

[0045] In the organic light emitting device of the present invention, the lowermost part of the hole transport unit 200 contacts the anode 10 and the uppermost part of the hole transport unit 200 contacts the organic light emitting layer 30, as exemplarily shown in FIG. 1. In some cases, an electron blocking layer or a hole control layer, which controls the transport speed of holes transmitted to the organic light emitting layer 30, may be further provided between the upper part of the hole transport unit 200 and the organic light emitting layer 30.

[0046] Further, in the organic light emitting device of the present invention, disposition of two or more pairs of the hole injection layers 210a, 210b, ... respectively formed of a single hole injection material and the hole transport layers 220a, 220b, ... respectively formed of a single hole transport material, which are alternately deposited, means that the hole transport unit 200 includes at least four layers, i.e., a hole injection layer 210a, a hole transport layer 220a, a hole injection layer 210b and a hole transport layer 220b, which are sequentially deposited on the anode 10, as exemplarily shown in FIG. 2, and may further include another hole injection layer 210c and another hole transport layer 220c on the hole transport layer 220b, as exemplarily shown in FIG. 3. Each of the hole injection layers 210a, 210b, ... and the hole

transport layers 220a, 220b, ... of the hole transport unit 200 is formed by depositing a single material, and an interface is formed between adjacent layers.

[0047] In the organic light emitting device of the present invention, the thicknesses of the hole injection layers 210a, 210b, ... are smaller than the thicknesses of the hole transport layers 220a, 220b, ..., and, among the hole injection layers 210a, 210b, ..., the first hole injection layer 210a contacting the anode 10 may have the greatest thickness. The reason for this is that the first hole injection layer 210a contacting the anode 10 has the greatest interfacial barrier of the anode 10 with the organic layer. The hole injection layer 210a should have a designated thickness such that holes may enter the hole transport unit 200 via the barrier. The hole injection layers 210a, 210b, ... have thicknesses of about 10Å to 40Å and, thereamong, the first hole injection layer 210a may have a thickness of about 20Å to 40Å.

[0048] Although the hole transport unit 200 includes plural pairs of the hole injection layers 210a, 210b, ... and the hole transport layers 220a, 220b, ..., the hole transport unit 200 is not deposited infinitely. That is, the hole transport unit 200 serves to set the position of the organic light emitting layer 30 formed thereon and, thus, the total thickness of the hole transport unit 200 is within the range of 150Å to 2500Å. If organic light emitting devices respectively disposed in sub-pixels of an organic light emitting display emit different colors of light, hole transport units 200 of the organic light emitting devices in the respective sub-pixels may have different thicknesses. That is, the thickness of the hole transport unit 200 may be determined so that the intensity of light emitted from the organic light emitting layer 30 is the greatest according to the resonant period of a wavelength corresponding to the light.

[0049] Further, the hole transport unit 200 has a positive function of transmitting holes to the organic light emitting layer 30 so that the holes are combined with electrons transmitted from the cathode 60 to generate excitons and then to emit light. For this purpose, the hole transport layers 220a, 220b, ... occupy the majority of the total thickness of the hole transport unit 200, i.e., about 70% to 99% of the total thickness of the hole transport unit 200. That is, in the hole transport unit 200, the hole transport layers 220a, 220b, ... are thicker than the hole injection layers 210a, 210b,

[0050] Here, as exemplarily shown in FIG. 4, the Lowest Unoccupied Molecular Orbital (LUMO) level of a hole injection layer 210 of the hole transport unit 200 may be equal to or lower than the Highest Occupied Molecular Orbital (HOMO) level of a hole transport layer 220. More particularly, a HOMO-LUMO band gap of the hole injection layer 210 may be spaced apart from a HOMO-LUMO band gap of the hole transport layer 220 even by a small distance. The LUMO level of the hole injection layer 210 may be lower than the HOMO level of the hole transport layer 220 by 0.01 eV to 1.00 eV.

[0051] The reason why there is a great difference in energy band gaps between the hole injection layer 210 and the hole transport layer 220 of the hole transport unit 200 is to cause the hole injection layer 210 having a lower LUMO level to induce a function of generating charges. That is, electrons in the hole transport layer 220 having a relatively high HOMO level jump to the adjacent hole injection layer 210 having a low LUMO level, locations within the hole transport layer 220, from which the electrons are removed, are filled with holes, and, thus, the hole transport unit 200 has hole transport characteristics. Here, the LUMO level of the hole injection layer 210 is lower than the HOMO level of the adjacent hole transport layer 220 and, thereby, electrons may easily enter the hole injection layer 210 and the electrons may be trapped within the hole injection layer 210 having a lower LUMO level.

[0052] The HOMO level and the LUMO level have negative values, and that the LUMO level of the hole injection layers 210a, 210b, ... is lower than the HOMO level of the hole transport layers 220a, 220b, ... means that the absolute value of the LUMO level of the hole injection layers 210a, 210b, ... is greater than the absolute value of the HOMO level of the hole transport layers 220a, 220b and the energy band gaps of the hole transport layer 220 and the hole injection layer 210 do not overlap and are separated from each other, as exemplarily shown in FIG. 4. Here, a separation difference does not exceed 1 eV. The reason for this is that each of all organic materials has a lower HOMO level than a LUMO level and thus it is difficult to synthesize a material for the hole injection layer 210 having a lower LUMO level than the HOMO level of the hole transport layer 220 by more than 1 eV, and it is difficult to secure material stability.

[0053] The above-described hole transport unit 200 may be applied to the above-described organic light emitting device having a unit structure and contact an anode or a charge generation layer of a structure having a plurality of stacks.

[0054] FIG. 5 is a cross-sectional view illustrating an organic light emitting device in accordance with another embodiment of the present invention.

[0055] That is, as exemplarily shown in FIG. 5, the organic light emitting device in accordance with this embodiment of the present invention has a structure including a plurality of stacks. In more detail, the organic light emitting device includes at least one charge generation layer 300 provided between an anode 10 and a cathode 60, and stacks 400 and 500 provided between the anode and cathode 10 and 60 and the charge generation layer 300.

[0056] If a plurality of charge generation layers 300 is provided, another stack may be further provided between the charge generation layers 300.

[0057] Further, the respective stacks 400 and 500 include hole transport units 200, organic light emitting layers 410 and 510, and electron transport layers 420 and 520. The hole transport units 200 have the same configuration and physical properties as the above-described hole transport unit 200 in accordance with the former embodiment.

[0058] The charge generation layer 300 may contact the electron transport layer 420 of the lower stack 400. Here, if the charge generation layer 300 is formed by stacking n-type and p-type charge generation layers, the n-type charge

generation layer may directly contact the electron transport layer 420 and the p-type charge generation layer may contact the hole transport unit 200 of the upper stack 500.

[0059] As circumstances require, the charge generation layer 300 may be a single n-type charge generation layer and, in this case, the hole transport unit 200 may have a function of a p-type charge generation layer.

[0060] FIG. 6 is a graph comparatively showing lifespans an organic light emitting device of comparative example 1, in which a hole transport unit includes a layer formed of a hole transport material and a hole injection material mixed with each other, and an organic light emitting device of comparative example 2, in which a hole transport unit includes a pair of a hole injection layer formed of a single material and a hole transport layer formed of a single material, and FIG. 7 is a graph comparatively showing lifespans of the organic light emitting device of comparative example 2 and the organic light emitting devices in accordance with the embodiments of the present invention.

[0061] With reference to FIGS. 6 and 7 and Tables 1 and 2 below, in comparative example 1 (①), 3 wt% of a hole injection material is mixed with a hole transparent material, as compared to the hole transport unit 200 in accordance with the present invention, and, in comparative example 2 (②) a pair of a hole injection layer and a hole transport layer are provided through deposition.

[0062] Further, experimental example 1 (③) and experimental example 2 (④) relate to the embodiment of the present invention shown in FIG. 2, in which two pairs of hole injection layers formed of a single material and hole transport layers formed of a single material are alternately disposed through deposition. On the assumption that the total thickness of a pair of the hole injection layer and the hole transport layer is 220Å, the hole injection layers have a thickness of 20Å and the hole transport layers have a thickness of 200Å in experimental example 1, and the hole injection layers have a thickness of 35Å and the hole transport layers have a thickness of 185Å in experimental example 2.

[0063] Further, experimental example 3 (⑤) relates to the embodiment of the present invention shown in FIG. 3, in which three pairs of hole injection layers formed of a single material and hole transport layers formed of a single material are alternately disposed through deposition. In this case, the hole injection layers have a thickness of 20Å and the hole transport layers have a thickness of 135Å.

[0064] In comparative examples and experimental examples, experiments are carried out in a state in which the total thickness of the hole transport layers or the hole transport unit is within the range of 400Å to 470Å. Such a state serves to satisfy the resonant condition of the organic light emitting layer on which the hole transport layers or the hole transport unit is located.

[Table 1]

	HIL1	HTL1	HIL2	HTL2	HIL3	HTL3	NOTE
①	Hole transport material + 3 wt% of hole injection material						Doping-type
②	70 Å	400 Å	-				Layered-type
③	20 Å	200 Å	20 Å	200 Å	-		
④	35 Å	185 Å	35 Å	185 Å	-		
⑤	20 Å	135 Å	20 Å	135 Å	20 Å	135 Å	

[Table 2]

	Driving voltage (V)	Efficiency (%)	CIE _x	CIE _y
①	9.0	40	0.131	0.080
②	7.3	100	0.131	0.075
③	7.9	118	0.131	0.076
④	7.5	110	0.133	0.072
⑤	7.9	111	0.127	0.092

[0065] Table 1 represents thickness conditions of the respective comparative examples and experimental examples, and Table 2 and FIGS. 6 and 7 represent experimental results thereof.

[0066] As stated in Table 2, if the hole transport layer is doped with the hole injection material in comparative example 1, driving voltage is raised to 9.0 V by 15% to 25% of driving voltages of experimental examples 1 to 3 (the first and second embodiments) and comparative example 2. Therefore, it may be confirmed that driving voltage of the doped

structure is raised, as compared to the layered structures.

[0067] Further, on the assumption that efficiency of comparative example 2 is 100%, efficiencies of comparative example 1 and experimental examples 1, 2 and 3 are acquired by comparing measured data of luminance characteristics to current Cd/A thereof with data of example 2. If efficiency of comparative example 2 having a layered structure including a pair of the hole injection layer and the hole transport layer is 100%, efficiencies of the first and second embodiments of the present invention are raised to 110% or more and, thus, it may be confirmed that, when two or more pairs of hole injection layers and hole transport layers are alternately stacked, efficiency is raised. That is, this means that under the same current conditions, the first and second embodiments of the present invention have luminance values enhanced by 10% or more, as compared to the luminance value of comparative example 2 and, thus, it may be confirmed that alternate deposition of two or more pairs of hole injection layers formed of a single hole injection material and hole transport layers formed of a single hole transport material is effective.

[0068] Further, in Table 2, it may be confirmed that CIE_x and CIE_y values of comparative examples 1 and 2 and the first and second embodiments of the present invention are substantially equal or similar, and this means that, if the same light emitting layer is applied to comparative examples 1 and 2 and the first and second embodiments of the present invention, approximately equivalent color expression is possible under the respective conditions.

[0069] Table 2 represents that the organic light emitting devices of the present invention have remarkably low driving voltage, as compared to comparative example 1, and have improved efficiency, as compared to comparative examples 1 and 2. Further, through comparison between comparative example 2 and the first and second embodiments of the present invention, driving voltage of comparative example 2 is decreased more than driving voltages of the first and second embodiments of the present invention but efficiency of comparative example 2 is lower than efficiencies of the first and second embodiments of the present invention by 10% or more and, thus, if the same efficiency is implemented, driving voltage of comparative example 2 is substantially higher than driving voltages of the first and second embodiments of the present invention. Further, with reference to FIGS. 6 and 7, when the embodiments of the present invention are applied, the organic light emitting devices of the present invention may have excellent lifespan, as compared to the comparative examples.

[0070] In FIGS. 6 and 7, lifespans of the organic light emitting devices are measured until luminance is decreased from 100% at an initial stage to 97%, i.e., by about 3%.

[0071] As exemplarily shown in FIG. 6, it may be confirmed that the lifespan of the organic light emitting device of comparative example 2 including a pair of the hole injection layer and hole transport layer is extended by 10 or more times the lifespan of the organic light emitting device of comparative example 1 including the doped hole transport layer and, as exemplarily shown in FIG. 7, it may be confirmed that the lifespans of the organic light emitting devices of the first and second embodiments of the present invention are extended by 1.4 to 1.9 times the lifespan of the organic light emitting device of comparative example 2.

[0072] Through the experiment of FIG. 6, it may be confirmed that the lifespan of the organic light emitting device including the hole transport layer doped with the dopant material is remarkably shortened, as compared to the organic light emitting device including the hole injection layer formed of the hole injection material and the hole transport layer formed of the hole transport material, which are alternately stacked.

[0073] The inventor(s) of the present invention have considered the cause of shortening lifespan of the doped structure (comparative example 1). A dopant material is added just to assist generation of charges in a hole transport layer, but the dopant material present in the hole transport layer lowers chemical stability of the hole transport layer, directly reacts with a hole transport material, does not fulfill a charge generation function and causes malfunction of the hole transport material.

[0074] The present invention is provided, from the viewpoint of such lifespan difference, to find out effects of a layered structure of a single hole injection material and a single hole transport material and particularly to deduce a structure in which two or more pairs of hole injection layers formed of a single material and hole transport layers formed of a single material are stacked so as to have improved lifespan, as compared to comparative example 2. That is, if a layered structure including layers, each of which is formed of a single material, is applied, materials of adjacent layers do not influence the opposite layers except at the interface therebetween and, thus, internal chemical stability of the layers may be acquired, chemical stability of the respective layers may be maintained and thus the structure may be driven for a long time.

[0075] In Tables 1 and 2 and FIG. 7, effect differences among experimental examples 1 to 3 are caused by thickness differences between a single hole injection material and a single hole transport material, which are stacked in a plural pairs.

[0076] In terms of lifespan, when two pairs of hole injection layers formed of a single material and hole transport layers formed of a single material are alternately stacked, and particularly, the hole injection layers have a thickness of 35Å and the hole transport layers have a thickness of 185Å, the longest lifespan is acquired. It may be confirmed that the lifespans of the organic light emitting devices decrease in order of experimental example 4, experimental example 3, and experimental example 5. In general, in a structure in which a hole transport layer is doped with a hole injection material as a dopant material, a small amount of the hole injection material, i.e., 5 wt% or less of the hole injection

material is injected into the hole transport layer, an injection depth of the hole injection material is limited to 10Å or less and, thus, a thickness occupied by the hole injection material is very small as compared to the total thickness of the hole transport layer, but the above experiment indicates that, in each pair of the hole injection layer and the hole transport layer of the hole transport unit of the organic light emitting device of the present invention, the hole transport layer should assure a designated thickness of 10Å to 40Å so as to achieve normal operation. That is, if one hole injection layer and one hole transport layer are provided in a pair, a ratio of the hole injection layer to the hole transport layer is 1:10 to 1:5 and, thus, the ratio of the hole injection layers to the overall hole transport unit of the present invention may be increased, as compared to comparative example 1, so as to achieve normal operation of the respective hole injection layers.

[0077] Further, thickness arrangement of the hole injection layers and the hole transport layers of the hole transport unit may influence a hole transport speed, thereby controlling the width of an emission zone. That is, if two or more pairs of hole injection layers formed of a single material and hole transport layers formed of a single material are provided, both efficiency and lifespan of the organic light emitting device may be remarkably increased, as compared to comparative example 2.

[0078] FIG. 8 is a graph comparatively showing lifespans of organic light emitting devices of experimental examples, in which the same hole injection material and different hole transport materials are used.

[0079] In experimental examples of FIG. 8, lifespans of organic light emitting devices shown in FIG. 1, which include hole transport layers formed of hole transport materials A to E having different HOMO levels, are measured, as stated in Table 3 below.

[0080] In this case, hole injection layers contacting the hole transport layers are formed of the same material having a LUMO level of -5.46 eV and a HOMO level of -9 eV.

[Table 3]

Hole transport material	Driving voltage (V)	HOMO (eV)	LUMO (eV)
A	7.2	-5.23	-2.17
B	7.3	-5.36	-2.26
C	7.2	-5.4	-2.4
D	7.8	-5.52	-2.52
E	8.0	-5.61	-2.51

[0081] With reference to FIG. 8, it may be confirmed that, if the HOMO level of the hole transport material, such as the hole transport material D or E, is lower than the LUMO level (-5.46 eV) of the hole injection material (in this case, there is an overlapping section of energy band gaps between a hole injection layer and a hole transport layer), the lifespan of the organic light emitting device is remarkably shortened, as compared to if the HOMO level of the hole transport material, such as the hole transport material A, B or C, is higher than the LUMO level (-5.46 eV) of the hole injection material (in this case, energy band gaps of a hole injection layer and a hole transport layer are spaced apart from each other).

[0082] Further, it may be confirmed through Table 3 that, if the HOMO level of the hole transport material, such as the hole transport material D or E, is lower than the LUMO level (-5.46 eV) of the hole injection material (in this case, there is an overlapping section of energy band gaps between a hole injection layer and a hole transport layer), driving voltage (7.8 V or 8.0 V) of the organic light emitting device is higher than driving voltage if the HOMO level of the hole transport material, such as the hole transport material A, B or C, is higher than the LUMO level (-5.46 eV) of the hole injection material (in this case, energy band gaps of a hole injection layer and a hole transport layer are spaced apart from each other) by 10% or more. That is, the hole transport unit of the organic light emitting device of the present invention, in which two or more pairs of hole injection layers formed of a single material and hole transport layers formed of a single material are stacked and energy band gaps of the hole injection layers and the hole transport layers are spaced apart from each other, has driving voltage reduction effects, as compared to a structure in which energy band gaps of hole injection layers and hole transport layers overlap each other.

[0083] That is, as the organic light emitting device of the present invention, if two or more pairs of hole injection layers formed of a single material and hole transport layers formed of a single material are stacked and energy band gaps of the hole injection layers and the hole transport layers are spaced apart from each other, reduction in driving voltage, improvement in efficiency and remarkable enhancement in lifespan may be expected. In this figure, a gradation of a horizontal axis represents 100 hours, and use of the hole transport materials A to C to form the hole transport layers causes lifespan extension effects of about 2 times or more, as compared to use of the hole transport materials D and E to form the hole transport layers.

[0084] The HOMO levels of the hole transport layers and the LUMO levels of the hole injection layers of the above-described experimental examples are not limited to Table 3 and, if the LUMO level of the hole injection layer 210 is equal to or lower than the HOMO level of the hole transport layer 220, reduction in driving voltage, improvement in efficiency and remarkable enhancement in lifespan are expected, as described above.

[0085] FIG. 9 is a view illustrating a method of fabricating a hole transport unit of an organic light emitting device in accordance with the present invention.

[0086] First, the method of fabricating the hole transport unit in accordance with the present invention is carried out in order below.

[0087] A substrate 700 including anodes 10 of respective sub-pixels is prepared and then disposed such that the anodes 10 face a hole transport unit supply chamber 600.

[0088] Here, the hole transport unit supply chamber 600 is provided with a hole injection material supply source 610 and a hole transport material supply source 620.

[0089] Thereafter, the hole injection material supply source 610 and the hole transport material supply source 620 sequentially supply corresponding materials to the substrate 700, thereby forming a hole injection layer 210 and a hole transport layer 220. Through repetition of such a process, two or more pairs of hole injection layers 210 and hole transport layers 220 are formed and thereby a hole transport unit 200 is fabricated.

[0090] In such a process of fabricating the hole transport unit 200, the hole transport material supply source 620 is repetitively used while varying the scan direction of the substrate 700.

[0091] The substrate 700 is used in an organic light emitting display and, in this case, may include a thin film transistor connected to the lower surface of a first electrode 10 of each of the sub-pixels. The formation method of the thin film transistor is not restricted, the thin film transistor may include a gate electrode, an active layer, a source electrode and a drain electrode, and the source electrode or the drain electrode may be connected to the first electrode. Further, the active layer may include an amorphous silicon layer, a polysilicon layer, a double layer including the same, a plurality of layers including the same or an oxide film semiconductor, or be changed to various types.

[0092] In a conventional structure in which a hole transport layer is doped with a hole injection material as a dopant material, it is difficult to properly disperse a small amount of the dopant material and to quantify dispersion of the dopant material in the process and, thus, it is difficult to achieve uniform performance of the hole transport layer due to non-uniform distribution of the dopant material within the hole transport layer. However, as described above, the hole transport unit of the organic light emitting device in accordance with the present invention has a layered structure of hole transport layers formed of a single material and hole injection layers formed of a single material and may thus solve the above problem caused by difficulty in quantification of the dopant material.

[0093] The organic light emitting device in accordance with the present invention may be applied to each sub-pixel and thus applied to an organic light emitting display.

[0094] FIG. 10 is a cross-sectional view illustrating an organic light emitting display in accordance with the present invention.

[0095] As exemplarily shown in FIG. 10, the organic light emitting display in accordance with the present invention includes a substrate 100 including a plurality of sub-pixels, thin film transistors (TFTs) of the respective sub-pixels being provided on the substrate 100, and organic light emitting devices (OLED) having anodes 10 and cathodes 60. Here, the anode 10 or the cathode 60 of each organic light emitting device is connected to each TFT. Although FIG. 10 illustrates one sub-pixel, sub-pixels having the same shape are substantially arranged in a matrix on the substrate 100.

[0096] Here, the thin film transistor includes a gate electrode 101 provided in a designated region on the substrate 100, a gate insulating film 102 formed on the substrate 100 so as to cover the gate electrode 101, a semiconductor layer 103 formed on the gate insulating film 102 so as to correspond to the gate electrode 101, and a source electrode 104a and a drain electrode 104b formed at both sides of the semiconductor layer 103.

[0097] Further, an inorganic protective film 105 and an organic protective film 106 are sequentially provided to cover the source electrode 104a and the drain electrode 104b, and the anode 10 or the cathode 60 is connected to the drain electrode 104b via a contact hole 1060 formed through the organic protective film 106 and the inorganic protective film 105 to expose a part of the drain electrode 104b.

[0098] For example, if the anode 10 is connected to the drain electrode 104b, an organic stack, in which a hole transport unit 200, an organic light emitting layer 30, an electron transport layer 40 and an electron injection layer 50 are sequentially deposited, is formed on the anode 10, and the cathode 60 is provided on the organic stack. As circumstances require, the organic stack may be replaced with the stack structure shown in FIG. 5.

[0099] On the other hand, if the cathode 60 is connected to the drain electrode 104b, an organic stack, in which the above-described elements are provided in reverse order, is provided. That is, an electron injection layer 50, an electron transport layer 40, an organic light emitting layer 30 and a hole transport unit 20 are sequentially deposited.

[0100] In some cases, a hole injection layer may be further provided between the anode 10 and a hole transport layer of the hole transport unit 200, and an electron injection layer may be further provided between the electron transport layer and the cathode 60.

[0101] Further, although this figure illustrates a bank 107 provided to define an emission zone, the bank 107 may be omitted and the emission zone may be defined by other structures or the organic stack and the cathode 60 may be provided in common in all sub-pixels and colors of the sub-pixels may be discriminated by color filters.

[0102] Moreover, although FIG. 10 illustrates the organic light emitting device in accordance with the embodiment shown in FIG. 1, the disclosure is not limited thereto and the organic light emitting device in accordance with the embodiment shown in FIG. 5, in which a plurality of stacks is provided between an anode and a cathode, may be provided.

[0103] The above-described organic light emitting display may achieve color expression by emitting different colors of light through the organic light emitting layers of the respective sub-pixels, or achieve color expression by adding a color filter layer to a light emitting portion of a common organic light emitting layer.

[0104] Such an organic light emitting display including the above-described organic light emitting device may have the same effects as the above-described organic light emitting device.

[0105] As apparent from the above description, an organic light emitting device and an organic light emitting display using the same in accordance with one embodiment of the present invention have effects below.

[0106] First, hole injection layers are formed of a single material and hole transport layers are formed of a single material, and plural pairs of the hole injection layers and the hole transport layers are alternately deposited to form a hole transport unit, thereby achieving reduction in driving voltage and improvement in efficiency and lifespan.

[0107] Second, in a conventional structure in which a hole transport layer is doped with a hole injection material as a dopant material, it is difficult to properly disperse a small amount of the dopant material and to quantify dispersion of the dopant material in the process and, thus, it is difficult to achieve uniform performance of the hole transport layer due to non-uniform distribution of the dopant material in the hole transport layer. However, the hole transport unit of the organic light emitting device in accordance with the present invention has a layered structure of the hole transport layers formed of a single material and the hole injection layers formed of a single material and may thus solve such a problem.

Claims

1. An organic light emitting device comprising:

an anode (10) and a cathode (60) disposed opposite each other;
an organic light emitting layer (30) provided between the anode (10) and the cathode (60); and
a hole transport unit (200) provided between the anode and the organic light emitting layer and including two or more pairs of hole injection layers (210a, 210b, ...) formed of a single hole injection material and hole transport layers (220a, 220b, ...) formed of a single hole transport material, the hole injection layers (210a, 210b, ...) and the hole transport layers (220a, 220b, ...) being alternately disposed.

2. The organic light emitting device according to claim 1, wherein a LUMO level of the hole injection layers (210a, 210b, ...) is lower than or equal to a HOMO level of the hole transport layers (220a, 220b, ...).

3. The organic light emitting device according to claim 2, wherein the LUMO level of the hole injection layers (210a, 210b, ...) is lower than the HOMO level of the hole transport layers (220a, 220b, ...) by 0.01 eV to 1.00 eV.

4. The organic light emitting device according to any one of claims 1 to 3, wherein the hole injection material is any one of 7,7,8,8-tetracyano-2,3,5,6-tetrafluoroquinodimethane (F4TCNQ), fluorine-substituted 3,4,9,10-perylene-tetracarboxylic dianhydride (PTCDA), cyano-substituted PTCDA, 1,4,5,8-naphthalene-tetracarboxylic dianhydride (NTCDA), hexanitrile hexaazatriphenylene (HAT) and hexaazatriphenylene-hexacarbonitrile (HAT-CN), or a derivative thereof.

5. The organic light emitting device according to any one of claims 1 to 4, wherein the hole transport material is any one of N,N'-bis-(1-naphthalenyl)-N,N'-bis-phenyl-(1,1'-biphenyl)-4,4'-diamine (NPB, also referred to as N,N'-bis(naphthalene-1-yl)-N,N'-bis(phenyl)benzidine (NPD)), N,N'-bis(3-methylphenyl)-N,N'-diphenylbenzidine (TPD), s-TAD and 4,4',4''-tris(N-3-methylphenyl-N-phenyl-amino)-triphenylamine (MTDATA), or a derivative thereof.

6. The organic light emitting device according to any one of claims 1 to 5, wherein:

the thickness of the hole injection layers (210a, 210b, ...) is smaller than the thickness of the hole transport layers (220a, 220b, ...);
the thickness of the hole transport layers (220a, 220b, ...) is 10Å to 40Å; and
the total thickness of the hole transport unit (200) is 150Å to 2500Å.

7. An organic light emitting device comprising:

an anode (10) and a cathode (60) disposed opposite each other;
 a charge generation layer (300) located between the anode (10) and the cathode (60) so as to divide two or
 more stacks (400, 500) provided between the anode (10) and the cathode (60);
 organic light emitting layers (410, 510) respectively provided on the two or more stacks (400, 500); and
 a hole transport unit (200) provided on any one of the two or more stacks (400, 500), contacting the anode (10)
 or the charge generation layer (300) and including two or more pairs of hole injection layers (210a, 210b, ...)
 formed of a single hole injection material and hole transport layers (220a, 220b, ...) formed of a single hole
 transport material, the hole injection layers (210a, 210b, ...) and the hole transport layers (210a, 210b, ...) being
 alternately disposed.

8. The organic light emitting device according to claim 7, wherein a LUMO level of the hole injection layers (210a, 210b, ...) is lower than or equal to a HOMO level of the hole transport layers (220a, 220b, ...).

9. An organic light emitting display comprising:

a substrate (100) including a plurality of sub-pixels, each sub-pixel of the plurality of sub-pixels comprising a
 thin film transistor and an organic light emitting device (OLED) according to any one of claims 1 to 8, wherein
 the anode (10) or the cathode (60) of the organic light emitting device is connected to the thin film transistor.

FIG. 1

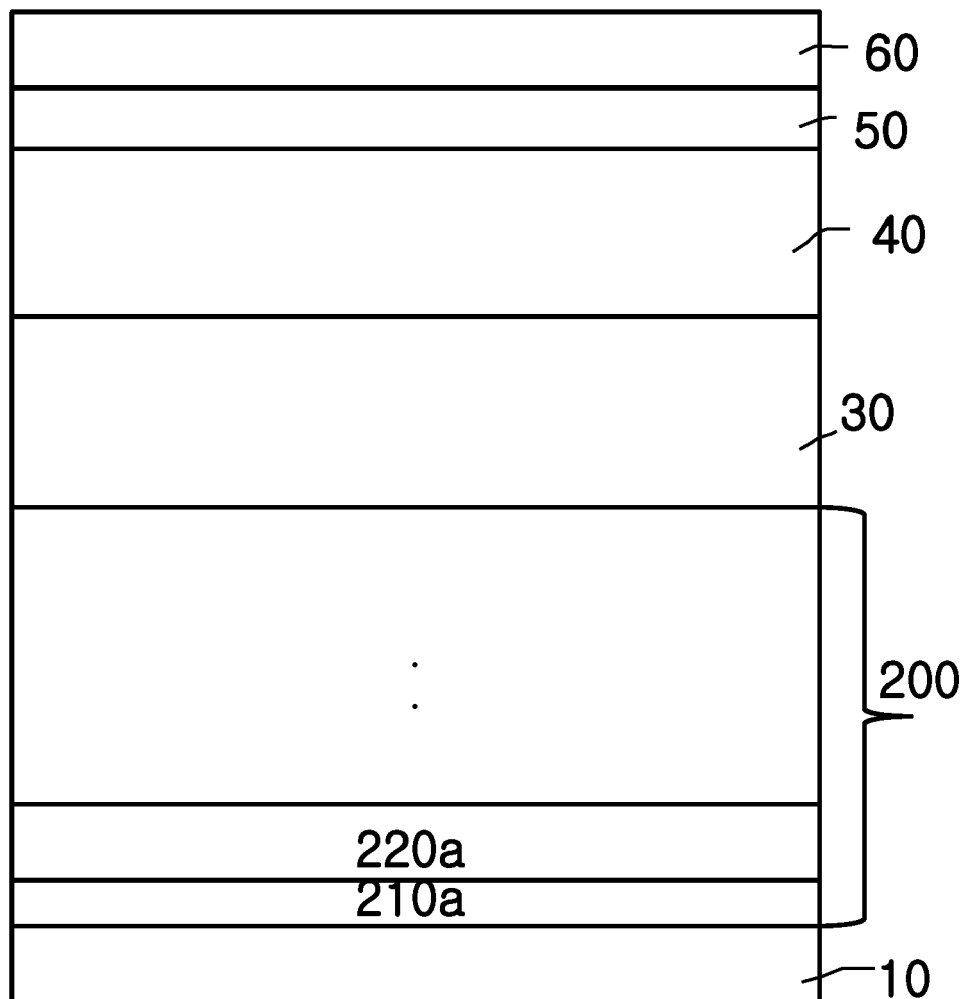


FIG. 2

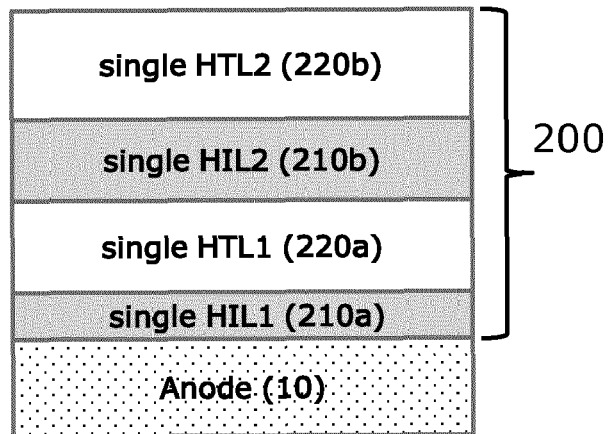


FIG. 3

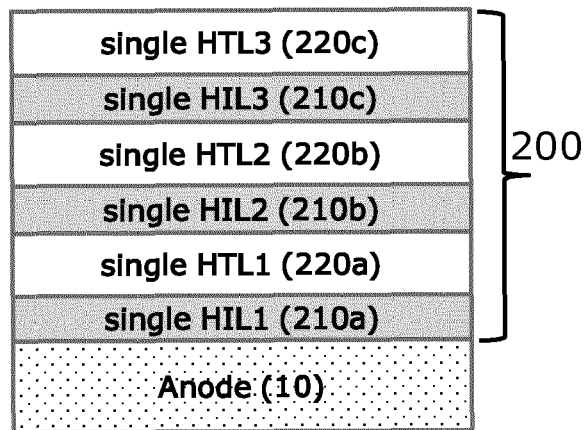


FIG. 4

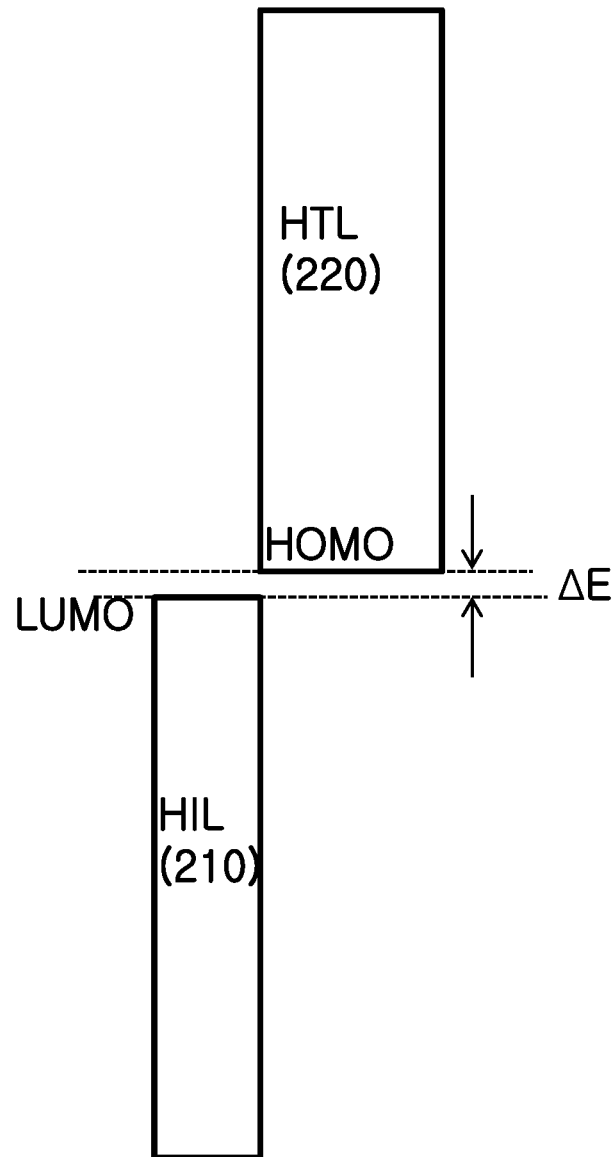


FIG. 5

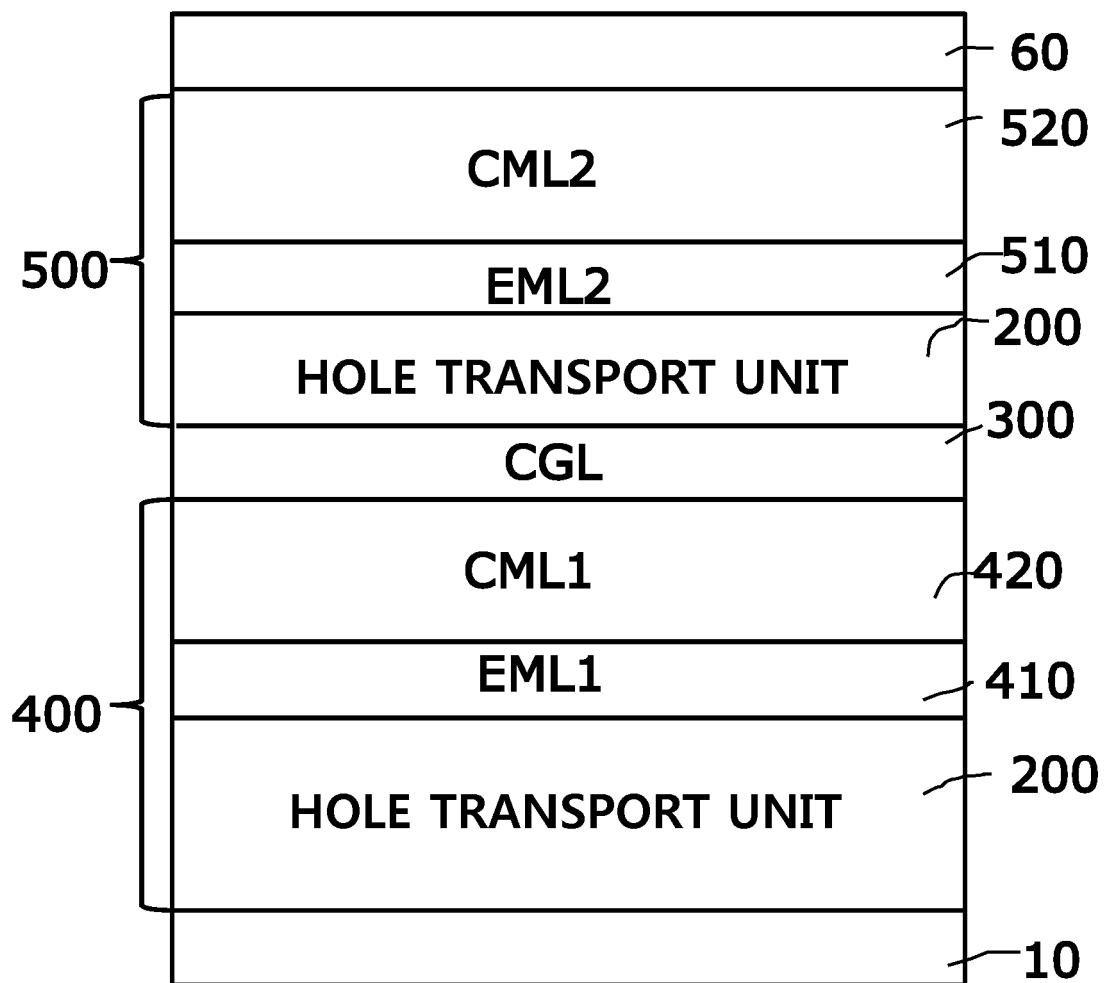


FIG. 6

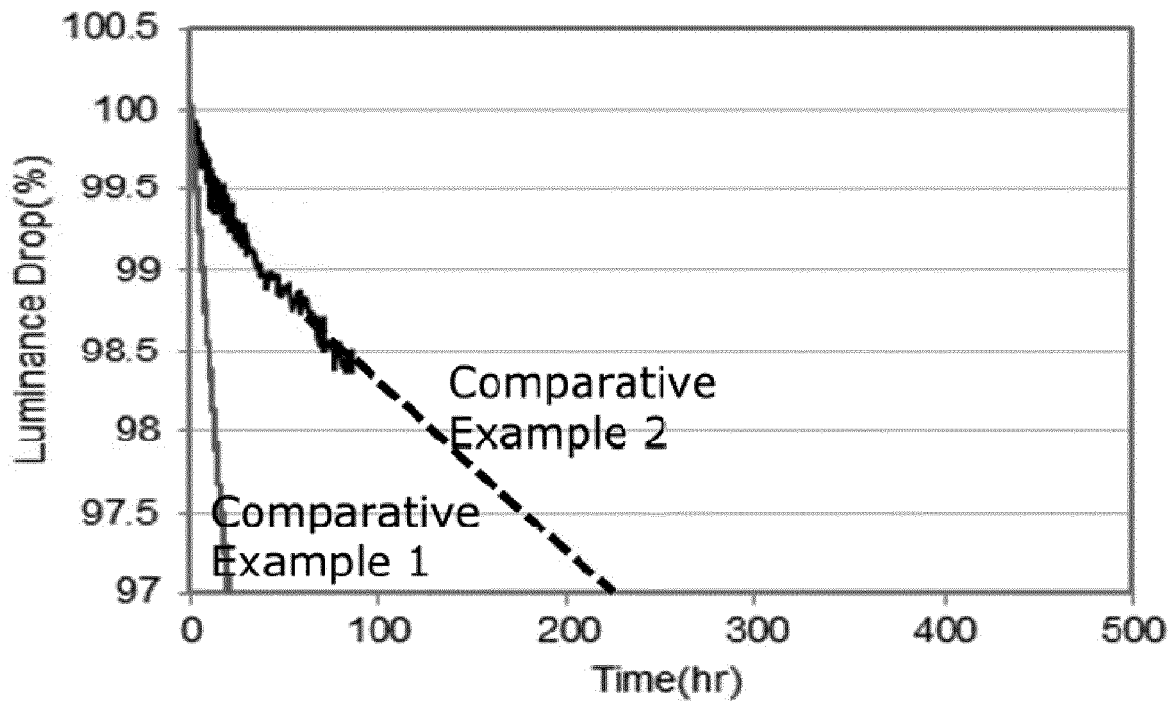


FIG. 7

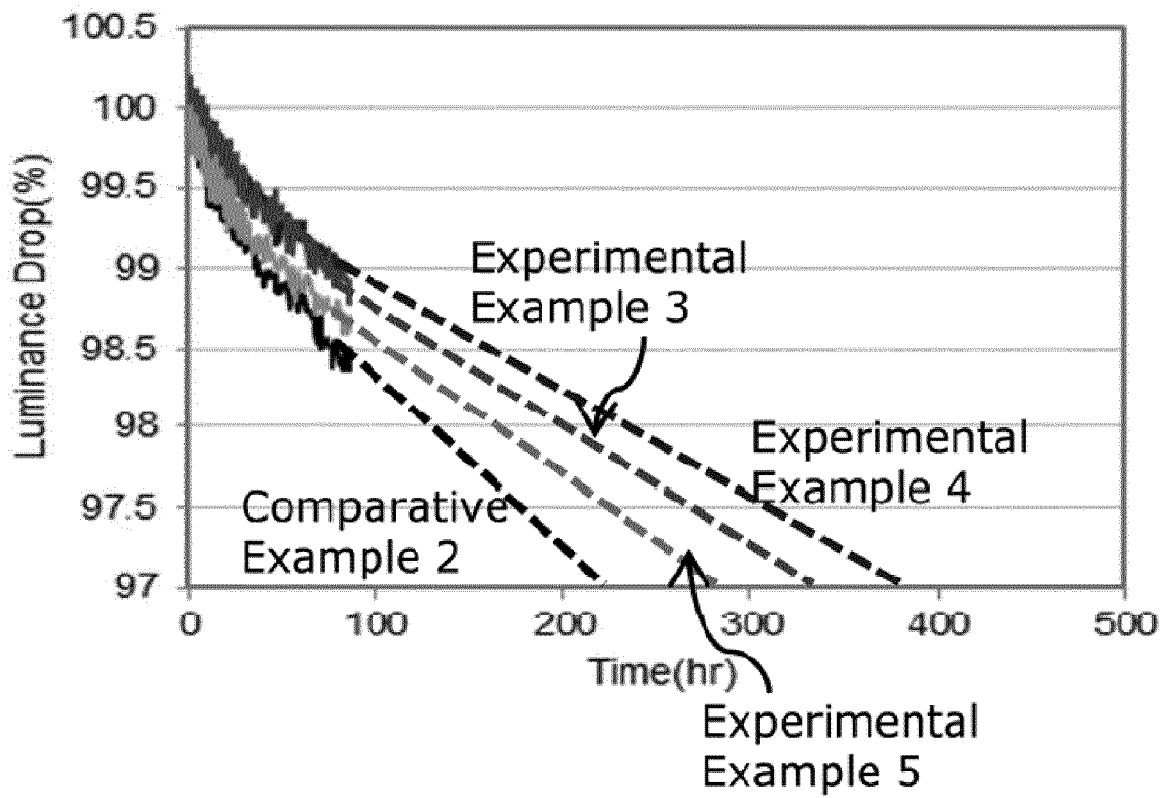


FIG. 8

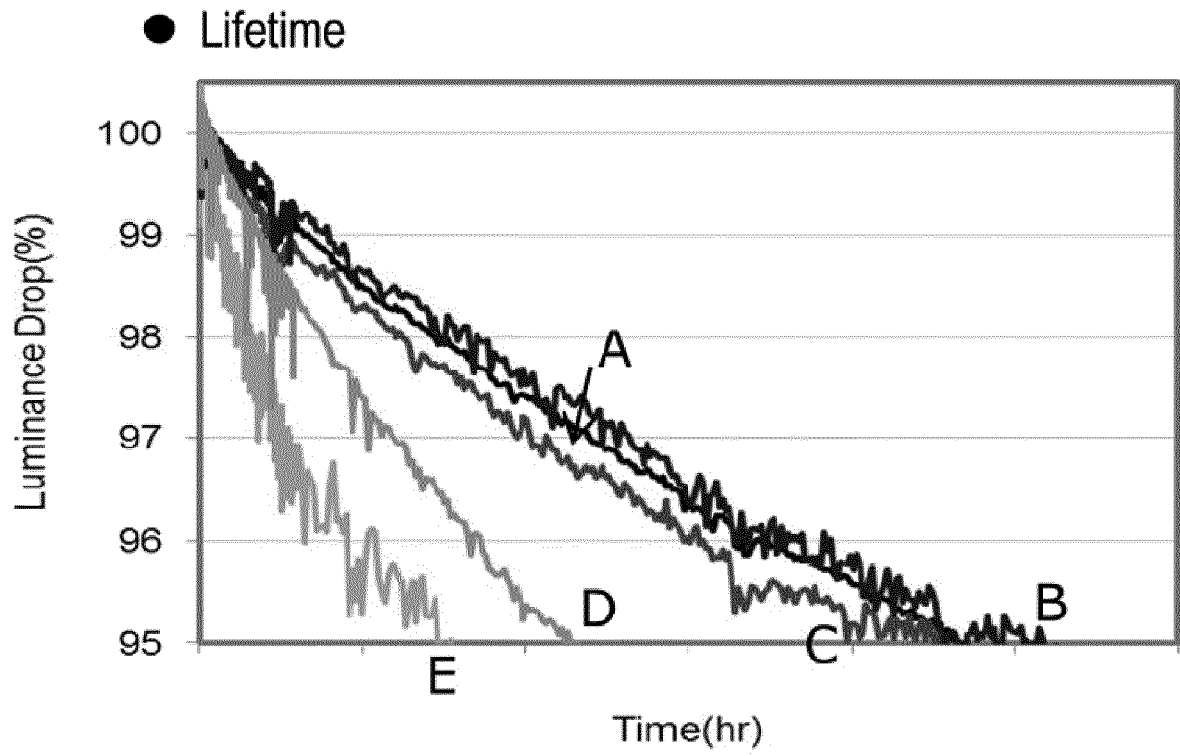


FIG. 9


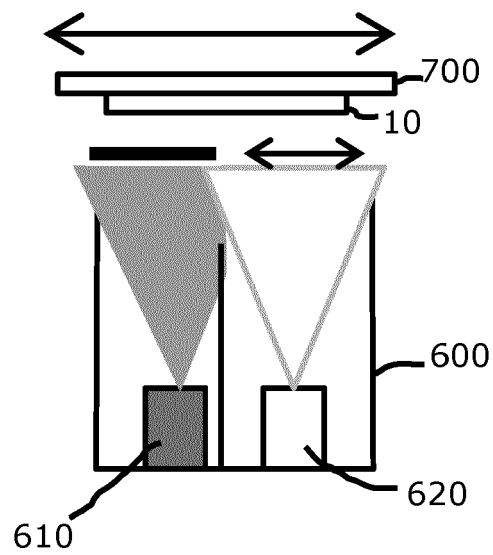


FIG. 10



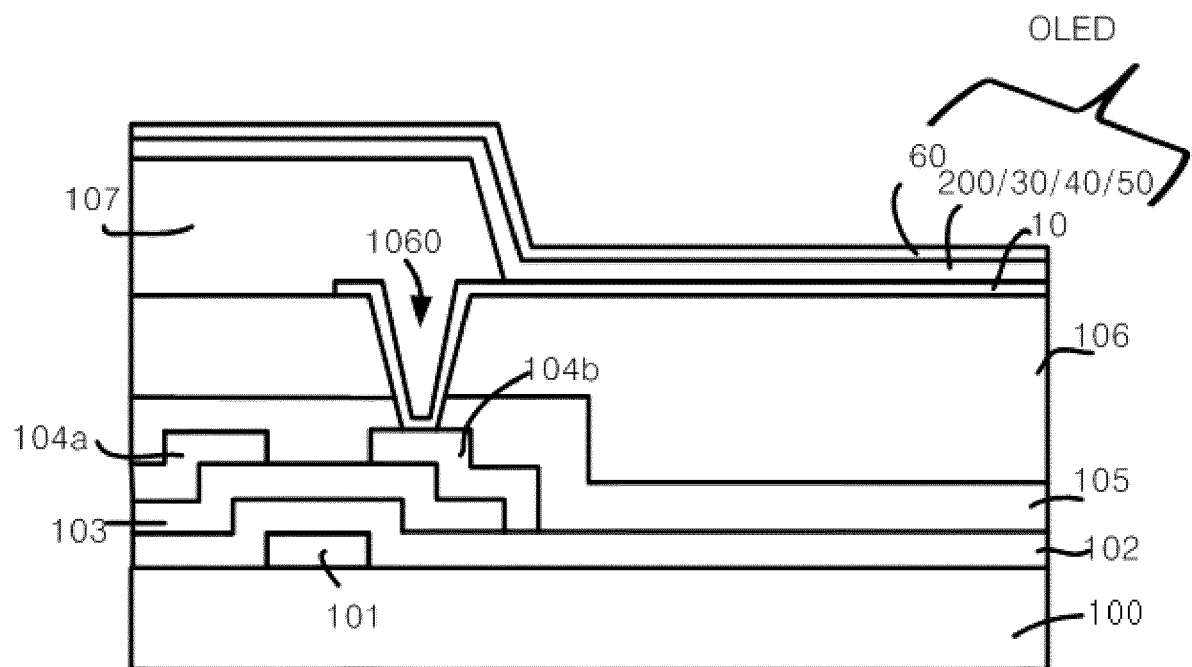

EUROPEAN SEARCH REPORT

Application Number
EP 17 18 3468

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	HIN-WAI MO ET AL: "Multi-Alternating Organic Semiconducting Films with High Electric Conductivity", ADVANCED FUNCTIONAL MATERIALS, WILEY - VCH VERLAG GMBH & CO. KGAA, DE, vol. 24, no. 34, 10 September 2014 (2014-09-10), pages 5375-5379, XP001591632, ISSN: 1616-301X, DOI: 10.1002/ADFM.201400468 [retrieved on 2014-06-23] * the whole document *	1,2,5-7, 9	INV. H01L51/50
X	US 2011/215308 A1 (IM JA-HYUN [KR] ET AL) 8 September 2011 (2011-09-08) * paragraph [0142]; figure 2 *	1,4,6,7, 9	
			TECHNICAL FIELDS SEARCHED (IPC)
			H01L
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 20 November 2017	Examiner Wolfbauer, Georg
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 17 18 3468

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-11-2017

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011215308 A1	08-09-2011	CN 102201432 A	28-09-2011
		EP 2365555 A2	14-09-2011
		JP 6192699 B2	06-09-2017
		JP 2011187959 A	22-09-2011
		JP 2016048787 A	07-04-2016
		KR 20110101418 A	16-09-2011
		US 2011215308 A1	08-09-2011

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 1020160097551 [0001]

专利名称(译)	有机发光器件和使用其的有机发光显示器		
公开(公告)号	EP3276699A1	公开(公告)日	2018-01-31
申请号	EP2017183468	申请日	2017-07-27
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	KIM BYUNG SOO SEOK HAN BYEOL KIM SEOK HYUN		
发明人	KIM, BYUNG-SOO SEOK, HAN-BYEOL KIM, SEOK-HYUN		
IPC分类号	H01L51/50		
CPC分类号	H01L27/3244 H01L51/5064 H01L51/5088 H01L51/5044 H01L51/5096 H01L2251/552 H01L51/5004 H01L51/5056 H01L51/5203		
优先权	1020160097551 2016-07-29 KR		
外部链接	Espacenet		

摘要(译)

公开了一种有机发光器件和使用该有机发光器件的有机发光显示器。有机发光装置包括由单一材料形成的两对或更多对空穴注入层 (210a , 210b , ...) 和由单一材料形成的空穴传输层 (220a , 220b , ...) , 交替堆叠从而实现驱动电压的降低以及效率和寿命的提高。

FIG. 2

