



(11) **EP 3 291 327 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
17.04.2019 Bulletin 2019/16

(51) Int Cl.:
H01L 51/54 ^(2006.01) **C07D 213/57** ^(2006.01)

(21) Application number: **17177815.2**

(22) Date of filing: **26.06.2017**

(54) **ORGANIC COMPOUND, AND ORGANIC LIGHT EMITTING DIODE AND ORGANIC LIGHT
EMITTING DISPLAY DEVICE INCLUDING THE SAME**

ORGANISCHE VERBINDUNG UND ORGANISCHE LEUCHTDIODE SOWIE ORGANISCHE
LICHTEMITTIERENDE ANZEIGEVORRICHTUNG DAMIT

COMPOSÉ ORGANIQUE ET DIODE ÉLECTROLUMINESCENTE ORGANIQUE ET AFFICHEUR
ÉLECTROLUMINESCENT ORGANIQUE LES UTILISANT

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **31.08.2016 KR 20160111582**

(43) Date of publication of application:
07.03.2018 Bulletin 2018/10

(73) Proprietor: **LG Display Co., Ltd.
Seoul 07336 (KR)**

(72) Inventors:
• **KIM, Jung-Keun**
10845 Paju-si, Gyeonggi-do (KR)
• **KIM, Do-Han**
10845 Paju-si, Gyeonggi-do (KR)
• **SEO, Jeong-Dae**
10845 Paju-si, Gyeonggi-do (KR)

- **SHIN, Ji-Cheol**
10845 Paju-si, Gyeonggi-do (KR)
- **CHOI, Heung-Woo**
10845 Paju-si, Gyeonggi-do (KR)
- **HONG, Wan-Pyo**
10845 Paju-si, Gyeonggi-do (KR)
- **SUH, Sang-Duk**
10845 Paju-si, Gyeonggi-do (KR)
- **YOON, Joo-Yong**
10845 Paju-si, Gyeonggi-do (KR)
- **HONG, Sung-Kil**
10845 Paju-si, Gyeonggi-do (KR)

(74) Representative: **Viering, Jentschura & Partner
mbB**
Patent- und Rechtsanwälte
Am Brauhaus 8
01099 Dresden (DE)

(56) References cited:
EP-A1- 2 833 700 EP-A1- 3 026 727

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present application claims the benefit of Korean Patent Application No. 10-2016-0111582 filed in Korea on August 31, 2016.

BACKGROUND OF THE INVENTION**FIELD OF THE INVENTION**

[0002] The present invention relates to an organic compound and more particularly to an organic compound being capable of reducing a driving voltage of an organic light emitting diode and improving an emitting efficiency of the organic light emitting diode and the organic light emitting display device including the organic compound.

DISCUSSION OF THE RELATED ART

[0003] Recently, as requirements of a flat panel display device having small occupied area have been increased, an organic light emitting display (OLED) device including an organic light emitting diode are technically developed.

[0004] The organic light emitting diode emits light by injecting electrons from a cathode as an electron injection electrode and holes from an anode as a hole injection electrode into an emission compound layer, combining the electrons with the holes, generating an exciton, and transforming the exciton from an excited state to a ground state. A flexible substrate, for example, a plastic substrate, can be used as a base substrate where elements are formed. Since the OLED does not require a backlight assembly, the OLED has low weight and low power consumption. Moreover, the OLED can be operated at a voltage (e.g., 10V or below) lower than a voltage required to operate other display devices.

[0005] In the organic light emitting diode, to efficiently inject the hole into an emitting material layer (EML), a hole injection layer (HIL) and a hole transporting layer (HTL) may be formed between the anode and the EML. In this instance, the HIL may include a single material or a matrix with a p-type dopant.

[0006] For example, the HAT-CN compound may be used for the single material or the p-type dopant. However, there is problems of high driving voltage and low emitting efficiency in the organic light emitting diode including the HAT-CN compound in the HIL. EP 3 026 727 A1 relates to an organic light emitting display device which shows good operating voltage. EP 2 833 700 A1 relates to an organic electroluminescence (EL) device, in particular, to a stacked multi-photon emission (MPE) device having two or more emitting units.

SUMMARY OF THE INVENTION

[0007] Accordingly, the present invention is directed to an organic compound and an organic light emitting diode and an organic light emitting display (OLED) device including the same that substantially obviate one or more of the problems due to limitations and disadvantages of the related art.


[0008] An object of the present invention is to provide an organic compound being capable of preventing problems of high driving voltage and low emitting efficiency.

[0009] An object of the present invention is to provide an organic light emitting diode and an OLED device having low driving voltage and high emitting efficiency.

[0010] Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0011] To achieve these and other advantages and in accordance with the purpose of the present invention, as embodied and broadly described herein, various embodiments provide an organic compound according to claim 1. Further embodiments are described in the dependent claims. According to aspect, an organic compound is represented by following Formula:


[Formula]

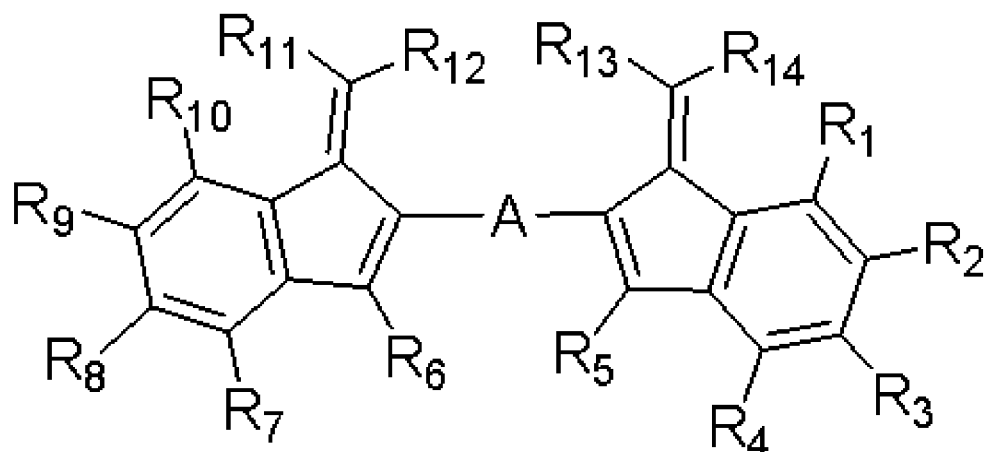

wherein each of R₁ to R₁₄ is independently selected from hydrogen, substituted or non-substituted C₆ to C₁₂ aryl, substituted or non-substituted C₃ to C₁₁ heteroaryl, substituted or non-substituted C₁ to C₁₀ alkyl, substituted or non-substituted C₁ to C₁₀ alkoxy, ether, cyano group (CN), fluorine, tri-fluoro methyl, tri-fluoro methoxy and trimethylsilyl, and at least one of R₁ to R₁₀ is the cyano group, and wherein at least one of R₁₁ to R₁₄ is the cyano group, and A is selected from substituted or non-substituted C₆ to C₃₀ aryl and substituted or non-substituted C₃ to C₃₀ heteroaryl.

[0012] In another aspect, an organic light emitting diode comprises first and second electrodes facing each other; a first emitting part between the first and second electrodes and including a hole injection layer, a first hole transporting layer and a first emitting material layer; and an electron auxiliary layer between the first emitting part and the second electrode, wherein the first hole transporting layer includes an organic compound represented by following Formula:

[Formula]

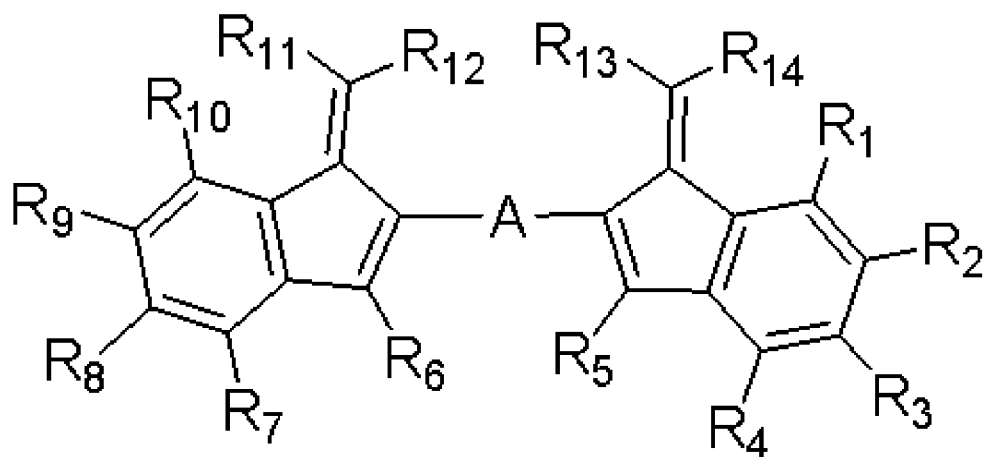


wherein each of R₁ to R₁₄ is independently selected from hydrogen, substituted or non-substituted C₆ to C₁₂ aryl, substituted or non-substituted C₃ to C₁₁ heteroaryl, substituted or non-substituted C₁ to C₁₀ alkyl, substituted or non-substituted C₁ to C₁₀ alkoxy, ether, cyano group (CN), fluorine, tri-fluoro methyl, tri-fluoro methoxy and trimethylsilyl, and at least one of R₁ to R₁₀ is the cyano group, and wherein at least one of R₁₁ to R₁₄ is the cyano group, and A is selected from substituted or non-substituted C₆ to C₃₀ aryl and substituted or non-substituted C₃ to C₃₀ heteroaryl.

[0013] In another aspect, an organic light emitting diode comprises first and second electrodes facing each other; a

first emitting part between the first and second electrodes; a second emitting part between the first emitting part and the second electrode and including a hole transporting layer; and a charge generation layer between the first and second emitting parts, wherein the charge generation layer includes an organic compound represented by following Formula:


[Formula]

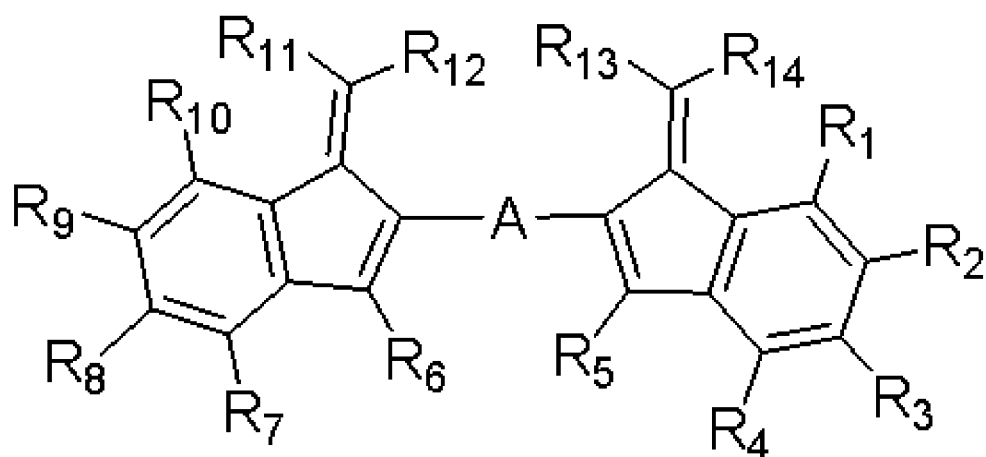

wherein each of R₁ to R₁₄ is independently selected from hydrogen, substituted or non-substituted C₆ to C₁₂ aryl, substituted or non-substituted C₃ to C₁₁ heteroaryl, substituted or non-substituted C₁ to C₁₀ alkyl, substituted or non-substituted C₁ to C₁₀ alkoxy, ether, cyano group (CN), fluorine, tri-fluoro methyl, tri-fluoro methoxy and trimethylsilyl, and at least one of R₁ to R₁₀ is the cyano group, and wherein at least one of R₁₁ to R₁₄ is the cyano group, and A is selected from substituted or non-substituted C₆ to C₃₀ aryl and substituted or non-substituted C₃ to C₃₀ heteroaryl.

[0014] In another aspect, an organic light emitting display device comprises a substrate; an organic light emitting diode over the substrate and including first and second electrodes facing each other, a first emitting part between the first and second electrodes and including a hole injection layer, a first hole transporting layer and a first emitting material layer and an electron auxiliary layer between the first emitting part and the second electrode; and a thin film transistor between the substrate and the organic light emitting diode and connected to the organic light emitting diode, wherein the first hole transporting layer includes an organic compound represented by following Formula:


[Formula]

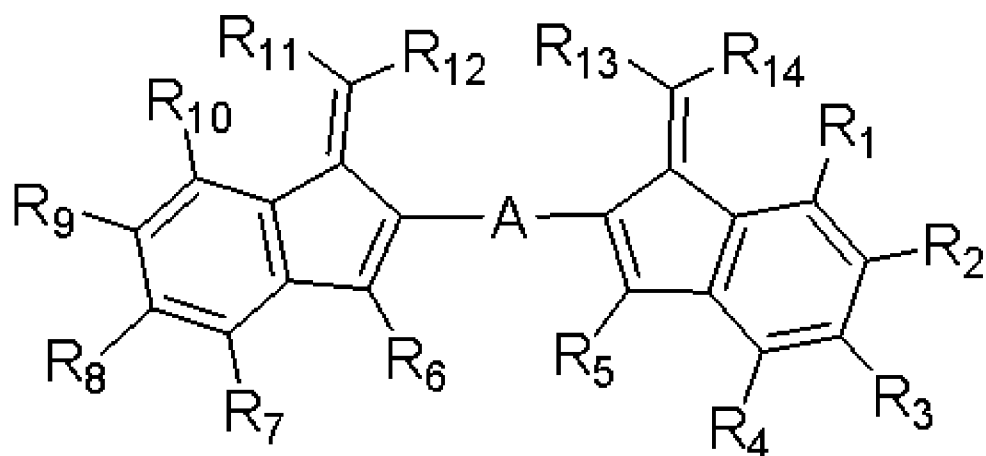

wherein each of R_1 to R_{14} is independently selected from hydrogen, substituted or non-substituted C_6 to C_{12} aryl, substituted or non-substituted C_3 to C_{11} heteroaryl, substituted or non-substituted C_1 to C_{10} alkyl, substituted or non-substituted C_1 to C_{10} alkoxy, ether, cyano group (CN), fluorine, tri-fluoro methyl, tri-fluoro methoxy and trimethylsilyl, and at least one of R_1 to R_{10} is the cyano group, and wherein at least one of R_{11} to R_{14} is the cyano group, and A is selected from substituted or non-substituted C_6 to C_{30} aryl and substituted or non-substituted C_3 to C_{30} heteroaryl.

[0015] In another aspect, an organic light emitting display device comprises a substrate; an organic light emitting diode over the substrate and including first and second electrodes facing each other, a first emitting part between the first and second electrodes, a second emitting part between the first emitting part and the second electrode and including a hole transporting layer and a charge generation layer between the first and second emitting parts; and a thin film transistor between the substrate and the organic light emitting diode and connected to the organic light emitting diode, wherein the charge generation layer includes an organic compound represented by following Formula:

[Formula]

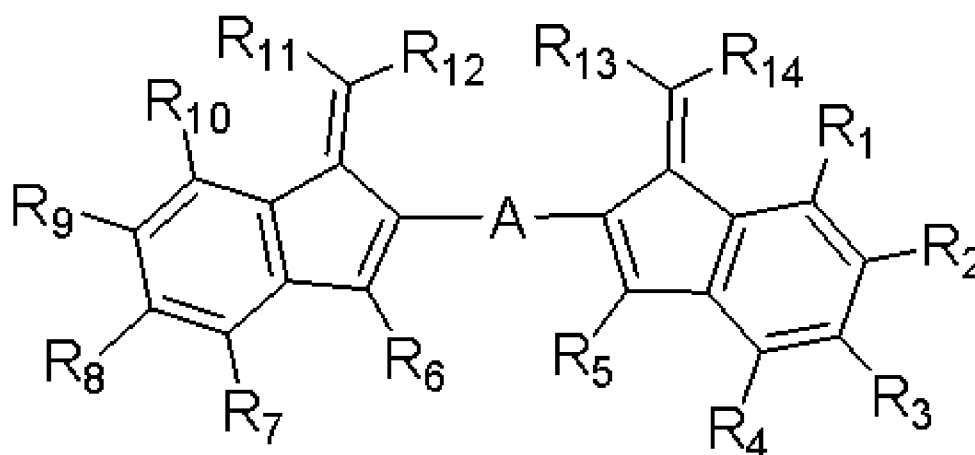

wherein each of R_1 to R_{14} is independently selected from hydrogen, substituted or non-substituted C_6 to C_{12} aryl, substituted or non-substituted C_3 to C_{11} heteroaryl, substituted or non-substituted C_1 to C_{10} alkyl, substituted or non-substituted C_1 to C_{10} alkoxy, ether, cyano group (CN), fluorine, tri-fluoro methyl, tri-fluoro methoxy and trimethylsilyl, and at least one of R_1 to R_{10} is the cyano group, and wherein at least one of R_{11} to R_{14} is the cyano group, and A is selected from substituted or non-substituted C_6 to C_{30} aryl and substituted or non-substituted C_3 to C_{30} heteroaryl.

[0016] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the invention as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0017] The accompanying drawings, which are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate embodiments of the invention and together with the description serve to explain the principles of the invention.

FIG. 1 is a schematic cross-sectional view of an OLED device according to the present invention.

FIG. 2 is a schematic cross-sectional view of an organic light emitting diode according to a first embodiment of the present invention.

FIGs. 3A and 3B are schematic cross-sectional views of an organic light emitting diode of a tandem structure according to a second embodiment of the present invention, respectively.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0018] Reference will now be made in detail to the preferred embodiments, examples of which are illustrated in the accompanying drawings.

[0019] FIG. 1 is a schematic cross-sectional view of an OLED device according to the present invention.

[0020] As shown in FIG. 1, an OLED device 100 includes a substrate 110, an organic light emitting diode D over the substrate 110, an encapsulation film 120 covering the organic light emitting diode D.

[0021] A driving thin film transistor (TFT) Td is disposed on the substrate 110, and the organic light emitting diode D is connected to the driving TFT Td.

[0022] Although not shown, a gate line and a data line are disposed on or over the substrate 110 and cross each other to define a pixel region. In addition, a power line, which is parallel to and spaced apart from the gate line or the data line, a switching TFT, which is electrically connected to the gate line and the data line, and a storage capacitor, which is connected to the power line and an electrode of the switching TFT may be formed on or over the substrate 110.

[0023] The driving TFT Td is connected to the switching TFT and includes a semiconductor layer 152, a gate electrode 160, a source electrode 170 and a drain electrode 172.

[0024] The semiconductor layer 152 is formed on the substrate 110. The semiconductor layer 152 may be formed of an oxide semiconductor material or a poly-silicon.

[0025] When the semiconductor layer 152 includes the oxide semiconductor material, a light-shielding pattern (not shown) may be formed under the semiconductor layer 152. The light to the semiconductor layer 152 is shielded or blocked by the light-shielding pattern such that thermal degradation of the semiconductor layer 152 can be prevented. On the other hand, when the semiconductor layer 152 includes polycrystalline silicon, impurities may be doped into both sides of the semiconductor layer 152.

[0026] A gate insulating layer 154 is formed on the semiconductor layer 152. The gate insulating layer 154 may be formed of an inorganic insulating material such as silicon oxide or silicon nitride.

[0027] The gate electrode 160, which is formed of a conductive material, e.g., metal, is formed on the gate insulating layer 154 to correspond to a center of the semiconductor layer 152. The gate electrode 160 is connected to the switching TFT.

[0028] An interlayer insulating layer 162, which is formed of an insulating material, is formed on an entire surface of the substrate 110 including the gate electrode 160. The interlayer insulating layer 162 may be formed of an inorganic insulating material, e.g., silicon oxide or silicon nitride, or an organic insulating material, e.g., benzocyclobutene or photoacryl.

[0029] The interlayer insulating layer 162 includes first and second contact holes 164 and 166 exposing both sides of the semiconductor layer 152. The first and second contact holes 164 and 166 are positioned at both sides of the gate electrode 160 to be spaced apart from the gate electrode 160.

[0030] The source electrode 170 and the drain electrode 172, which are formed of a conductive material, e.g., metal, are formed on the interlayer insulating layer 162. The source electrode 170 and the drain electrode 172 are spaced apart from each other with respect to the gate electrode 160 and respectively contact both sides of the semiconductor layer 152 through the first and second contact holes 164 and 166.

[0031] In the driving TFT Td, the gate electrode 160, the source electrode 170 and the drain electrode 172 are positioned over the semiconductor layer 150. Namely, the driving TFT Td has a coplanar structure.

[0032] Alternatively, in the driving TFT Td, the gate electrode may be positioned under the semiconductor layer, and the source and drain electrodes may be positioned over the semiconductor layer such that the driving TFT Td may have an inverted staggered structure. In this instance, the semiconductor layer may include amorphous silicon.

[0033] The switching TFT may have substantially the same structure as the driving TFT Td.

[0034] A passivation layer 174, which includes a drain contact hole 176 exposing the drain electrode 172 of the driving TFT Td, is formed to cover the driving TFT Td.

[0035] A first electrode 180, which is connected to the drain electrode 172 of the driving TFT Td through the drain contact hole 176, is separately formed on the passivation layer 174 in each pixel region.

[0036] The first electrode 180 may be an anode and may be formed of a conductive material having a relatively high work function. For example, the first electrode 180 may be formed of a transparent conductive material such as indium-tin-oxide (ITO), indium-zinc-oxide (IZO) or zinc oxide (ZnO).

[0037] When the OLED device 100 of the present invention is a top-emission type, a reflection electrode or a reflection layer may be formed under the first electrode 180. For example, the reflection electrode or the reflection layer may be formed of aluminum (Al), silver (Ag), nickel (Ni) or aluminum-palladium-copper (APC) alloy.

[0038] A bank layer 186, which covers edges of the first electrode 180, is formed on the passivation layer 174. The bank 186 exposes a center of the first electrode 180 in the pixel region.

[0039] An organic emitting layer 182 is formed on the first electrode 180. As explained below, the organic emitting layer 182 may include a single emitting part. Alternatively, the organic emitting layer 182 may include at least two emitting parts such that the organic light emitting diode D has a tandem structure.

[0040] A second electrode 184 is formed over the substrate 110 including the emitting layer 182. The second electrode 184 is positioned at an entire surface of the display area. The second electrode 184 may be a cathode and may be formed of a conductive material having a relatively low work function. For example, the second electrode 184 may be formed of aluminum (Al), magnesium (Mg) or Al-Mg alloy.

[0041] The first electrode 180, the emitting layer 182 and the second electrode 184 constitute the organic light emitting diode D.

[0042] On the other hand, at least two emitting parts with a charge generation layer therebetween may be formed between the first and second electrode 180 and 184 such that a white organic light emitting diode may be provided. In this instance, a color filter layer (not shown) may be formed under or over the organic light emitting diode D.

[0043] The encapsulation film 120 is formed on the organic light emitting diode D to prevent penetration of moisture into the organic light emitting diode D. For example, the encapsulation film 120 may have a triple-layered structure of a first inorganic layer, an organic layer and a second inorganic layer. However, it is not limited thereto.

[0044] FIG. 2 is a schematic cross-sectional view of an organic light emitting diode according to a first embodiment of the present invention.

[0045] As shown in FIG. 2, the organic light emitting diode D includes a first electrode 180, a second electrode 184, an organic emitting layer 182 between the first and second electrodes 180 and 184 and including a hole injection layer (HIL) 210, a hole transporting layer (HTL) 220, an emitting material layer (EML) 230 and an electron auxiliary layer 240. Namely, the organic light emitting diode D of the first embodiment of the present invention includes a single emitting part.

[0046] As mentioned above, the first electrode 180 is the anode for injecting a hole and includes a high work function conductive material, e.g., ITO, IZO or ZO. The second electrode 184 is the cathode for injecting an electron and includes a low work function conductive material, e.g., Al, Mg or Al-Mg alloy.

[0047] The HIL 210 is positioned between the first electrode 180 and the HTL 220, and the HTL 220 is positioned between the HIL 210 and the EML 230. The electron auxiliary layer 240 is positioned between the EML 230 and the second electrode 184. For example, the electron auxiliary layer 240 may include an electron transporting layer (ETL) and an electron injection layer (EIL) sequentially stacked on the EML 230.


[0048] The HIL 210 may be a p-type HIL. For example, the HIL 210 may include a host material and a p-type dopant or a single material of the p-type dopant.

[0049] The p-type dopant has a strong electron withdrawing substituent. The electron in the HTL 220 or in the host material of the HIL 210 is withdrawn by the p-type dopant such that an electron path (or an electron transporting path) is provided. Namely, the p-type dopant has a strong electron withdrawing property.

[0050] To increase the electron withdrawing property, a p-type dopant including a cyano-substituent or a fluorine-substituent, each of which has the strong electron withdrawing property, is introduced.

[0051] For example, the F4-TCNQ compound is introduced as the p-type dopant. However, since the F4-TCNQ compound has a relatively small molecular weight, the F4-TCNQ compound has high sublimation property such that there may be problems of the contamination of the deposition source, the reproducibility of the device, the thermal stability of the device, and so on.

[0052] On the other hand, the HAT-CN compound of following Formula, which has a relatively high molecular weight, is introduced as the p-type dopant. However, the HAT-CN compound has high lowest unoccupied molecular orbital (LUMO) level such that there may be problems of high driving voltage and low emitting efficiency.




[0053] The electron moves from the highest occupied molecular orbital (HOMO) level of the HTL or the host material of the HIL into the LUMO level of the p-type dopant such that the electron path is generated. Namely, to efficiently generate the electron path, the LUMO level of the p-type dopant and the HOMO level of the HTL or the host material of the EIL should be similar to each other.

[0054] However, since the HAT-CN compound has high LUMO level, the increase problem of the driving voltage and the decrease problem of the emitting efficiency are generated in the organic light emitting diode D.

[0055] The HIL 210 in the organic light emitting diode D according to the first embodiment of the present invention includes an organic compound in Formula 1. Namely, the HIL 210 includes the organic compound without other compounds or the organic compound as the p-type dopant with a host material. The organic compound may have a weight % of about 1 to 50 with respect to the host material.

[Formula 1]

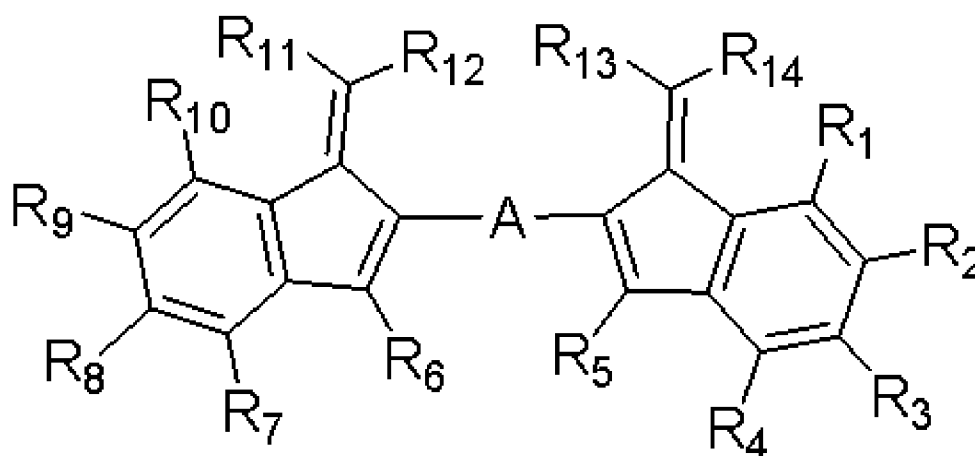

[0056] In the Formula 1, each of R_1 to R_{10} may be independently selected from hydrogen, substituted or non-substituted C_6 to C_{12} aryl, substituted or non-substituted C_3 to C_{11} heteroaryl, substituted or non-substituted C_1 to C_{10} alkyl, substituted or non-substituted C_1 to C_{10} alkoxy, ether, cyano group (CN), fluorine, tri-fluoro methyl, tri-fluoro methoxy and trimethylsilyl, and at least one of R_1 to R_{10} is the cyano group.













[0057] In addition, each of R_{11} to R_{14} may be independently selected from hydrogen, substituted or non-substituted C_6 to C_{12} aryl, substituted or non-substituted C_3 to C_{11} heteroaryl, substituted or non-substituted C_1 to C_{10} alkyl, substituted or non-substituted C_1 to C_{10} alkoxy, ether, cyano group, fluorine, tri-fluoro methyl, tri-fluoro methoxy and trimethylsilyl, and at least one of R_{11} to R_{14} is the cyano group. All of R_{11} to R_{14} may be the cyano group.

[0058] In addition, "A" is selected from substituted or non-substituted C_6 to C_{30} aryl and substituted or non-substituted C_3 to C_{30} heteroaryl. For example, "A" may be one of benzene (phenylene), naphthalene (naphthalenylene), pyridine (pyridinylene), diazine (diazinylene), dibenzofurane (dibenzofuranylene) and dibenzothiophene (dibenzothiophenylene). The substituent of "A" may be selected from fluorine, cyanide, C_6 to C_{12} aryl and C_3 to C_{12} heteroaryl.


[0059] The organic compound of the present invention in the Formula 1 has the strong (high) electron withdrawing property and high thermal stability. In addition, the organic compound of the present invention in the Formula 1 has the low LUMO level. For example, the organic compound may have the LUMO level of about -5.8 to -5.4eV.

[0060] Namely, the LUMO level of the organic compound is substantially equal to or less than the HOMO level of the HTL 220 or the host material in the HIL 210. Accordingly, the organic compound of the present invention in the HIL 210 easily receives the electron from the HTL 220 or the host material in the HIL 210 such that the electron path is also easily provided or generated. In other words, the electron transporting efficiency in the organic light emitting diode D, which includes the organic compound of the Formula 1 in the HIL 210, is improved such that the driving voltage is decreased and the emitting efficiency is increased.


[0061] For example, the organic compound of the Formula 1 may be one of the materials in Formula 2.

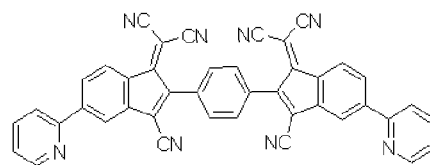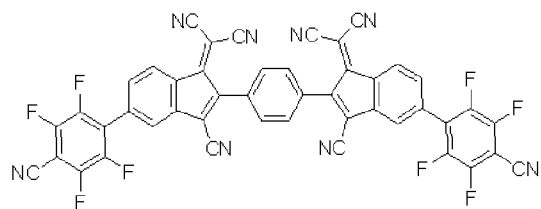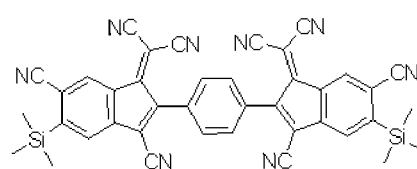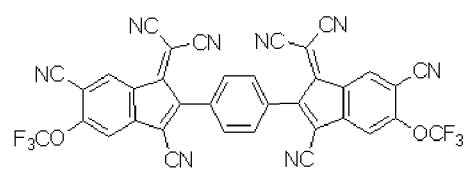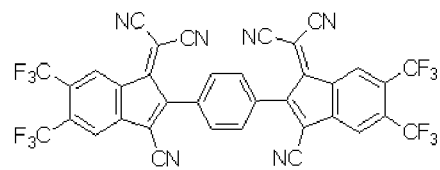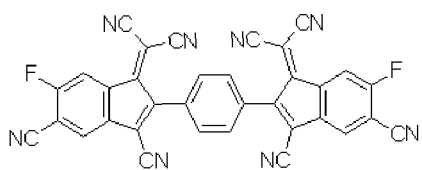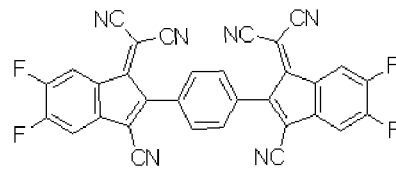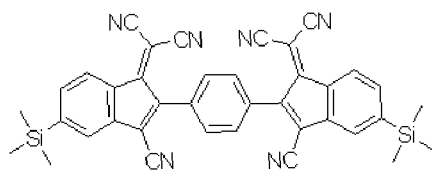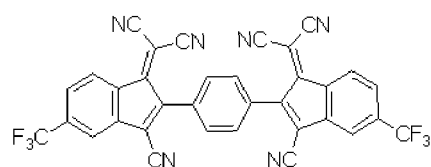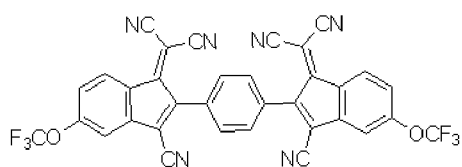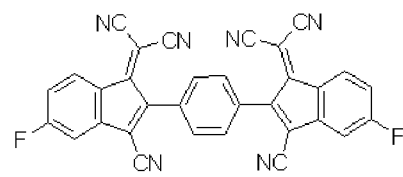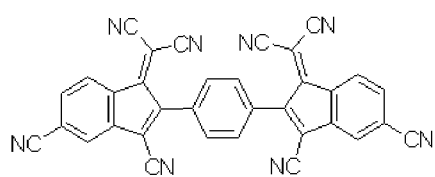



5

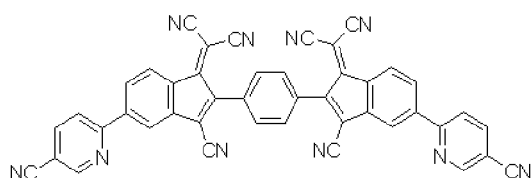


10

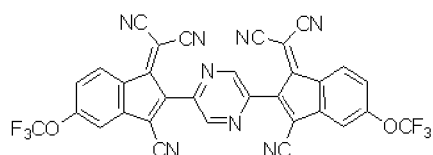


15

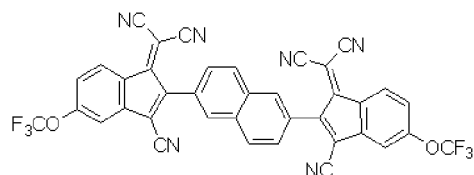


20

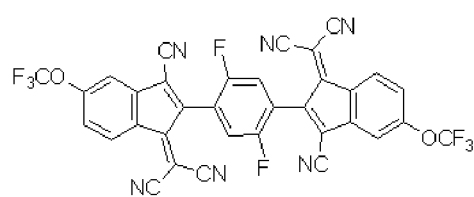


25

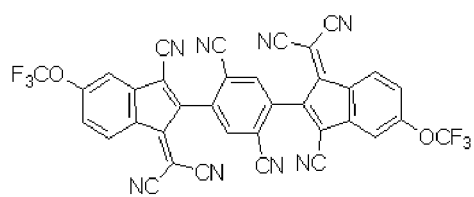


30




35

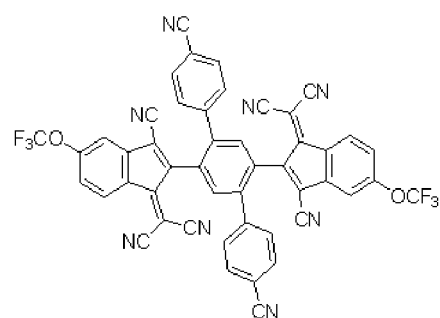

40





















45








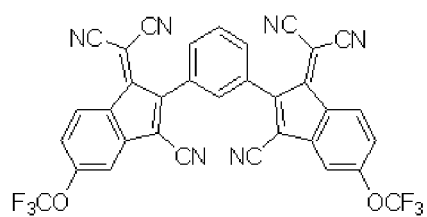






50

55

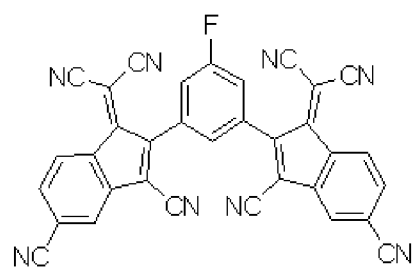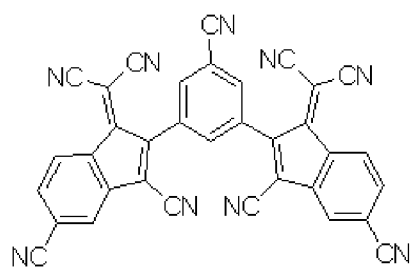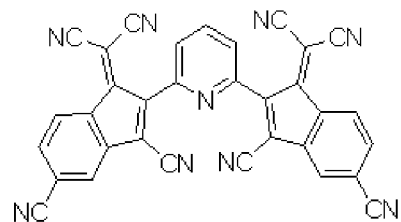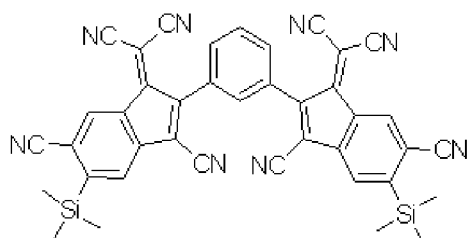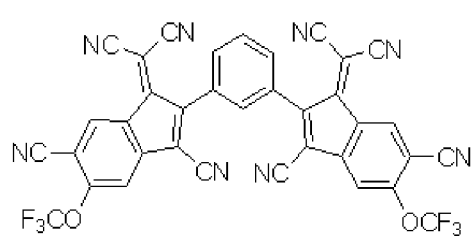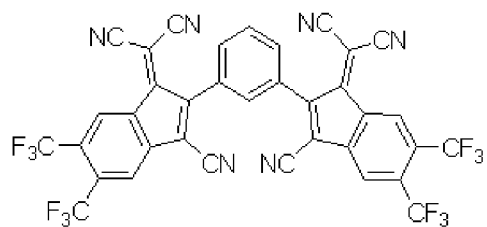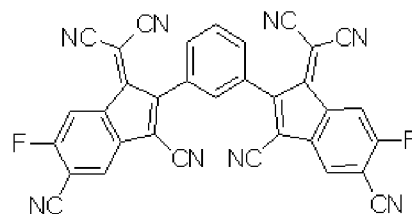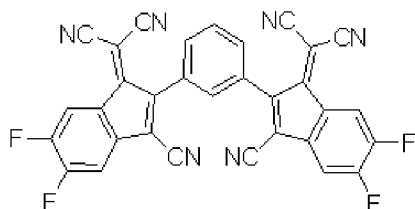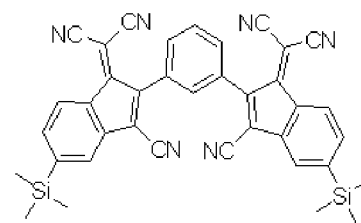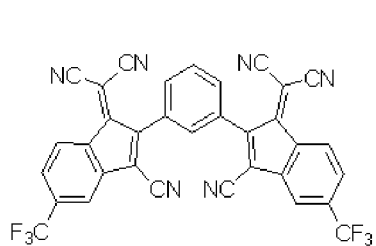

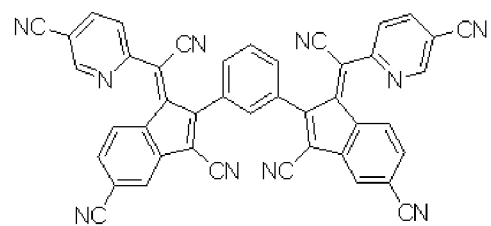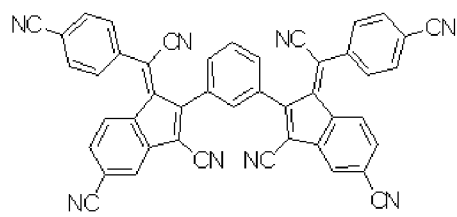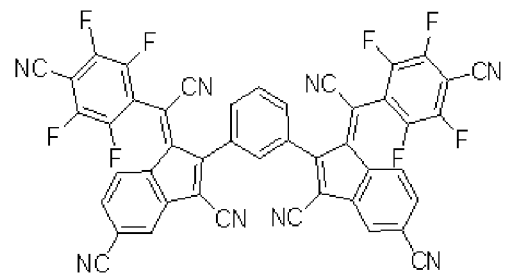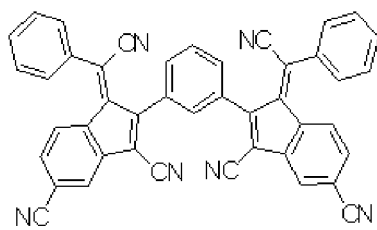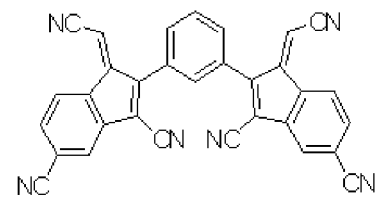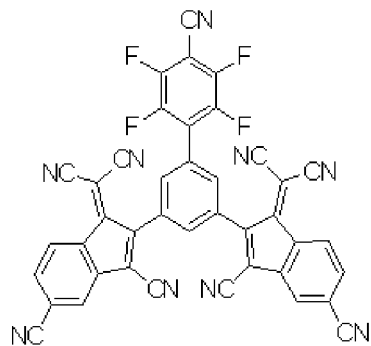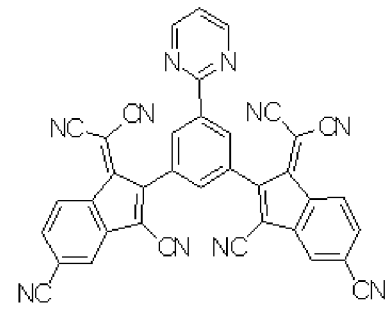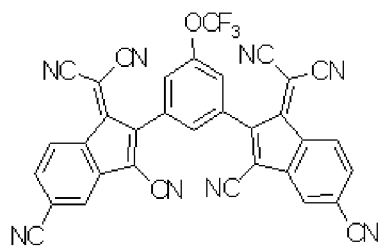

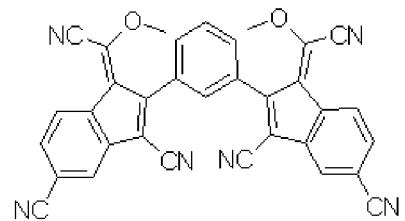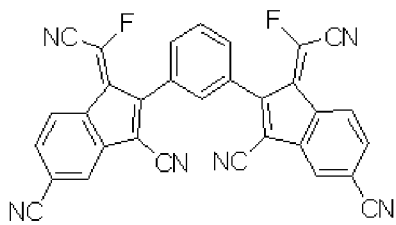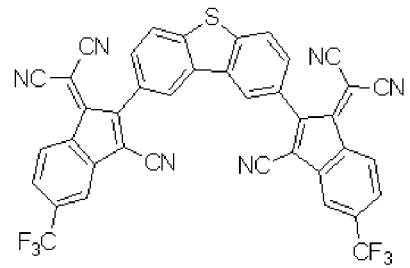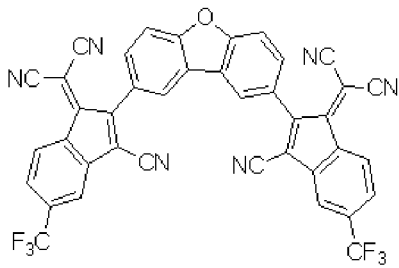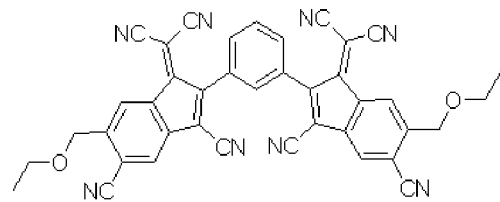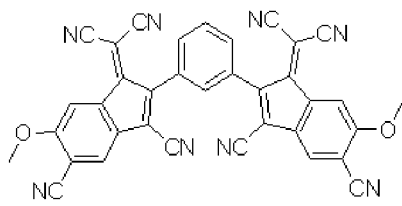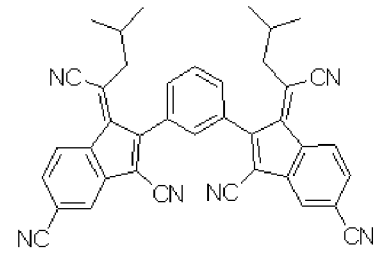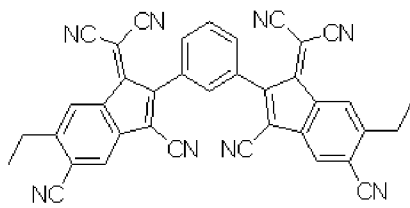

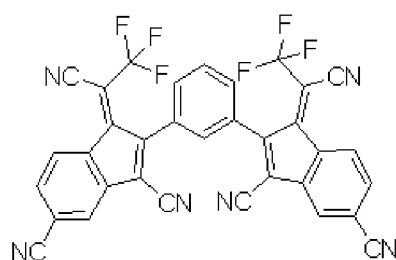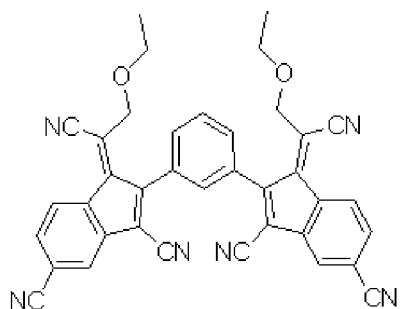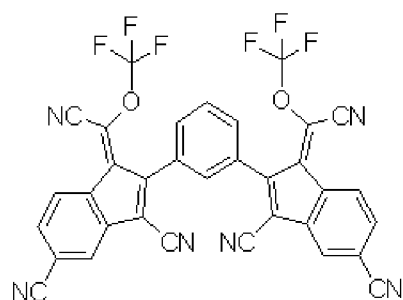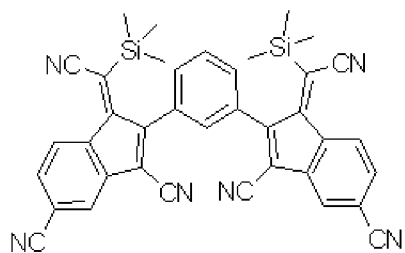

[0062] As mentioned above, the organic compound of the present invention has the strong (high) electron withdrawing property and high thermal stability. In addition, the organic compound of the present invention has the low LUMO level.

[0063] Namely, the LUMO level of the organic compound is substantially equal to or less than the HOMO level of the HTL 220 or the host material in the HIL 210. Accordingly, the electron transporting efficiency in the organic light emitting diode D, which includes the organic compound of the Formula 1 in the HIL 210, is improved such that the driving voltage is decreased and the emitting efficiency is increased.


Synthesis

1. Synthesis of compound A-1

(1) compound A-1-a

[0064]

[Reaction Formula 1-1]

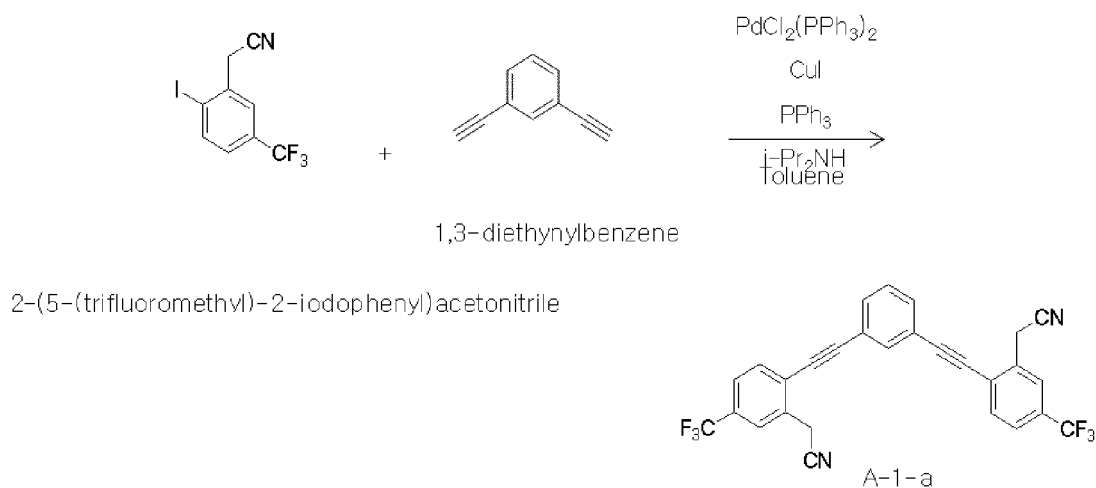


[0065] 1,3-diethynylbenzene (0.1mol), $\text{PdCl}_2(\text{PPh}_3)_2$ (4mmol), CuI (4mmol), PPh_3 (8mmol) and $i\text{-Pr}_2\text{NH}$ (0.2mol) were input into the 2-neck flask (250ml) and stirred under the room temperature. 2-(5-(trifluoromethyl)-2-iodophenyl)acetonitrile (0.22mol) was input into the mixture and stirred under the room temperature for 24 hours. The mixture was extracted with water/EA(ethylene acetate) to obtain an organic layer, and the organic layer was dried using MgSO_4 . A column-chromatography was performed onto the resultant such that the compound A-1-a of the solid state was obtained. (25.6g, 52%)

(2) compound A-1-b

[0066]

[Reaction Formula 1-2]

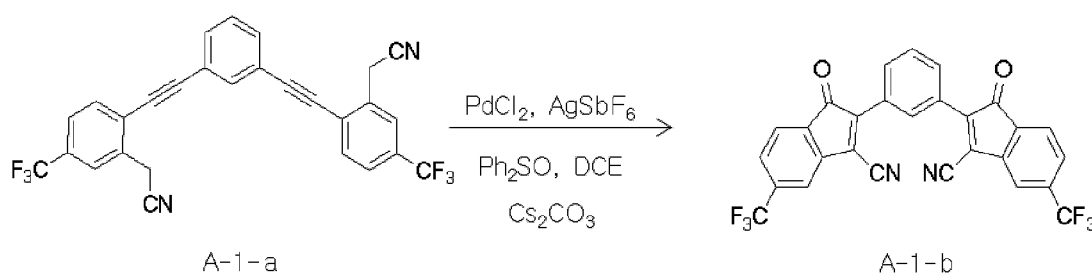


[0067] The compound A-1-a (0.052mol), PdCl_2 (10.4mmol), AgSbF_6 (15.6mmol) and Ph_2SO (0.3mol) were dissolved with dichloroethane (DCE) in the 2-neck flask (250ml) and stirred under the temperature of 60 °C for 24 hours. Cs_2CO_3 (0.15mol) was additionally added into the mixture, and the mixture was stirred for 12 hours. After completion of the reaction, the mixture was extracted using CH_2Cl_2 , and CH_2Cl_2 was completely removed. The mixture was input into 35% HCl solution and stirred for 2 hours. The mixture was extracted using $\text{CH}_2\text{Cl}_2/\text{NH}_4\text{Cl}$ (aqueous) to obtain an organic layer, and the organic layer was dried using MgSO_4 . A column-chromatography was performed onto the resultant such that the compound A-1-b of the solid state was obtained. (9.2g, 34%)

(3) compound A-1

[0068]

[Reaction Formula 1-3]

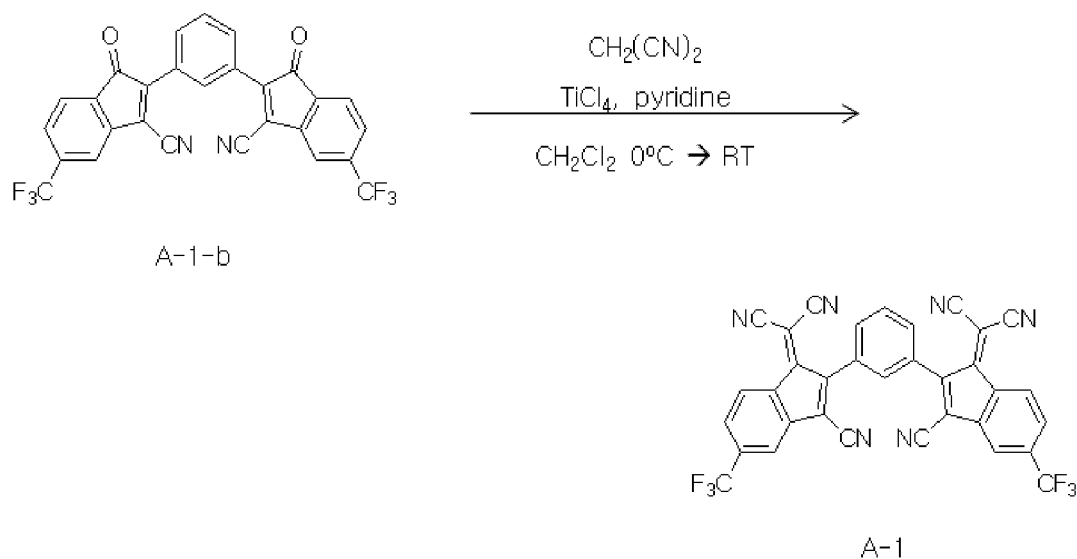


[0069] The compound A-1-b (17.7mmol), malononitrile (0.106mol) and CH_2Cl_2 were input into the 2-neck flask (100ml) and stirred under the argon condition for 30 minutes. TiCl_4 (0.106mol) was slowly dropped, and pyridine (0.13mol) was added. The mixture was stirred under the room temperature. After completion of the reaction, the mixture was extracted using $\text{CH}_2\text{Cl}_2/\text{NH}_4\text{Cl}$ (aqueous) to obtain an organic layer, and the organic layer was dried using MgSO_4 . A column-chromatography was performed onto the resultant such that the compound A-1 of the solid state was obtained. (4.68g, 43%)

2. Compound A-2

[0070]

[Reaction Formula 2]

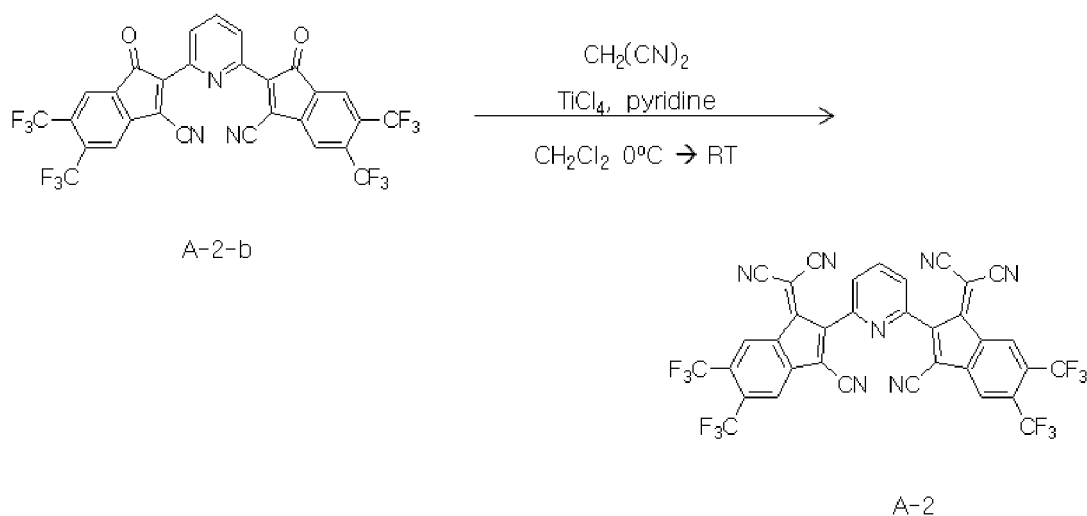


[0071] The compound A-2-b was used instead of the compound A-1-b such that the compound A-2 (28%) was obtained.

3. Compound A-3

[0072]

[Reaction Formula 3]

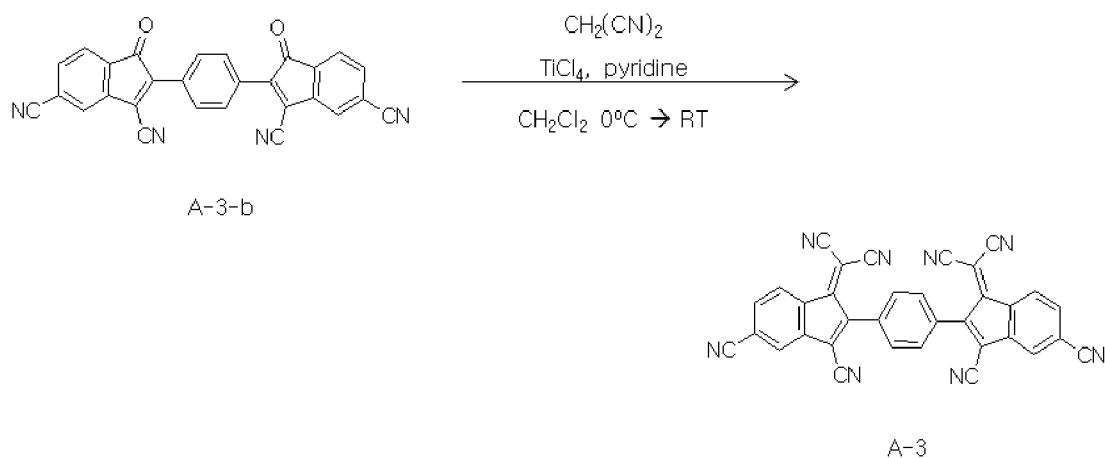


[0073] The compound A-3-b was used instead of the compound A-1-b such that the compound A-3 (49%) was obtained.

4. Compound A-4

[0074]

[Reaction Formula 4]

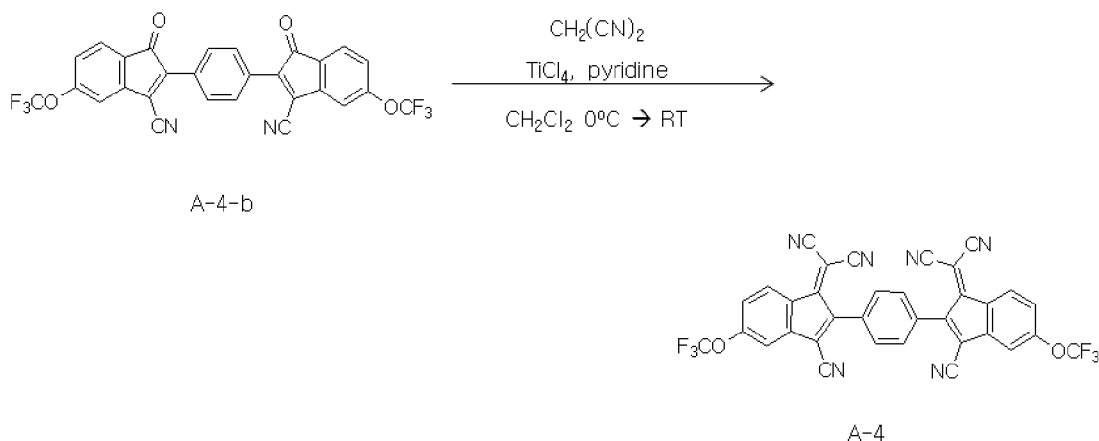

[0075] The compound A-4-b was used instead of the compound A-1-b such that the compound A-4 (43%) was obtained.

[0076] The energy levels of the compound A-1, A-2, A-3 and A-4, NPD, which may be used for the HTL or the host material of the HIL, and HAT-CN, which may be used for the dopant of the HIL, are measured and listed in Table 1.

Table 1

	HOMO [eV]	LUMO [eV]	Bandgap [eV]
A-1	-7.73	-5.58	2.15
A-2	-8.03	-5.79	2.24
A-3	-7.79	-5.75	2.04
A-4	-7.45	-5.44	2.01
HAT-CN	-8.68	-5.2	3.48
NPD	-5.4	-2.3	3.1

[0077] As shown in Table 1, the LUMO level of the compound A-1, A-2, A-3 and A-4 is lower than the HOMO level of the compound NPD such that the HIL including the organic compound of the present invention has improved hole injection property. On the other hand, the LUMO level of the compound HAT-CN is higher than the HOMO level of the compound NPD such that the hole injection property of the HIL including the compound HAT-CN is degraded.

Organic light emitting diode

1. Example 1 (Ex1)

[0078] An ITO layer is deposited and patterned on a substrate and washed to form the anode (2mm*2mm). The substrate is loaded in a vacuum chamber having a base pressure of $5 \sim 7 \times 10^{-8}$, and layers are sequentially deposited as below.

(1) the HIL (the compound A-1, 50 Å), (2) the HTL (NPD, 800 Å), (3) the EML (host (Formula 3-1) and dopant (Formula 3-2, 5wt% doping), 300 Å), (4) the ETL (compound of Formula 3-3, 200 Å), (5) the EIL (LiF, 5 Å) and (11) the cathode (Al, 1000 Å).

2. Example 2 (Ex2)

[0079] Instead of the compound A-1 in "Example 1", the compound NPD and the compound A-1 as a dopant (10wt% doping) are used.

3. Example 3 (Ex3)

[0080] Instead of the compound A-1 in "Example 1", the compound A-2 is used.

4. Example 4 (Ex4)

[0081] Instead of the compound A-1 in "Example 1", the compound NPD and the compound A-2 as a dopant (10wt% doping) are used.

5. Example 5 (Ex5)

[0082] Instead of the compound A-1 in "Example 1", the compound A-3 is used.

6. Example 6 (Ex6)

[0083] Instead of the compound A-1 in "Example 1", the compound NPD and the compound A-3 as a dopant (10wt% doping) are used.

7. Example 7 (Ex7)

[0084] Instead of the compound A-1 in "Example 1", the compound A-4 is used.

8. Example 8 (Ex8)

[0085] Instead of the compound A-1 in "Example 1", the compound NPD and the compound A-4 as a dopant (10wt% doping) are used.

9. Comparative Example 1 (Ref1)

[0086] Instead of the compound A-1 in "Example 1", the compound HAT-CN is used.


10. Comparative Example 2 (Ref2)

[0087] Instead of the compound A-1 in "Example 1", the compound NPD and the compound HAT-CN as a dopant (10wt% doping) are used.


11. Comparative Example 3 (Ref3)

[0088] The HIL in "Example 1" is omitted.


[Formula 3-1]



[Formula 3-2]



15 [Formula 3-3]

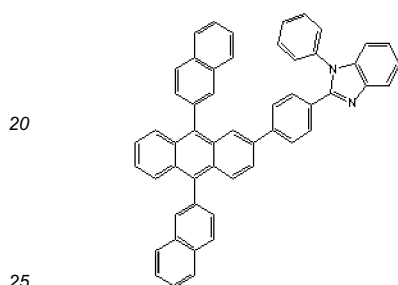

[0089] The driving voltage, the emitting efficiency and the external quantum efficiency (EQE) of the organic light emitting diodes of "Ex1" to "Ex8" and "Ref1" to "Ref3" are measured and listed in Table 2.

Table 2

	Voltage [V]	Efficiency [Cd/A]	EQE [%]
Ex1	3.9	4.8	5.0
Ex2	3.9	4.9	4.9
Ex3	3.8	4.7	5.2
Ex4	3.9	4.6	5.1
Ex5	3.7	5.0	5.5
Ex6	3.7	4.9	5.4
Ex7	4.0	4.7	4.9
Ex8	4.1	4.6	4.7
Ref1	4.0	4.5	4.9
Ref2	5.9	3.1	3.9
Ref3	7.0	1.5	1.9

[0090] As shown in Table 2, the driving properties, e.g., the driving voltage, the emitting efficiency and the external quantum efficiency, of the organic light emitting diode of the present invention are improved.

[0091] FIGs. 3A and 3B are schematic cross-sectional views of an organic light emitting diode of a tandem structure according to a second embodiment of the present invention, respectively.

[0092] As shown in FIG. 3A, the organic light emitting diode D includes a first electrode 180, a second electrode 184, an organic emitting layer 182 between the first and second electrodes 180 and 184 and including first and second emitting parts ST1 and ST2 and a charge generation layer (CGL) 330.

[0093] As mentioned above, the first electrode 180 is the anode for injecting a hole and includes a high work function conductive material, e.g., ITO, IZO or ZO. The second electrode 184 is the cathode for injecting an electron and includes

a low work function conductive material, e.g., Al, Mg or Al-Mg alloy.

[0094] The CGL 330 is positioned between the first and second emitting parts ST1 and ST2. Namely, the first emitting part ST1, the CGL 330 and the second emitting part ST2 are sequentially stacked on the first electrode 180. In other words, the first emitting part ST1 is positioned between the first electrode 180 and the CGL 330, and the second emitting part ST2 is positioned between the second electrode 184 and the CGL 330.

[0095] The first emitting part ST1 may include a hole injection layer (HIL) 312, a first hole transporting layer (HTL) 314, a first emitting material layer (EML) 316 and a first electron transporting layer (ETL) 318 sequentially stacked on the first electrode 180. Namely, the HIL 312 and the first HTL 314 are positioned between the first electrode 180 and the first EML 316, and the HIL 312 is positioned between the first electrode 180 and the first HTL 314. In addition, the first ETL 318 is positioned between the first EML 316 and the CGL 330.

[0096] A hole injection from the first electrode 180 into the first EML 316 is improved by the HIL 312. The HIL 312 may include the organic compound of the above Formula 1. The HIL 312 may be formed of the organic compound without other compounds or may be formed of the organic compound as a dopant with a host material.

[0097] Alternatively, the HIL 312 may include at least one selected from a group consisting of copper phthalocyanine (CuPC), poly(3,4)-ethylenedioxythiophene (PEDOT) and polyaniline.

[0098] The HIL 312 may have a thickness of about 1 to 150nm. The hole injection property may be improved with the thickness above 1nm, and an increase of the driving voltage resulting from an increase of the thickness of the HIL 312 may be prevented with the thickness below 150nm.

[0099] A hole transporting is improved by the first HTL 314. The first HTL 314 may include at least one selected from a group consisting of N,N'-bis(naphthalen-1-yl)-N,N'-bis(phenyl)-2,2'-dimethylbenzidine (NPD), N,N'-bis-(3-methylphenyl)-N,N'-bis(phenyl)-benzidine (TPD), 2,2',7,7'-tetrakis(N,N-diphenylamino)-9,9'-spirofluorene (spiro-TAD) and 4,4',4''-Tris(N-3-methylphenyl-N-phenylamino)-triphenylamine (MTDATA), but it is not limited thereto.

[0100] The first HTL 314 may have a thickness of about 1 to 150nm. The hole transporting property may be improved with the thickness above 1nm, and an increase of the driving voltage resulting from an increase of the thickness of the first HTL 314 may be prevented with the thickness below 150nm.

[0101] The first EML 316 may be a blue EML. Alternatively, the first EML 316 may be a red EML, a green EML or a yellow EML.

[0102] An electron transporting is improved by the first ETL 318. The first ETL 318 may include a compound represented by Formula 3-3, tris(8-hydroxy-quinolinato)aluminum (Alq₃), 2-(4-biphenyl)-5-(4-tertbutylphenyl)-1,3,4-oxadiazole (PBD), 3-(4-biphenyl)-4-phenyl-5-tertbutylphenyl-1,2,4-triazole (TAZ) or Bis(2-methyl-8-quinolinolate)-4-(phenylphenolato)aluminum (BAIq), but it is not limited thereto.

[0103] The first ETL 318 may have a thickness of about 1 to 150nm. The electron transporting property may be improved with the thickness above 1nm, and an increase of the driving voltage resulting from an increase of the thickness of the first ETL 318 may be prevented with the thickness below 150nm.

[0104] The second emitting part ST2 may include a second HTL 322, a second EML 324, a second ETL 326 and an electron injection layer (EIL) 328. The second HTL 322 is positioned between the CGL 330 and the second EML 324, and the second ETL 326 is positioned between the second EML 324 and the second electrode 184. In addition, the EIL 328 is positioned between the second ETL 326 and the second electrode 184.

[0105] The second HTL 322 and the second ETL 326 may be same as or different from the first HTL 314 and the first ETL 318 in the first emitting part ST1, respectively. The EIL 328 may be omitted according to the structure or property of the organic light emitting diode.

[0106] The second EML 324 may be red, green, blue or yellow-green EML. For example, when the first EML 316 is the blue EML, the second EML 324 may be yellow-green EML.

[0107] An electron injection is improved by the EIL 328. The EIL 328 may include at least one selected from a group consisting of tris(8-hydroxy-quinolinato)aluminum (Alq₃), 2-(4-biphenyl)-5-(4-tertbutylphenyl)-1,3,4-oxadiazole (PBD), 3-(4-biphenyl)-4-phenyl-5-tertbutylphenyl-1,2,4-triazole (TAZ) and Bis(2-methyl-8-quinolinolate)-4-(phenylphenolato)aluminum (BAIq), but it is not limited thereto.

[0108] On the other hand, the EIL 328 may further include a metal compound. For example, the metal compound may be at least one selected from a group consisting of LiF, NaF, KF, RbF, CsF, FrF, BeF₂, MgF₂, CaF₂, SrF₂, BaF₂ and RaF₂, but it is not limited thereto.

[0109] The EIL 328 may have a thickness of about 1 to 50nm. The electron injection property may be improved with the thickness above 1nm, and an increase of the driving voltage resulting from an increase of the thickness of the EIL 328 may be prevented with the thickness below 50nm.

[0110] The CGL 330 is positioned between the first emitting part ST1 and the second emitting part ST2. Namely, the first and second emitting parts ST1 and ST2 are connected by the CGL 330. The CGL 330 may be a P-N junction type CGL including an N-type CGL 330N and a P-type CGL 330P.

[0111] The N-type CGL 330N is positioned between the first ETL 318 and the second HTL 322, and the P-type CGL 330P is positioned between the N-type CGL 330N and the second HTL 322.

[0112] The CGL 330 generates a charge or separates a charge into a hole and an electron such that the hole and the electron are provided into the first and second emitting parts ST1 and ST2.

[0113] The N-type CGL 330N provides the electron into the first ETL 318 of the first emitting part ST1, and the first ETL 318 provide the electron into the first EML 316 of the first emitting part ST1. On the other hand, the P-type CGL 330P provide the hole into the second HTL 322 of the second emitting part ST2, and the second HTL 322 provide the hole into the second EML 324 of the second emitting part ST2. Accordingly, the emitting efficiency of the organic light emitting diode D including a plurality of EMLs or a plurality of emitting parts is improved, and the driving voltage of the organic light emitting diode D is reduced.

[0114] Referring to FIG. 3B, an organic light emitting diode D includes a first electrode 180, a second electrode 184, an organic emitting layer 182 between the first and second electrodes 180 and 184 and including first to third emitting parts ST1, ST2 and ST3 and first and second charge generation layers (CGLs) 430 and 450. Alternatively, four or more emitting parts and three or more CGLs may be disposed between the first and second electrodes 180 and 184.

[0115] As mentioned above, the first electrode 180 is the anode for injecting a hole and includes a high work function conductive material, e.g., ITO, IZO or ZO. The second electrode 184 is the cathode for injecting an electron and includes a low work function conductive material, e.g., Al, Mg or Al-Mg alloy.

[0116] The first and second CGLs 430 and 450 are positioned between the first and second emitting parts ST1 and ST2 and the second and third emitting parts ST2 and ST3, respectively. Namely, the first emitting part ST1, the first CGL 430, the second emitting part ST2, the second CGL 450 and the third emitting part ST3 are sequentially stacked on the first electrode 180. In other words, the first emitting part ST1 is positioned between the first electrode 180 and the first CGL 430, and the second emitting part ST2 is positioned between the first and second CGLs 430 and 450. In addition, the third emitting part ST3 is positioned between the second electrode 184 and the second CGL 450.

[0117] The first emitting part ST1 may include an HIL 412, a first HTL 414, a first EML 416 and a first ETL 418 sequentially stacked on the first electrode 180. Namely, the HIL 412 and the first HTL 414 are positioned between the first electrode 180 and the first EML 416, and the HIL 412 is positioned between the first electrode 180 and the first HTL 414. In addition, the first ETL 418 is positioned between the first EML 416 and the first CGL 430.

[0118] The HIL 412 may include the organic compound of the above Formula 1. The HIL 412 may be formed of the organic compound without other compounds or may be formed of the organic compound as a dopant with a host material such as NPD. The organic compound may have a weight % of about 1 to 50 with respect to the host material.

[0119] The second emitting part ST2 may include a second HTL 422, a second EML 424 and a second ETL 426. The second HTL 422 is positioned between the first CGL 430 and the second EML 424, and the second ETL 426 is positioned between the second EML 424 and the second CGL 450.

[0120] The third emitting part ST3 may include a third HTL 442, a third EML 444, a third ETL 446 and an EIL 448. The third HTL 442 is positioned between the second CGL 450 and the third EML 444, and the third ETL 446 is positioned between the third EML 444 and the second electrode 184. In addition, the EIL 448 is positioned between the third ETL 446 and the second electrode 184.

[0121] The first CGL 430 is positioned between the first emitting part ST1 and the second emitting part ST2, and the second CGL 450 is positioned between the second emitting part ST2 and the third emitting part ST3. Each of the first and second CGLs 430 and 450 may be a P-N junction type CGL. The first CGL 430 includes an N-type CGL 430N and a P-type CGL 430P, and the second CGL 450 an N-type CGL 450N and a P-type CGL 450P.

[0122] In the first CGL 430, the N-type CGL 430N is positioned between the first ETL 418 and the second HTL 422, and the P-type CGL 430P is positioned between the N-type CGL 430N and the second HTL 422.

[0123] In the second CGL 450, the N-type CGL 450N is positioned between the second ETL 426 and the third HTL 442, and the P-type CGL 450P is positioned between the N-type CGL 450N and the third HTL 442.

[0124] Each of the first and second CGLs 430 and 450 generates a charge or separates a charge into a hole and an electron such that the hole and the electron are provided into the first to third emitting parts ST1 to ST3.

[0125] Namely, in the first CGL 430, the N-type CGL 430N provides the electron into the first ETL 418 of the first emitting part ST1, and the P-type CGL 430P provide the hole into the second HTL 422 of the second emitting part ST2. In addition, in the second CGL 450, the N-type CGL 450N provides the electron into the second ETL 426 of the second emitting part ST2, and the P-type CGL 450P provide the hole into the third HTL 442 of the third emitting part ST3.

[0126] Each of the N-type CGLs 330N, 430N and 450N includes an organic material with a metal or an N-type dopant. For example, the metal may be one of Li, Na, K, Rb, Cs, Mg, Ca, Sr, Ba, La, Ce, Sm, Eu, Tb, Dy and Yb. The N-type dopant may be an alkali metal, an alkali metal compound, an alkali earth metal or an alkali earth metal compound. The N-type dopant may be one of Li, Cs, K, Rb, Mg, Na, Ca, Sr, Eu and Yb.

[0127] The organic material for the N-type CGLs 330N, 430N and 450N may be a C₂₀ to C₆₀ heterocyclic compound. For example, the organic material may be one of tris(8-hydroxy-quinolino)aluminum (Alq₃), triazine derivatives, hydroxy-quinoline derivatives, benzazole derivatives and silole derivatives.

[0128] At least one of the P-type CGLs 330P, 430P and 450P may include the organic compound of the present invention. Each of the P-type CGLs 330P, 430P and 450P may be formed of the organic compound without other

compounds or may be formed of the organic compound as a dopant with a host material such as NPD. The organic compound may have a weight % of about 1 to 50 with respect to the host material.

[0129] The organic compound of the present invention has the strong (high) electron withdrawing property and high thermal stability. In addition, the organic compound of the present invention has the low LUMO level. Namely, the LUMO level of the organic compound is substantially equal to or less than the HOMO level of the second HTLs 322 and 422 and/or the third HTL 442 or the host material in the P-type CGLs 330P, 430P and 450P. Accordingly, when the tandem structure organic light emitting diode D includes the P-type CGLs 330P, 430P and 450P, the hole transporting property is improved such that the driving voltage of the organic light emitting diode D and the OLED device 100 (of FIG. 1) is decreased and the emitting efficiency of the organic light emitting diode D and the OLED device 100 is increased.

Organic light emitting diode

1. Example 9 (Ex9)

[0130] An ITO layer is deposited and patterned on a substrate and washed to form the anode (2mm*2mm). The substrate is loaded in a vacuum chamber having a base pressure of $5\sim 7 \times 10^{-8}$, and layers are sequentially deposited as below.

(1) the HIL (the compound A-1, 50 Å), (2) the first HTL (NPD, 600 Å), (3) the first EML (host (Formula 3-1) and dopant (Formula 3-2, 5wt% doping), 300 Å), (4) the first ETL (compound of Formula 3-3, 200 Å), (5) the N-type CGL (host (Formula 4) and dopant (Li, 2wt% doping), 150 Å), (6) the P-type CGL (the compound A-1, 50 Å), (7) the second HTL (NPD, 400 Å), (8) the second EML (host (Formula 3-1) and dopant (Formula 3-2, 5wt% doping), 300 Å), (9) the second ETL (compound of Formula 3-3, 350 Å), (10) the EIL (LiF, 5 Å) and (11) the cathode (Al, 1000 Å).

2. Example 10 (Ex10)

[0131] Instead of the compound A-1 in "Example 9", the compound NPD and the compound A-1 as a dopant (10wt% doping) are used.

3. Example 11 (Ex11)

[0132] Instead of the compound A-1 in "Example 9", the compound A-2 is used.

4. Example 12 (Ex12)

[0133] Instead of the compound A-1 in "Example 9", the compound NPD and the compound A-2 as a dopant (10wt% doping) are used.

5. Example 13 (Ex13)

[0134] Instead of the compound A-1 in "Example 9", the compound A-3 is used.

6. Example 14 (Ex14)

[0135] Instead of the compound A-1 in "Example 9", the compound NPD and the compound A-3 as a dopant (10wt% doping) are used.

7. Example 15 (Ex15)

[0136] Instead of the compound A-1 in "Example 9", the compound A-4 is used.

8. Example 16 (Ex16)

[0137] Instead of the compound A-1 in "Example 9", the compound NPD and the compound A-4 as a dopant (10wt% doping) are used.

9. Comparative Example 4 (Ref4)

[0138] Instead of the compound A-1 in "Example 9", the compound HAT-CN is used.


10. Comparative Example 5 (Ref5)

[0139] Instead of the compound A-1 in "Example 9", the compound NPD and the compound HAT-CN as a dopant (10wt% doping) are used.

11. Comparative Example 6 (Ref6)

[0140] The HIL and the P-type CGL in "Example 9" are omitted.

[Formula 4]



[0141] The driving voltage, the emitting efficiency and the external quantum efficiency (EQE) of the organic light emitting diodes of "Ex9" to "Ex16" and "Ref4" to "Ref6" are measured and listed in Table 3.

Table 3

	Voltage [V]	Efficiency [Cd/A]	EQE [%]
Ex9	8.5	6.9	7.8
Ex10	8.6	7.0	8.0
Ex11	8.4	7.0	7.9
Ex12	8.4	7.1	8.0
Ex13	8.0	7.4	8.5
Ex14	8.2	7.5	8.5
Ex15	8.6	6.8	7.7
Ex16	8.7	6.9	7.8
Ref4	8.8	5.6	6.7
Ref5	12.9	4.7	5.3
Ref6	-	-	-


[0142] As shown in Table 3, the driving properties, e.g., the driving voltage, the emitting efficiency and the external quantum efficiency, of the organic light emitting diode of the present invention are improved.

[0143] As mentioned above, the organic compound of the present invention has the strong (high) electron withdrawing property and high thermal stability. In addition, the organic compound of the present invention has the low LUMO level. Accordingly, the organic compound of the present invention in the HIL and/or the P-type CGL easily receives the electron from the HTL or the host material in the HIL such that the electron path is also easily provided or generated. In other words, the electron transporting efficiency in the organic light emitting diode, which includes the organic compound in the HIL and/or the P-type CGL, is improved such that the driving voltage is decreased and the emitting efficiency is increased.

Claims





1. An organic compound, represented by following Formula:

[Formula]

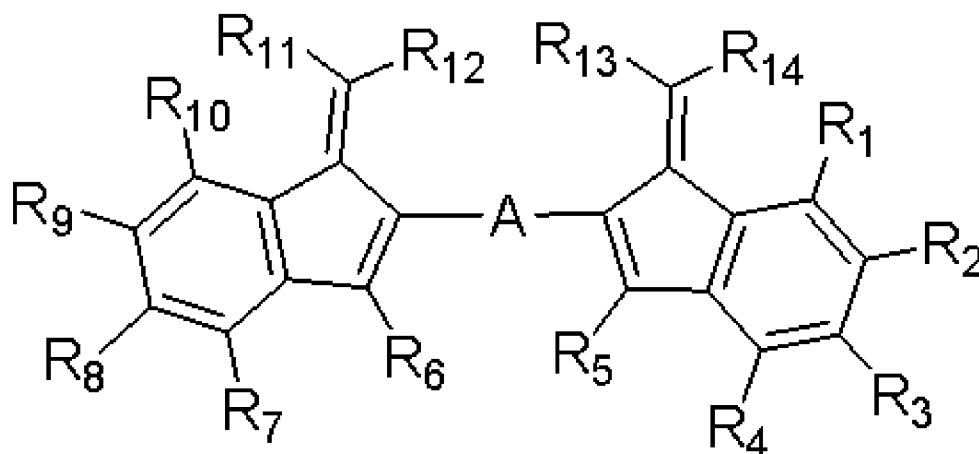


wherein each of R_1 to R_{14} is independently selected from hydrogen, substituted or non-substituted C_6 to C_{12} aryl, substituted or non-substituted C_3 to C_{11} heteroaryl, substituted or non-substituted C_1 to C_{10} alkyl, substituted or non-substituted C_1 to C_{10} alkoxy, ether, cyano group, fluorine, tri-fluoro methyl, tri-fluoro methoxy and trimethylsilyl, and at least one of R_1 to R_{10} is the cyano group, and wherein at least one of R_{11} to R_{14} is the cyano group, and A is selected from substituted or non-substituted C_6 to C_{30} aryl and substituted or non-substituted C_3 to C_{30} heteroaryl.


2. The organic compound according to claim 1, wherein all of R_{11} to R_{14} are the cyano group.
3. The organic compound according to claim 1 or 2, wherein A is one of benzene, naphthalene, pyridine, diazine, dibenzofurane and dibenzothiophene.
4. The organic compound according to claim 1, wherein the organic compound is selected from:

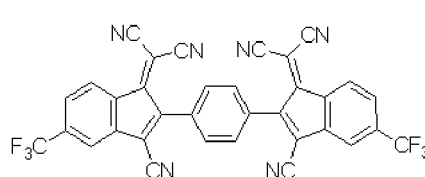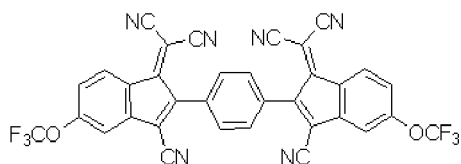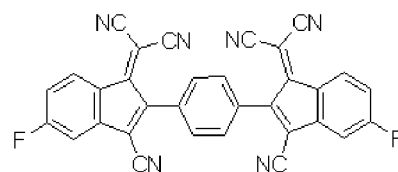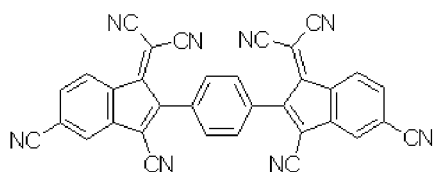


5

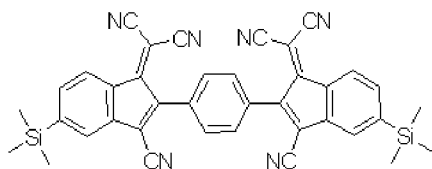


10

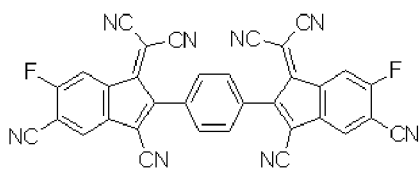


15

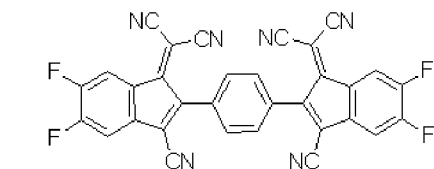


20

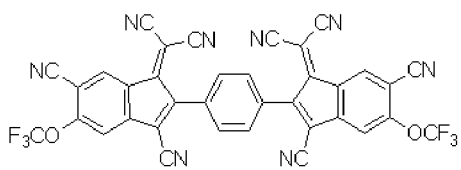


25

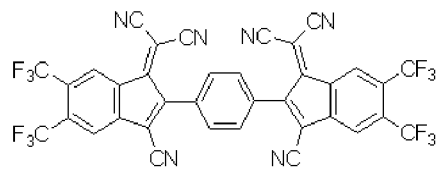


30

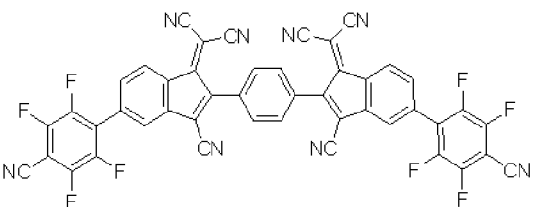


35

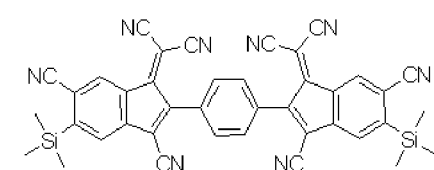


40

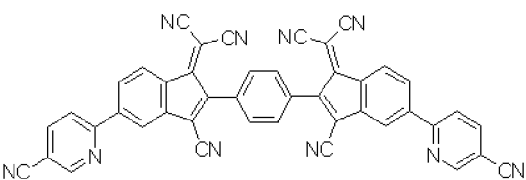




45












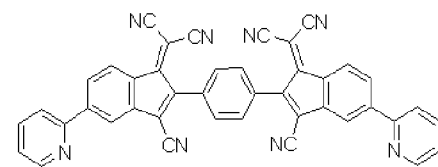


50

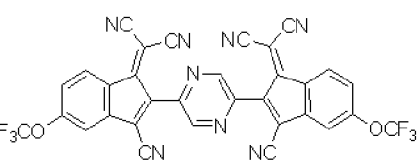


55

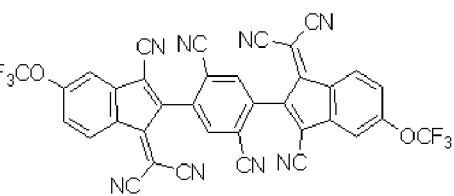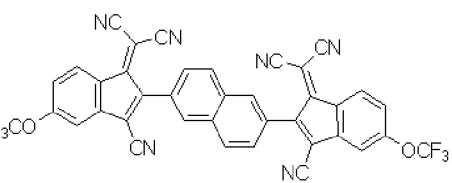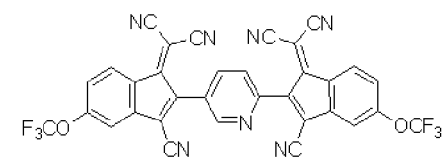


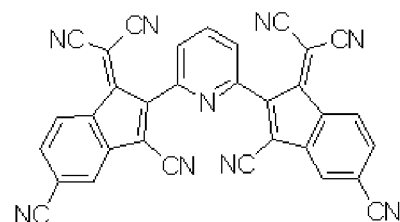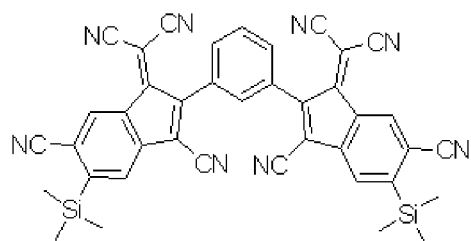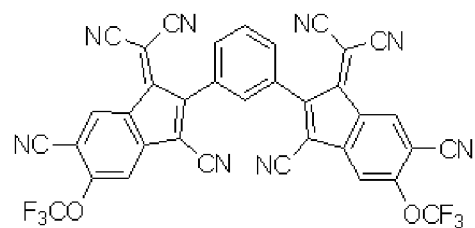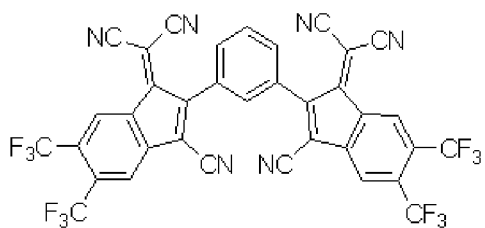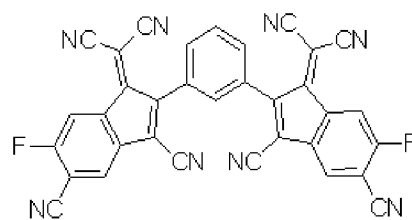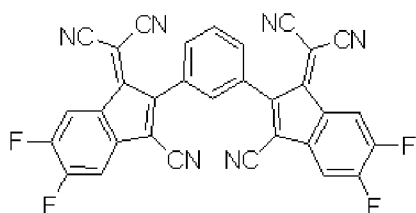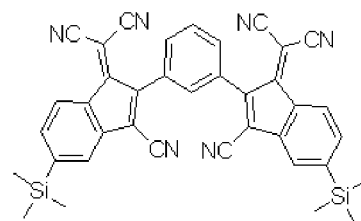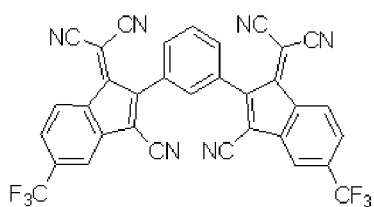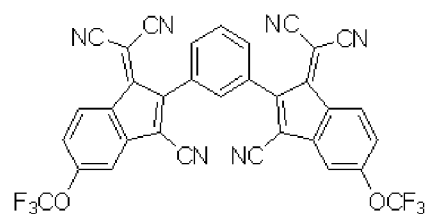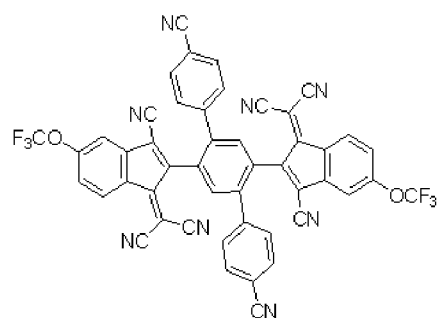


5

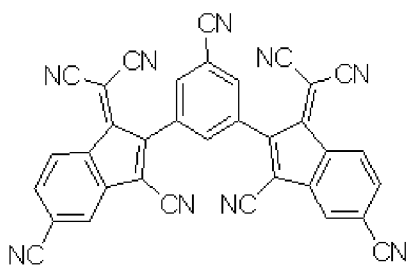


10

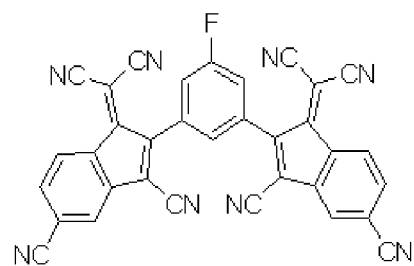


15

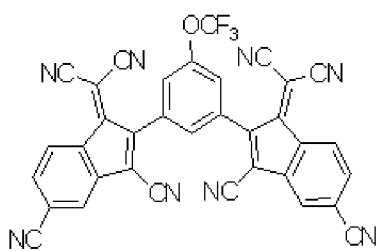


20

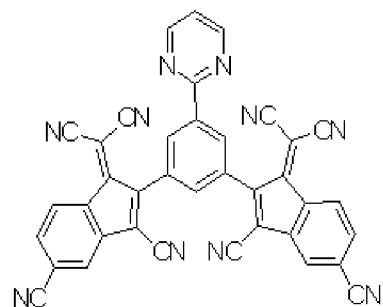


25

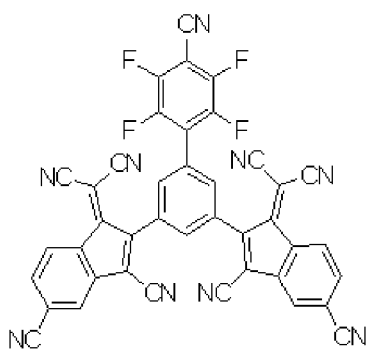


30

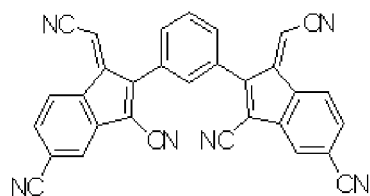


35

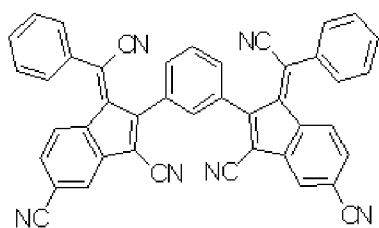


40

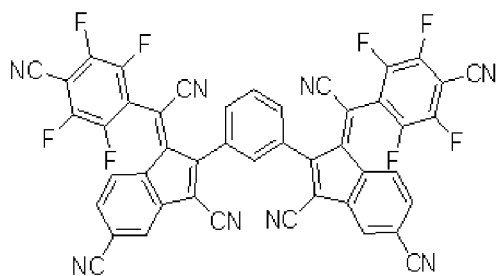











45


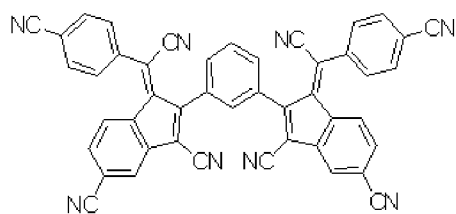


50

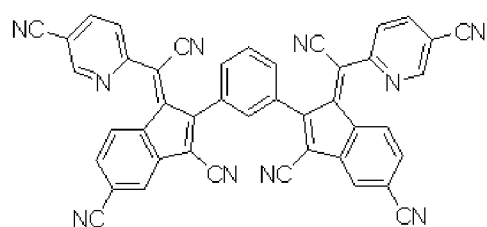

55

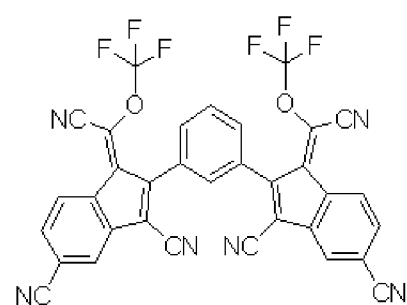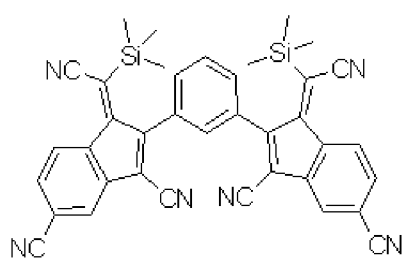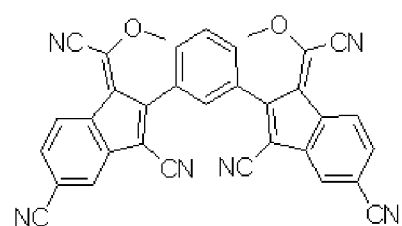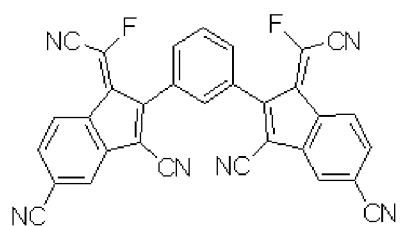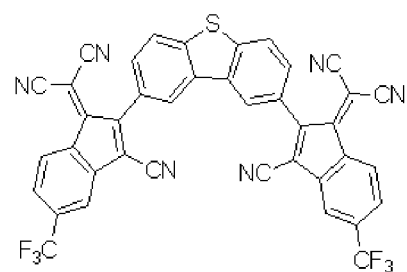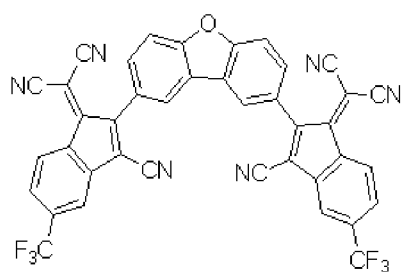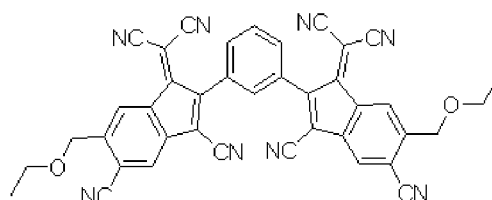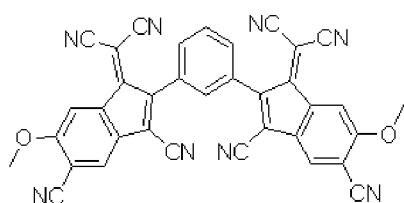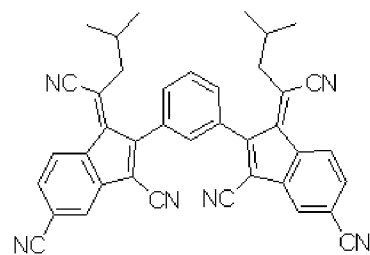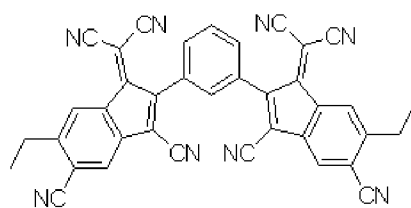

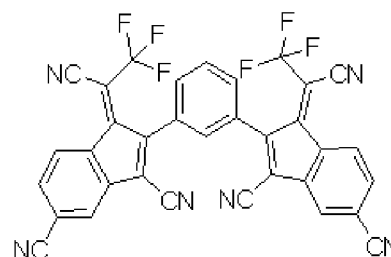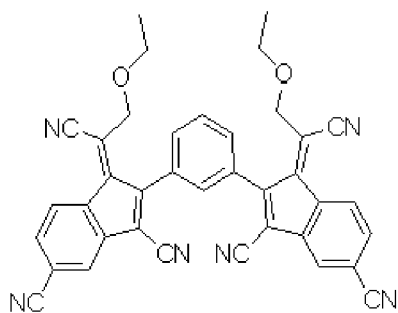

5. An organic light emitting diode (D), comprising:

first and second electrodes (180, 184) facing each other;
a first emitting part between the first and second electrodes (180, 184) and including a hole injection layer (210),
a first hole transporting layer (220) and a first emitting material layer (230); and
an electron auxiliary layer (240) between the first emitting part and the second electrode (184), **characterized in that** the hole injection layer (210) includes an organic compound according to any one of claims 1 to 4.

6. The organic light emitting diode (D) according to claim 5, wherein the first hole transporting layer (220) comprises a material, wherein a lowest unoccupied molecular orbital (LUMO) level of the organic compound is substantially equal to or smaller than a highest occupied molecular orbital (HOMO) level of the material of the first hole transporting layer (220).

7. The organic light emitting diode (D) according to claim 5 or 6, wherein the hole injection layer (210) further includes a host material, and an LUMO level of the organic compound is substantially equal to or smaller than a HOMO level of the host material.

8. The organic light emitting diode (D) according to any one of claims 5 to 7, further comprising:

a second emitting part between the first emitting part and the electron auxiliary layer and including a second hole transporting layer; and
a charge generation layer between the first and second emitting parts,
wherein the charge generation layer includes the organic compound.

9. An organic light emitting diode (D), comprising:

first and second electrodes (180, 184) facing each other;
a first emitting part (ST1) between the first and second electrodes (180, 184);
a second emitting part (ST2) between the first emitting part (ST1) and the second electrode (184) and including a hole transporting layer (322); and
a charge generation layer (330) between the first and second emitting parts (ST1, ST2), **characterized in that** the charge generation layer (330) includes an organic compound according to any one of claims 1 to 4.

10. The organic light emitting diode (D) according to claim 9, wherein the hole transporting layer (322) comprises a material, wherein an LUMO level of the organic compound is substantially equal to or smaller than a HOMO level of the material of the hole transporting layer (322).

11. The organic light emitting diode (D) according to claim 9 or 10, wherein the charge generation layer (330) further includes a host material, and an LUMO level of the organic compound is substantially equal to or smaller than a HOMO level of the host material.

12. The organic light emitting diode (D) according to any one of claims 9 to 11, wherein the charge generation layer (330) includes an N-type charge generation layer (330N) and a P-type charge generation layer (330P) between the N-type charge generation layer (330N) and the second emitting part (ST2), and wherein the P-type charge generation layer (330P) includes the organic compound.

13. An organic light emitting display device (100), comprising:

a substrate (110);
an organic light emitting diode (D) according to any one of claims 5 to 8 over the substrate (110); and
a thin film transistor (Td) between the substrate (110) and the organic light emitting diode (D) and connected to the organic light emitting diode (D).


14. An organic light emitting display device (100), comprising:

a substrate (110);
an organic light emitting diode (D) according to any one of claims 9 to 12 over the substrate (110); and
a thin film transistor (Td) between the substrate (110) and the organic light emitting diode (D) and connected to the organic light emitting diode (D).

Patentansprüche

1. Eine organische Verbindung, die mittels der folgenden Formel wiedergegeben wird:

[Formel]


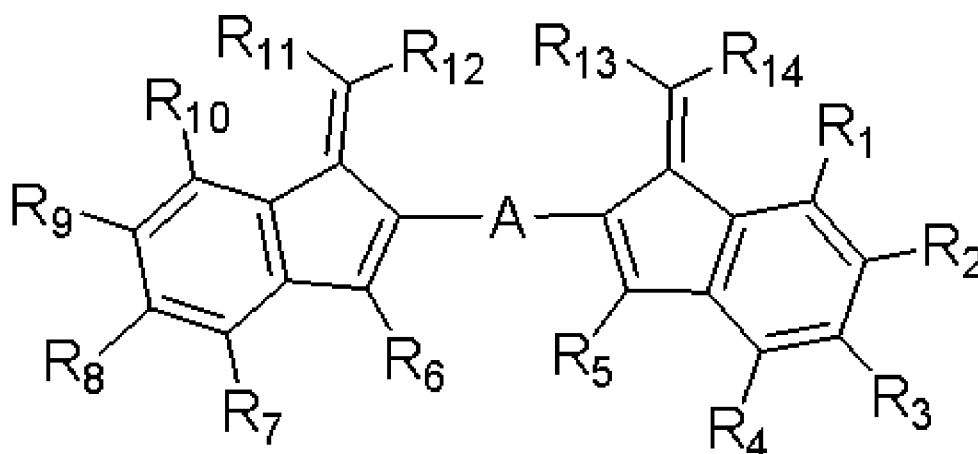


wobei jedes von R_1 bis R_{14} unabhängig ausgewählt ist aus Wasserstoff, substituiertem oder nicht-substituiertem C_6 - bis C_{12} -Aryl, substituiertem oder nicht-substituiertem C_3 - bis C_{11} -Heteroaryl, substituiertem oder nicht-substituiertem C_1 - bis C_{10} -Alkyl, substituiertem oder nicht-substituiertem C_1 - bis C_{10} -Alkoxy, einem Ether, einer Cyano-Gruppe, Fluor, Trifluormethyl, Trifluormethoxy und Trimethylsilyl, und mindestens eines von R_1 bis R_{10} die Cyano-Gruppe ist, und wobei mindestens eines von R_{11} bis R_{14} die Cyano-Gruppe ist, und A ausgewählt ist aus substituiertem oder nicht-substituiertem C_6 - bis C_{30} -Aryl und substituiertem oder nicht-substituiertem C_3 - bis C_{30} -Heteroaryl.



2. Die organische Verbindung gemäß Anspruch 1, wobei alle R_{11} bis R_{14} die Cyano-Gruppe sind.

3. Die organische Verbindung gemäß Anspruch 1 oder 2, wobei A eines von Benzol, Naphthalen, Pyridin, Diazin, Dibenzofuran und Dibenzothiophen ist.



4. Die organische Verbindung gemäß Anspruch 1, wobei die organische Verbindung ausgewählt ist aus:

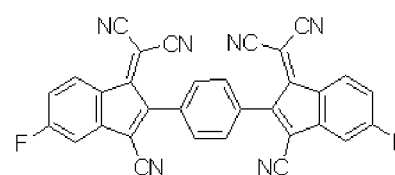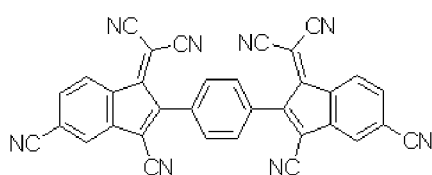



5

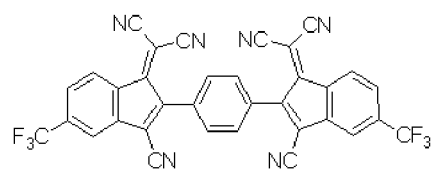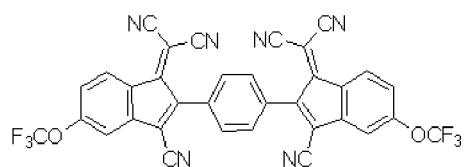



10

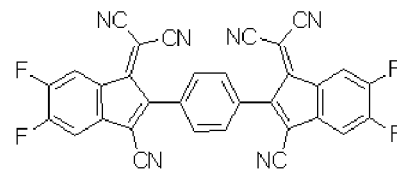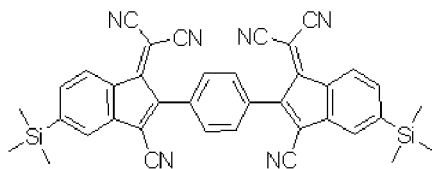



15

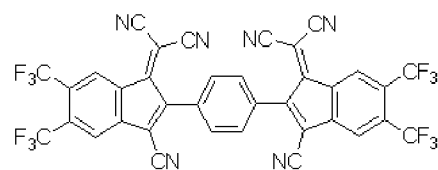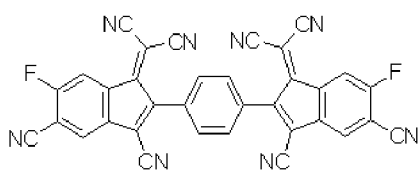

20

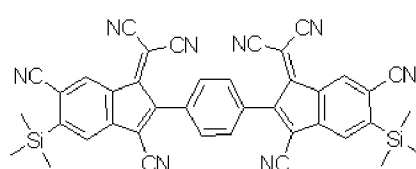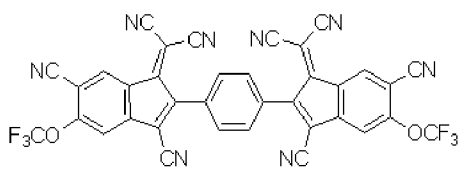



25

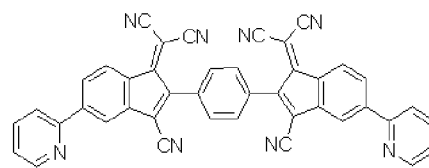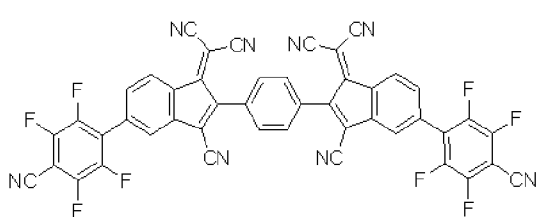



30

35

40


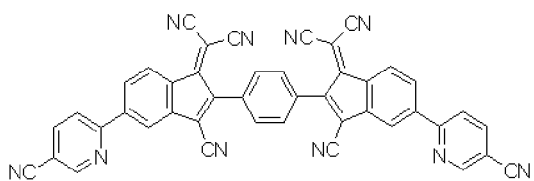














45

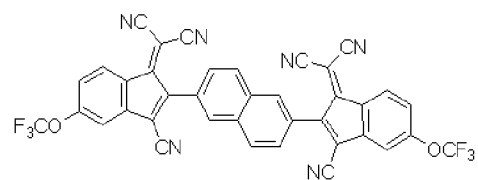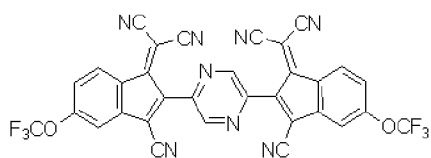


50

55

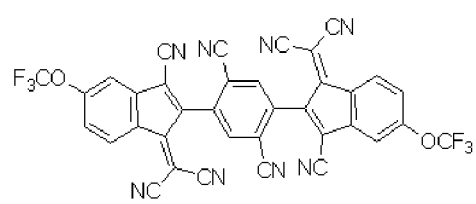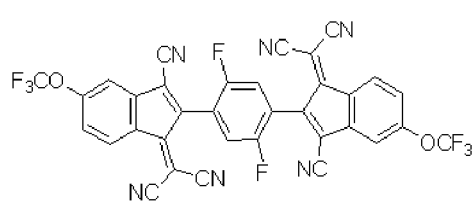


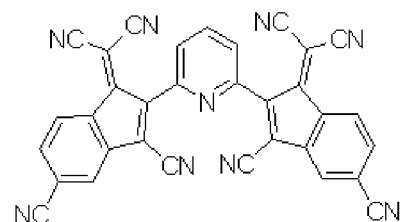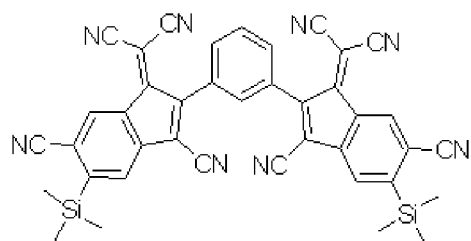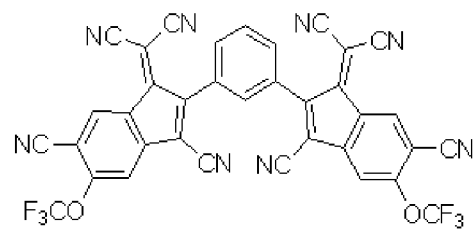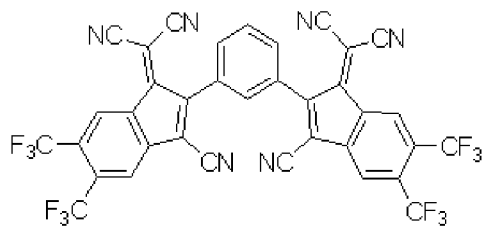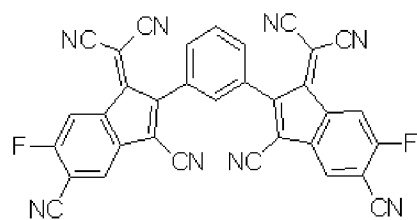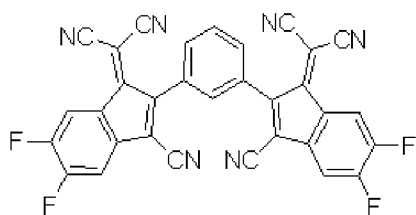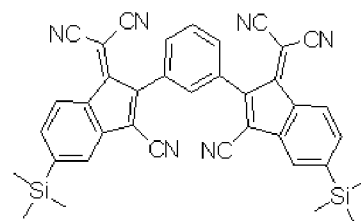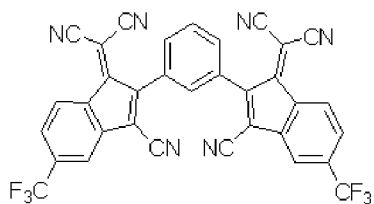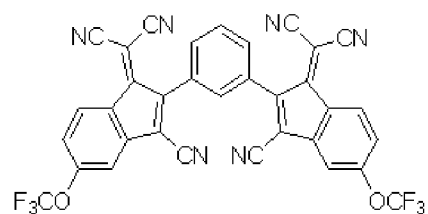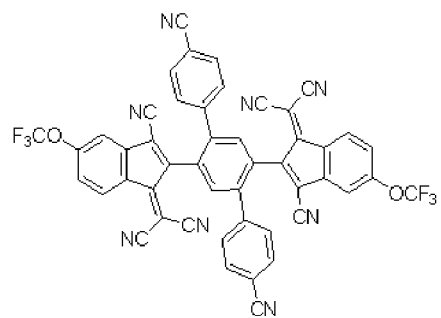


5

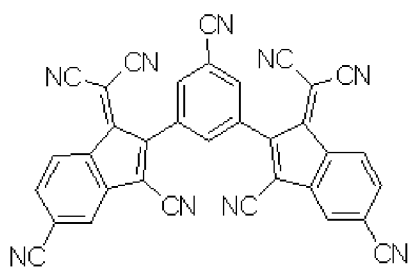


10

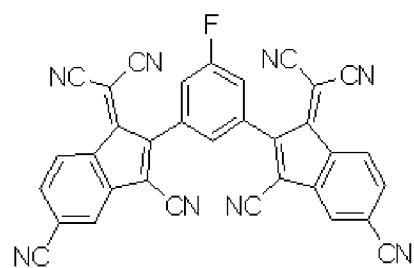


15

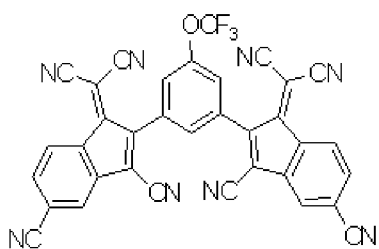


20

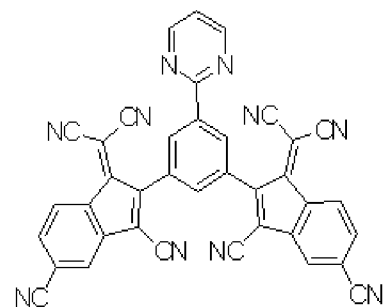


25

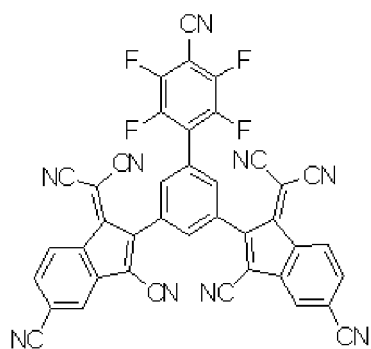


30

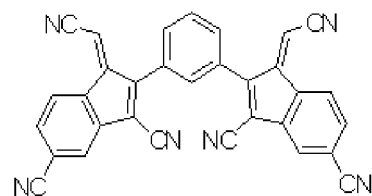


35

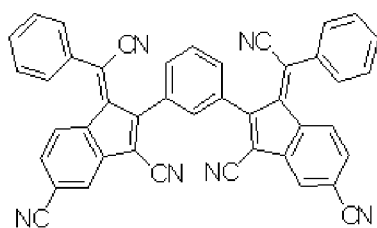


40

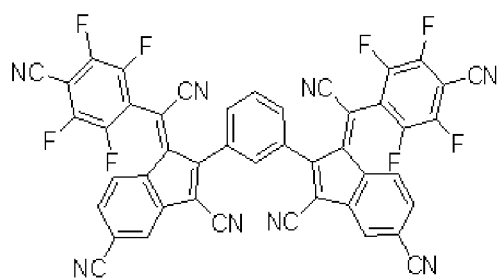











45


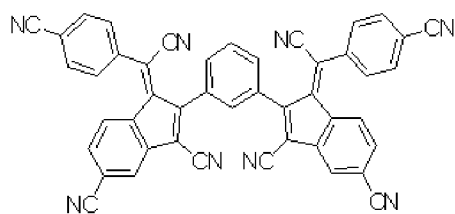


50

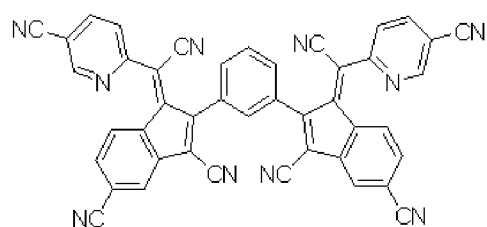

55

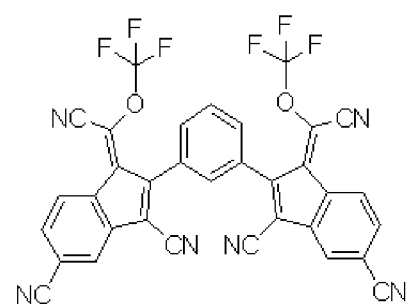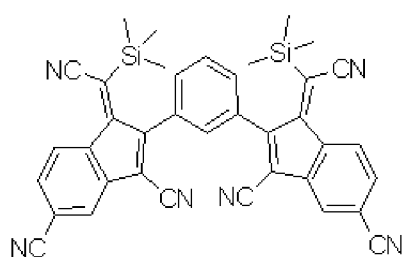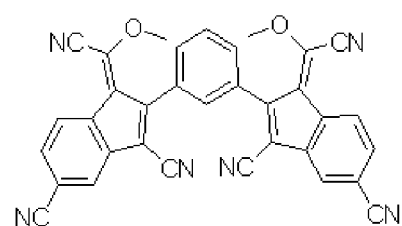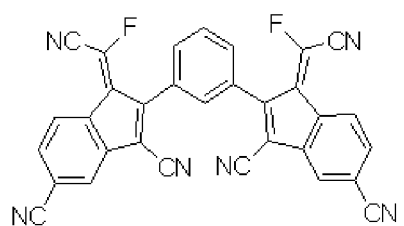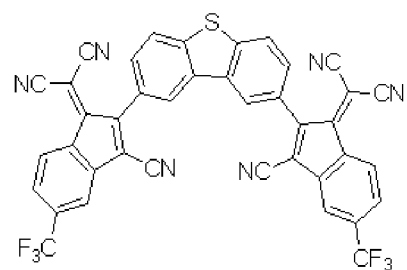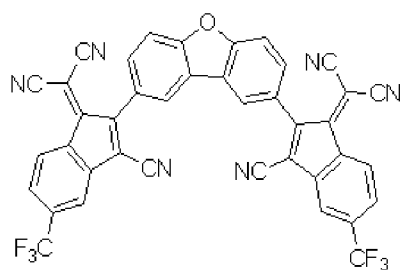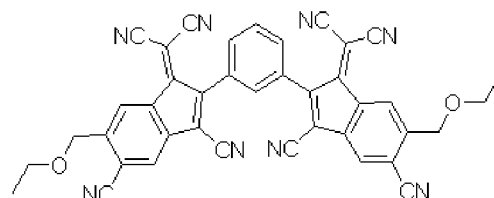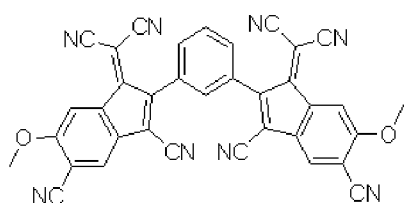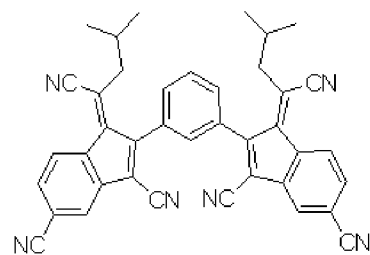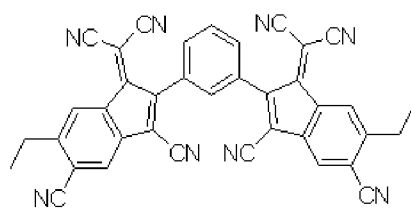

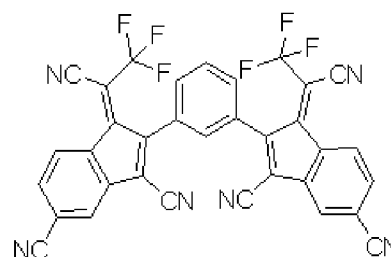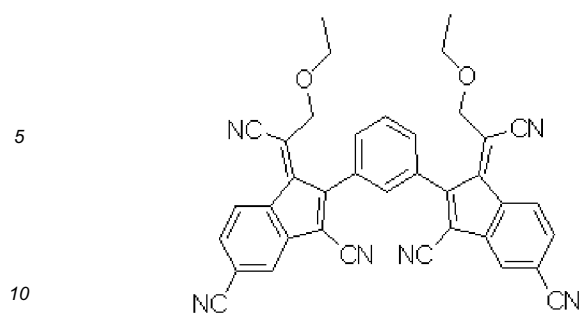

5. Eine organische lichtemittierende Diode (D), aufweisend:

15 eine erste Elektrode (180) und eine zweite Elektrode (184), die einander gegenüberliegen;
einen ersten emittierenden Teil zwischen der ersten Elektrode (180) und der zweiten Elektrode (184), und der
eine Löcher-Injektionsschicht (210), eine erste Löcher-Transportschicht (220) und eine erste emittierende Ma-
terialschicht (230) aufweist; und
eine Elektronen-Hilfsschicht (240) zwischen dem ersten emittierenden Teil und der zweiten Elektrode (184),
20 **dadurch gekennzeichnet, dass**
die Löcher-Injektionsschicht (210) eine organische Verbindung gemäß einem der Ansprüche 1 bis 4 aufweist.

6. Die organische lichtemittierende Diode gemäß Anspruch 5, wobei die erste Löcher-Transportschicht (220) ein Ma-
25 terial aufweist, wobei ein niedrigstes unbesetztes Molekülorbital (LUMO)-Niveau der organischen Verbindung im
Wesentlichen gleich ist zu einem oder kleiner ist als ein höchstes besetztes Molekülorbital (HOMO)-Niveau des
Materials der ersten Löcher-Transportschicht (220).

7. Die organische lichtemittierende Diode gemäß Anspruch 5 oder 6, wobei die Löcher-Injektionsschicht (210) ferner
30 ein Wirtsmaterial aufweist und ein LUMO-Niveau der organischen Verbindung im Wesentlichen gleich ist zu einem
oder kleiner ist als ein HOMO-Niveau des Wirtsmaterials.

8. Die organische lichtemittierende Diode gemäß einem der Ansprüche 5 bis 7, ferner aufweisend:

35 einen zweiten emittierenden Teil zwischen dem ersten emittierenden Teil und der Elektronen-Hilfsschicht, und
der eine zweite Löcher-Transportschicht aufweist; und
eine Ladungserzeugungsschicht zwischen dem ersten emittierenden Teil und dem zweiten emittierenden Teil,
wobei die Ladungserzeugungsschicht die organische Verbindung aufweist.

9. Eine organische lichtemittierende Diode (D), aufweisend:

40 eine erste Elektrode (180) und eine zweite Elektrode (184), die einander gegenüberliegen;
einen ersten emittierenden Teil (ST1) zwischen der ersten Elektrode (180) und der zweiten Elektrode (184);
einen zweiten emittierenden Teil (ST2) zwischen dem ersten emittierenden Teil (ST1) und der zweiten Elektrode
(184), und der eine Löcher-Transportschicht (322) aufweist; und
45 eine Ladungserzeugungsschicht (330) zwischen dem ersten emittierenden Teil (ST1) und dem zweiten emit-
tierenden Teil (ST2),
dadurch gekennzeichnet, dass
die Ladungserzeugungsschicht (330) eine organische Verbindung gemäß einem der Ansprüche 1 bis 4 aufweist.

50 10. Die organische lichtemittierende Diode (D) gemäß Anspruch 9, wobei die Löcher-Transportschicht (322) ein Material
aufweist, wobei ein LUMO-Niveau der organischen Verbindung im Wesentlichen gleich ist zu einem oder kleiner
ist als ein HOMO-Niveau des Materials der Löcher-Transportschicht (322).

55 11. Die organische lichtemittierende Diode (D) gemäß Anspruch 9 oder 10, wobei die Ladungserzeugungsschicht (330)
ferner ein Wirtsmaterial aufweist und ein LUMO-Niveau der organischen Verbindung im Wesentlichen gleich ist zu
einem oder kleiner ist als ein HOMO-Niveau des Wirtsmaterials.

12. Die organische lichtemittierende Diode (D) gemäß einem der Ansprüche 9 bis 11, wobei die Ladungserzeugungs-

schicht (330) eine Ladungserzeugungsschicht des N-Typs (330N) aufweist und eine Ladungserzeugungsschicht des P-Typs (330P) zwischen der Ladungserzeugungsschicht des N-Typs (330N) und dem zweiten emittierenden Teil (ST2), und wobei die Ladungserzeugungsschicht des P-Typs (330P) die organische Verbindung aufweist.

13. Eine organische lichtemittierende Anzeigevorrichtung (100), aufweisend:

ein Substrat (110);
eine organische lichtemittierende Diode (D) gemäß einem der Ansprüche 5 bis 8 über dem Substrat (110); und
einen Dünnschichttransistor (Td) zwischen dem Substrat (110) und der organischen lichtemittierenden Diode (D), und der mit der organischen lichtemittierenden Diode (D) verbunden ist.


14. Eine organische lichtemittierende Anzeigevorrichtung (100), aufweisend:

ein Substrat (110);
eine organische lichtemittierende Diode (D) gemäß einem der Ansprüche 9 bis 12 über dem Substrat (110); und
einen Dünnschichttransistor (Td) zwischen dem Substrat (110) und der organischen lichtemittierenden Diode (D), und der mit der organischen lichtemittierenden Diode (D) verbunden ist.

Revendications

1. Composé organique, représenté par la formule suivante :

[Formule]
















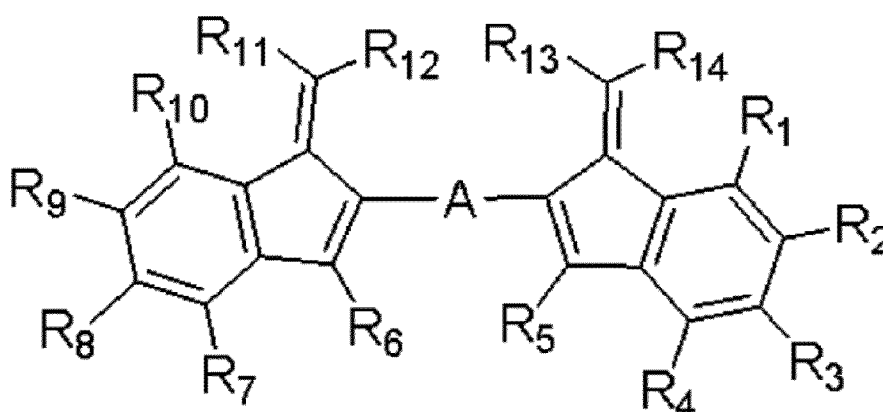














dans laquelle chacun de R_1 à R_{14} est indépendamment choisi parmi un atome d'hydrogène, un groupe aryle en C_6 à C_{12} substitué ou non substitué, un groupe hétéroaryle en C_3 à C_{11} substitué ou non substitué, un groupe alkyle en C_1 à C_{10} substitué ou non substitué, un groupe alcoxy en C_1 à C_{10} substitué ou non substitué, un éther, un groupe cyano, un atome de fluor, un groupe trifluorométhyle, un groupe trifluorométhoxy et un groupe triméthylsilyle, et au moins un de R_1 à R_{10} est un groupe cyano, et dans laquelle au moins un de R_{11} à R_{14} est un groupe cyano, et A est choisi parmi un groupe aryle en C_6 à C_{30} substitué ou non substitué, un groupe hétéroaryle en C_3 à C_{30} substitué ou non substitué.











2. Composé organique selon la revendication 1, dans lequel tous les groupes R_{11} à R_{14} sont le groupe cyano.













3. Composé organique selon la revendication 1 ou 2, dans lequel A est un parmi les groupes benzène, naphtalène, pyridine, diazine, dibenzofurane et dibenzothiophène.



4. Composé organique selon la revendication 1, le composé organique étant choisi parmi :

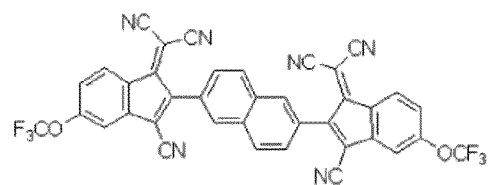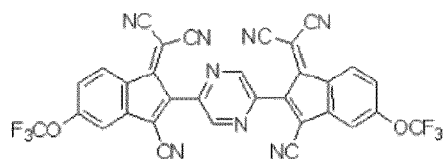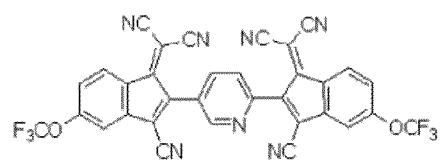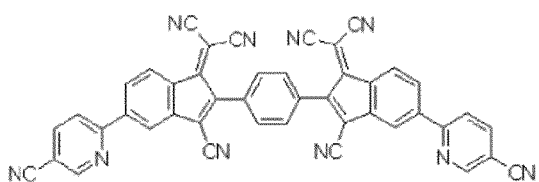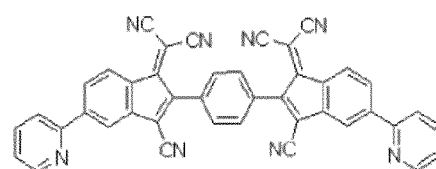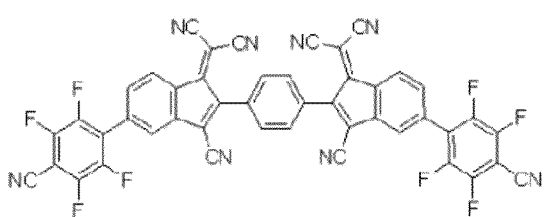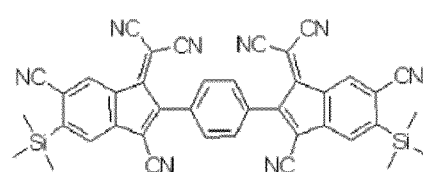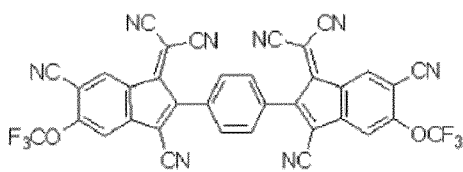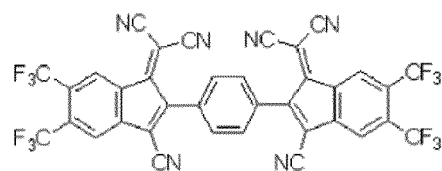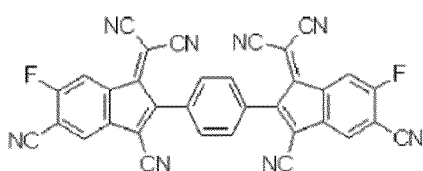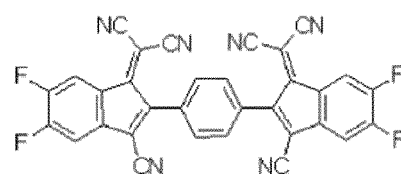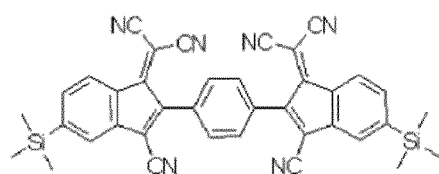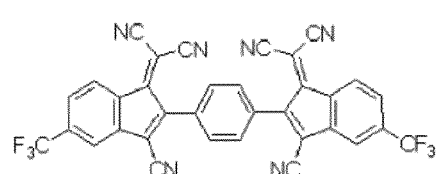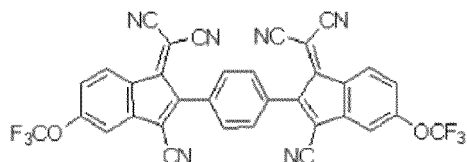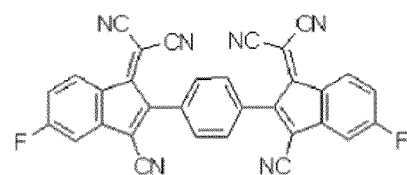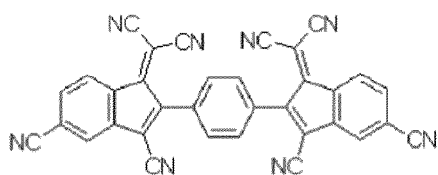

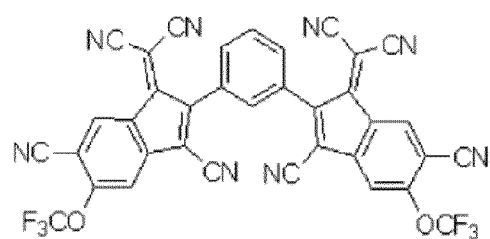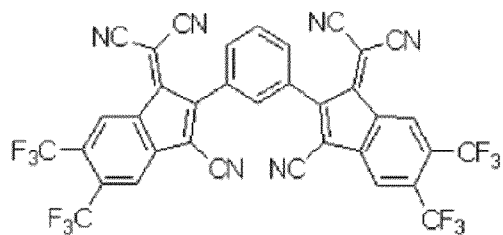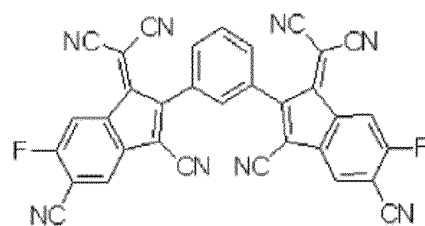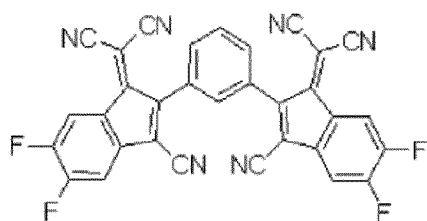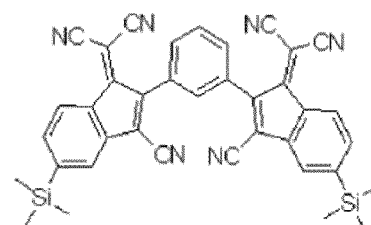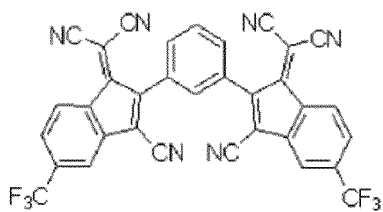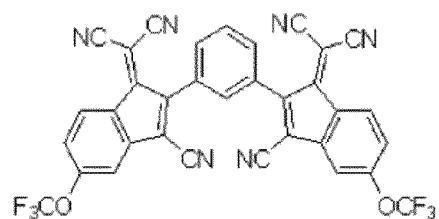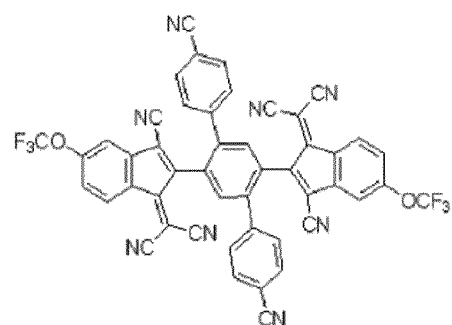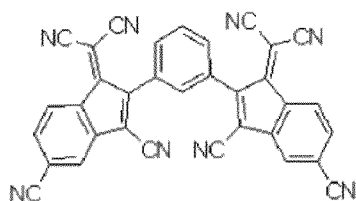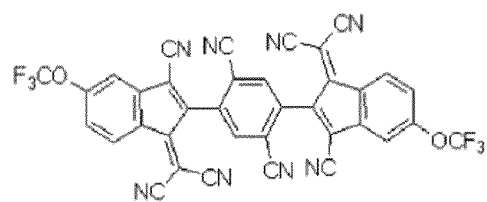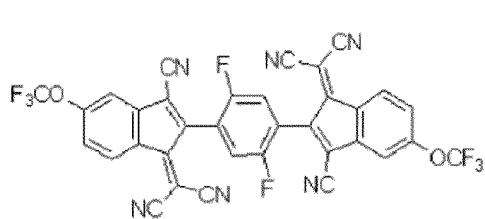

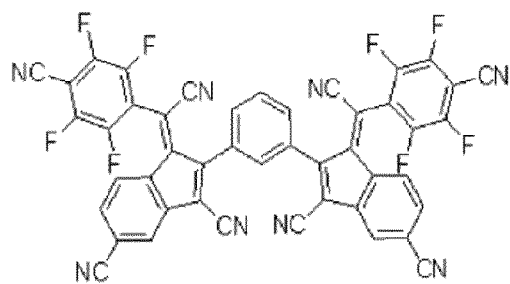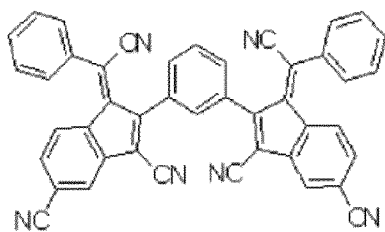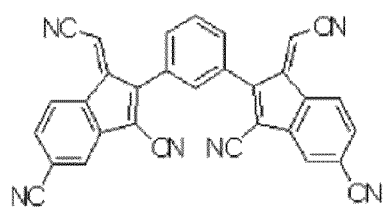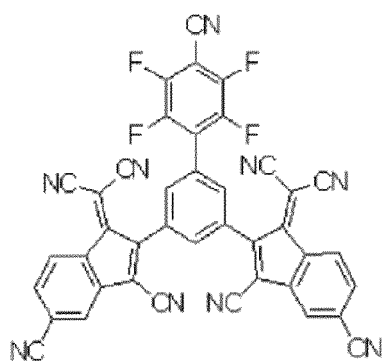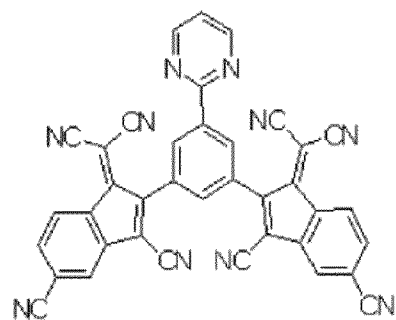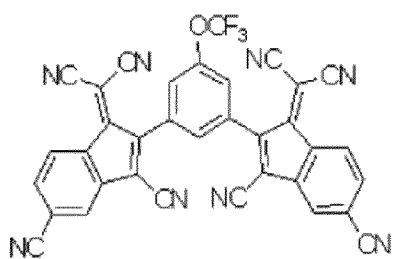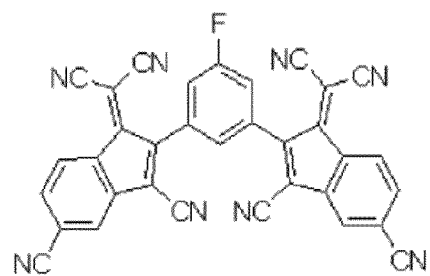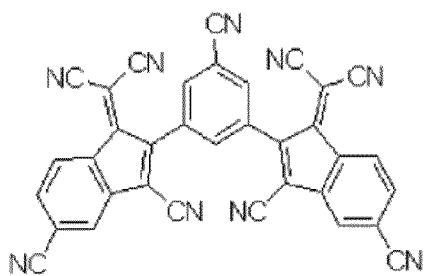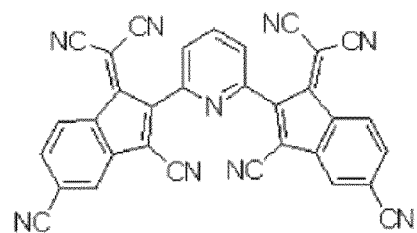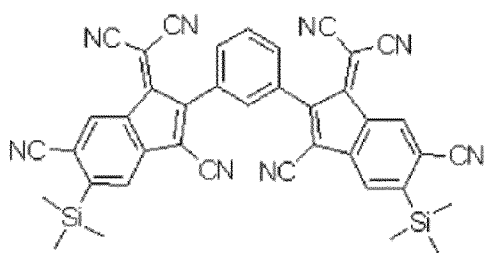

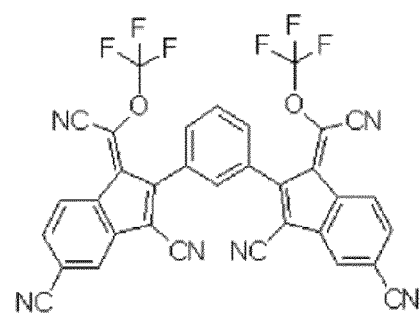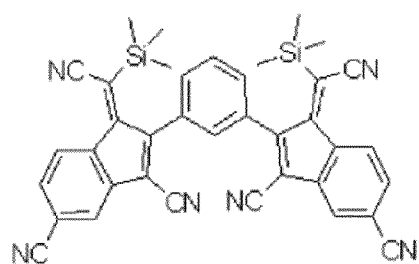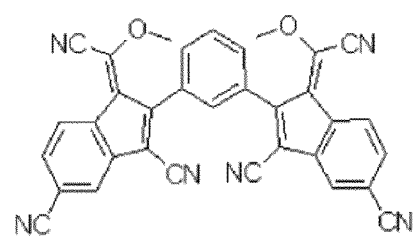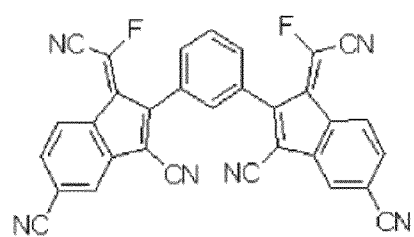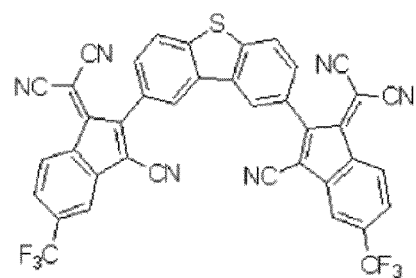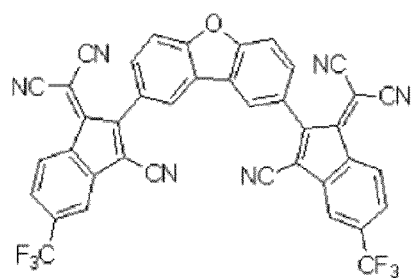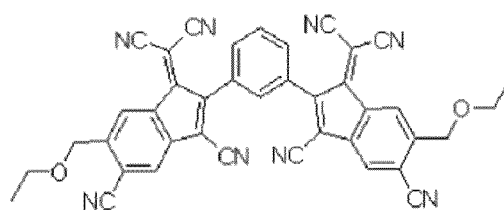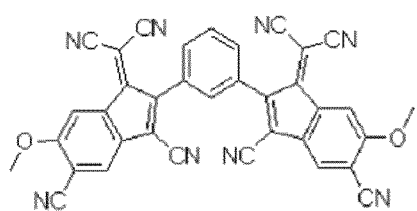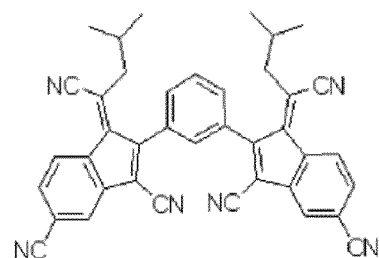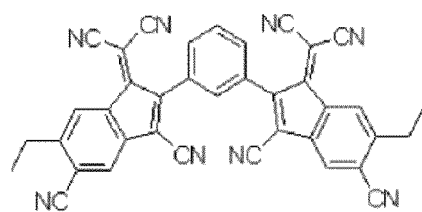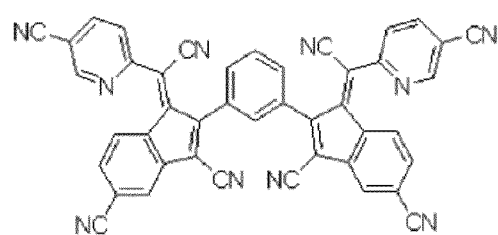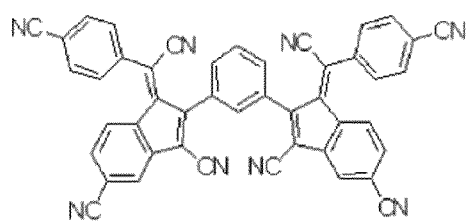

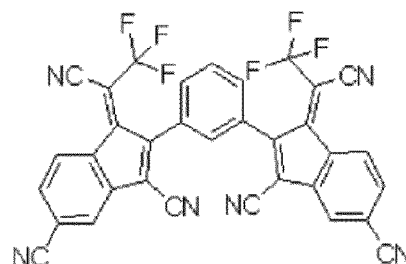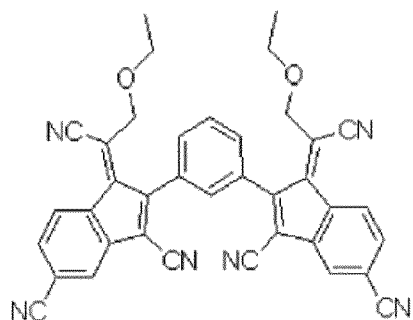

5. Diode électroluminescente organique (D), comprenant :

des première et seconde électrodes (180, 184) qui se font face l'une par rapport à l'autre ;
une première partie d'émission entre les première et seconde électrodes (180, 184) et comprenant une couche d'injection de trous (210), une première couche de transport de trous (220) et une première couche de matériau d'émission (230) ; et

une couche auxiliaire d'électrons (240) entre la première partie d'émission et la seconde électrode (184),

caractérisée en ce que

la couche d'injection de trous (210) comprend un composé organique selon l'une quelconque des revendications 1 à 4.

6. Diode électroluminescente organique (D) selon la revendication 5, dans laquelle la première couche de transport de trous (220) comprend un matériau, un niveau d'orbitale moléculaire vacante la plus basse (LUMO) du composé organique étant sensiblement égal ou inférieur à un niveau d'orbitale moléculaire occupée la plus haute (HOMO) du matériau de la première couche de transport de trous (220).

7. Diode électroluminescente organique (D) selon la revendication 5 ou 6, dans laquelle la couche d'injection de trous (210) comprend en outre un matériau hôte, et un niveau LUMO du composé organique est sensiblement égal ou inférieur à un niveau HOMO du matériau hôte.

8. Diode électroluminescente organique (D) selon l'une quelconque des revendications 5 à 7, comprenant en outre :

une seconde partie d'émission entre la première partie d'émission et la couche auxiliaire d'électrons et comprenant une seconde couche de transport de trous ; et

une couche de génération de charge entre les première et seconde parties d'émission,
la couche de génération de charge comprenant le composé organique.

9. Diode électroluminescente organique (D) comprenant :

des première et seconde électrodes (180, 184) qui se font face l'une par rapport à l'autre ;

une première partie d'émission (ST1) entre les première et seconde électrodes (180, 184) ;

une seconde partie d'émission (ST2) entre la première partie d'émission (ST1) et la seconde électrode (184) et comprenant une couche de transport de trous (322) ; et

une couche de génération de charge (330) entre les première et seconde parties d'émission (ST1, ST2),

caractérisée en ce que

la couche de génération de charge (330) comprend un composé organique selon l'une quelconque des revendications 1 à 4.

10. Diode électroluminescente organique (D) selon la revendication 9, dans laquelle la couche de transport de trous (322) comprend un matériau, un niveau LUMO du composé organique étant sensiblement égal ou inférieur à un niveau HOMO du matériau de la couche de transport de trous (322).

11. Diode électroluminescente organique (D) selon la revendication 9 ou 10, dans laquelle la couche de génération de charge (330) comprend en outre un matériau hôte, et un niveau LUMO du composé organique est sensiblement égal ou inférieur à un niveau HOMO du matériau hôte.

12. Diode électroluminescente organique (D) selon l'une quelconque des revendications 9 à 11, dans laquelle la couche de génération de charge (330) comprend une couche de génération de charge de type N (330N) et une couche de génération de charge de type P (330P) entre la couche de génération de charge de type N (330N) et la seconde partie d'émission (ST2), et dans laquelle la couche de génération de charge de type P (330P) comprend le composé organique.

13. Dispositif d'affichage électroluminescent organique (100) comprenant :

un substrat (110) ;

une diode électroluminescente organique (D) selon l'une quelconque des revendications 5 à 8 sur le substrat (110) ; et

un transistor en couche mince (Td) entre le substrat (110) et la diode électroluminescente organique (D) et connecté à la diode électroluminescente organique (D).

14. Dispositif d'affichage électroluminescent organique (100) comprenant :

un substrat (110) ;

une diode électroluminescente organique (D) selon l'une quelconque des revendications 9 à 12 sur le substrat (110) ; et

un transistor en couche mince (Td) entre le substrat (110) et la diode électroluminescente organique (D) et connecté à la diode électroluminescente organique (D).

FIG. 1

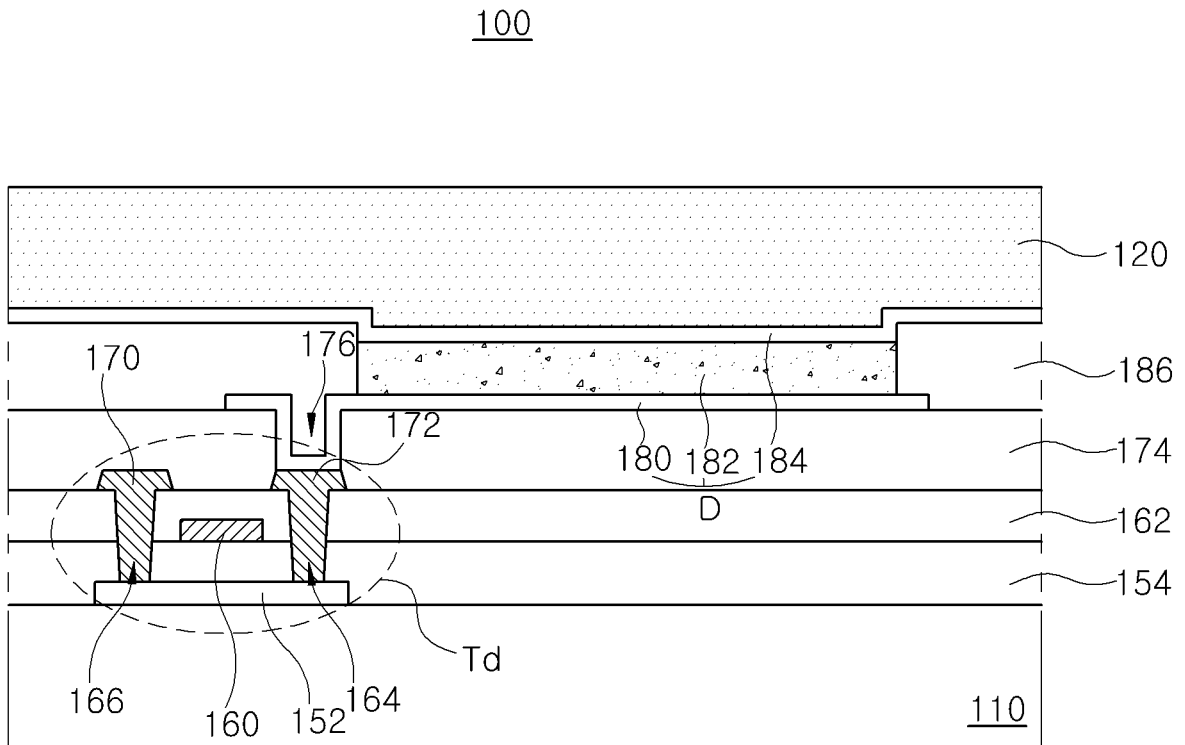


FIG. 2

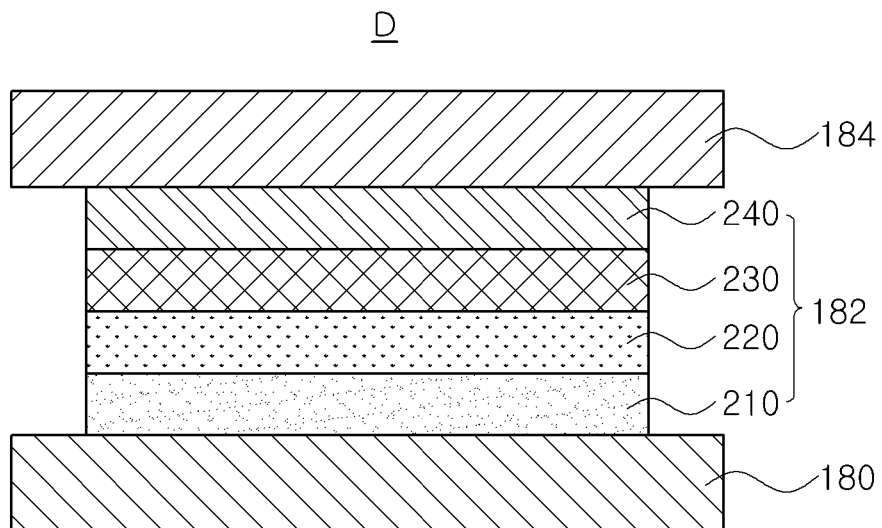


FIG. 3A

D


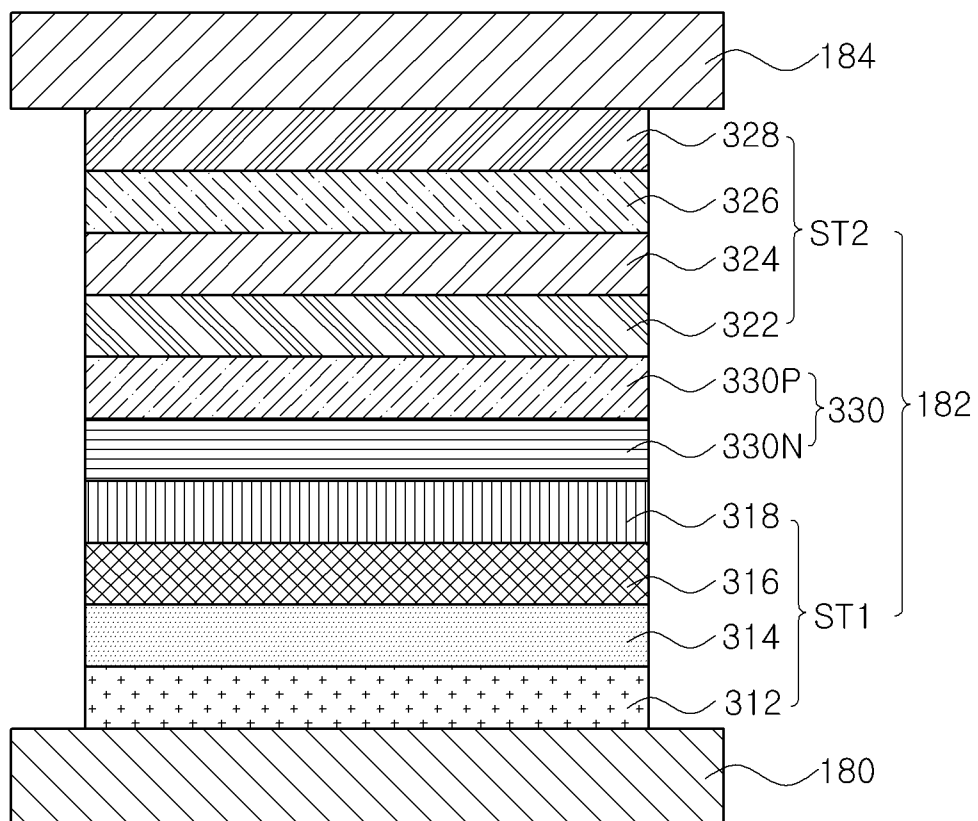


FIG. 3B

D

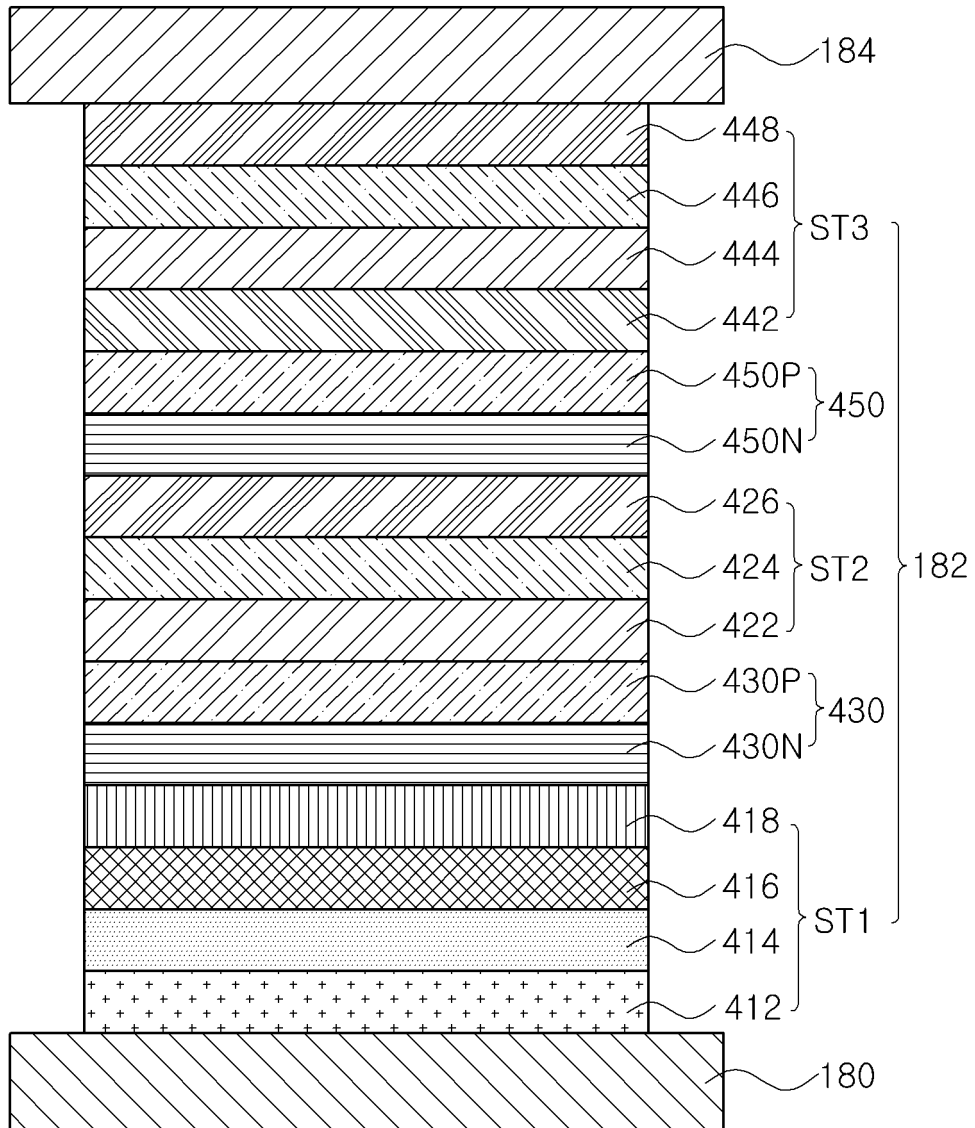

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 1020160111582 [0001]
- EP 3026727 A1 [0006]
- EP 2833700 A1 [0006]

专利名称(译)	有机化合物，以及包括其的有机发光二极管和有机发光显示装置		
公开(公告)号	EP3291327B1	公开(公告)日	2019-04-17
申请号	EP2017177815	申请日	2017-06-26
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	KIM JUNG KEUN KIM DO HAN SEO JEONG DAE SHIN JI CHEOL CHOI HEUNG WOO HONG WAN PYO SUH SANG DUK YOON JOO YONG HONG SUNG KIL		
发明人	KIM, JUNG-KEUN KIM, DO-HAN SEO, JEONG-DAE SHIN, JI-CHEOL CHOI, HEUNG-WOO HONG, WAN-PYO SUH, SANG-DUK YOON, JOO-YONG HONG, SUNG-KIL		
IPC分类号	H01L51/54 C07D213/57		
CPC分类号	C07C255/47 C07C255/51 C07C255/52 C07C255/54 C07D213/57 C07D213/85 C07D239/26 C07D241/12 C07D307/91 C07D333/76 C07F7/081 C09K11/06 C09K2211/1007 C09K2211/1011 C09K2211/1029 C09K2211/1044 C09K2211/1088 C09K2211/1092 H01L27/32 H01L51/0052 H01L51/0067 H01L51/0073 H01L51/0074 H01L51/50 H01L51/5004 H01L51/5056 H01L51/0058 H01L51/5278 C07C255/33 C07C255/35 H01L27/3248 H01L51/0035 H01L51/0059 H01L51/0094 H01L51/5012 H01L51/504 H01L51/5088 H01L27/3244 H01L51/5044 H01L51/5206 H01L51/5221 H01L2251/552		
优先权	1020160111582 2016-08-31 KR		
其他公开文献	EP3291327A1		
外部链接	Espacenet		

摘要(译)

本发明提供由下式表示的有机化合物：其中R₁至R₁₄各自独立地选自氢，取代或未取代的C₆至C₁₂芳基，取代或未取代的C₃至C₁₁杂芳基，取代或未取代的C₁至C₁₀烷基，取代或未取代的C₁至C₁₀烷氧基，醚，氰基（CN），氟，三氟甲基，三氟甲氧基和三甲基甲硅烷基，和至少一个R₁至R₁₀中的R₁是氰基，并且其中R₁₁至R₁₄中的至少一个是氰基，并且A选自取代或未取代的C₆至C₃₀芳基和取代或未取代的C₃至C₃₀杂芳基。本发明还提供有机发光二极管（D）和包含该有机化合物的有机发光显示装置（100）。

[Formula]