

(19)



(11)

EP 3 327 786 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
19.02.2020 Bulletin 2020/08

(51) Int Cl.:
H01L 27/32^(2006.01) H01L 51/52^(2006.01)

(21) Application number: **17204335.8**

(22) Date of filing: **29.11.2017**

(54) ORGANIC LIGHT-EMITTING DISPLAY DEVICE

ORGANISCHE LICHEMITTIERENDE ANZEIGEVORRICHTUNG

AFFICHEUR ÉLECTROLUMINESCENT ORGANIQUE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(30) Priority: **29.11.2016 KR 20160160844**

(43) Date of publication of application:
30.05.2018 Bulletin 2018/22

(73) Proprietor: **LG Display Co., Ltd.
Seoul, 07336 (KR)**

(72) Inventors:
• **PARK, Jongchan
Paju-si, Gyeonggi-do 10845 (KR)**

• **UM, Hyunchul
Paju-si, Gyeonggi-do 10845 (KR)**
• **OH, JeeHwan
Paju-si, Gyeonggi-do 10845 (KR)**

(74) Representative: **Viering, Jentschura & Partner
mbB
Patent- und Rechtsanwälte
Am Brauhaus 8
01099 Dresden (DE)**

(56) References cited:
**US-A1- 2016 079 564 US-A1- 2016 204 373
US-A1- 2016 307 971**

EP 3 327 786 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

BACKGROUND

Technical Field

[0001] The present disclosure relates to an organic light-emitting display (OLED) device, and more specifically to an OLED device having an even surface at inactive area for disposing lines.

Description of the Related Art

[0002] As information technology has developed display devices that represent information contained in electrical signals in the form of visual images are in widespread use. In accordance with this, a various display panels that can be implemented in devices which are thinner, lighter and consume less power have been developed to replace existing CRTs (Cathode Ray Tubes) so fast.

[0003] Examples of such display devices include LCD (Liquid Crystal Displays), OLED (Organic Light-Emitting Displays), ELD (Electro Luminescence Displays), EPD (Electrophoretic Displays, Electronic Paper Displays), EWD (Electro-Wetting Display) device, etc. Among these, an OLED emerges as the next generation display devices having a self-emitting characteristic since it exhibits good performance over LCD in terms of viewing angle, contrast ratio, response time, power consumption, etc. Examples thereof are disclosed in US 2016/079564 A1, US 2016/307971 A1, US 2016/204373 A1.

[0004] Recently, as OLED have smaller size and higher resolution, the number of required lines is increased. However, the space for disposing such lines becomes insufficient in order to reduce the size and thickness of displays, and to narrow or eliminate the bezel of displays (narrow bezel or zero bezel). Under the circumstances, it is an important issue to make a space for disposing lines and other elements.

BRIEF SUMMARY

[0005] An object of the present disclosure is to reduce a level difference of structures between an active area and inactive area by disposing a structure in the inactive area.

[0006] Another object of the present disclosure is to provide an OLED device having an area with an even surface in the inactive area. Yet an object of the present disclosure is to form the structure disposed in the inactive area for providing the even surface in the inactive area together with the elements in the active area.

[0007] It should be noted that objects of the present disclosure are not limited to the above-described objects, and other objects of the present disclosure will be apparent to those skilled in the art from the following descriptions.

[0008] Various embodiments provide an organic light-emitting display (OLED) device according to claim 1. Further embodiments are described in the dependent claims.

5 **[0009]** According to example embodiments of the present disclosure, the flow of an organic material in an organic member of an encapsulation layer in an inactive area of an OLED device can be suppressed by disposing a structure in the inactive area.

10 **[0010]** According to example embodiments of the present disclosure, an OLED device has an area with an even surface in an inactive area where a conductive line is disposed, so that the conductive line can be utilized as a variety of lines.

15 **[0011]** According to example embodiments of the present disclosure, a structure disposed in an inactive area can be formed together with elements disposed in an active area without any additional process or cost.

20 **[0012]** It should be noted that effects of the present disclosure are not limited to those described above and other effects of the present disclosure will be apparent to those skilled in the art from the following descriptions.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

25 **[0013]** The above and other aspects, features and other advantages of the present disclosure will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a plan view for illustrating an organic light-emitting display (OLED) device according to an example embodiment of the present disclosure;

FIG. 2 is a cross-sectional view of a portion of an active area of an OLED device according to an example embodiment of the present disclosure;

FIG. 3 is a cross-sectional view of a portion of an active area and an inactive area of an OLED device according to an example embodiment of the present disclosure;

FIG. 4 is a cross-sectional view of a portion of an active area of an OLED device according to another example embodiment of the present disclosure;

FIG. 5 is a cross-sectional view of a portion of an active area and an inactive area of an OLED device according to another example embodiment of the present disclosure;

FIG. 6 is a cross-sectional view of a portion of an active area and an inactive area of an OLED device according to Comparative Example; and

FIGS. 7 to 9 are cross-sectional views of a portion of an active area and an inactive area of an OLED device according to comparative examples useful for understanding the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0014] Advantages and features of the present disclosure and methods to achieve them will be elucidated from example embodiments described below in detail with reference to the accompanying drawings. However, the present disclosure is not limited to example embodiments disclosed herein but may be implemented in various different ways. The example embodiments are provided for making the disclosure of the present disclosure thorough and for fully conveying the scope of the present disclosure to those skilled in the art. It is to be noted that the scope of the present disclosure is defined only by the claims.

[0015] The figures, dimensions, ratios, angles, the numbers of elements given in the drawings are merely illustrative and are not limiting. Like reference numerals denote like elements throughout the descriptions. Further, descriptions on well-known technologies may be omitted in order not to unnecessarily obscure the gist of the present disclosure. It is to be noted that the terms "comprising," "having," "including" and so on, used in the description and claims, should not be interpreted as being restricted to the means listed thereafter unless specifically stated otherwise. Where an indefinite or definite article is used when referring to a singular noun, e.g., "a," "an," "the," this includes a plural of that noun unless specifically stated otherwise. In describing elements, they are interpreted as including error margins even without explicit statements.

[0016] In describing positional relationship, such as "an element A on an element B," "an element A above an element B," "an element A below an element B" and "an element A next to an element B," another element C may be disposed between the elements A and B unless the term "directly" or "immediately" is explicitly used. As used herein, a phrase "an element A on an element B" refers to that the element A may be disposed directly on the element B and/or the element A may be disposed indirectly on the element B via another element C. As used herein, phrases "an element A connected to an element B" or "an element A coupled with an element B" refer to that the element A may be directly connected to/coupled with the element B, that another element C may be interposed between the element A and the element B, and/or that the element A may be indirectly connected to/coupled with the element B via another element C.

[0017] The terms first, second and the like in the descriptions and in the claims are used for distinguishing between similar elements and not necessarily for describing a sequential or chronological order. These terms are used to merely distinguish one element from another. Accordingly, as used herein, a first element may be a second element within the technical idea of the present disclosure.

[0018] Like reference numerals denote like elements

throughout the descriptions.

[0019] The drawings are not to scale and the relative dimensions of various elements in the drawings are depicted schematically and not necessarily to scale.

[0020] Features of various example embodiments of the present disclosure may be combined partially or totally. As will be clearly appreciated by those skilled in the art, technically various interactions and operations are possible. Various example embodiments can be practiced individually or in combination.

[0021] Since the material of an organic member of an encapsulation layer typically has a low viscosity, it is required to control the flow of the material of the organic member. In order to efficiently control the flow of the organic member in the encapsulation layer, structures are disposed in the inactive area of the substrate. However, such typical structures have limitation in controlling the flow of the organic member because they are formed by sequentially stacking a bank, a spacer, etc.

[0022] In addition, various components such as electrodes and lines may be disposed in the active area as required by the high resolution of OLED devices. In doing so, there may be a level difference between the active area and the inactive area. Therefore, it is difficult to control the flow of the organic member of the encapsulation layer with typical structures.

[0023] In addition, when a touch sensing electrode is disposed on the encapsulation layer of the OLED device, a touch line for transmitting/receiving a signal to/from the touch sensing electrode may be disposed in the inactive area of the substrate. There may be a level difference between the active area and the inactive area by various components arranged in the active area of the substrate. Therefore, the touch line formed on the encapsulation layer may not be normally formed or may be disconnected.

[0024] In view of the above, the inventors of the application have studied a method for controlling the flow of an organic member of an encapsulation layer while suppressing the disconnection of the touch line in order to dispose a touch sensing electrode for sensing a touch pressure of a user in an OLED device.

[0025] Hereinafter, example embodiments of the present disclosure will be described in detail with reference to the accompanying drawings.

[0026] FIG. 1 is a plan view for illustrating an organic light-emitting display (OLED) device according to an example embodiment of the present disclosure. FIG. 1 shows a substrate 101, an encapsulation layer 120 and a barrier film 140 among various elements of the OLED device 100 for convenience of illustration. The other elements of the OLED device 100 will be described with reference to FIGS. 2. and 3.

[0027] As shown in FIG. 1, the OLED device 100 includes an active area A/A, in which an array of pixels is disposed. Although the OLED device 100 is shown as having one active area A/A, it may have more than one active areas.

[0028] An inactive area I/A may be disposed around the active area A/A. Specifically, the inactive area I/A may surround the active area A/A. Although the inactive area I/A is shown as surrounding the rectangular active area A/A, the shape and arrangement of the active area A/A and the inactive area I/A are not limited thereto. For example, when the display device is employed in a wearable device worn on a user, it may have a circular shape like a watch. In addition, the idea of example embodiments of the present disclosure may be employed by free-form display devices applicable to instrument clusters for vehicles, etc.

[0029] Each pixel in the active area A/A may be associated with a pixel driving circuit. The pixel driving circuit may include at least one switching transistor and at least one driving transistor. Each pixel driving circuit may be electrically connected to signal lines such as a gate line and a data line so as to communicate with a gate driver, a data driver, etc., disposed in the inactive area I/A.

[0030] The gate driver may be implemented as a thin-film transistor in the inactive area I/A. The driver may be referred to as GIPs (gate-in-panel). The data driver may also be implemented in the inactive area I/A. In addition, some components such as a data driver IC may be mounted on a separated PCB and may be coupled with a connection interface (a pad, a bump, a pin, etc.) disposed in the inactive area I/A via a circuit film such as a FPCB (flexible printed circuit board), a COF (chip-on-film), a TCP (tape-carrier-package), etc. The PCB may be, but is not limited to, disposed on the rear surface of the substrate 101.

[0031] The OLED device 100 may include a variety of additional elements for generating various signals or for driving pixels in the active area A/A. The additional elements for driving the pixels may include an inverter circuit, a multiplexer, an electrostatic discharge (ESD) circuit, etc. The OLED device 100 may include additional elements associated with other features than driving the pixels. For example, the OLED device 100 may include additional elements for providing a touch sense feature, a user authentication feature (e.g., fingerprint recognition feature), a multi-level pressure sense feature, a tactile feedback feature, etc.

[0032] The substrate 101 supports thereon a variety of elements of the OLED device 100. The substrate 101 may be made of a transparent, insulative material such as glass, plastic, etc. But, it is not limited thereto.

[0033] An organic light-emitting element 130 may be disposed on the substrate 101 in the active area A/A. The encapsulation layer 120 may be disposed on the organic light-emitting element 130 to cover it. The encapsulation layer 120 may seal the organic light-emitting element 130. The encapsulation layer 120 protects the organic light-emitting element 130 from moisture or oxygen. The barrier film 140 is disposed on the encapsulation layer 120. The organic light-emitting element 130, the encapsulation layer 120 and the barrier film 140 will be described in detail below with reference to FIGS. 2 and 3.

[0034] The OLED device 100 may include a plurality of pixels, and each pixel may include a plurality of sub-pixels. The sub-pixel is a minimum unit for representing one color. One sub-pixel may include a plurality of transistors, capacitors, and a plurality of lines. One sub-pixel may be of a 2T1C type including two transistors and one capacitor, but this is not limiting. The sub-pixel may be of 4T1C, 7T1C or 6T2C type, for example. In this regard, the number ahead of T denotes the number of transistors disposed in one sub-pixel, and the number ahead of C denotes the number of capacitors disposed in one sub-pixel.

[0035] FIG. 2 is a cross-sectional view of a part of an active area of an OLED device according to an example embodiment of the present disclosure. FIG. 2 is a schematic cross-sectional view of a region corresponding to one pixel of the active area A/A of the OLED device 100.

[0036] As shown in FIG. 2, the substrate 101 supports thereon various elements of the OLED device 100. The substrate 101 may be made of a transparent, insulative material such as glass, plastic, etc. When the substrate 101 is made of a plastic material, materials such as polyimide (PI)-based or polycarbonate (PC)-based materials may be used. Particularly, polyimide (PI) is commonly used since it can be applied to a high-temperature process and can be coated.

[0037] A buffer layer 102 is disposed on the substrate 101. The buffer layer 102 protects electrodes and electric lines from impurities such as alkali ions that leak out of the substrate 101 or other layers. The buffer layer 102 may be made of silicon oxide (SiO_x), silicon nitride (SiN_x), or a multiple layers thereof.

[0038] The buffer layer 102 includes a multi-buffer 102-1 and an active buffer 102-2. The multi-buffer 102-1 may be formed by alternately stacking silicon oxide (SiO₂) and silicon nitride (SiN_x), and may suppress the diffusion of moisture and/or oxygen permeating into the substrate 101. The active buffer 102-2 protects the active layer 111 of a thin-film transistor 110 and can suppress various kinds of defects. The active buffer 102-2 may be formed of amorphous silicon (a-Si), etc. Although the buffer layer 102 is shown as including both of the multi-buffer 102-1 and the active buffer 102-2, it is merely illustrative. The buffer layer 102 may include only one of them. Also, the buffer layer 102 may be eliminated.

[0039] The thin-film transistor 110 is disposed on the buffer layer 102. The thin-film transistor 110 may include an active layer 111, a gate electrode 112, a source electrode 113, and a drain electrode 114.

[0040] The active layer 111 is disposed on the buffer layer 102. The active layer 111 works as the channel of the thin-film transistor 110. The active layer 111 may be formed of various materials such as polysilicon, amorphous silicon, oxide semiconductor, etc.

[0041] A gate insulating layer 103 is disposed on the active layer 111. The gate insulating layer 103 is disposed so as to insulate the active layer 111 from the gate electrode 112. The gate insulating layer 103 is made of an

inorganic material such as, for example, silicon oxide and silicon nitride, and may be made up of a single layer or multiple layers.

[0042] The gate electrode 112 is disposed on the gate insulating layer 103.

[0043] An interlayer insulating layer 104 is disposed on the gate electrode 112. The interlayer insulating layer 104 is made of an inorganic material such as, for example, silicon oxide and silicon nitride, and may be comprised of a single layer or multiple layers.

[0044] The source electrode 113 and the drain electrode 114 are disposed on the interlayer insulating layer 104. Each of the source electrode 113 and the drain electrode 114 is electrically connected to the active layer 111 via a contact hole formed in the interlayer insulating layer 104 and in the gate insulating layer 103. Although the thin-film transistor 110 is shown as a co-planar structure for convenience of illustration, this is not limited thereto.

[0045] A passivation layer 108 is disposed on the source electrode 113 and the drain electrode 114. The passivation layer 108 may protect the source electrode 113 and the drain electrode 114. The passivation layer 108 is made of an inorganic material such as, for example, silicon oxide and silicon nitride, and may be comprised of a single layer or multiple layers. It is to be noted that the passivation layer 108 is not an essential element and thus may be eliminated.

[0046] Although FIG. 2 shows only the driving thin-film transistor 110 among various devices for driving the organic light-emitting element 130 for convenience of illustration, this is not limited thereto. That is, various devices such as a switching thin-film transistor for driving the organic light-emitting element 130, a thin-film transistor for compensation, a capacitor, etc. may be disposed in the active area A/A, which may configure circuit elements 112' and 114'. The circuit elements 112' and 114' may be disposed in the inactive area I/A as well as in the active area A/A.

[0047] A first planarization layer 105-1 is disposed on the thin-film transistor 110. The first planarization layer 105-1 is an insulating layer for providing a flat surface over the circuit elements 112' and 114' including the thin-film transistor 110 and protecting the thin-film transistor 110. The first planarization layer 105-1 may be formed of at least one of an acrylic-based resin, an epoxy resin, a phenol resin, a polyamide-based resin, a polyimide-based resin, an unsaturated polyester resin, a polyphenylene-based resin, polyphenylene sulfide-based resin, etc. But this is not limited thereto.

[0048] On the first planarization layer 105-1, various metal layers that work as lines or electrodes may be disposed. For example, a connection electrode 114-1 for electrically connecting the thin-film transistor 110 with an anode 131 may be disposed on the first planarization layer 105-1.

[0049] The second planarization layer 105-2 is disposed on the first planarization layer 105-1. The second planarization layer 105-2 provides a flat surface over the

first planarization layer 105-1. The second planarization layer 105-2 may be formed of at least one of an acrylic-based resin, an epoxy resin, a phenol resin, a polyamide-based resin, a polyimide-based resin, an unsaturated polyester resin, a polyphenylene-based resin, polyphenylene sulfide-based resin, etc. But this is not limited thereto.

[0050] According to an example embodiment of the present disclosure, the OLED device 100 may include the plurality of planarization layers 105-1 and 105-2 because the numbers of various lines and elements increases as the resolution of the OLED device 100 becomes higher. That is, in a high-resolution OLED device, a larger number of lines and elements may be disposed in a narrower space. Thus a space for disposing lines and elements can be increased using the plurality of planarization layers 105-1 and 105-2. Accordingly, by disposing various metal layers such as the connection electrode 114-1 between the first planarization layer 105-1 and the second planarization layer 105-2, it is possible to make the lines, electrodes and elements easier. Also, when a dielectric material is used for the first planarization layer 105-1 and the second planarization layer 105-2, the first planarization layer 105-1 and/or the second planarization layer 105-2 may be used for forming a capacitance of a capacitor between metal layers.

[0051] The organic light-emitting element 130 is disposed on the plurality of planarization layers 105-1 and 105-2. Specifically, the organic light-emitting element 130 is disposed on the second planarization layer 105-2 in the active area A/A. The organic light-emitting element 130 includes an anode 131, an organic emission layer 132 on the anode 131, and a cathode 133 on the organic emission layer 132.

[0052] The anode 131 may be electrically connected to the drain electrode 114 of the thin-film transistor 110 via the connection electrode 114-1. When the OLED device 100 is a top-emission OLED device, the anode 131 may be formed of a reflective layer having high reflectance and a transparent conductive layer on the reflective layer. But this is not limited thereto. In addition, when the OLED device 100 is a top-emission OLED device, the cathode 133 may be formed of a transparent conductive layer and may be formed of a very thin metal material. But this is not limited thereto.

[0053] The organic emission layer may be comprised of a single emissive layer emitting light of one color or multiple emissive layers emitting white light. In addition to the organic emission layer 132, an electron injection layer, an electron transport layer, a hole transport layer, a hole injection layer, etc. may be further disposed. Further, the organic emission layer 132 may be formed in each of the pixels or may be formed throughout the entire active area A/A. When the organic emission layer 132 of the organic light-emitting element 130 emits white light, a color filter may be formed on or under the organic light-emitting element 130.

[0054] A bank 106 is disposed on the second planari-

zation layer 105-2 in the active area A/A except the emission area. That is, the bank 106 may cover the anode 131 partially so as to expose some part of the anode 131. Thus the exposed part of the anode 131 may be defined as the emission area. The bank 106 may be made of an inorganic insulative material such as silicon oxide and silicon nitride or an organic insulative material such as BCB, acryl-based resin or imide-based resin. But this is not limited thereto.

[0055] A spacer 107 is disposed on the bank 106. The spacer 107 serves to avoid a fine metal mask (FMM) used in forming the organic emission layer 132 of the organic light-emitting element 130 from being directly in contact with the bank 106 or the anode 131. Therefore, the spacer 107 can avoid the organic light-emitting element 130 from being damaged. The spacer 107 may be made of either the same material as or a different material from that of the bank 106. Further, the spacer 107 and the bank 106 may be formed together during the same process. The cathode 133 may be disposed to cover the spacer 107 and the bank 106 as the spacer 107 is disposed on the bank 106.

[0056] The encapsulation layer 120 may be disposed on the organic light-emitting element 130 to cover it. The encapsulation layer 120 is disposed on the first planarization layer 105-1 and the second planarization layer 105-2. The encapsulation layer 120 minimizes oxygen and moisture permeating into the organic light-emitting element 130, various electrodes and lines. For example, the encapsulation layer 120 can protect from occurring a pixel shrinking that is emission area is reduced, or black spots in the emission area as the organic light-emitting element 130 is exposed to moisture or oxygen.

[0057] The encapsulation layer 120 includes a first inorganic layer 121, an organic member (or first organic member or first organic member) 122 on the first inorganic layer 121, and a second inorganic layer 123 on the organic member 122. Specifically, the organic member 122 is disposed between the first inorganic layer 121 and the second inorganic layer 123. The organic member 122 may be surrounded by the first inorganic layer 121 and the second inorganic layer 123. The first inorganic layer 121 and the second inorganic layer 123 serve to suppress (or minimize) the permeation of moisture or oxygen. The organic member 122 covers lines, electrodes, elements, etc. to provide the flat surface of the second inorganic layer 123. As described above, by configuring the encapsulation layer 120 with the plurality of inorganic layers 121 and 123 and the organic member 122, the path via which moisture or oxygen would pass becomes longer and more complicated. Therefore it is possible to prevent or delay as late as possible the permeation of moisture or oxygen.

[0058] The first inorganic layer 121 is made of an inorganic material. For example, the first inorganic layer 121 may be made of an inorganic material such as one of silicon oxide (SiO_2), silicon nitride (SiN_x) and aluminum oxide (AlO_x). The first inorganic layer 121 may be formed

by, but is not limited to, a vacuum deposition method such as chemical vapor deposition (CVD) or atomic layer deposition (ALD).

[0059] The organic member (or first organic member or first organic member) 122 may cover lines, electrodes, elements, etc. The organic member 122 may cover foreign matters or particles that may be possible during the fabricating process. The organic member 122 may be made of an organic material, for example, silicon oxycarbon (SiOCz) acryl or epoxy-based resin. The organic member 122 may be formed by various coating methods such as inkjet coating, slit coating, etc.

[0060] The second inorganic layer 123 is made of an inorganic material. For example, the second inorganic layer 123 may be made of an inorganic material such as one of silicon oxide, silicon nitride and aluminum oxide. The second inorganic layer 123 may be formed by a vacuum deposition method such as chemical vapor deposition or atomic layer deposition. But this is not limited thereto.

[0061] The barrier film 140 is disposed on the encapsulation layer 120. The barrier film 140 encapsulates the elements thereunder including the organic light-emitting element 130. The barrier film 140 may be a retarded film or an optically isotropic film, for example. If the barrier film 140 has optically isotropic property, it transmits incident light without phase retardation. In addition, an organic film or an inorganic film may be further disposed on or under the barrier film 140. The organic film or the inorganic film formed on or under the barrier film 140 may suppress (or minimize) permeation of moisture or oxygen.

[0062] An adhesive layer 145 may be disposed between the barrier film 140 and the encapsulation layer 120. The adhesive layer 145 attaches the barrier film 140 to the encapsulation layer. The adhesive layer 145 may be a heat-curable, light-curable or naturally-curable adhesive. For example, the adhesive layer 145 may be made of a material such as B-PSA (Barrier pressure sensitive adhesive). A polarizing film, a top cover, etc. may be further disposed on the barrier film 140. In some example embodiments, the barrier film 140 and the adhesive layer 145 may be eliminated.

[0063] FIG. 3 is a cross-sectional view of a portion of an active area and an inactive area of an OLED device according to an example embodiment of the present disclosure. FIG. 3 shows a portion of the active area A/A and the inactive area I/A of the OLED device 100. The identical elements described above with reference to FIG. 2 will be omitted.

[0064] As shown in FIG. 3, the circuit elements 112' and 114' are disposed on the substrate 101 in the active area A/A and the inactive area I/A. The circuit elements 112' and 114' may be made of the same material as the conductive material constituting the thin-film transistor 110 formed in the active area A/A. For example, the circuit elements 112' and 114' may be made of the same material as the gate electrode 112, the source electrode 113

and the drain electrode 114 of the thin-film transistor 110 during the same process. The circuit part 112' and 114' may include, for example, a GIP (Gate In Panel) and various lines.

[0065] Various insulating layers may be formed on the circuit elements 112' and 114'. For example, the first planarization layer 105-1 and the second planarization layer 105-2 may be extended from the active area A/A to the inactive area I/A. The first planarization layer 105-1 may be disposed above the circuit elements 112' and 114' disposed in the active area A/A and the inactive area I/A. The second planarization layer 105-2 may be disposed on the first planarization layer 105-1.

[0066] On the first planarization layer 105-1, metal layers having various functions such as the connection electrode 114-1 as shown in FIG. 2 or a second connection line 114-2 as shown in FIG. 3 may be disposed. Inorganic layers 109-1 and 109-2 for disposing and protecting metal layers may be disposed on the first planarization layer 105-1. For example, the inorganic layers 109-1 and 109-2 may be buffer layers and protective layers made of an inorganic material, for example. The inorganic layers 109-1 and 109-2 may include an opening for out-gassing gas generated in the first planarization layer 105-1. In some embodiments, the inorganic layers 109-1 and 109-2 may be eliminated.

[0067] In the inactive area I/A, a power line 114" is disposed on a further outer side than the circuit elements 112' and 114'. The power line 114" may be, for example, a ground voltage (Vss) line. Although the power line 114" is made of the same material as the source electrode 113 and the drain electrode 114, this is merely illustrative. It may be made of the same material as the gate electrode 112. The first planarization layer 105-1 is disposed above the circuit elements 112' and 114' to provide a flat surface over the circuit elements 112' and 114'.

[0068] When the power line 114" is the ground voltage (Vss) line, the power line 114" is electrically connected to the cathode 133 in the inactive area I/A. Specifically, the cathode 133 comes in contact with a first connection line 131', which is made of the same material as the anode 131. The first connection line 131' comes in contact with the second connection line 114-2 which is made of the same material as the connection electrode 114-1. As the second connection line 114-2 comes in contact with the power line 114", the power line 114" can be electrically connected to the cathode 133. The first connection line 131' may include an opening for out-gassing gas generated in the first planarization layer 105-1 and the second planarization layer 105-2.

[0069] A dual-buffer structure 150 may be disposed at an outer periphery of the planarization layer 105-1, 105-2 in the inactive area I/A. A dual-buffer structure 150 may be disposed apart from the first planarizing layer 105-1 and the second planarizing layer 105-2 in the inactive area I/A. The double buffer structure 150 reduces the height difference between the top of the dual-buffer structure 150 and the top of the organic member 122 (or the

first organic member 122) of the encapsulation layer 120, thereby suppressing (or minimizing) the overflow of the organic member 122. The height of the dual-buffer structure 150 may be adjusted by at least one sub-layer and at least one wall disposed on the at least one sub-layer. The one sub-layer may be made of the same material as the first planarization layer 105-1 or the second planarization layer 105-2.

[0070] In addition, the dual-buffer structure 150 may include a second organic layer 160 (or second organic member) in a gap of the dual-buffer structure 150 to provide an even top surface. As used herein, the term "the even top surface" means a substantially flat surface having a certain degree of flatness such that a conductive layer can be formed normally thereon without being disconnected even with some level difference.

[0071] The width of the gap of the dual-buffer structure 150 may be determined by the distance between the at least one sub-layer and another sub-layer disposed at the outer periphery of the at least one sub-layer. The top surface of the dual-buffer structure 150 may be formed by filling between a wall on the at least one sub-layer and an additional wall disposed on the another sub-layer, with the second organic layer 160.

[0072] The dual-buffer structure 150 includes a first structure 153 having a first wall 152, a second structure 157 disposed on a further outer side than the first structure 153 in the inactive area I/A and having a second wall 156, and the second organic member 160. The second organic member 160 is disposed in a space between the first wall 152 and the second wall 156.

[0073] The first structure 153 includes a first support layer 151 and the first wall 152. The first support layer 151 may be formed of the same material as the first planarization layer 105-1 or the second planarization layer 105-2 during the same manufacturing process such that it is spaced apart from the first planarization layer 105-1. The first support layer 151 may work as a sub-layer to increase the height of the first structure 153. The first structure 153 may have the first wall 152 disposed on the first support layer 151. Consequently, the height of the first structure 153 can be increased, such that it is possible to suppress the organic material from overflowing during the process of forming the first organic member 122 of the encapsulation layer 120. That is, by adjusting the height of the dual-buffer structure 150, it is possible to prevent the organic material from being excessively applied to the outside of the substrate 101 during the manufacturing process of the organic member 122. Therefore, the dual-buffer structure 150 controls the flow of the organic material, such that a region where the organic material is applied to form the organic member 122 is formed can be defined.

[0074] The first wall 152 may be made of the same material as one or more insulating patterns disposed in the active area A/A. For example, the first wall 152 may include a lower layer 152-1 made of the same material as the bank 106, and an upper layer 152-2 made of the

same material as the spacer 107. The lower layer 152-1 of the first wall 152 may be made of the same material as and together with the bank 106, and the upper layer 152-2 of the first wall 152 may be made of the same material as and together with the spacer 107. However, this is merely illustrative. For example, the lower layer 152-1 of the first wall 152 may be made of the same material as the second planarization layer 105-2, and the upper layer 152-2 of the first wall 152 may be made of the same material as the bank 106 or the spacer 107. In addition, the first wall 152 may include a lower layer 152-1 made of the same material as the second planarization layer 105-2, an intermediate layer made of the same material as the bank 106, and an upper layer 152-2 made of the same material as the spacer.

[0075] The second structure 157 may be disposed at an outer periphery of the first structure 153 in the inactive area I/A. The second structure 157 includes a second support layer 155 and the second wall 156. In one embodiment, it also includes a third wall 154. The second support layer 155 may be formed of the same material as the first planarization layer 105-1 or the second planarization layer 105-2 during the same manufacturing process. The second support layer 155 may work as a sub-layer to increase the height of the second structure 157.

[0076] The second wall 156 is disposed on the second support layer 155. The configuration and functionality of the second wall 156 are identical to those of the first wall 152, and thus redundant description will be omitted.

[0077] The second organic member 160 is disposed in a space between the first wall 152 and the second wall 156. The second organic member 160 may be made of a material capable of provide a flat surface over the structures 153 and 157. For example, the second organic member 160 may be made of an organic material and may be made of the same material as the first organic member 122 of the encapsulation layer 120. If the second organic member 160 may be made of the same material as the organic member 122 of the encapsulation layer 120, the second organic member 160 may be formed by an inkjet coating. That is, the width of the gap of the dual-buffer structure 150 may be adjusted to obtain a space for disposing the second organic member 160, and the second organic member 160 may be applied in the space to form the top surface of the dual-buffer structure 150. In this manner, the dual-buffer structure 150 can provide an even top surface in the inactive area I/A.

[0078] As shown in FIG. 3, the second structure 157 may be higher than the first structure 153. In addition, the second structure 157 may overlap with the first structure 153. In addition, the second structure 157 may include a third wall 154. The third wall 154 may be disposed at an inner side of the second wall 156 on the second support layer 155. In addition, the third wall 154 may be

disposed at an outer periphery of the first wall 154 on the first support layer 151. The configuration and functionality of the third wall 154 are identical to those of the first wall 152, and thus redundant description will be omitted.

[0079] The second organic member 160 disposed between the first wall 152 and the second wall 156, specifically, may fill the space between the second wall 156 and the third wall 154.

[0080] The second organic member 160 may be disposed on the second structure 157 and may fill the space between the second wall 156 and the third wall 154. In addition, when the first inorganic layer 121 and the second inorganic layer 123 of the encapsulation layer 120 are disposed such that they cover the first support layer 151 and the first wall 152 of the first structure 153 and the second support layer 155, the second wall 156 and the third wall 154 of the second structure 157, the second organic member 160 may be disposed on the first inorganic layer 121 and the second inorganic layer 123 between the second wall 156 and the third wall 154, to fill the space between the second wall 156 and the third wall 154.

[0081] The second organic member 160 may provide an even top surface in the inactive area I/A. As OLED devices have smaller size and higher resolution, the number of required lines, electrodes, elements, etc. are increased. However, the space for disposing lines, electrodes, elements, etc. are insufficient. Particularly, in the inactive area I/A, various components are disposed, such that there are many steep level differences. When a line is disposed along a steep level difference, the lines may not be normally formed or may be disconnected. To overcome this, an additional even area can be provided in the inactive area I/A using the first structure 153, the second structure 157 and the second organic member 160 so as to provide an additional space for disposing various lines. By doing so, it is possible to avoid disconnection of lines, and to reduce the size of the inactive area I/A for providing a space for disposing the lines.

[0082] The first support layer 151 and the first wall 154 of the first structure 153 and the second support layer 155, the second wall 156 and the third wall 154 of the second structure 157 may be made of the same material as an insulating pattern disposed in the active area A/A. Therefore, the first structure 153 and the second structure 157 can be formed together during the manufacturing process of the insulating pattern disposed in the active area A/A. As a result, the process for fabricating the first structure 153 and the second structure 157 can be simplified.

[0083] In addition, the second organic member 160 may be made of the same material as the organic member 122 of the encapsulation layer 120. Accordingly, the second organic member 160 may be manufactured by using the same manufacturing equipment as that used for manufacturing the organic member 122 of the encapsulation layer 120. As a result, it is possible to simplify a process for fabricating the second organic member 160

to suppress the overflow of the organic member 122 of the encapsulation layer 120 and provide an even top surface. In addition, the fabricating cost can also be reduced.

[0084] FIG. 4 is a cross-sectional view of a portion of an active area of an OLED device according to another example embodiment of the present disclosure. FIG. 5 is a cross-sectional view of a portion of an active area and an inactive area of an OLED device according to another example embodiment of the present disclosure. The OLED device 200 shown in FIGS. 4 and 5 is substantially identical to the OLED device 100 shown in FIGS. 1 to 3 except for that a plurality of touch sensing electrodes 261 is disposed on the encapsulation layer 120 and a touch line 262 is disposed on the dual-buffer structure 150; and, therefore, the redundant description will be omitted.

[0085] As shown in FIG. 4, a plurality of conductive patterns may be disposed on the encapsulation layer 120 in the active area A/A. The plurality of conductive patterns may be a plurality of touch sensing electrodes 261. That is, the plurality of touch sensing electrodes 261 is formed on the second inorganic layer 123 of the encapsulation layer 120. As shown in FIG. 4, the plurality of touch sensing electrodes 261 may be formed in the form of a plurality of blocks. In this case, the plurality of touch sensing electrodes 261 may be made of a transparent conductive material such as ITO. In some embodiments, the plurality of touch sensing electrodes 261 may be made as a metal mesh. That is, each of the plurality of touch sensing electrodes 261 may be made of a metal material, and may be arranged in the form of a mesh in a plane.

[0086] As shown in FIG. 5, a conductive layer may be disposed on the second structure 157 disposed in the inactive area I/A. The conductive layer may be the touch line 262. The touch line 262 may be electrically connected to the touch sensing electrodes 261 disposed in the active area A/A to transmit/receive a signal to/from the touch sensing electrodes 261.

[0087] In the OLED device 200 according to this example embodiment of the present disclosure, the touch sensing electrodes 261 can be formed directly on the encapsulation layer 120 instead of attaching an additional touch panel. Therefore, the process of forming the touch sensing electrodes 261 can be simplified as compared with fabricating and attaching an additional touch panel, and a light and thin OLED device can be produced.

[0088] In addition, in the OLED device 200 according to this example embodiment of the present disclosure, the second organic member 160 provides an even top surface. Accordingly, the conductive layer such as the touch line 262 can be formed on the second organic member 160 without being disconnected or damaged by a level difference in the inactive area I/A. As a result, the touch line 262 can be fabricated reliably, and a space for forming the touch line 262 can be created, such that the size of the inactive area I/A can be reduced.

[0089] FIG. 6 is a cross-sectional view of a portion of an active area and an inactive area of an OLED device

according to Comparative Example. The OLED device 1000 according to Comparative Example shown in FIG. 6 is substantially identical to the OLED device 100 shown in FIGS. 4 and 5 except for the structure disposed in the inactive area I/A; and, therefore, the redundant description will be omitted.

[0090] As shown in FIG. 6, in the OLED device 1000 according to Comparative Example, only the first wall 152 and the second wall 154 were disposed in the inactive area I/A. Accordingly, in the OLED device 1000, the organic matter is likely to overflow during the process of forming the organic member 122 of the encapsulation layer 120, compared to the OLED device 100 including the dual-buffer structure 150 shown in FIGS. 4 and 5.

[0091] In addition, in the OLED device 1000 according to Comparative Example, the second organic member 160 filling the space between the first wall 152 and the second wall 154 is not provided. As a result, in the OLED device 1000, there is an area X where a steep level difference exists by the first wall 152 and the second wall 154. Accordingly, in the OLED device 1000, if a conductive layer such as the touch line 262 is formed along the first wall 152 and the second wall 154, the conductive layer is likely to be disconnected or fail to be formed normally. In the OLED device 1000, a conductive layer such as the touch line 262 may be disposed on a further outer side than the second wall 154. As a result, the size of the inactive area I/A of the OLED device 1000 may increase.

[0092] In contrast, the OLED devices 200 shown in FIGS. 4 and 5 are different from the OLED device 1000 in that they further include the dual-buffer structure 150, such that it is possible to suppress the organic material from being excessively applied out of the substrate 101 during the manufacturing process of the organic member 122 of the encapsulation layer 120. In addition, the OLED devices 200 shown in FIGS. 4 and 5 can provide an additional even area in the inactive area I/A to provide additional space for disposing various lines.

[0093] FIGS. 7 to 9 are cross-sectional views of a portion of an active area and an inactive area of OLED devices according to comparative examples useful for understanding the present invention.

[0094] FIG. 7 is a cross-sectional view of a portion of an active area and an inactive area of an OLED device according to yet another comparative example useful for understanding the present invention. An OLED device 300 shown in FIG. 7 is substantially identical to the OLED device 100 shown in FIGS. 1 to 3 except for a second structure 357 of a dual-buffer structure 350 and a second organic member 360; and, therefore, the redundant description will be omitted.

[0095] As shown in FIG. 7, the dual-buffer structure 350 may be disposed apart from the outer periphery of the first planarizing layer 105-1 and the second planarizing layer 105-2 in the inactive area I/A. The dual-buffer structure 350 includes a first structure 353 having a first support layer 351 and a first wall 352, a second structure 357 disposed at an outer periphery of the first structure

353 in the inactive area I/A and having a second wall 356, and the second organic member 360.

[0096] The second structure 357 may include a second support layer 354, a third support layer 355 and a second wall 356.

[0097] The second support layer 354 may be formed of the same material as the first planarization layer 105-1 or the second planarization layer 105-2 during the same manufacturing process. The second support layer 354 may work as a sub-layer to increase the height of the second structure 357.

[0098] The third support layer 355 may be disposed under the second support layer 354 or between the second support layer 354 and the second wall 356. Accordingly, the third support layer 355 may work as a sub-layer to further increase the height of the second structure 357. Consequently, the height of the dual-buffer structure 153 can be further increased, such that it is possible to suppress the organic material from overflowing during the process of forming the organic member 122 of the encapsulation layer 120.

[0099] The third support layer 355 may be formed of the same material as the first planarization layer 105-1 or the second planarization layer 105-2 during the same manufacturing process. It is to be noted that the third support layer 355 may be formed in a processing step different from the processing step of forming the second support layer 354. That is, the third support layer 355 is not formed together with the second support layer 354. Accordingly, the third support layer 355 may be made of a different material from that of the second support layer 354.

[0100] The location of the second wall 356 may vary depending on the locations of the second support layer 354 and the third support layer 355. When the third support layer 355 is formed on the second support layer 354, the second wall 356 is disposed on the third support layer 355. When the second support layer 354 is formed on the third support layer 355, the second wall 356 is disposed on the second support layer 354. The configuration and functionality of the second wall 356 are identical to those of the first wall 152 of the first structure 353, and thus redundant description will be omitted.

[0101] The second structure 357 is spaced apart from the first structure 353 to provide a space between the first structure 353 and the second structure 357. The second organic member 360 is disposed between the first structure 353 and the second structure 357 to fill the space therebetween. Specifically, the second organic member 360 may fill the space between the first wall 352 and the second wall 356. As a result, the top surface of the second organic member 360 can become larger than that of the second organic member when the first structure 353 overlaps with the second structure 357. A conductive layer such as a touch line may be disposed on the second organic member 360 of the dual-buffer structure 350, and a touch sensing electrode may be disposed on the encapsulation layer 120 in the active area A/A.

Accordingly, it is possible to provide a larger area for disposing a conductive layer such as the touch line connected to the touch sending electrodes.

[0102] FIG. 8 is a cross-sectional view of a portion of an active area and an inactive area of an OLED device according to yet another comparative example useful for understanding the present invention. An OLED device 400 shown in FIG. 8 is substantially identical to the OLED device 300 shown in FIG. 7 except for a first structure 453 of a dual-buffer structure 450 and a second organic member 460; and, therefore, the redundant description will be omitted.

[0103] As shown in FIG. 8, the dual-buffer structure 450 may be disposed apart from the outer periphery of the first planarizing layer 105-1 and the second planarizing layer 105-2 in the inactive area I/A. The dual-buffer structure 450 includes a first structure 453 having a first wall 352, a second structure 357 disposed at an outer periphery of the first structure 453 in the inactive area I/A and having a second wall 356, and the second organic member 460.

[0104] The first structure 453 may include a first support layer 351, a fourth support layer 457 and a first wall 352.

[0105] The first support layer 351 may be formed of the same material as the first planarization layer 105-1 or the second planarization layer 105-2 during the same manufacturing process. The first support layer 351 may work as a sub-layer to increase the height of the first structure 453.

[0106] The fourth support layer 457 may be disposed under the first support layer 351 or between the first support layer 351 and the first wall 352. Accordingly, the fourth support layer 457 may work as a sub-layer to further increase the height of the first structure 453.

[0107] The fourth support layer 457 may be formed of the same material as the first planarization layer 105-1 or the second planarization layer 105-2 during the same manufacturing process. It is to be noted that the fourth support layer 457 may be formed in a processing step different from the processing step of forming the first support layer 351. That is, the fourth support layer 457 is not formed together with the first support layer 351. Accordingly, the fourth support layer 457 may be made of a different material from that of the first support layer 351.

[0108] The location of the first wall 352 may vary depending on the locations of the first support layer 351 and the fourth support layer 457. When the fourth support layer 457 is formed on the first support layer 351, the first wall 352 is disposed on the fourth support layer 457. When the fourth support layer 457 is formed on the first support layer 351, the first wall 352 is disposed on the first support layer 351. The configuration and functionality of the first wall 352 are identical to those of the second wall 356 of the second structure 357, and thus redundant description will be omitted.

[0109] The first structure 453 may be disposed closer to the first planarization layer 105-1 than the second

structure 357 is. The first structure 453 may include a first support layer 351, a fourth support layer 457 and a first wall 352. Accordingly, the top surface of the first wall 352 of the first structure 453 may be higher than the top surface of the second planarization layer 105-2. Consequently, the height of the dual-buffer structure 450 can be increased, such that the organic material can fill between the first structure 453 and the first planarization layer 105-1 during the manufacturing process of the organic member 122 of the encapsulation layer 120. Accordingly, the first wall 352 of the first structure 453 reduces the organic material from going over the first wall 352 during the process of forming the organic member 122, so that overflow of the organic material can be suppressed.

[0110] The second structure 357 is spaced apart from the first structure 453 to provide a space between the first structure 453 and the second structure 357. The second organic member 460 may fill the space between the first structure 453 and the second structure 357. Specifically, the second organic member 460 may fill the space between the first wall 352 and the second wall 356. As a result, the top surface of the second organic member 460 can become larger than that of the second organic member when the first structure 453 overlaps with the second structure 357. A conductive layer such as a touch line may be disposed on the second organic member 460 of the dual-buffer structure 450, and a touch sensing electrode may be disposed on the encapsulation layer 120 in the active area A/A. Accordingly, it is possible to provide a larger area for disposing a conductive layer such as the touch line connected to the touch sending electrodes.

[0111] FIG. 9 is a cross-sectional view of a portion of an active area and an inactive area of an OLED device according to yet another comparative example useful for understanding the present invention. An OLED device 500 shown in FIG. 9 is substantially identical to the OLED device 400 shown in FIG. 8 except for that a first structure 553 of a dual-buffer structure 550 further include a fourth wall 558, and that a second structure 557 of the dual-buffer structure 550 and a second organic layer 560 are modified, and, therefore, the redundant description will be omitted.

[0112] As shown in FIG. 9, the dual-buffer structure 550 may be disposed apart from the outer periphery of the first planarizing layer 105-1 and the second planarizing layer 105-2 in the inactive area I/A. The dual-buffer structure 550 includes a first structure 553 having a first support layer 351, a first wall 352, a fourth support structure 457 and a fourth wall 558. Structure 550 also includes a second structure 557 disposed at an outer periphery of the first structure 553 in the inactive area I/A and having a second wall 356, and a second organic member 560.

[0113] The location of the fourth wall 558 may vary depending on the locations of the first support layer 351 and the fourth support layer 457. When the fourth support

layer 457 is formed on the first support layer 351, the fourth wall 558 is disposed on the fourth support layer 457. When the fourth support layer 457 is formed on the first support layer 351, the fourth wall 558 is disposed on the first support layer 351. The configuration and functionality of the fourth wall 558 are identical to those of the first wall 352 of the first structure 553, and thus redundant description will be omitted.

[0114] The fourth wall 558 may be disposed at an outer periphery of the first wall 352. Accordingly, there may be a space between the first wall 352 and the fourth wall 558 on the first support layer 351 or the fourth support layer 457. The first wall 352 of the first structure 553 reduces the organic material from going over the first wall 352 during the process of forming the organic member 122, so that overflow of the organic material can be suppressed. Even if the organic material forming the organic member 122 passes over the first wall 352, the organic material may fill the space between the first wall 352 and the fourth wall 558. Accordingly, the fourth wall 558 reduces the organic material forming the organic member 122 from overflowing out of the first structure 553, so that the overflow of the organic material can be further suppressed.

[0115] The second structure 557 may include a second support layer 555 and a second wall 356.

[0116] The second support layer 555 may be formed of the same material as the first planarization layer 105-1 or the second planarization layer 105-2 during the same manufacturing process. The second support layer 555 may work as a sub-layer to increase the height of the second structure 557.

[0117] The second wall 356 is disposed on the second support layer 555. The configuration and functionality of the second wall 356 are identical to those of the first wall 352 of the first structure 553, and thus redundant description will be omitted.

[0118] The second structure 557 is spaced apart from the first structure 553 to provide a space between the first structure 553 and the second structure 557. Accordingly, the second organic member 560 may fill the space between the first structure 553 and the second structure 557. Specifically, the second organic member 560 may fill the space between the first support layer 351 and the fourth support layer 457 of the first structure 553 and the second structure 557. As a result, the top surface of the second organic member 560 can become larger than that of the second organic member when the first structure 553 overlaps with the second structure 557. A conductive layer such as a touch line may be disposed on the second organic member 560 of the dual-buffer structure 550, and a touch sensing electrode may be disposed on the encapsulation layer 120 in the active area A/A. Accordingly, it is possible to provide a larger area for disposing a conductive layer such as the touch line connected to the touch sending electrodes.

[0119] The example embodiments of the present disclosure can also be described as follows:

[0120] According to an aspect of the present disclosure, an OLED device includes: a substrate comprising an active area and an inactive area surrounding the active area; a first planarization layer on circuit elements in the active area and in the inactive area; a second planarization layer on the first planarization layer; an organic light-emitting element on the second planarization layer in the active area; a bank on the second planarization layer so that it partially covers an anode of the organic light-emitting element; and a spacer on the bank; an encapsulation layer covering the organic light-emitting element, where the encapsulation layer comprises a first inorganic layer, a second inorganic layer and a first organic member between the first inorganic layer and the second inorganic layer; a first structure spaced apart from the first planarization layer in the inactive area and comprising a first support layer made of the same material as the first planarization layer or the second planarization layer, and a first wall on the first support layer; a second structure positioned an outer periphery of the first structure in the inactive area, where the second structure comprises a second support layer made of the same material as the first planarization layer or the second planarization layer, a second wall on the second support layer; and a third wall positioned at an inner side of the second wall on the second support layer, a second organic member located in a space between the first wall and the third wall, wherein each of the first wall, the second wall and the third wall comprises a lower layer made of the same material as the bank, and an upper layer made of the same material as the spacer.

[0121] The second structure may be higher than the first structure and partially overlap with the first structure.

[0122] The second structure may be spaced apart from the first structure to provide a space between the first structure and the second structure.

[0123] The second organic member may be positioned in the space.

[0124] The second structure may include a third support layer positioned under the second support layer or between the second support layer and the second wall.

[0125] The third support layer may be made of a material that is different from that of the second support layer and is the same as that of the first planarization layer or the second planarization layer.

[0126] The first structure may include a fourth support layer positioned under the first support layer or between the first support layer and the first wall.

[0127] A top surface of the first wall may be higher than a top surface of the second planarization layer for the first organic member to be minimized from flowing over the first wall.

[0128] The first structure may include a fourth wall, and the fourth wall may be positioned at an outer periphery of the first wall.

[0129] The fourth support layer may be made of a material that is different from that of the second support layer and is the same as that of the first planarization layer or

the second planarization layer.

[0130] The OLED device may further include a conductive layer on the second organic member.

[0131] The OLED device may further include: a plurality of touch sensing electrodes on the encapsulation layer, wherein the conductive layer is a touch line connected to the plurality of touch sensing electrodes.

[0132] Thus far, example embodiments of the present disclosure have been described in detail with reference to the accompanying drawings. However, the present disclosure is not limited to the example embodiments, and modifications and variations can be made thereto without departing from the scope of the present disclosure. The scope of protection sought by the present disclosure is defined by the appended claims.

[0133] The various embodiments described above can be combined to provide further embodiments.

Claims

1. An organic light-emitting display device (100) comprising:

a substrate (101) comprising an active area (A/A) and an inactive area (I/A) surrounding the active area (A/A);

a first planarization layer (105-1) on circuit elements in the active area (A/A) and in the inactive area (I/A);

a second planarization layer (105-2) on the first planarization layer (105-1);

an organic light-emitting element (130) on the second planarization layer (105-2) in the active area (A/A);

a bank (106) on the second planarization layer (105-2) so that it partially covers an anode (131) of the organic light-emitting element (130); and a spacer (107) on the bank (106),

an encapsulation layer (120) covering the organic light-emitting element (130), the encapsulation layer (120) comprising a first inorganic layer (121), a second inorganic layer (123) and a first organic member (122) between the first inorganic layer (121) and the second inorganic layer (123);

a first structure (153) spaced apart from the first planarization layer (105-1) in the inactive area (I/A) and including a first support layer (151) made of the same material as at least one of the first planarization layer (105-1) and the second planarization layer (105-2);

a first wall (152) on the first support layer (151);

a second structure (157) positioned at an outer periphery of the first structure (153) in the inactive area (I/A) and including a second support layer (155) made of the same material as at least one of first planarization layer (105-1) and the

- second planarization layer (105-2);
 a second wall (156) on the second support layer (155); and
 a third wall (154) positioned at an inner side of the second wall (156) on the second support layer (155),
 a second organic member (160) positioned between the second wall (156) and the third wall (154),
 wherein each of the first wall (152), the second wall (156) and the third wall (154) comprises a lower layer (152-1, 156-1, 154-1) made of the same material as the bank (106), and an upper layer (152-2, 156-2, 154-2) made of the same material as the spacer (107).
2. The organic light-emitting display device (100) of claim 1, wherein the second structure (157) is higher than the first structure (153) and partially overlaps with the first structure (153).
3. The organic light-emitting display device (100) of any one of claims 1 or 2, wherein the second structure (157) is spaced apart from the first structure (153) such that a space is provided between the first structure (153) and the second structure (157).
4. The organic light-emitting display device (100) of claim 3, wherein the second organic member (160) is positioned in the space.
5. The organic light-emitting display device (300) of claim 4, wherein the second structure (357) comprises a third support layer (355) positioned under the second support layer (354) or between the second support layer (155) and the second wall (356).
6. The organic light-emitting display device (300) of claim 5, wherein the third support layer (355) is made of a material that is different from that of the second support layer (354) and is the same as that of at least one of the first planarization layer (105-1) and the second planarization layer (105-2).
7. The organic light-emitting display device (400) of any one of claims 4 to 6, wherein the first structure (353) comprises a fourth support layer (457) positioned under the first support layer (351) or between the first support layer (351) and the first wall (352).
8. The organic light-emitting display device (400) of claim 7, wherein a top surface of the first wall (352) is higher than a top surface of the second planarization layer (105-2) to inhibit the first organic member (122) from flowing over the first wall (352).
9. The organic light-emitting display device (500) of claim 7 or 8, wherein the first structure (553) comprises a fourth wall (558) and the fourth wall (558) is positioned at an outer periphery of the first wall (352).
10. The organic light-emitting display device (500) of any one of claims 7 to 9, wherein the fourth support layer (457) is made of a material that is different from that of the second support layer (555) and is the same as that of the first planarization layer (105-1) or the second planarization layer (105-2).
11. The organic light-emitting display device (200) of any one of claims 4 to 10, further comprising: a conductive layer on the second organic member (160), and preferably a plurality of touch sensing electrodes (261) on the encapsulation layer (120), wherein the conductive layer (262) is a touch line connected to the plurality of touch sensing electrodes (261).
12. The organic light-emitting display device (100) according to any one of claims 1 to 11, wherein:
 the first structure (153) and the second structure (157) constitute a dual-buffer structure (150) positioned at an outer periphery of the planarization layers (105-1, 105-2) in the inactive area (I/A),
 the dual-buffer structure (150) has a height that is between a top surface of the dual-buffer structure (150) and a top surface of the first organic member (122) in the inactive area (I/A) to suppress overflow of the first organic member (122), and
 the dual-buffer structure (150) comprises the second organic member (160) in a gap of the dual-buffer structure (150) to planarize the top surface of the dual-buffer structure (150).

Patentansprüche

1. Organische lichtemittierende Anzeigevorrichtung (100), aufweisend:
- ein Substrat (101) mit einem aktiven Bereich (A/A) und einem inaktiven Bereich (I/A), der den aktiven Bereich (A/A) umgibt;
 eine erste Planarisierungsschicht (105-1) auf Schaltungselementen in dem aktiven Bereich (A/A) und in dem inaktiven Bereich (I/A);
 eine zweite Planarisierungsschicht (105-2) auf der ersten Planarisierungsschicht (105-1);
 ein organisches lichtemittierendes Element (130) auf der zweiten Planarisierungsschicht (105-2) in dem aktiven Bereich (A/A);
 eine Bank (106) auf der zweiten Planarisierungsschicht (105-2), so dass sie teilweise eine Anode (131) des organischen lichtemittierenden Elements (130) bedeckt; und

- einen Abstandshalter (107) auf der Bank (106), eine Verkapselungsschicht (120), die das organische lichtemittierende Element (130) bedeckt, wobei die Verkapselungsschicht (120) eine erste anorganische Schicht (121), eine zweite anorganische Schicht (123) und ein erstes organisches Element (122) zwischen der ersten anorganischen Schicht (121) und der zweiten anorganischen Schicht (123) aufweist; eine erste Struktur (153), die von der ersten Planarisierungsschicht (105-1) in dem inaktiven Bereich (I/A) beabstandet ist und eine erste Trägerschicht (151) aufweist, die aus dem gleichen Material gebildet ist wie mindestens eine der ersten Planarisierungsschicht (105-1) und der zweiten Planarisierungsschicht (105-2); eine erste Wand (152) auf der ersten Trägerschicht (151); eine zweite Struktur (157), die an einem Außenumfang der ersten Struktur (153) in dem inaktiven Bereich (I/A) angeordnet ist und eine zweite Trägerschicht (155) aufweist, die aus dem gleichen Material gebildet ist wie mindestens eine der ersten Planarisierungsschicht (105-1) und der zweiten Planarisierungsschicht (105-2); eine zweite Wand (156) auf der zweiten Trägerschicht (155); und eine dritte Wand (154), die an einer Innenseite der zweiten Wand (156) auf der zweiten Trägerschicht (155) angeordnet ist, ein zweites organisches Element (160), das zwischen der zweiten Wand (156) und der dritten Wand (154) angeordnet ist, wobei die erste Wand (152), die zweite Wand (156) und die dritte Wand (154) jeweils eine untere Schicht (152-1, 156-1, 154-1), die aus dem gleichen Material wie die Bank (106) gebildet ist, und eine obere Schicht (152-2, 156-2, 154-2), die aus dem gleichen Material wie der Abstandshalter (107) gebildet ist, aufweist.
2. Organische lichtemittierende Anzeigevorrichtung (100) nach Anspruch 1, wobei die zweite Struktur (157) höher ist als die erste Struktur (153) und teilweise mit der ersten Struktur (153) überlappt.
 3. Organische lichtemittierende Anzeigevorrichtung (100) nach einem der Ansprüche 1 oder 2, wobei die zweite Struktur (157) von der ersten Struktur (153) derart beabstandet ist, dass ein Raum zwischen der ersten Struktur (153) und der zweiten Struktur (157) bereitgestellt ist.
 4. Organische lichtemittierende Anzeigevorrichtung (100) nach Anspruch 3, wobei das zweite organische Element (160) in dem
- Raum angeordnet ist.
5. Organische lichtemittierende Anzeigevorrichtung (300) nach Anspruch 4, wobei die zweite Struktur (357) eine dritte Trägerschicht (355) aufweist, die unter der zweiten Trägerschicht (354) oder zwischen der zweiten Trägerschicht (155) und der zweiten Wand (356) angeordnet ist.
 6. Organische lichtemittierende Anzeigevorrichtung (300) nach Anspruch 5, wobei die dritte Trägerschicht (355) aus einem Material gebildet ist, das sich von dem der zweiten Trägerschicht (354) unterscheidet und das gleiche ist wie das von mindestens einer der ersten Planarisierungsschicht (105-1) und der zweiten Planarisierungsschicht (105-2).
 7. Organische lichtemittierende Anzeigevorrichtung (400) nach einem der Ansprüche 4 bis 6, wobei die erste Struktur (353) eine vierte Trägerschicht (457) aufweist, die unter der ersten Trägerschicht (351) oder zwischen der ersten Trägerschicht (351) und der ersten Wand (352) angeordnet ist.
 8. Organische lichtemittierende Anzeigevorrichtung (400) nach Anspruch 7, wobei eine obere Oberfläche der ersten Wand (352) höher ist als eine obere Oberfläche der zweiten Planarisierungsschicht (105-2), um zu verhindern, dass das erste organische Element (122) über die erste Wand (352) fließt.
 9. Organische lichtemittierende Anzeigevorrichtung (500) nach Anspruch 7 oder 8, wobei die erste Struktur (553) eine vierte Wand (558) aufweist und die vierte Wand (558) an einem Außenumfang der ersten Wand (352) angeordnet ist.
 10. Organische lichtemittierende Anzeigevorrichtung (500) nach einem der Ansprüche 7 bis 9, wobei die vierte Trägerschicht (457) aus einem Material gebildet ist, das sich von dem der zweiten Trägerschicht (555) unterscheidet und das das gleiche ist wie das der ersten Planarisierungsschicht (105-1) oder der zweiten Planarisierungsschicht (105-2).
 11. Organische lichtemittierende Anzeigevorrichtung (200) nach einem der Ansprüche 4 bis 10, ferner aufweisend: eine leitende Schicht auf dem zweiten organischen Element (160) und vorzugsweise eine Vielzahl von Berührungserfassungselektroden (261) auf der Verkapselungsschicht (120), wobei die leitende Schicht

(262) une Berührungsleitung ist, die mit der Vielzahl von Berührungserfassungselektroden (261) verbunden ist.

12. Organische lichtemittierende Anzeigevorrichtung (100) nach einem der Ansprüche 1 bis 11, wobei:

die erste Struktur (153) und die zweite Struktur (157) eine Doppelpufferstruktur (150) bilden, die an einem Außenumfang der Planarisierungsschichten (105-1, 105-2) in dem inaktiven Bereich (I/A) angeordnet ist, die Doppelpufferstruktur (150) eine Höhe aufweist, die zwischen einer oberen Oberfläche der Doppelpufferstruktur (150) und einer oberen Oberfläche des ersten organischen Elements (122) in dem inaktiven Bereich (I/A) liegt, um ein Überlaufen des ersten organischen Elements (122) zu unterdrücken, und

die Doppelpufferstruktur (150) das zweite organische Element (160) in einem Spalt der Doppelpufferstruktur (150) aufweist, um die obere Oberfläche der Doppelpufferstruktur (150) zu planarisieren.

Revendications

1. Dispositif d'affichage électroluminescent organique (100) comprenant :

un substrat (101) comprenant une zone active (A/A) et une zone inactive (I/A) entourant la zone active (A/A) ;
une première couche de planarisation (105-1) sur des éléments de circuit dans la zone active (A/A) et dans la zone inactive (I/A) ;
une deuxième couche de planarisation (105-2) sur la première couche de planarisation (105-1) ;
un élément électroluminescent organique (130) sur la deuxième couche de planarisation (105-2) dans la zone active (A/A) ;
un banc (106) sur la deuxième couche de planarisation (105-2) de sorte que celui-ci recouvre partiellement une anode (131) de l'élément électroluminescent organique (130) ; et
un espaceur (107) sur le banc (106),
une couche d'encapsulation (120) recouvrant l'élément électroluminescent organique (130), la couche d'encapsulation (120) comprenant une première couche inorganique (121), une deuxième couche inorganique (123) et un premier composant organique (122) entre la première couche inorganique (121) et la deuxième couche inorganique (123) ;
une première structure (153) espacée de la pre-

mière couche de planarisation (105-1) dans la zone inactive (I/A) et comprenant une première couche de support (151) constituée du même matériau qu'au moins l'une parmi la première couche de planarisation (105-1) et la deuxième couche de planarisation (105-2) ;
une première paroi (152) sur la première couche de support (151) ;
une deuxième structure (157) positionnée au niveau d'une périphérie externe de la première structure (153) dans la zone inactive (I/A) et comprenant une deuxième couche de support (155) constituée du même matériau qu'au moins l'une parmi la première couche de planarisation (105-1) et la deuxième couche de planarisation (105-2) ;
une deuxième paroi (156) sur la deuxième couche de support (155) ; et
une troisième paroi (154) positionnée sur un côté interne de la deuxième paroi (156) sur la deuxième couche de support (155),
un deuxième composant organique (160) positionné entre la deuxième paroi (156) et la troisième paroi (154),
dans lequel chacune de la première paroi (152), la deuxième paroi (156) et la troisième paroi (154) comprend une couche inférieure (152-1, 156-1, 154-1) constituée du même matériau que le banc (106), et une couche supérieure (152-2, 156-2, 154-2) constituée du même matériau que l'espaceur (107).

2. Dispositif d'affichage électroluminescent organique (100) selon la revendication 1, dans lequel la deuxième structure (157) est plus haute que la première structure (153) et chevauche partiellement la première structure (153).
3. Dispositif d'affichage électroluminescent organique (100) selon l'une quelconque des revendications 1 ou 2, dans lequel la deuxième structure (157) est espacée de la première structure (153) de sorte qu'un espacement soit disposé entre la première structure (153) et la deuxième structure (157).
4. Dispositif d'affichage électroluminescent organique (100) selon la revendication 3, dans lequel le deuxième composant organique (160) est positionné dans l'espacement.
5. Dispositif d'affichage électroluminescent organique (300) selon la revendication 4, dans lequel la deuxième structure (357) comprend une troisième couche de support (355) positionnée sous la deuxième couche de support (354) ou entre la deuxième couche de support (155) et la deuxième paroi (356).
6. Dispositif d'affichage électroluminescent organique

- (300) selon la revendication 5, dans lequel la troisième couche de support (355) est constituée d'un matériau qui est différent de celui de la deuxième couche de support (354) et est le même que celui d'au moins l'une parmi la première couche de planarisation (105-1) et la deuxième couche de planarisation (105-2). 5
7. Dispositif d'affichage électroluminescent organique (400) selon l'une quelconque des revendications 4 à 6, dans lequel la première structure (353) comprend une quatrième couche de support (457) positionnée sous la première couche de support (351) ou entre la première couche de support (351) et la première paroi (352). 10 15
8. Dispositif d'affichage électroluminescent organique (400) selon la revendication 7, dans lequel une surface supérieure de la première paroi (352) est plus haute qu'une surface supérieure de la deuxième couche de planarisation (105-2) pour empêcher le premier composant organique (122) de s'écouler sur la première paroi (352). 20
9. Dispositif d'affichage électroluminescent organique (500) selon la revendication 7 ou 8, dans lequel la première structure (553) comprend une quatrième paroi (558) et la quatrième paroi (558) est positionnée au niveau d'une périphérie externe de la première paroi (352). 25 30
10. Dispositif d'affichage électroluminescent organique (500) selon l'une quelconque des revendications 7 à 9, dans lequel la quatrième couche de support (457) est constituée d'un matériau qui est différent de celui de la deuxième couche de support (555) et est le même que celui de la première couche de planarisation (105-1) ou la deuxième couche de planarisation (105-2). 35 40
11. Dispositif d'affichage électroluminescent organique (200) selon l'une quelconque des revendications 4 à 10, comprenant en outre : une couche conductrice sur le deuxième composant organique (160), et de préférence une pluralité d'électrodes de détection de contact (261) sur la couche d'encapsulation (120), dans lequel la couche conductrice (262) est une ligne tactile connectée à la pluralité d'électrodes de détection de contact (261). 45 50
12. Dispositif d'affichage électroluminescent organique (100) selon l'une quelconque des revendications 1 à 11, dans lequel : 55
- la première structure (153) et la deuxième structure (157) constituent une structure de double tampon (150) positionnée au niveau d'une périphérie externe des couches de planarisation

(105-1, 105-2) dans la zone inactive (I/A), la structure de double tampon (150) a une hauteur qui est située entre une surface supérieure de la structure de double tampon (150) et une surface supérieure du premier composant organique (122) dans la zone inactive (I/A) pour supprimer le débordement du premier composant organique (122), et la structure de double tampon (150) comprend le deuxième composant organique (160) dans un écartement de la structure de double tampon (150) pour planariser la surface supérieure de la structure de double tampon (150).

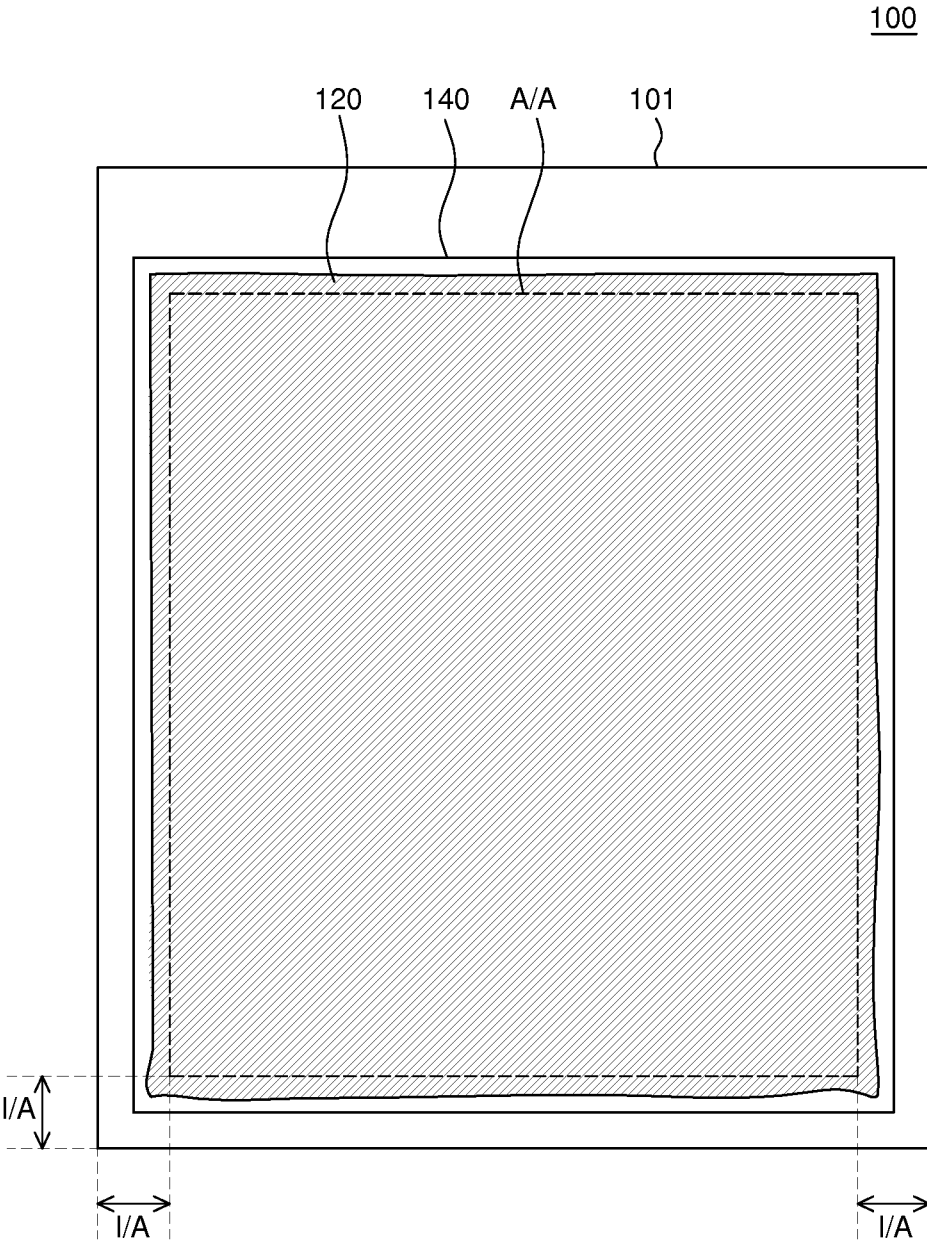


FIG. 1

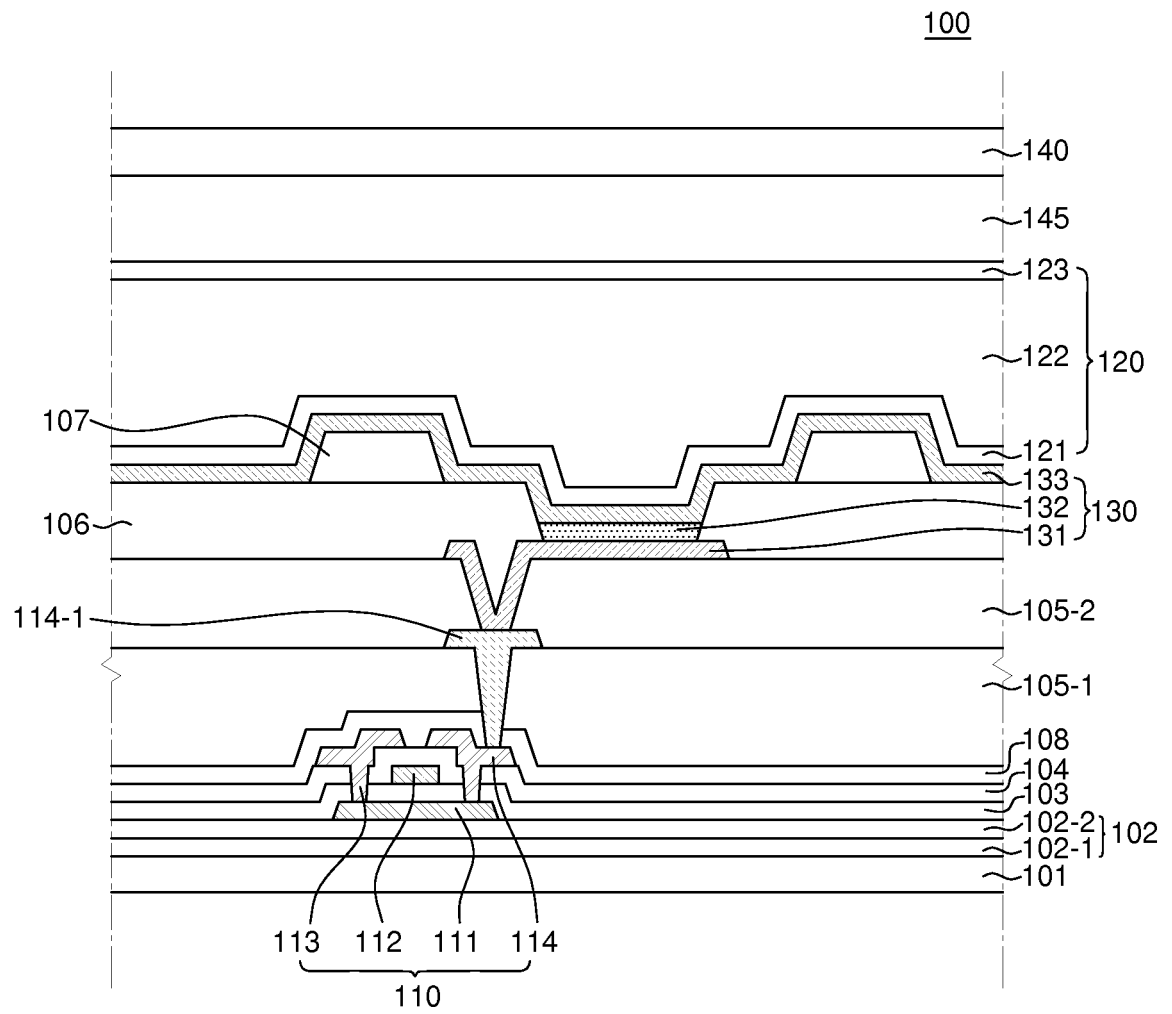


FIG. 2

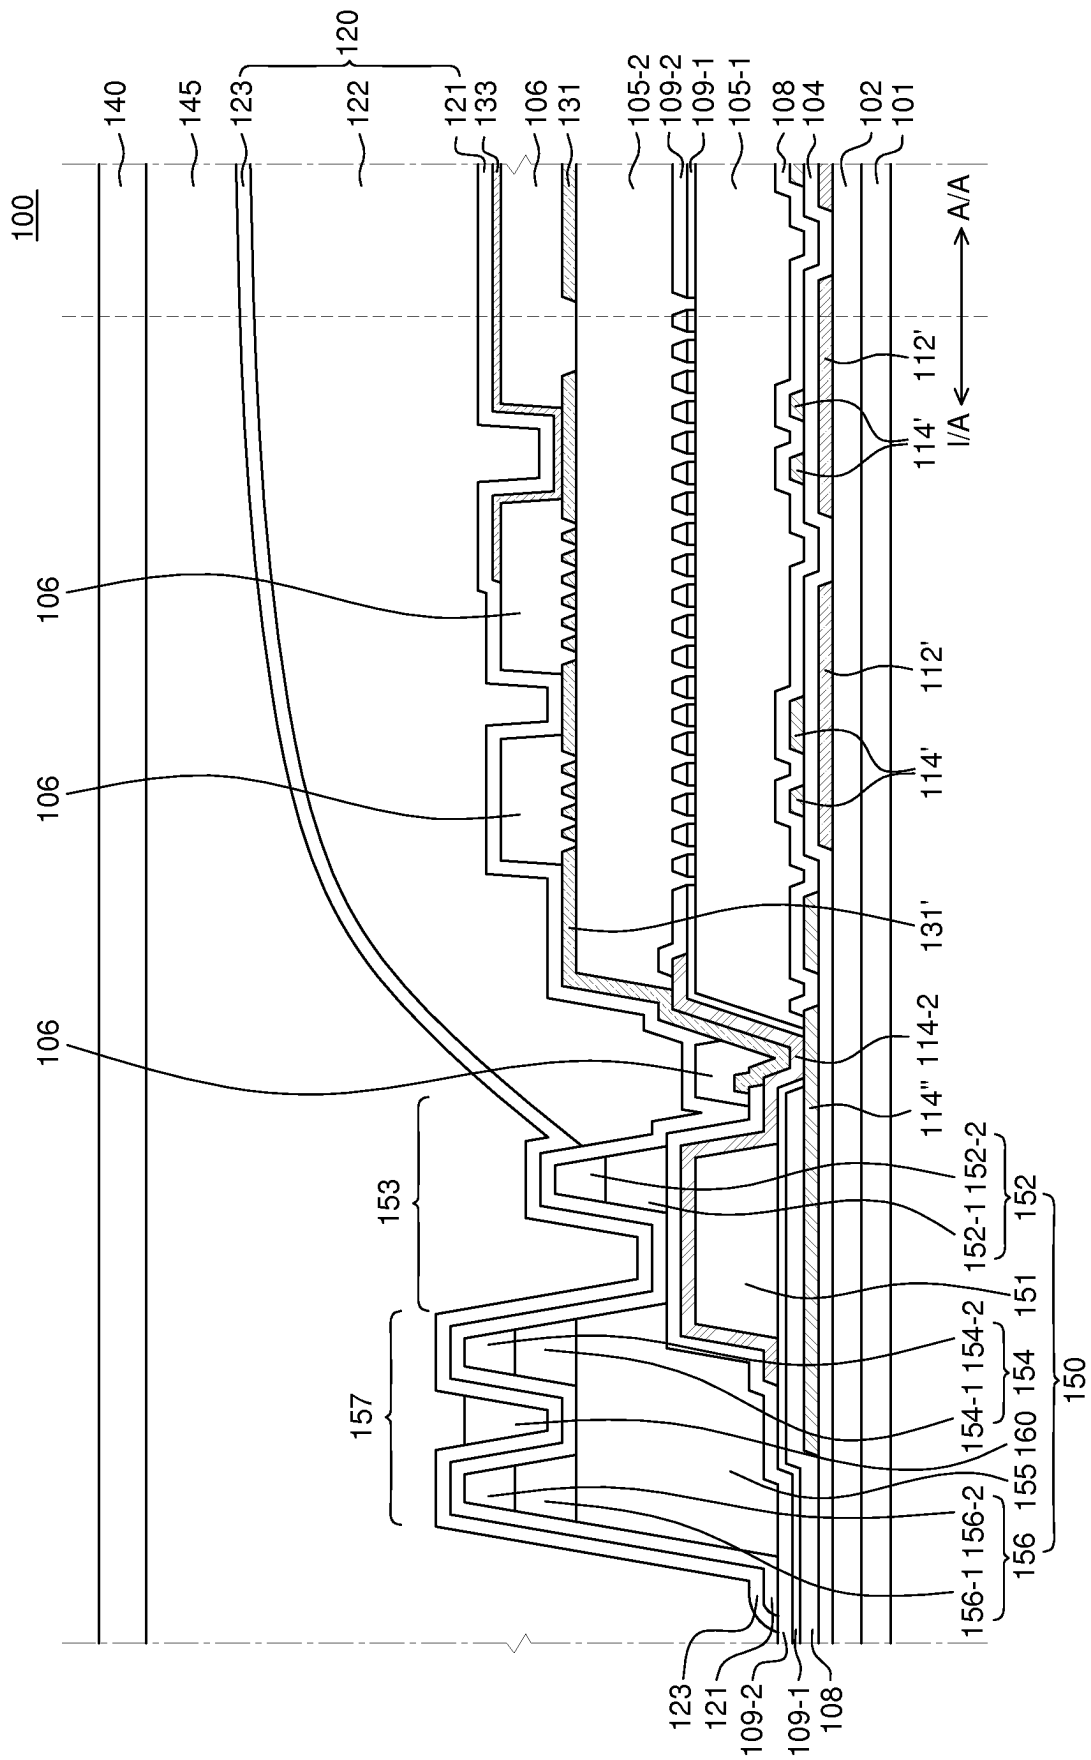


FIG. 3

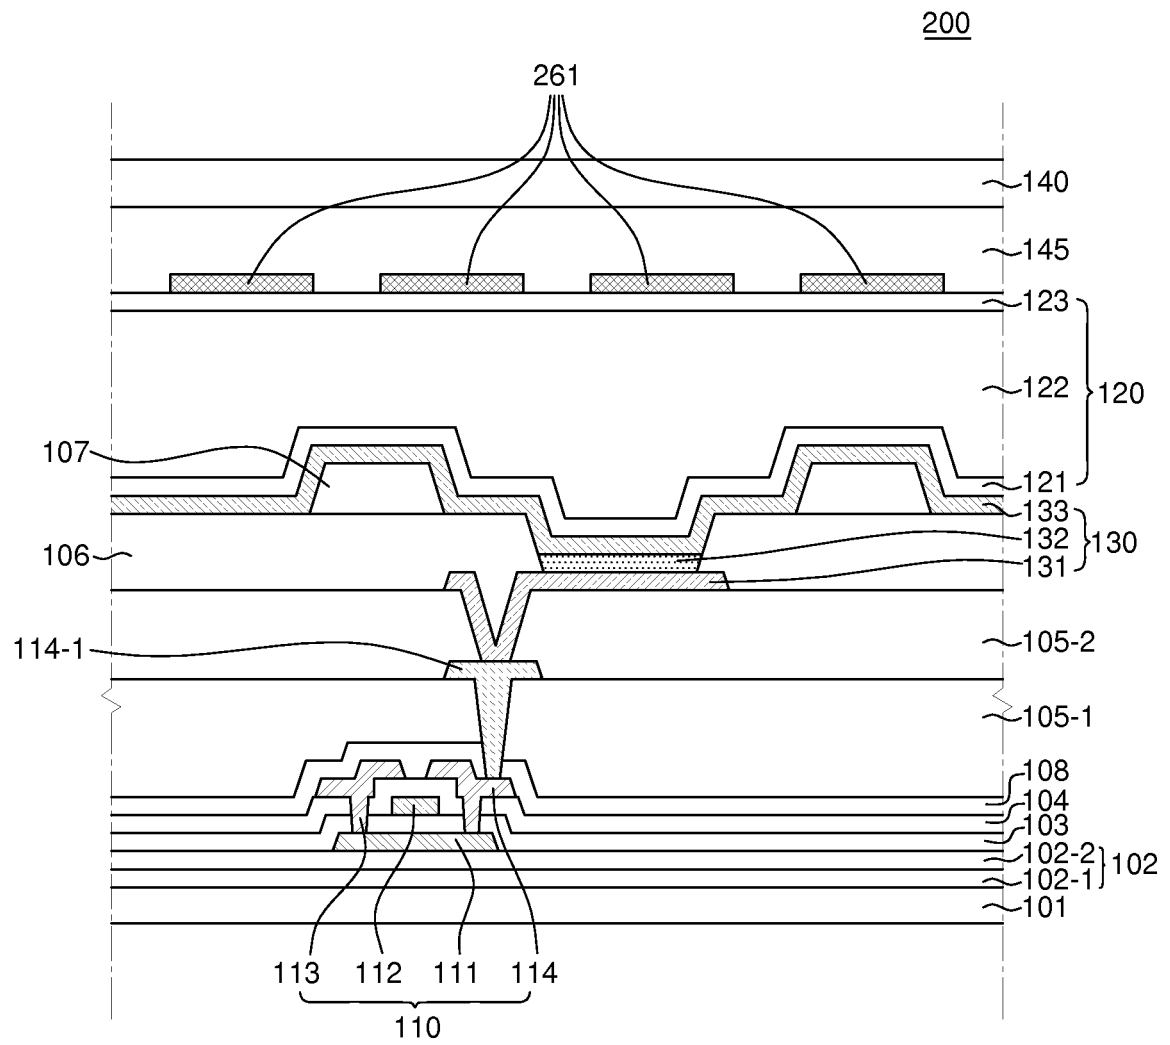


FIG. 4

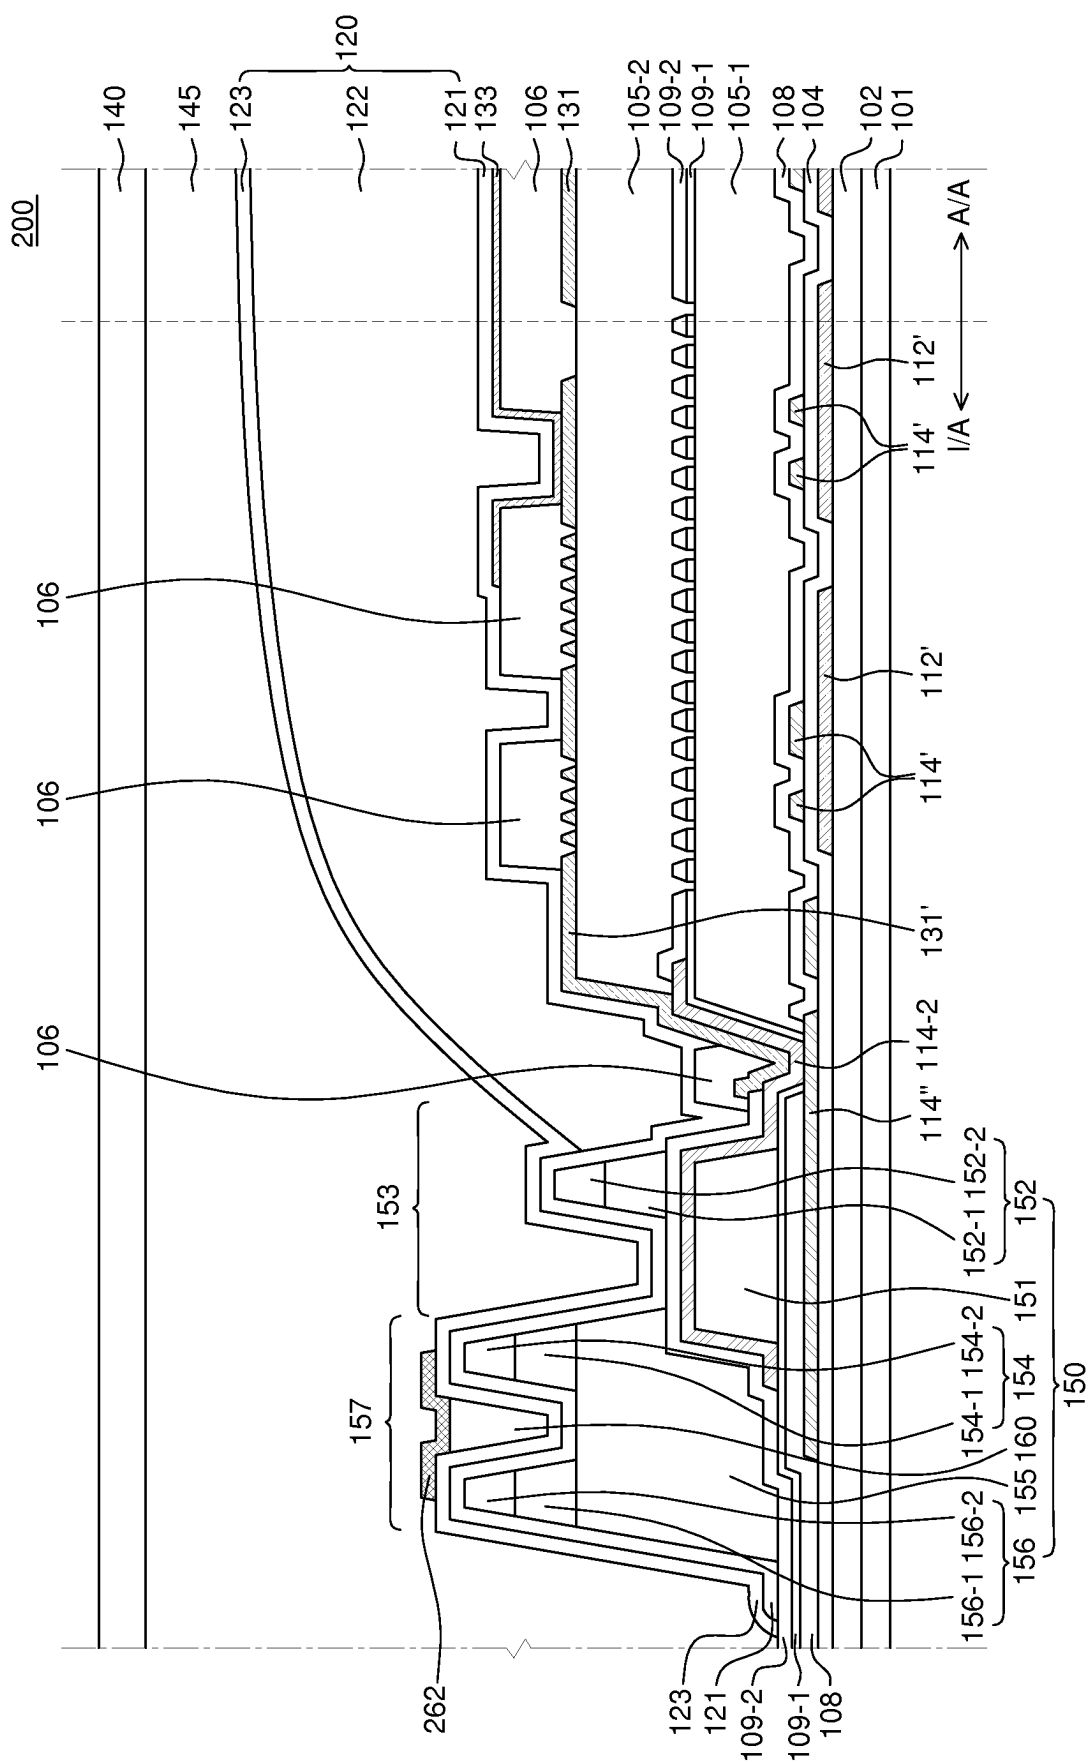


FIG. 5

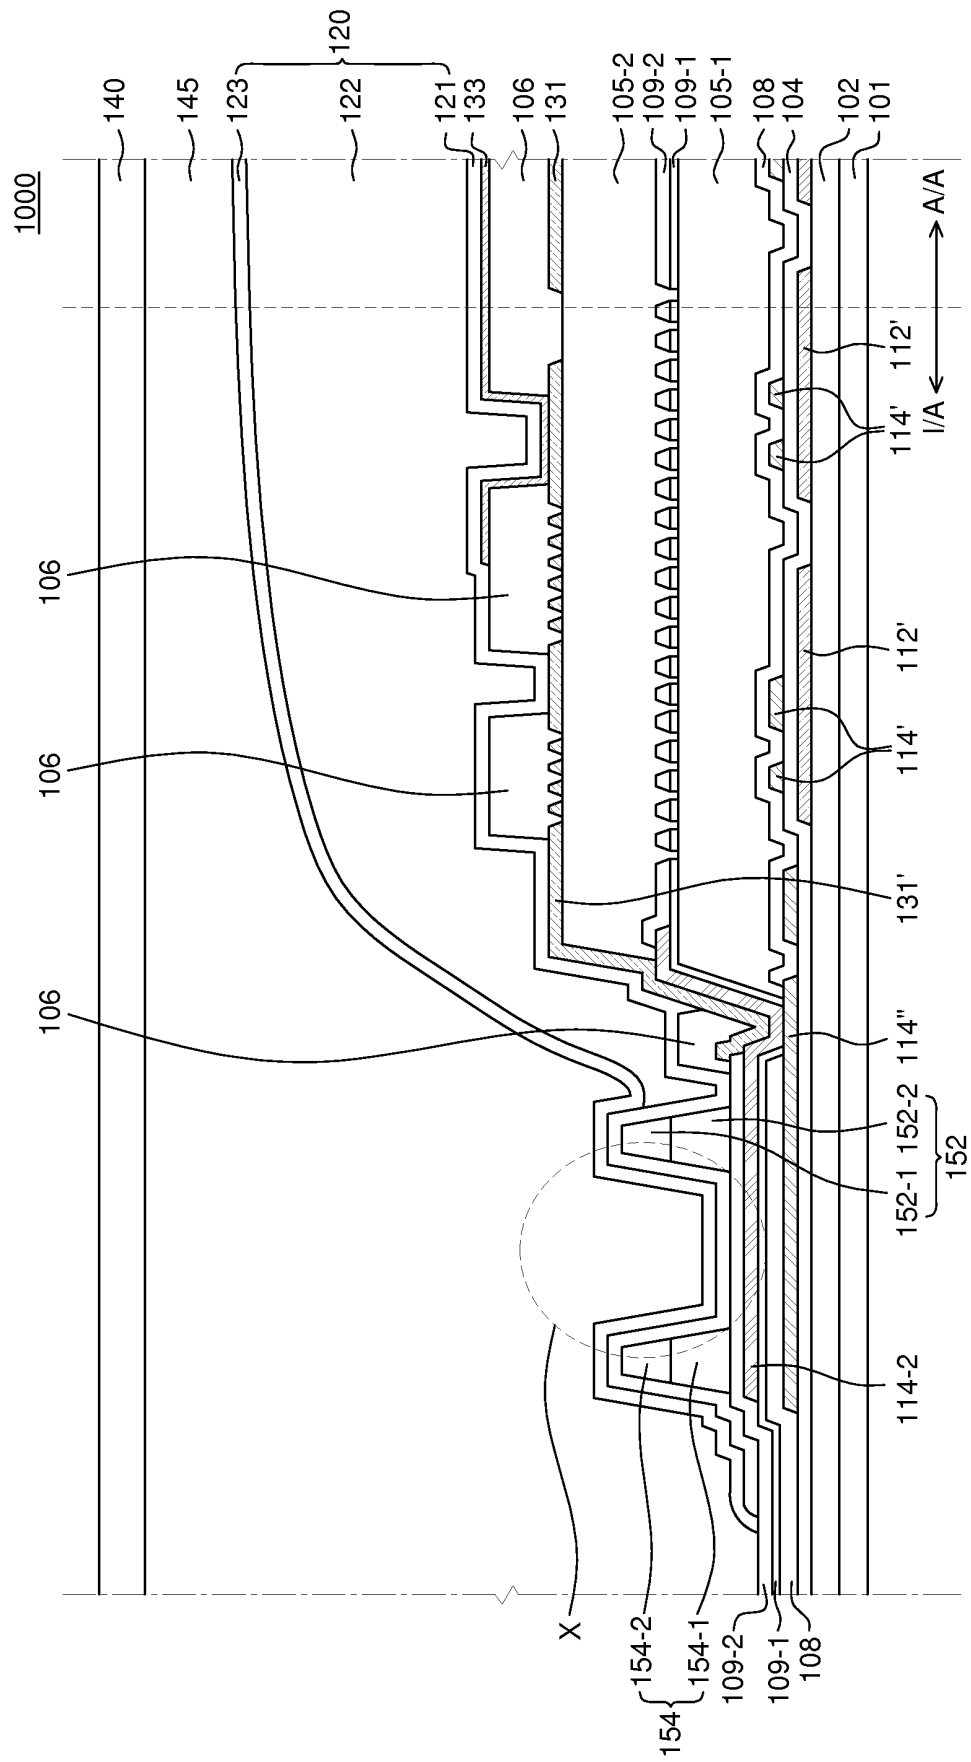


FIG. 6

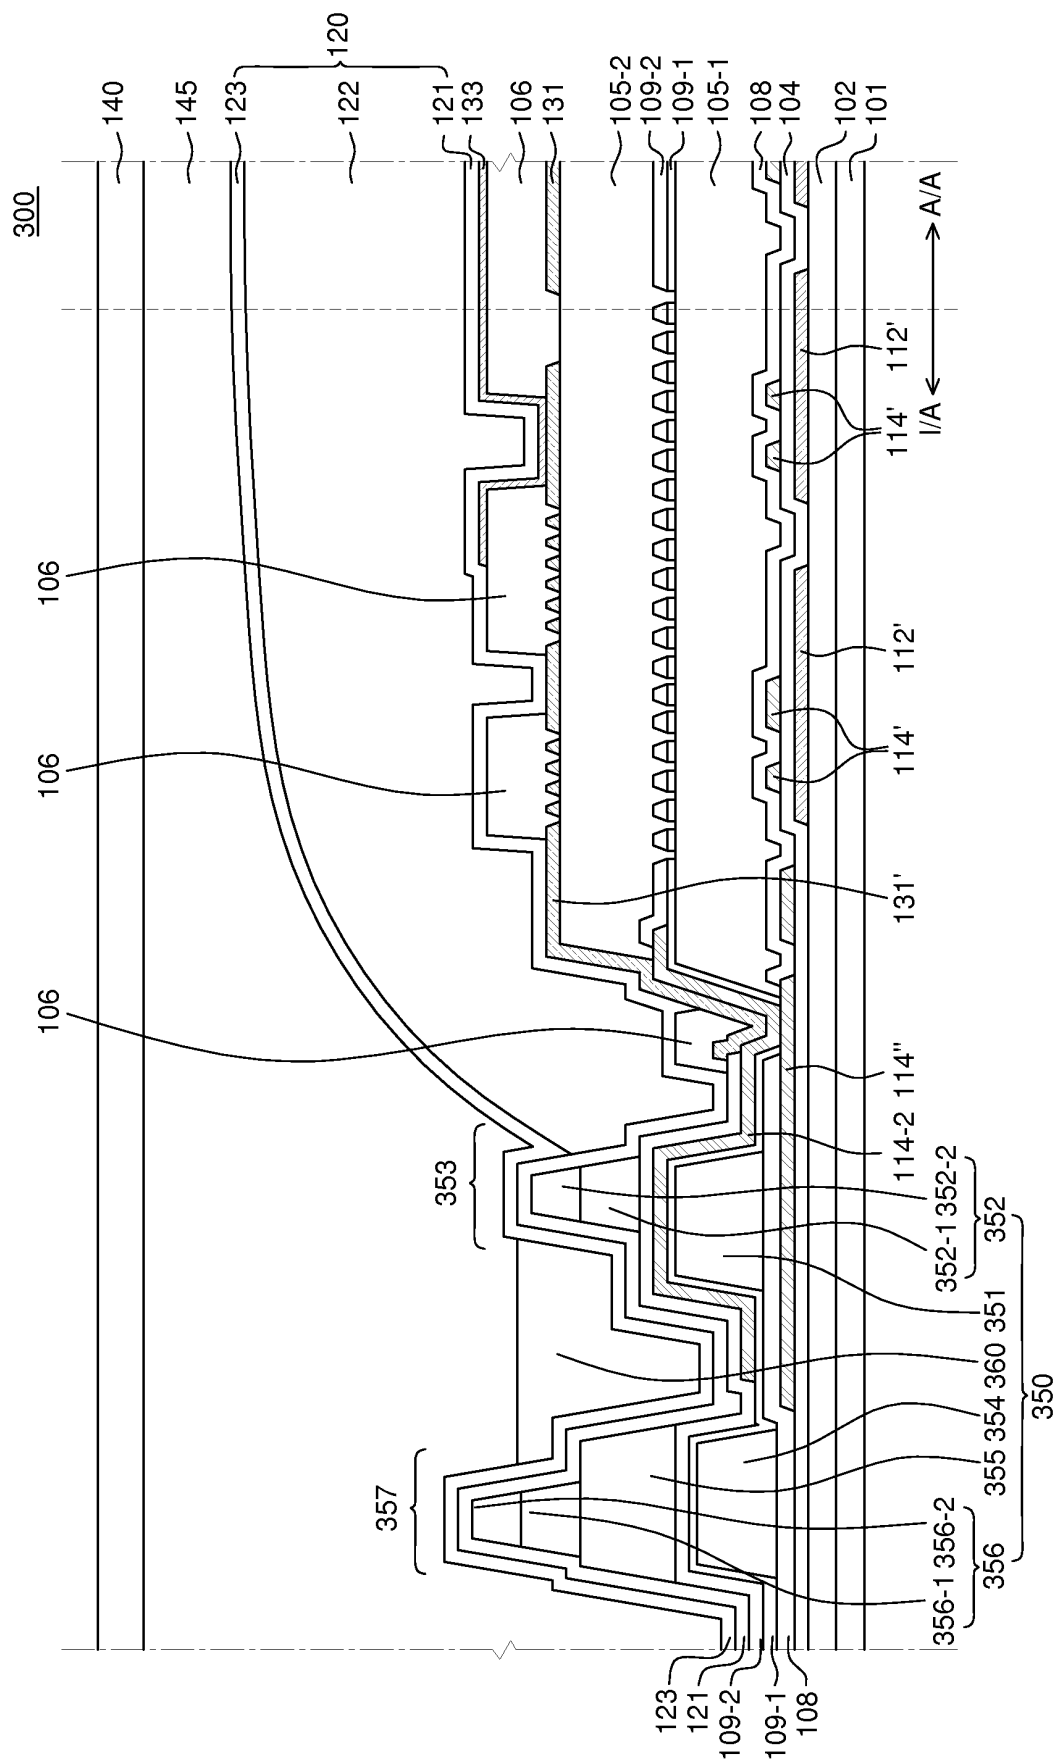


FIG. 7

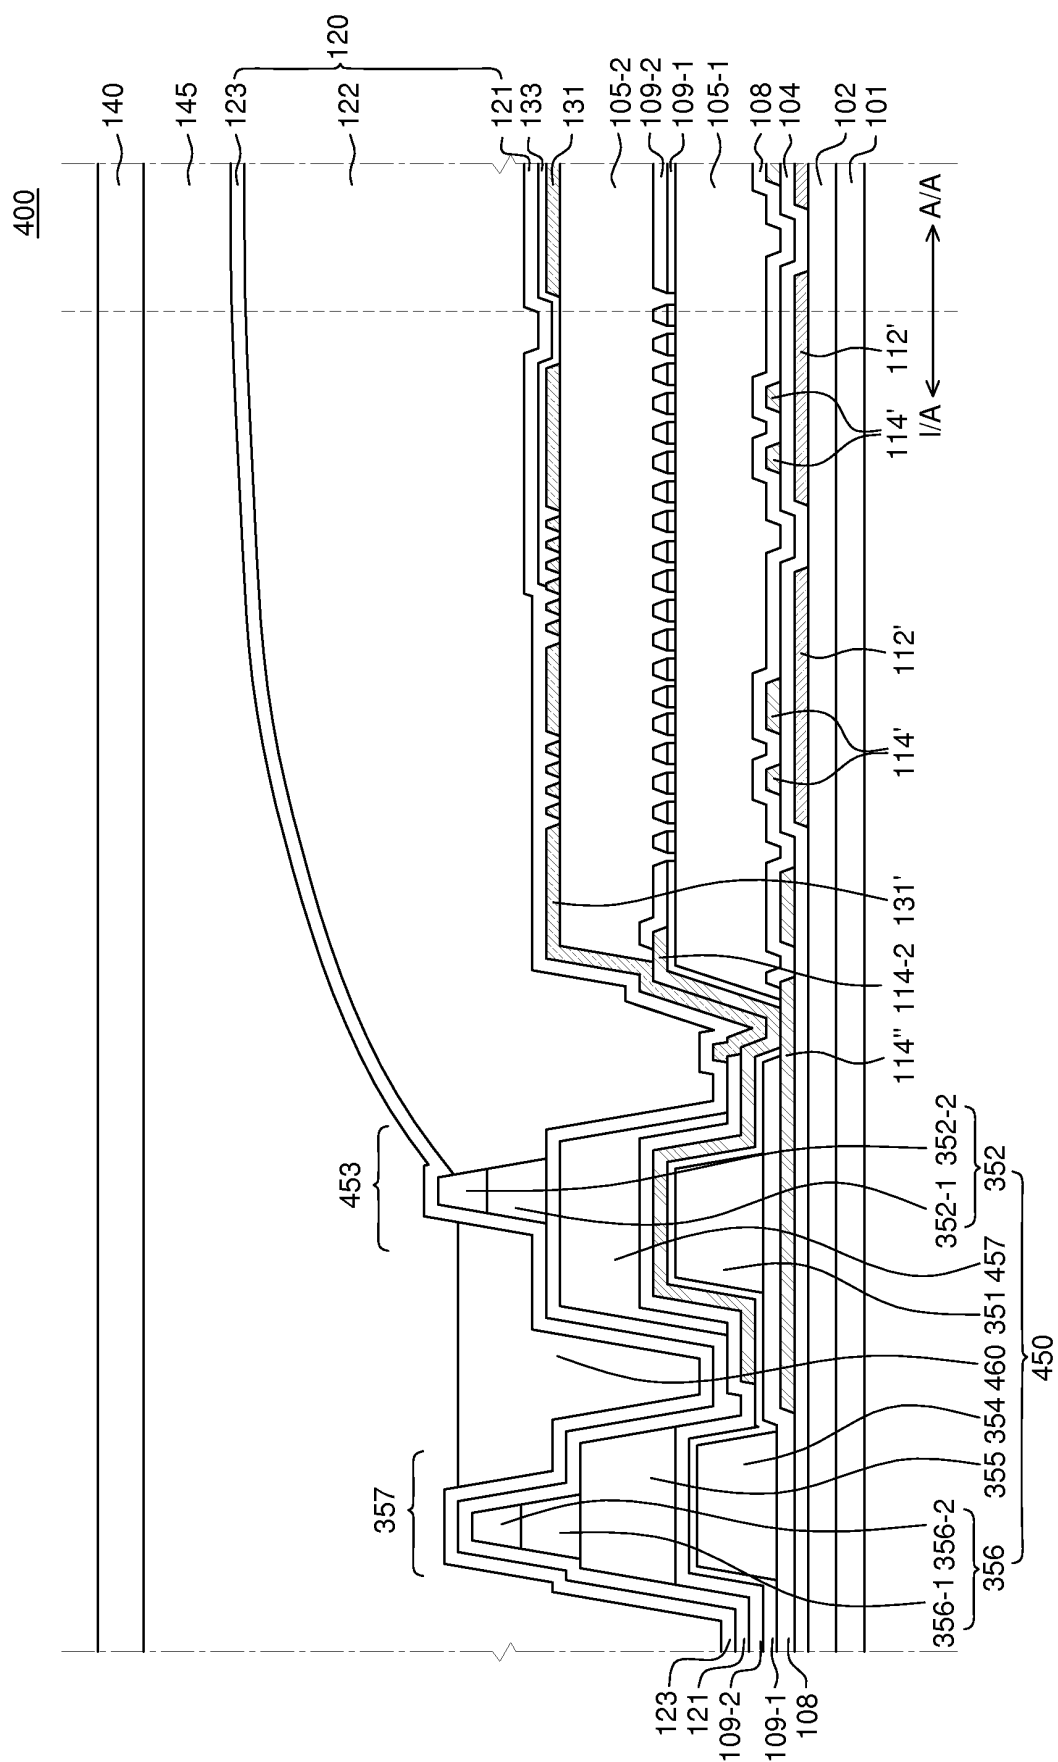


FIG. 8

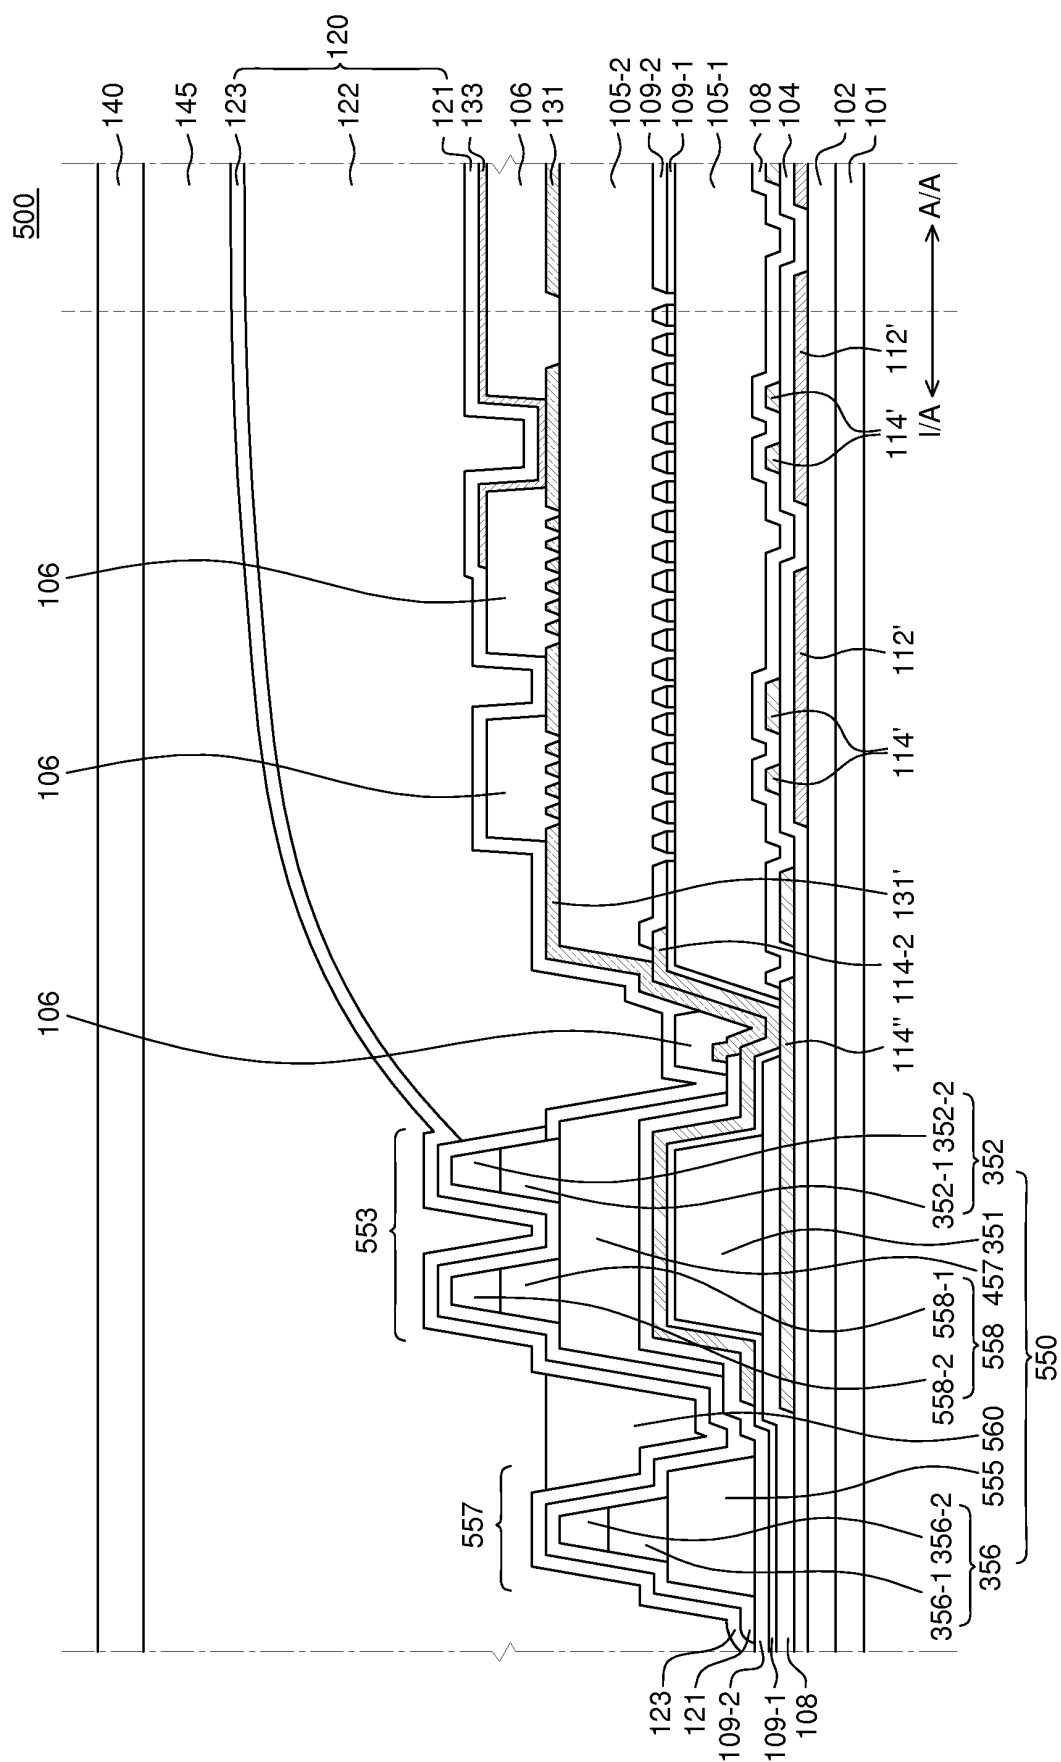


FIG. 9

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2016079564 A1 [0003]
- US 2016307971 A1 [0003]
- US 2016204373 A1 [0003]

专利名称(译)	有机发光显示装置		
公开(公告)号	EP3327786B1	公开(公告)日	2020-02-19
申请号	EP2017204335	申请日	2017-11-29
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	PARK JONGCHAN UM HYUNCHUL OH JEEHWAN		
发明人	PARK, JONGCHAN UM, HYUNCHUL OH, JEEHWAN		
IPC分类号	H01L27/32 H01L51/52		
CPC分类号	H01L51/5253 H01L27/3258 H01L51/5256 G06F3/0412 G06F2203/04103 H01L27/323 H01L27/3276		
优先权	1020160160844 2016-11-29 KR		
其他公开文献	EP3327786A1		
外部链接	Espacenet		

摘要(译)

本文公开了一种有机发光显示 (OLED) 装置 (100) , 该装置包括 : 基板 (101) , 包括有源区 (A / A) 和围绕该有源区 (A / A) 的无源区 (I / A) 。 ; 第一平坦化层 (105-1) ; 第二平坦化层 (105-2) ; 有机发光元件 (130) ; 封装层 (120) , 其包括第一无机层 (121) , 第二无机层 (123) 和第一有机构件 (122) ; 在非活性区域 (I / A) 中的第一结构 (153) , 其包括由与第一平坦化层 (105-1) 或第二平坦化层 (105-2) 相同的材料制成的第一支撑层 (151) , 第二结构 (157) 位于非活性区域 (I / A) 中 , 并且包括由与第一平坦化层 (105-1) 或第二平坦化层 (105-2) 相同的材料制成的第二支撑层 (155) 。

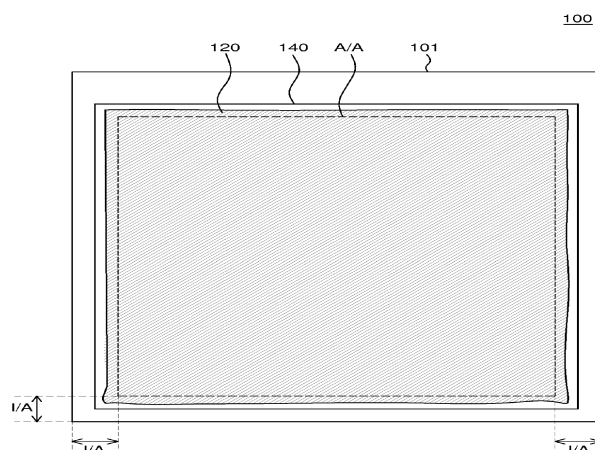


FIG. 1