

(19)



(11)

**EP 3 376 550 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**25.12.2019 Bulletin 2019/52**

(51) Int Cl.:  
**H01L 51/56<sup>(2006.01)</sup> H01L 27/32<sup>(2006.01)</sup>**

(21) Application number: **18161103.9**

(22) Date of filing: **09.03.2018**

(54) **ORGANIC LIGHT-EMITTING DISPLAY APPARATUS AND METHOD OF MANUFACTURING THE SAME**

ORGANISCHE LICHEMITTIERENDE ANZEIGEVORRICHTUNG UND VERFAHREN ZUR  
HERSTELLUNG DAVON

APPAREIL À AFFICHAGE ÉLECTROLUMINESCENT ORGANIQUE ET SON PROCÉDÉ DE  
FABRICATION

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB  
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO  
PL PT RO RS SE SI SK SM TR**

(30) Priority: **13.03.2017 KR 20170030982**

(43) Date of publication of application:  
**19.09.2018 Bulletin 2018/38**

(73) Proprietor: **Samsung Display Co., Ltd.  
Gyeonggi-Do (KR)**

(72) Inventors:  
• **KIM, Jaesik  
Gyeonggi-do (KR)**

• **LEE, Yeonhwa  
Gyeonggi-do (KR)**  
• **LEE, Joongu  
Gyeonggi-do (KR)**  
• **JEONG, Sehoon  
Gyeonggi-do (KR)**

(74) Representative: **Mouteney, Simon James  
Marks & Clerk LLP  
15 Fetter Lane  
London EC4A 1BW (GB)**

(56) References cited:  
**JP-A- 2002 237 383 JP-A1-WO2010 100 922  
US-A1- 2011 156 079 US-A1- 2016 020 424**

**EP 3 376 550 B1**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### BACKGROUND

#### 1. Field

**[0001]** One or more embodiments relate to an organic light-emitting display apparatus and a method of manufacturing the organic light-emitting display apparatus.

#### 2. Description of the Related Art

**[0002]** An organic light-emitting display apparatus is a self-emitting display apparatus that includes a hole injection electrode, an electron injection electrode, and an organic emission layer formed between the hole injection electrode and the electron injection electrode; and emits light when holes injected from the hole injection electrode and electrons injected from the electron injection electrode recombine in the organic emission layer. The organic light-emitting display apparatus has advantages such as low power consumption, high luminance, and fast response, and thus has received attention as a next-generation display apparatus.

**[0003]** US 2016/0020424 A1 and US2011/0156079A and JP2002237383 refer to organic electro-luminescent displays and methods of fabricating the same using an inkjet printing method.

### SUMMARY

**[0004]** Embodiments are directed to an organic light-emitting display apparatus as recited in claim 1, including a substrate, a first first electrode on the substrate, a first organic functional layer on the first first electrode, the first organic functional layer including a first emission layer, a first second electrode on the first organic functional layer, a second first electrode on the substrate, the second first electrode being spaced apart from the first first electrode, a second organic functional layer on the second first electrode, the second organic functional layer including a second emission layer, a second second electrode on the second organic functional layer, and a self-assembled layer between the first organic functional layer and the second organic functional layer, the self-assembled layer containing fluorine.

**[0005]** A color of light emitted from the first emission layer may be different from a color of light emitted from the second emission layer.

**[0006]** Each of the first organic functional layer and the second organic functional layer may further include at least one of a hole injection layer, a hole transport layer, an electron transport layer, and an electron injection layer.

**[0007]** The organic light-emitting display apparatus includes a pixel-defining layer including an insulating layer and covering an edge of the first first electrode and an edge of the second first electrode.

**[0008]** An edge portion of the first organic functional layer and an edge portion of the second organic functional layer may be on an inclined surface of the pixel-defining layer.

**[0009]** The self-assembled layer is on the pixel-defining layer and surrounds the first organic functional layer and the second organic functional layer.

**[0010]** The self-assembled layer is spaced apart from end portions of the first organic functional layer and the second organic functional layer by a pre-set gap.

**[0011]** The self-assembled layer may be under the pixel-defining layer and may surround peripheries of the first first electrode and the second first electrode.

**[0012]** The self-assembled layer may overlap end portions of the first first electrode and the second first electrode.

**[0013]** The self-assembled layer may include a fluorocarbon group (-CF<sub>3</sub>).

**[0014]** The first first electrode and the second first electrode may include a conductive oxide.

**[0015]** The first first electrode and the second first electrode may include at least one of indium tin oxide, indium zinc oxide, zinc oxide, indium oxide, indium gallium oxide, and aluminium zinc oxide.

**[0016]** The organic light-emitting display apparatus may further include a common electrode integrally formed on the first second electrode and the second second electrode.

**[0017]** Embodiments are also directed to a method of manufacturing an organic light-emitting display apparatus as recited in claims 9 to 14, including forming a first first electrode and a second first electrode on a substrate so as to be spaced apart from each other, forming a self-assembled layer containing fluorine on the first first electrode and the second first electrode, sequentially forming a first lift-off layer and a first photoresist on the self-assembled layer, removing a portion of the first lift-off layer and a portion of the first photoresist in an area corresponding to the first first electrode and allowing the self-assembled layer to remain, removing a portion of the self-assembled layer on the first first electrode by performing first plasma heat treatment, and sequentially forming, on the first first electrode, a first organic functional layer and a first second electrode, wherein the first organic functional layer includes a first emission layer, and lifting off a remaining portion of the first lift-off layer.

**[0018]** The first lift-off layer may have a fluorine content ranging from 20 wt% to 60 wt%.

**[0019]** The first organic functional layer and the first second electrode may be formed by a deposition process.

**[0020]** Removing the portion of the first photoresist may include performing a photolithography process.

**[0021]** The first lift-off layer may be etched and removed by using a first solvent containing fluorine.

**[0022]** The self-assembled layer may be formed by a vapor deposition method.

**[0023]** The self-assembled layer may include a hydro-

lyzable reactive group and a fluorine-containing functional group.

**[0024]** The method may further include sequentially forming a second lift-off layer and a second photoresist after lifting off the remaining portion of the first lift-off layer, removing a portion of the second lift-off layer and a portion of the second photoresist in an area corresponding to the second first electrode and allowing the self-assembled layer to remain, removing a portion of the self-assembled layer on the second first electrode by performing second plasma heat treatment, sequentially forming a second organic functional layer and the second second electrode on the second first electrode, wherein the second organic functional layer includes a second emission layer, and lifting off a remaining portion of the second lift-off layer.

**[0025]** The method may further include forming, between the first first electrode and the second first electrode, a pixel-defining layer including an insulating layer.

**[0026]** The self-assembled layer may be formed on the pixel-defining layer.

**[0027]** The self-assembled layer may be formed under the pixel-defining layer.

**[0028]** The method may further include forming a common electrode in an integral form on the first second electrode and the second second electrode.

**[0029]** Embodiments are also directed to a method of manufacturing an organic light-emitting display apparatus, including forming a first first electrode and a second first electrode on a substrate so as to be spaced apart from each other, forming a first self-assembled layer on the first first electrode and the second first electrode, forming a first photoresist on the first self-assembled layer, removing a portion of the first photoresist in an area corresponding to the first first electrode and allowing the first self-assembled layer to remain, removing a portion of the first self-assembled layer on the first first electrode by performing first plasma heat treatment, and sequentially forming a first organic functional layer and a first second electrode on the first first electrode. The first organic functional layer includes a first emission layer, and lifting off a remaining portion of the first photoresist and a remaining portion of the first self-assembled layer.

**[0030]** At least some of the above features that accord with the above and other features according to the invention are set-out in the claims.

#### BRIEF DESCRIPTION OF THE DRAWINGS

**[0031]** Features will be made apparent to those of skill in the art by describing in detail embodiments with reference to the attached drawings in which:

FIG. 1 illustrates a cross-sectional view of an organic light-emitting display apparatus according to an embodiment;

FIG. 2 illustrates a plan view of a portion of the organic light-emitting display apparatus according to

the embodiment illustrated in FIG. 1;

FIG. 3 illustrates a cross-sectional view for explaining forming a plurality of anodes on a substrate of the organic light-emitting display apparatus according to the embodiment illustrated in FIG. 1;

FIG. 4 illustrates a cross-sectional view for explaining forming a pixel-defining layer in the organic light-emitting display apparatus according to the embodiment illustrated in FIG. 1;

FIGS. 5A to 5F illustrate cross-sectional views for explaining stages of a first unit process of forming the organic light-emitting display apparatus according to the embodiment illustrated in FIG. 1;

FIGS. 6A to 6F illustrate cross-sectional views for explaining stages of a second unit process of forming the organic light-emitting display apparatus according to the embodiment illustrated in FIG. 1;

FIGS. 7A to 7F illustrate cross-sectional views for explaining stages of a third unit process of forming the organic light-emitting display apparatus according to the embodiment illustrated in FIG. 1;

FIG. 8 illustrates a cross-sectional view of an organic light-emitting display apparatus according to an embodiment;

FIG. 9 illustrates a plan view of a portion of the organic light-emitting display apparatus according to the embodiment illustrated in FIG. 8;

FIG. 10 illustrates a cross-sectional view for explaining an operation of forming a plurality of anodes and a self-assembled monolayer on a substrate of the organic light-emitting display apparatus according to the embodiment illustrated in FIG. 8;

FIG. 11 illustrates a cross-sectional view for explaining forming a pixel-defining layer in the organic light-emitting display apparatus according to the embodiment illustrated in FIG. 8;

FIGS. 12A to 12F illustrate cross-sectional views for explaining stages of a first unit process of forming the organic light-emitting display apparatus according to the embodiment illustrated in FIG. 8;

FIGS. 13A to 13F illustrate cross-sectional views for explaining stages of a second unit process of forming the organic light-emitting display apparatus according to the embodiment illustrated in FIG. 8;

FIGS. 14A to 14F illustrate cross-sectional views for explaining a third unit process of forming the organic light-emitting display apparatus according to the embodiment illustrated in FIG. 8;

FIGS. 15A to 15E illustrate cross-sectional views for explaining a first unit process of forming an organic light-emitting display apparatus according to an embodiment;

FIGS. 16A to 16E illustrate cross-sectional views for explaining a second unit process of forming the organic light-emitting display apparatus following the first unit process illustrated in FIGS. 15A to 15E according to an embodiment;

FIGS. 17A to 17E illustrate cross-sectional views for

explaining a third unit process of forming the organic light-emitting display apparatus following the second unit process illustrated in FIGS. 16A to 16E according to an embodiment;

FIGS. 18A to 18E illustrate cross-sectional views for explaining a first unit process of forming an organic light-emitting display apparatus according to a comparative example;

FIGS. 19A to 19E illustrate cross-sectional views for explaining a second unit process of the organic light-emitting display apparatus according to the comparative example;

FIGS. 20A to 20E illustrate cross-sectional views for explaining a third unit process of the organic light-emitting display apparatus according to the comparative example; and

FIG. 21 illustrates a diagram illustrating an operation mechanism of a self-assembled monolayer.

## DETAILED DESCRIPTION

**[0032]** Example embodiments will now be described more fully hereinafter with reference to the accompanying drawings; however, the invention may be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough, and will convey implementations to those skilled in the art.

**[0033]** In the drawing figures, the dimensions of layers and regions may be exaggerated for clarity of illustration. It will also be understood that when a layer or element is referred to as being "on" another layer or substrate, it can be directly on the other layer or substrate, or intervening layers may also be present. Further, it will be understood that when a layer is referred to as being "under" another layer, it can be directly under, and one or more intervening layers may also be present. In this regard, unless otherwise provided, a description that a layer or element is "under" another layer or element may be interpreted as indicating that the layer or element is closer to the substrate than the other layer or element. In addition, it will also be understood that when a layer is referred to as being "between" two layers, it can be the only layer between the two layers, or one or more intervening layers may also be present. Like reference numerals refer to like elements throughout.

**[0034]** FIG. 1 illustrates a cross-sectional view of an organic light-emitting display apparatus 1 according to an embodiment, and FIG. 2 illustrates a plan view of a portion of the organic light-emitting display apparatus 1 according to the embodiment.

**[0035]** Referring to FIGS. 1 and 2, in the organic light-emitting display apparatus 1, a plurality of anodes including a first anode 101, a second anode 102, and a third anode 103 may be on a substrate 100 in a spaced apart relationship each other.

**[0036]** First to third organic functional layers 141, 142,

and 143 including first to third emission layers may be respectively located on the first to third anodes 101, 102, and 103. First to third auxiliary cathodes 181, 182, and 183 including a conductive material may be respectively located on the first to third organic functional layers 141, 142, and 143. An integrally formed common electrode 180 may be located on the first to third auxiliary cathodes 181, 182, and 183. (The first auxiliary cathode 181, the second auxiliary cathode 182, and the third auxiliary cathode 183 may also be referred to as a first second electrode, a second second electrode and a third second electrode, so as to not be limited as to polarity. For example, in some implementations, electrodes 101, 102, and 103 may be cathodes, and electrodes 180, 181, 182, and 183 may be anodes.)

**[0037]** A pixel-defining layer 110 including an insulating material may cover end portions of the first to third anodes 101, 102, and 103. The pixel-defining layer 110 may prevent electric field concentration at each of the end portions of the first to third anodes 101, 102, and 103.

**[0038]** A self-assembled monolayer 150 may be located on the pixel-defining layer 110. The self-assembled monolayer 150 may surround the first to third organic functional layers 141, 142 and 143. The self-assembled monolayer 150 may be spaced apart from the end portions of the first to third organic functional layers 141, 142, and 143 by a predetermined distance D1.

**[0039]** The self-assembled monolayer 150 may include a fluorine-containing functional group and a hydrolyzable reactive group.

**[0040]** The fluorine-containing functional group may include fluorocarbon (-CF<sub>3</sub>). The hydrolyzable reactive group may include a silicone compound. For example, the self-assembled monolayer 150 may include FOTS (1H,1H,2H,2H-perfluorooctyletrichlorosilane), FOTS (heptadecafluoro-1,1,2,2-tetrahydrodecyl)trichlorosilane), FOMMS (CF<sub>3</sub>(CF<sub>2</sub>)<sub>5</sub>(CH<sub>2</sub>)<sub>2</sub>Si(CH<sub>3</sub>)<sub>2</sub>Cl), FOMDS (CF<sub>3</sub>(CF<sub>2</sub>)<sub>5</sub>(CH<sub>2</sub>)<sub>2</sub>Si(CH<sub>3</sub>)Cl<sub>2</sub>), FOTES (CF<sub>3</sub>(CF<sub>2</sub>)<sub>5</sub>(CH<sub>2</sub>)<sub>2</sub>Si(OC<sub>2</sub>H<sub>5</sub>)<sub>3</sub>), or the like.

**[0041]** The self-assembled monolayer may include a hydrophobic functional group containing a methyl group (-CH<sub>3</sub>). For example, the self-assembled monolayer may include octadecyltrichlorosilane (OTS), dichlorodimethylsilane (DDMS), or the like.

**[0042]** The fluorine-containing functional group may be located at a greater distance from the surfaces of the first to third anodes 101, 102, and 103 and the pixel-defining layer 110 than the hydrolyzable reactive group. The fluorine-containing functional group of the self-assembled monolayer 150 may have a small difference in surface energy with respect to a first lift-off layer 121 (see FIG. 5A) containing fluorine, to be described below. Thus, the first lift-off layer 121 may be uniformly formed on the self-assembled monolayer 150, thereby improving patterning precision. In addition, the term "monolayer" used in the self-assembled monolayer is not limited as meaning that the self-assembled monolayer includes a single molecule. Herein, instead of the term "self-assembled mon-

olayer", the term "self-assembled layer" may be used as having the same meaning as the term "self-assembled monolayer".

[0043] With reference to FIGS. 3 to 7F, a method of manufacturing the organic light-emitting display apparatus 1 and the organic light-emitting display apparatus 1 manufactured by the above method are described in more detail.

[0044] FIG. 3 illustrates a cross-sectional view for explaining forming the first to third anodes 101, 102, and 103 on the substrate 100 of the organic light-emitting display apparatus 1. FIG. 4 illustrates a cross-sectional view for explaining forming the pixel-defining layer 110 in the organic light-emitting display apparatus 1. FIGS. 5A to 5F illustrates cross-sectional views for explaining a first unit process of forming the organic light-emitting display apparatus 1. FIGS. 6A to 6F illustrate cross-sectional views for explaining a second unit process of the organic light-emitting display apparatus 1. FIGS. 7A to 7F illustrate cross-sectional views for explaining a third unit process of the organic light-emitting display apparatus 1.

[0045] Referring to FIG. 3, a plurality of anodes including the first anode 101, the second anode 102, and the third anode 103 may be formed on the substrate 100. (The first anode 101, the second anode 102, and the third anode 103 may also be referred to as a first first electrode, a second first electrode and a third first electrode, so as to not be limited as to polarity.)

[0046] The substrate 100 may include suitable materials. For example, the substrate 100 may include glass or plastic. Examples of the plastic may include materials having excellent heat resistance and excellent durability, such as polyimide, polyethylenenaphthalate, polyethyleneterephthalate, polyarylate, polycarbonate, polyetherimide, and polyethersulfone.

[0047] A buffer layer for flattening a top surface of the substrate 100 and preventing penetration of impurities may be further formed on the substrate 100. For example, the buffer layer may be a single layer or a plurality of layers including silicon nitride, silicon oxide, and/or the like.

[0048] The first to third anodes 101, 102, and 103 may be hole injection electrodes and may include materials having a high work function. The first to third anodes 101, 102, and 103 may each include a transparent conductive oxide component. For example, the first to third anodes 101, 102, and 103 may include at least one selected from indium tin oxide, indium zinc oxide, zinc oxide, indium oxide, indium gallium oxide, and aluminium zinc oxide. The first to third anodes 101, 102, and 103 may each be a single layer or may be a plurality of layers including a metal and/or an alloy such as silver (Ag), aluminium (Al), magnesium (Mg), lithium (Li), or calcium (Ca).

[0049] The first to third anodes 101, 102, and 103 may electrically contact first to third thin-film transistors, respectively, that are located between the substrate 100 and the first to third anodes 101, 102, and 103.

[0050] Referring to FIG. 4, the pixel-defining layer 110 surrounding edges of the first anode 101, the second anode 102, and the third anode 103 may be formed on the substrate 100.

[0051] End portions of the first to third anodes 101, 102, and 103 may be sharp. Accordingly, when a current is applied after the first to third auxiliary cathodes 181, 182, and 183 are formed, there is a possibility that an electric field could concentrate on the end portions of the first to third anodes 101, 102, and 103, and thus an electrical short circuit could occur during operation. However, when the end portions of the first to third anodes 101, 102, and 103 are covered by the pixel-defining layer 110, as illustrated in FIGS. 1 and 4, an electric field may be prevented from concentrating at the end portions of the first to third anodes 101, 102, and 103.

[0052] The pixel-defining layer 110 may be an organic insulating layer including, for example, a general-purpose polymer such as poly(methyl methacrylate) (PMMA) or polystyrene (PS), a polymer derivative having a phenol group, an acryl-based polymer, an imide-based polymer, an arylether-based polymer, an amide-based polymer, a fluorine-based polymer, a p-xylene-based polymer, a vinyl alcohol-based polymer, or a blend thereof.

[0053] Referring to FIG. 5A, a self-assembled monolayer 150, a first lift-off layer 121, and a first photoresist 131 are sequentially formed on the substrate 100 on which the first to third anodes 101, 102, and 103 are formed.

[0054] The self-assembled monolayer 150 may be formed by using a coating method, a printing method, a deposition method, or the like. The self-assembled monolayer 150 may include a fluorine-containing functional group and a hydrolyzable reactive group, as described above. For example, as described above, the self-assembled monolayer 150 may include FOTS (1H,1H,2H,2H-perfluorooctyltrichlorosilane), FDTS (heptadecafluoro-1,1,2,2-tetrahydrodecyl)trichlorosilane), FOMMS ( $\text{CF}_3(\text{CF}_2)_5(\text{CH}_2)_2\text{Si}(\text{CH}_3)_2\text{Cl}$ ), FOMDS ( $\text{CF}_3(\text{CF}_2)_5(\text{CH}_2)_2\text{Si}(\text{CH}_3)_2\text{Cl}_2$ ), FOTES ( $\text{CF}_3(\text{CF}_2)_5(\text{CH}_2)_2\text{Si}(\text{OC}_2\text{H}_5)_3$ ), or the like.

[0055] The first lift-off layer 121 may include a fluoropolymer. The fluoropolymer included in the first lift-off layer 121 may include a polymer having a fluorine content ranging from about 20 wt% to about 60 wt%. For example, the fluoropolymer included in the first lift-off layer 121 may include at least one from among a copolymer of polytetrafluoroethylene, polychlorotrifluoroethylene, polydichlorodifluoroethylene, chlorotrifluoroethylene, and dichlorofluoroethylene, a copolymer of tetrafluoroethylene and perfluoroalkylvinylether, a copolymer of chlorotrifluoroethylene and perfluoroalkylvinylether, a copolymer of tetrafluoroethylene and perfluoroalkylvinylether, and a copolymer of chlorotrifluoroethylene and perfluoroalkylvinylether.

[0056] The first lift-off layer 121 may be formed by using a coating method, a printing method, a deposition method,

od, or the like. When the first lift-off layer 121 is formed by using a coating method or a printing method, curing and polymerization may be performed as desired, and then a process of forming a first photoresist 131 may be performed.

**[0057]** FIG. 21 schematically illustrates a mechanism by which a self-assembled monolayer 150 may operate when the self-assembled monolayer 150 is formed on a first anode 101.

**[0058]** For example, when a self-assembled monolayer 150 including FOTS is deposited on a first anode 101 including indium tin oxide, a hydrolyzable reactive group that includes silicon, of the self-assembled monolayer 150, may cause a hydrolysis and condensation reaction with a hydroxyl group (-OH) of the surface of the first anode 101. The self-assembled monolayer 150 may be covalently bonded to the surface of the first anode 101. This covalent bonding may increase adhesion between the surface of the self-assembled monolayer 150 and the surface of the first anode 101.

**[0059]** When a first lift-off layer 121 including a fluoropolymer is formed on the self-assembled monolayer 150, a fluorine-containing functional group of the self-assembled monolayer 150, which is in close contact with the first lift-off layer 121, may have a small difference in surface energy with respect to the first lift-off layer 121. Thus, the first lift-off layer 121 may be uniformly formed on the self-assembled monolayer 150.

**[0060]** The first photoresist 131 may be formed on the first lift-off layer 121. As illustrated in FIG. 5A, the first photoresist 131 at a position corresponding to the first anode 101 may be exposed through a first photomask M1 including an area M11 through which light L is transmitted.

**[0061]** Referring to FIG. 5B, the first photoresist 131 may be developed. The first photoresist 131 may be a positive photoresist or a negative photoresist. In the present embodiment, it is assumed that the first photoresist 131 is a positive photoresist. In the first photoresist 131 that is developed, a first portion 131-1 corresponding to the first anode 101 may be removed and a second portion 131-2 other than the first portion 131-1 may remain.

**[0062]** Referring to FIG. 5C, the first lift-off layer 121 may be etched by using a pattern of the first portion 131-1 of the first photoresist 131 as an etch mask.

**[0063]** The first lift-off layer 121 may include the fluoropolymer. Accordingly, a solvent that etches the fluoropolymer may be used as an etchant.

**[0064]** A first solvent including fluorine may be used as the etchant. The first solvent may include hydrofluoroether, which is a material that is electrochemically stable due to a low interaction with other materials and is environmentally stable due to a low global warming potential and a low toxicity.

**[0065]** A portion of the first lift-off layer 121 formed at a position corresponding to the first portion 131-1, that is, above the first anode 101, may be etched during an

etching process. The first lift-off layer 121 may be etched by the first solvent including fluorine to form a first undercut profile UC1 under a boundary surface of the first portion 131-1 of the first photoresist 131.

**[0066]** The self-assembled monolayer 150 may be well bonded to the top surface of the first anode 101 while the first lift-off layer 121 is etched. For example, as described above, a hydrolysis and condensation reaction may occur between a reactive group including silicon, included in the self-assembled monolayer 150, and the surface of the first anode 101. An adhesive strength due to covalent bonding between the self-assembled monolayer 150 and the surface of the first anode 101 may be increased.

**[0067]** In addition, a hydrolysis and condensation reaction may occur between a reactive group including silicon, included in the self-assembled monolayer 150, and a surface material of the pixel-defining layer 110, and thus an adhesive strength between the surface of the self-assembled monolayer 150 and the surface of the pixel-defining layer 110 may be increased. The self-assembled monolayer 150 may be well bonded to the top surface of the pixel-defining layer 110 while the first lift-off layer 121 is etched.

**[0068]** Referring to FIG. 5D, a portion of the self-assembled monolayer 150 on the first anode 101 may be removed by performing first plasma heat treatment PT1 on the structure illustrated in FIG. 5C.

**[0069]** The Si-O bond between the first anode 101 and the self-assembled monolayer 150 shown in FIG. 21 may be cleanly broken by the first plasma heat treatment PT1. In this regard, if the first lift-off layer 121 were to be directly formed on the first anode 101 after the formation of the first anode 101 without forming the self-assembled monolayer 150 and were to be removed in a subsequent process, a residue of the first lift-off layer 121 could remain on the first anode 101, causing contamination. However, in the present embodiment, the self-assembled monolayer 150 may be formed between the first anode 101 and the first lift-off layer 121 to prevent a residue of the first lift-off layer 121 from remaining on the first anode 101, thereby preventing deterioration of the organic-light emitting display apparatus.

**[0070]** Referring to FIG. 5E, a first organic functional layer 141 including a first emission layer and a first auxiliary cathode 181 may be sequentially formed on the structure illustrated in FIG. 5D.

**[0071]** The first organic functional layer 141 may further include at least one selected from a hole injection layer, a hole transport layer, an electron transport layer, and an electron injection layer.

**[0072]** The first organic functional layer 141 may be formed by a vacuum deposition method. In the deposition process, the first lift-off layer 121 and the first photoresist 131 may function as masks. A portion of the first organic functional layer 141 may be formed at a position corresponding to the first portion 131-1, that is, above the first anode 101, and the other portion of the first organic functional layer 141 may be formed on a second portion 131-2

of the first photoresist 131.

**[0073]** Like the first organic functional layer 141, the first auxiliary cathode 181 may also be formed by using a vacuum deposition method. In the deposition process, the first lift-off layer 121 and the first photoresist 131 may function as masks. A portion of the first auxiliary cathode 181 may be formed to cover a top surface of the first organic functional layer 141, and the other portion of the first auxiliary cathode 181 may be formed on the first organic functional layer 141 on a second portion 131-2 of the first photoresist 131 other than the first portion 131-1.

**[0074]** The first auxiliary cathode 181 may include the same material as that of a cathode 180 that is a common electrode to be described below. In some implementations, the first auxiliary cathode 181 may include a material different from that of the cathode 180. The first auxiliary cathode 181 may function as a barrier for protecting the first organic functional layer 141 from a solvent used in a subsequent lift-off process.

**[0075]** Referring to FIG. 5F, a lift-off process may be performed on the structure illustrated in FIG. 5E.

**[0076]** The first lift-off layer 121 may include the fluoropolymer. Accordingly, a second solvent including fluorine may be used in the lift-off process. The first organic functional layer 141 may be formed and then the lift-off process may be performed. Accordingly, the second solvent may include a material having a low reactivity with the first organic functional layer 141. Like the first solvent, the second solvent may include hydro fluoroether.

**[0077]** When the first lift-off layer 121 formed under the second portion 131-2 (see FIG. 5E) of the first photoresist 131 is lifted off, portions of the first organic functional layer 141 and the first auxiliary cathode 181 that were formed on the second portion 131-2 of the first photoresist 131 may be removed. Portions of the first organic functional layer 141 and the first auxiliary cathode 181 formed over the first anode 101 may remain as patterns.

**[0078]** The self-assembled monolayer 150 formed on the pixel-defining layer 110 is not removed. As described above, an adhesive strength between the surface of the self-assembled monolayer 150 and the surface of the pixel-defining layer 110 is high due to a hydrolysis and condensation reaction between a reactive group including silicon, included in the self-assembled monolayer 150, and a surface material of the pixel-defining layer 110. Accordingly, the self-assembled monolayer 150 may be well bonded to the top surface of the pixel-defining layer 110 while the first lift-off layer 121 is lifted off.

**[0079]** After the first unit process is performed, a second unit process of forming the second organic functional layer 142, which may emit light of a different color from that emitted by the first organic functional layer 141, may be performed on an area where the second anode 102 is located. The second unit process will now be described with reference to FIGS. 6A to 6F.

**[0080]** Referring to FIG. 6A, a second lift-off layer 122 and a second photoresist 132 may be sequentially

formed on the structure illustrated in FIG. 5F.

**[0081]** The second lift-off layer 122 may include a fluoropolymer. The second lift-off layer 122 may include the same material as that of the first lift-off layer 121 and may be formed by using a coating method, a printing method, or a deposition method.

**[0082]** The second photoresist 132 may be formed on the second lift-off layer 122. The second photoresist 132, may be exposed through a second photomask M2 including an area M21 through which light L is transmitted and area M22, the area M21 being at a position corresponding to the second anode 102.

**[0083]** Referring to FIG. 6B, the second photoresist 132 may be developed. In the second photoresist 132, a first portion 132-1 corresponding to the second anode 102 may be removed and a second portion 132-2 other than the first portion 132-1 may remain.

**[0084]** Referring to FIG. 6C, the second lift-off layer 122 may be etched by using a pattern of the first portion 132-1 of the second photoresist 132 as an etch mask.

**[0085]** The second lift-off layer 122 includes the fluoropolymer. Accordingly, a solvent that etches the fluoropolymer may be used as an etchant. For example, a first solvent including fluorine may be used as the etchant.

The first solvent may include hydro fluoroether.

**[0086]** A portion of the second lift-off layer 122 formed at a position corresponding to the first portion 132-1, that is, above the second anode 102, may be etched during an etching process. The second lift-off layer 122 may be etched by the first solvent including fluorine to form a second undercut profile UC2 under a boundary surface of the first portion 132-1 of the second photoresist 132.

**[0087]** The self-assembled monolayer 150 may be well bonded to the top surface of the second anode 102 while the second lift-off layer 122 is etched. In addition, the self-assembled monolayer 150 may be well bonded to the top surface of the pixel-defining layer 110 while the second lift-off layer 122 is etched.

**[0088]** Referring to FIG. 6D, a portion of the self-assembled monolayer 150 on the second anode 102 may be removed by performing a second plasma heat treatment PT2 on the structure illustrated in FIG. 6C.

**[0089]** A Si-O bond between the second anode 102 and the self-assembled monolayer 150 may be cleanly broken by the second plasma heat treatment PT2. Accordingly, a residue of the second lift-off layer 122 may not remain on the second anode 102.

**[0090]** Referring to FIG. 6E, a second organic functional layer 142 including a second emission layer and a second auxiliary cathode 182 may be sequentially formed on the structure illustrated in FIG. 6D.

**[0091]** The second organic functional layer 142 may further include at least one selected from a hole injection layer, a hole transport layer, an electron transport layer, and an electron injection layer.

**[0092]** The second organic functional layer 142 may be formed by using a vacuum deposition method. In the deposition process, the second lift-off layer 122 and the

second photoresist 132 may function as masks. A portion of the second organic functional layer 142 may be formed at a position corresponding to the first portion 132-1, that is, above the second anode 102, and another portion of the second organic functional layer 142 may be formed on the second portion 132-2 of the second photoresist 132.

**[0093]** Like the second organic functional layer 142, the second auxiliary cathode 182 may be formed by using a vacuum deposition method. In the deposition process, the second lift-off layer 122 and the second photoresist 132 may function as masks. A portion of the second auxiliary cathode 182 may be formed to cover a top surface of the second organic functional layer 142, and another portion of the second auxiliary cathode 182 may be formed on the second organic functional layer 142 on the second portion 132-2 of the second photoresist 132.

**[0094]** The second auxiliary cathode 182 may include the same material as that of the cathode 180 that is a common electrode to be described below. In some implementations, the second auxiliary cathode 182 may include a material different from that of the cathode 180. The second auxiliary cathode 182 may function as a barrier for protecting the second organic functional layer 142 from a solvent used in a subsequent lift-off process.

**[0095]** Referring to FIG. 6F, a lift-off process may be performed on the structure illustrated in FIG. 6E.

**[0096]** The second lift-off layer 122 includes the fluoropolymer. Accordingly, a second solvent including fluorine may be used in the lift-off process. The second organic functional layer 142 may be formed and then the lift-off process may be performed. Accordingly, the second solvent may include a material having a low reactivity with the second organic functional layer 142. Like the first solvent, the second solvent may include hydrofluoroether.

**[0097]** When the second lift-off layer 122 formed under the second portion 132-2 (see FIG. 6E) of the second photoresist 132 is lifted off, portions of the second organic functional layer 142 and the second auxiliary cathode 182 that were formed on the second portion 132-2 of the second photoresist 132 may be removed. Portions of the second organic functional layer 142 and the second auxiliary cathode 182 formed over the second anode 102 may remain as patterns.

**[0098]** As described above, an adhesive strength between the self-assembled monolayer 150 and the pixel-defining layer 110 may be sufficient such that the self-assembled monolayer 150 formed on the pixel-defining layer 110 is not removed when the second lift-off layer 122 is lifted off.

**[0099]** After the second unit process is performed, a third unit process of forming the third organic functional layer 143, which may emit light of a different color from that emitted by the first organic functional layer 141 and the second organic functional layer 142 may be performed on an area where the third anode 103 is located. The third unit process will now be described with refer-

ence to FIGS. 7A to 7F.

**[0100]** Referring to FIG. 7A, a third lift-off layer 123 and a third photoresist 133 may be sequentially formed the structure illustrated in FIG. 6F.

**[0101]** The third lift-off layer 123 may include a fluoropolymer. The third lift-off layer 123 may include the same material as that of the first and second lift-off layers 121 and 122 and may be formed by using a coating method, a printing method, or a deposition method.

**[0102]** The third photoresist 133 may be formed on the third lift-off layer 123. The third photoresist 133 at a position corresponding to the third anode 103 may be exposed through a third photomask M3 including an area M31 through which light L is transmitted and area M32.

**[0103]** Referring to FIG. 7B, the third photoresist 133 may be developed. In the third photoresist 133, a first portion 133-1 corresponding to the third anode 103 may be removed and a second portion 133-2 other than the first portion 133-1 may remain.

**[0104]** Referring to FIG. 7C, the third lift-off layer 123 may be etched by using a pattern of the first portion 133-1 of the third photoresist 133 as an etch mask.

**[0105]** The third lift-off layer 123 may include the fluoropolymer. Accordingly, a solvent that etches the fluoropolymer may be used as an etchant. For example, a first solvent including fluorine may be used as the etchant. The first solvent may include hydro fluoroether.

**[0106]** A portion of the third lift-off layer 123 formed at a position corresponding to the first portion 133-1, that is, above the third anode 103, may be etched during an etching process. The third lift-off layer 123 may be etched by the first solvent including fluorine to form a third undercut profile UC3 under a boundary surface of the first portion 133-1 of the third photoresist 133.

**[0107]** The self-assembled monolayer 150 may be well bonded to the top surface of the third anode 103 while the third lift-off layer 123 is etched. In addition, the self-assembled monolayer 150 may be well bonded to the top surface of the pixel-defining layer 110 while the third lift-off layer 123 is etched.

**[0108]** Referring to FIG. 7D, a portion of the self-assembled monolayer 150 on the third anode 103 may be removed by performing third plasma heat treatment PT3 on the structure illustrated in FIG. 7C.

**[0109]** An Si-O bond between the third anode 103 and the self-assembled monolayer 150 may be cleanly broken by the third plasma heat treatment PT3. Accordingly, a residue of the third lift-off layer 123 may not remain on the third anode 103.

**[0110]** Referring to FIG. 7E, a third organic functional layer 143 including a third emission layer and a third auxiliary cathode 183 may be sequentially formed on the structure illustrated in FIG. 7D.

**[0111]** The third organic functional layer 143 may further include at least one selected from a hole injection layer, a hole transport layer, an electron transport layer, and an electron injection layer.

**[0112]** The third organic functional layer 143 may be



formed by using a vacuum deposition method. In the deposition process, the third lift-off layer 123 and the third photoresist 133 may function as masks. A portion of the third organic functional layer 143 is formed at a position corresponding to the first portion 133-1, that is, above the third anode 103, and another portion of the third organic functional layer 143 may be formed on the second portion 133-2 of the third photoresist 133.

**[0113]** Like the third organic functional layer 143, the third auxiliary cathode 183 may be formed by using a vacuum deposition method. In the deposition process, the third lift-off layer 123 and the third photoresist 133 may function as masks. A portion of the third auxiliary cathode 183 may be formed to cover a top surface of the third organic functional layer 143, and another portion of the third auxiliary cathode 183 may be formed on the third organic functional layer 143 on the second portion 133-2 of the third photoresist 133.

**[0114]** The third auxiliary cathode 183 may include the same material as that of the cathode 180 that is a common electrode to be described below. In some implementations, the third auxiliary cathode 183 may include a material different from that of the cathode 180. The third auxiliary cathode 183 may function as a barrier for protecting the third organic functional layer 143 from a solvent used in a subsequent lift-off process.

**[0115]** Referring to FIG. 7F, a lift-off process is performed on the structure illustrated in FIG. 7E.

**[0116]** The third lift-off layer 123 may include the fluoropolymer. Accordingly, a second solvent including fluorine may be used in the lift-off process. The third organic functional layer 143 may be formed and then the lift-off process is performed. Accordingly, the second solvent may include a material having a low reactivity with the third organic functional layer 143. Like the first solvent, the second solvent may include hydro fluoroether.

**[0117]** When the third lift-off layer 123 formed under the second portion 133-2 (see FIG. 7E) of the third photoresist 133 is lifted off, portions of the third organic functional layer 143 and the third auxiliary cathode 183 that were formed on the second portion 133-2 of the third photoresist 133 may be removed, and portions of the third organic functional layer 143 and the third auxiliary cathode 183 formed over the third anode 103 may remain as patterns.

**[0118]** As described above, an adhesive strength between the self-assembled monolayer 150 and the pixel-defining layer 110 may be sufficient such that the self-assembled monolayer 150 formed on the pixel-defining layer 110 is not removed when the third lift-off layer 123 is lifted off.

**[0119]** The first, second, and third organic functional layers 141, 142, and 143 may emit light of different colors. When the light of different colors emitted from the first to third organic functional layers 141, 142, and 143 is mixed, white light may be formed. For example, the first, second, and third organic functional layers 141, 142, and 143 may emit red light, green light, and blue light, respectively.

For example, the first to third organic functional layers 141, 142, and 143 may be elements of sub-pixels constituting a unit pixel of the organic light-emitting display apparatus 1.

**[0120]** The organic light-emitting display apparatus 1 illustrated in FIG. 1 may represent one unit pixel. Embodiments may also be applied to an organic light-emitting display apparatus including a plurality of unit pixels that are the same as the unit pixel illustrated in FIG. 1. For example, a plurality of first organic functional layers 141, which emit a first color, may be simultaneously formed as first sub-pixels by using the first unit process. A plurality of second organic functional layers 142, which emit a second color, may be simultaneously formed as second sub-pixels by using the second unit process. A plurality of third organic functional layers 143, which emit a third color, may be simultaneously formed as third sub-pixels by using the third unit process. Through the first to third unit processes, full color may be realized.

**[0121]** In the present embodiment, when a self-assembled monolayer is formed between an anode and a lift-off layer without the formation of the lift-off layer directly on the anode, the self-assembled monolayer may prevent a residual film of the lift-off layer from being left on the anode, and thus deterioration of the organic light-emitting display apparatus 1 may be prevented.

**[0122]** Hereinafter, a method of manufacturing an organic light-emitting display apparatus 4 according to a comparative example is described with reference to FIGS. 18A to 20E.

**[0123]** FIGS. 18A to 18E illustrate cross-sectional views for explaining a first unit process of the organic light-emitting display apparatus 4 according to the comparative example. FIGS. 19A to 19E illustrate cross-sectional views for explaining a second unit process of the organic light-emitting display apparatus 4 according to the comparative example. FIGS. 20A to 20E illustrate cross-sectional views for explaining a third unit process of the organic light-emitting display apparatus 4 according to the comparative example.

**[0124]** Referring to FIG. 18A, a first lift-off layer 121 including a fluoropolymer is formed above a substrate 100 on which first to third anodes 101 to 103 and a pixel-defining layer 110 covering end portions of the first to third anodes 101 to 103 are formed, and a first photoresist 131 is formed on the first lift-off layer 121. The first photoresist 131 is formed at a position corresponding to a first anode 101 is exposed through a first photomask M1 including an area M11 through which light L is transmitted and area M12.

**[0125]** Referring to FIG. 18B, the first photoresist 131 is patterned. The first photoresist 131 that is exposed and developed is removed at the first portion 131-1 corresponding to the first anode 101 and remains at a second portion 131-2 other than the first portion 131-1.

**[0126]** Referring to FIG. 18C, the first lift-off layer 121 is etched by using a pattern of the first photoresist 131 of FIG. 18B as an etch mask and using a first solvent

(not shown) including fluorine. During an etching process, a portion of the first lift-off layer 121 formed at a position corresponding to the first portion 131-1, that is, on the first anode 101, is etched. The first lift-off layer 121 is etched to form a first undercut profile UC1 under a boundary surface of the first portion 131-1 of the first photoresist 131. When the first lift-off layer 121 is stripped after the etching process is performed, an undesirable residue of the first lift-off layer 121 may remain on the first anode 101.

**[0127]** Referring to FIG. 18D, a first organic functional layer 141 and a first auxiliary cathode 181 are sequentially formed on a structure of FIG. 18C.

**[0128]** Referring to FIG. 18E, a first lift-off process is performed such that remaining portions of the first lift-off layer 121 are entirely removed, and as a result, the first organic functional layer 141 and the first auxiliary cathode 181 remain as patterns on the first anode 101.

**[0129]** After the first unit process is completed, the second unit process is performed on an area at which a second anode 102 is located.

**[0130]** Referring to FIG. 19A, a second lift-off layer 122 and a second photoresist 132 are sequentially formed on a structure of FIG. 18E.

**[0131]** Referring to FIG. 19B, the second photoresist 132 is patterned. The second photoresist 132 that is exposed and developed is patterned to be removed at a first portion 132-1 corresponding to the second anode 102 and remain at a second portion 132-2 other than the first portion 132-1.

**[0132]** Referring to FIG. 19C, the second lift-off layer 122 is etched by using a pattern of the second photoresist 132 of FIG. 19B as an etch mask and using the first solvent (not shown) including fluorine. During an etching process, a portion of the second lift-off layer 122 formed at a position corresponding to the first portion 132-1, that is, on the second anode 102, is etched. The second lift-off layer 122 is etched to form a second undercut profile UC2 under a boundary surface of the first portion 132-1 of the second photoresist 132. When the second lift-off layer 122 is stripped after the etching process is performed, an undesirable residue of the second lift-off layer 122 may remain on the second anode 102.

**[0133]** Referring to FIG. 19D, a second organic functional layer 142 and a second auxiliary cathode 182 are sequentially formed on a structure of FIG. 19C.

**[0134]** Referring to FIG. 19E, a second lift-off process is performed such that remaining portions of the second lift-off layer 122 are entirely removed, and as a result, the second organic functional layer 142 and the second auxiliary cathode 182 remain as patterns on the second anode 102.

**[0135]** After the second unit process is completed, the third unit process is performed on an area at which a third anode 103 is located.

**[0136]** Referring to FIG. 20A, a third lift-off layer 123 and a third photoresist 133 are sequentially formed on a structure of FIG. 19E.

**[0137]** Referring to FIG. 20B, the third photoresist 133 is patterned. The third photoresist 133 that is exposed and developed is patterned to be removed at a first portion 133-1 corresponding to the third anode 103 and remain at a second portion 133-2 other than the first portion 133-1.

**[0138]** Referring to FIG. 20C, the third lift-off layer 123 is etched by using a pattern of the third photoresist 133 of FIG. 20B as an etch mask and using the first solvent (not shown) including fluorine. During an etching process, a portion of the third lift-off layer 123 formed at a position corresponding to the first portion 133-1, that is, on the third anode 103, is etched. The third lift-off layer 123 is etched to form a third undercut profile UC3 under a boundary surface of the first portion 133-1 of the third photoresist 133. When the third lift-off layer 123 is stripped after the etching process is performed, an undesirable residue of the third lift-off layer 123 may remain on the third anode 102.

**[0139]** Referring to FIG. 20D, a third organic functional layer 143 and a third auxiliary cathode 183 are sequentially formed on a structure of FIG. 20C.

**[0140]** Referring to FIG. 20E, a third lift-off process is performed such that remaining portions of the third lift-off layer 123 are entirely removed, and as a result, the third organic functional layer 143 and the third auxiliary cathode 183 remain as patterns on the third anode 103.

**[0141]** That is, according to the comparative example, when a lift-off layer is formed directly on an anode and then is patterned, it may not be possible to prevent a residual film of the lift-off layer from remaining on the anode.

**[0142]** Hereinafter, with reference to FIGS. 8 to 14F, an organic light-emitting display apparatus 2 according to an embodiment and a method of manufacturing the organic light-emitting display apparatus 2 are disclosed.

**[0143]** FIG. 8 illustrates a cross-sectional view of an organic light-emitting display apparatus 2 according to an embodiment, and FIG. 9 illustrates a plan view of a portion of the organic light-emitting display apparatus 2 according to the embodiment.

**[0144]** Referring to FIGS. 8 and 9, a plurality of anodes including a first anode 101, a second anode 102, and a third anode 103 that are spaced apart from each other on a substrate 100 may be provided. First to third organic functional layers 141, 142, and 143 including first to third emission layers may be respectively located on the first to third anodes 101, 102, and 103. First to third auxiliary cathodes 181, 182, and 183 including a conductive material may be respectively located on the first to third organic functional layers 141, 142, and 143. An integrally formed common electrode 180 may be located on the first to third auxiliary cathodes 181, 182, and 183.

**[0145]** In the organic light-emitting display apparatus 2 according to the embodiment, a self-assembled monolayer 150 may surround the first to third anodes 101, 102 and 103, and a pixel-defining layer 110 may be formed on the self-assembled monolayer 150. For ex-

ample, portions of the self-assembled monolayer 150 may be under the pixel defining layer. In this embodiment, the self-assembled monolayer 150 may overlap end portions of the first to third anodes 101, 102, and 103 by a predetermined thickness D2. Hereinafter, descriptions of this embodiment that are the same as those of the above-described embodiment illustrated in FIG. 1 may be omitted.

**[0146]** Referring to FIG. 10, a plurality of anodes including the first anode 101, the second anode 102, and the third anode 103 may be formed on the substrate 100, and the self-assembled monolayer 150 may be formed over the plurality of anodes.

**[0147]** Referring to FIG. 11, the pixel-defining layer 110 may be formed to surround edges of the first anode 101, the second anode 102, and the third anode 103. In this case, an end portion of the pixel-defining layer 110 may overlap an end portion of the self-assembled monolayer 150. The self-assembled monolayer 150 may include a fluorine-containing functional group and a hydrolyzable reactive group.

**[0148]** Referring to FIG. 12A, a first lift-off layer 121 and a first photoresist 131 may be sequentially formed on the structure illustrated in FIG. 11.

**[0149]** The first lift-off layer 121 may include a fluoropolymer and may be formed by using a coating method, a printing method, or a deposition method. The first photoresist 131 may be formed on the first lift-off layer 121. The first photoresist 131 at a position corresponding to the first anode 101 may be exposed through a first photomask M1 including an area M11 through which light L is transmitted and area M12.

**[0150]** The fluorine-containing functional group of the self-assembled monolayer 150 that closely contacts the first lift-off layer 121 may have a small difference in surface energy with respect to the first lift-off layer 121, and thus the first lift-off layer 121 may be uniformly formed on the self-assembled monolayer 150.

**[0151]** Referring to FIG. 12B, the first photoresist 131 may be developed. In the first photoresist 131 that is developed, a first portion 131-1 corresponding to the first anode 101 may be removed and a second portion 131-2 other than the first portion 131-1 may remain.

**[0152]** Referring to FIG. 12C, the first lift-off layer 121 may be etched by using a pattern of the first portion 131-1 of the first photoresist 131 as an etch mask. During an etching process, a portion of the first lift-off layer 121 formed at a position corresponding to the first portion 131-1, that is, above the first anode 101, may be etched. The first lift-off layer 121 may be etched by a first solvent including fluorine to form a first undercut profile UC1 under a boundary surface of the first portion 131-1 of the first photoresist 131.

**[0153]** The self-assembled monolayer 150 may be well bonded to the top surface of the first anode 101 while the first lift-off layer 121 is etched.

**[0154]** Referring to FIG. 12D, a portion of the self-assembled monolayer 150 on the first anode 101 may be

removed by performing first plasma heat treatment PT1 on the structure illustrated in FIG. 12C.

**[0155]** The Si-O bond between the first anode 101 and the self-assembled monolayer 150 shown in FIG. 21 may be cleanly broken by the first plasma heat treatment PT1.

**[0156]** Referring to FIG. 12E, a first organic functional layer 141 including a first emission layer and a first auxiliary cathode 181 are sequentially formed on the structure illustrated in FIG. 12D. A portion of the first organic functional layer 141 may be formed at a position corresponding to the first portion 131-1, that is, above the first anode 101, and another portion of the first organic functional layer 141 may be formed on the second portion 131-2 of the first photoresist 131. A portion of the first auxiliary cathode 181 may be formed to cover a top surface of the first organic functional layer 141, and another portion of the first auxiliary cathode 181 may be formed on the first organic functional layer 141 on the second portion 131-2 of the first photoresist 131 other than the first portion 131-1.

**[0157]** Referring to FIG. 12F, a lift-off process may be performed on the structure illustrated in FIG. 12E. When the first lift-off layer 121 formed under the second portion 131-2 (see FIG. 12E) of the first photoresist 131 is lifted off, portions of the first organic functional layer 141 and the first auxiliary cathode 181 formed over the second portion 131-2 of the first photoresist 131 may be removed, and portions of the first organic functional layer 141 and the first auxiliary cathode 181 formed over the first anode 101 may remain as patterns.

**[0158]** After the first unit process is performed, a second unit process of forming the second organic functional layer 142 that emits light of a different color from a color of light emitted by the first organic functional layer 141 may be performed on an area where the second anode 102 is located. The second unit process will now be described with reference to FIGS. 13A to 13F.

**[0159]** Referring to FIG. 13A, a second lift-off layer 122 and a second photoresist 132 may be sequentially formed on the structure illustrated in FIG. 12F. The second photoresist 132 at a position corresponding to the second anode 102 may be exposed through a second photomask M2 including an area M21 through which light L is transmitted and area M22.

**[0160]** The fluorine-containing functional group of the self-assembled monolayer 150 that closely contacts the second lift-off layer 122 may have a small difference in surface energy with respect to the second lift-off layer 122, and thus the second lift-off layer 122 may be uniformly formed on the self-assembled monolayer 150.

**[0161]** Referring to FIG. 13B, the second photoresist 132 may be developed. In the second photoresist 132, a first portion 132-1 corresponding to the second anode 102 is removed and a second portion 132-2 other than the first portion 132-1 may remain.

**[0162]** Referring to FIG. 13C, the second lift-off layer 122 may be etched by using a pattern of the first portion 132-1 of the second photoresist 132 as an etch mask. A

portion of the second lift-off layer 122 formed at a position corresponding to the first portion 132-1, that is, above the second anode 102, may be etched during an etching process. The second lift-off layer 122 may be etched by the first solvent including fluorine to form a second undercut profile UC2 under a boundary surface of the first portion 132-1 of the second photoresist 132. The self-assembled monolayer 150 may be well bonded to the top surface of the second anode 102 while the second lift-off layer 122 is etched.

[0163] Referring to FIG. 13D, a portion of the self-assembled monolayer 150 on the second anode 102 may be removed by performing a second plasma heat treatment PT2 on the structure illustrated in FIG. 13C. A Si-O bond between the second anode 102 and the self-assembled monolayer 150 may be cleanly broken by the second plasma heat treatment.

[0164] Referring to FIG. 13E, a second organic functional layer 142 including a second emission layer and a second auxiliary cathode 182 may be sequentially formed on the structure illustrated in FIG. 13D. A portion of the second organic functional layer 142 may be formed at a position corresponding to the first portion 132-1, that is, above the second anode 102, and the other portion of the second organic functional layer 142 may be formed on the second portion 132-2 of the second photoresist 132. A portion of the second auxiliary cathode 182 may be formed to cover a top surface of the second organic functional layer 142, and the other portion of the second auxiliary cathode 182 may be formed on the second organic functional layer 142 on the second portion 132-2 of the second photoresist 132 other than the first portion 132-1.

[0165] Referring to FIG. 13F, a lift-off process may be performed on a structure illustrated in FIG. 13E. When the second lift-off layer 122 formed under the second portion 132-2 of the second photoresist 132 is lifted off, portions of the second organic functional layer 142 and the second auxiliary cathode 182 formed over the second portion 132-2 of the second photoresist 132 may be removed, and portions of the second organic functional layer 142 and the second auxiliary cathode 182 formed over the second anode 102 may remain as patterns.

[0166] After the second unit process is performed, a third unit process of forming the third organic functional layer 143 that emits light of a different color from a color of light emitted by the first and second organic functional layers 141 and 142 may be performed on an area where the third anode 103 is located. The third unit process will now be described with reference to FIGS. 14A to 14F.

[0167] Referring to FIG. 14A, a third lift-off layer 123 and a third photoresist 133 may be sequentially formed on the structure illustrated in FIG. 13F. The third photoresist 133 at a position corresponding to the third anode 103 may be exposed through a third photomask M3 including an area M31 through which light L is transmitted and area M32.

[0168] The fluorine-containing functional group of the

self-assembled monolayer 150 that closely contacts the third lift-off layer 123 may have a small difference in surface energy with respect to the third lift-off layer 123, and thus the third lift-off layer 123 may be uniformly formed on the self-assembled monolayer 150.

[0169] Referring to FIG. 14B, the third photoresist 133 may be developed. In the third photoresist 133, a first portion 133-1 corresponding to the third anode 103 may be removed and a second portion 133-2 other than the first portion 133-1 may remain.

[0170] Referring to FIG. 14C, the third lift-off layer 123 may be etched by using a pattern of the first portion 133-1 of the third photoresist 133 as an etch mask. A portion of the third lift-off layer 123 formed at a position corresponding to the first portion 133-1, that is, above the third anode 103, may be etched during an etching process. The third lift-off layer 123 may be etched by the first solvent including fluorine to form a third undercut profile UC3 under a boundary surface of the first portion 133-1 of the third photoresist 133. The self-assembled monolayer 150 may be well bonded to the top surface of the third anode 103 while the third lift-off layer 123 is etched.

[0171] Referring to FIG. 14D, a portion of the self-assembled monolayer 150 on the third anode 103 may be removed by performing a third plasma heat treatment PT3 on a structure illustrated in FIG. 14C. A Si-O bond between the third anode 103 and the self-assembled monolayer 150 may be cleanly broken by the third plasma heat treatment.

[0172] Referring to FIG. 14E, a third organic functional layer 143 including a third emission layer and a third auxiliary cathode 183 may be sequentially formed the a structure illustrated in FIG. 14D. A portion of the third organic functional layer 143 may be formed at a position corresponding to the first portion 133-1, that is, above the third anode 103, and another portion of the third organic functional layer 143 may be formed on the second portion 133-2 of the third photoresist 133. A portion of the third auxiliary cathode 183 may be formed to cover a top surface of the third organic functional layer 143, and another portion of the third auxiliary cathode 183 may be formed on the third organic functional layer 143 on the second portion 133-2 of the third photoresist 133 other than the first portion 133-1.

[0173] Referring to FIG. 14F, a lift-off process may be performed on the structure illustrated in FIG. 14E. When the third lift-off layer 123 formed under the second portion 133-2 of the third photoresist 133 is lifted off, portions of the third organic functional layer 143 and the third auxiliary cathode 183 formed over the second portion 133-2 of the third photoresist 133 may be removed, and portions of the third organic functional layer 143 and the third auxiliary cathode 183 formed over the third anode 103 may remain as patterns.

[0174] Hereinafter, a method for manufacturing an organic light-emitting display apparatus 3 according to an embodiment will be briefly described with reference to FIGS. 15A to 17E.

**[0175]** The present embodiment differs from the previous embodiments in that a self-assembled monolayer is used as a lift-off layer without independently using the lift-off layer and the self-assembled monolayer.

**[0176]** FIGS. 15A to 15E illustrate cross-sectional views for explaining a first unit process of an organic light-emitting display apparatus 3 according to the embodiment.

**[0177]** Referring to FIG. 15A, first to third anodes 101, 102, and 103 may be formed on a substrate 100, and a pixel defining layer 110 defining a plurality of pixels may be formed to cover end portions of the first to third anodes 101, 102, and 103. After the pixel-defining layer 110 is formed, a first self-assembled monolayer 151 may be formed. A first photoresist 131 may be formed on the first self-assembled monolayer 151.

**[0178]** The first self-assembled monolayer 151 may include a hydrolyzable reactive group and a fluorine-containing functional group. In the present embodiment, as described above, the first photoresist 131 may be formed on the first self-assembled monolayer 151. The first photoresist 131 may, but need not, include a fluoropolymer. Accordingly, the first self-assembled monolayer 151 of the present embodiment need not include a fluorine-containing functional group as in the above-described embodiment. For example, the first self-assembled monolayer 151 may further include octadecyltrichlorosilane (OTS), dichlorodimethylsilane (DDMS), tetraethoxysilane (TEOS), or the like.

**[0179]** The first photoresist 131 at a position corresponding to the first anode 101 may be exposed through a first photomask M1 including an area M11 through which light L is transmitted and area M12. The fluorine-containing functional group of the first self-assembled monolayer 151 that closely contacts the first photoresist 131 may use a material having a small difference in surface energy with respect to a photosensitive material contained in the first photoresist 131.

**[0180]** Referring to FIG. 15B, the first photoresist 131 may be developed. In the first photoresist 131 that is developed, a first portion 131-1 corresponding to the first anode 101 may be removed and a second portion 131-2 other than the first portion 131-1 may remain.

**[0181]** Referring to FIG. 15C, a portion of the first self-assembled monolayer 151 on the first anode 101 may be removed by performing a first plasma heat treatment PT1 on the structure illustrated in FIG. 15B. A Si-O bond between the first anode 101 and the first self-assembled monolayer 151 may be cleanly broken by the first plasma heat treatment PT1.

**[0182]** Referring to FIG. 15D, a first organic functional layer 141 including a first emission layer and a first auxiliary cathode 181 may be sequentially formed on the structure illustrated in FIG. 15C. A portion of the first organic functional layer 141 may be formed at a position corresponding to the first portion 131-1, that is, above the first anode 101, and another portion of the first organic functional layer 141 may be formed on the second portion

131-2 of the first photoresist 131. A portion of the first auxiliary cathode 181 may be formed to cover a top surface of the first organic functional layer 141, and another portion of the first auxiliary cathode 181 may be formed on the first organic functional layer 141 on the second portion 131-2 of the first photoresist 131 other than the first portion 131-1.

**[0183]** Referring to FIG. 15E, a lift-off process may be performed on the structure illustrated in FIG. 15D. When the first photoresist 131 is lifted off, portions of the first organic functional layer 141 and the first auxiliary cathode 181 formed over the second portion 131-2 of the first photoresist 131 may be removed, and portions of the first organic functional layer 141 and the first auxiliary cathode 181 formed over the first anode 101 may remain as patterns. The first self-assembled monolayer 151 located between the pixel-defining layer 110 and the first photoresist 131 may also be removed.

**[0184]** FIGS. 16A to 16E illustrate cross-sectional views for explaining a second unit process of the organic light-emitting display apparatus 3 according to this embodiment.

**[0185]** Referring to FIG. 16A, a second self-assembled monolayer 152 and a second photoresist 132 may be sequentially formed on the structure illustrated in FIG. 15E. The second photoresist 132 at a position corresponding to the second anode 102 may be exposed through a second photomask M2 including an area M21 through which light L is transmitted and area M22. A functional group of the second self-assembled monolayer 152 that closely contacts the second photoresist 132 may use a material having a small difference in surface energy with respect to a photosensitive material contained in the second photoresist 132.

**[0186]** Referring to FIG. 16B, the second photoresist 132 may be developed. In the second photoresist 132 that is developed, a first portion 132-1 corresponding to the second anode 102 may be removed and a second portion 132-2 other than the first portion 132-1 may remain.

**[0187]** Referring to FIG. 16C, a portion of the second self-assembled monolayer 152 on the second anode 102 may be removed by performing second plasma heat treatment PT2 on a structure illustrated in FIG. 16B. A Si-O bond between the second anode 102 and the second self-assembled monolayer 152 may be cleanly broken by the second plasma heat treatment PT2.

**[0188]** Referring to FIG. 16D, a second organic functional layer 142 including a second emission layer and a second auxiliary cathode 182 may be sequentially formed on the structure illustrated in FIG. 16C. A portion of the second organic functional layer 142 may be formed at a position corresponding to the first portion 132-1, that is, above the second anode 102, and another portion of the second organic functional layer 142 may be formed on the second portion 132-2 of the second photoresist 132. A portion of the second auxiliary cathode 182 may be formed to cover a top surface of the second organic

functional layer 142, and another portion of the second auxiliary cathode 182 may be formed on the second organic functional layer 142 on the second portion 132-2 of the second photoresist 132 other than the first portion 132-1.

[0189] Referring to FIG. 16E, a lift-off process is performed on the structure illustrated in FIG. 16D. When the second photoresist 132 is lifted off, portions of the second organic functional layer 142 and the second auxiliary cathode 182 formed over the second portion 132-2 of the second photoresist 132 may be removed, and portions of the second organic functional layer 142 and the second auxiliary cathode 182 formed over the second anode 102 may remain as patterns. The second self-assembled monolayer 152 located between the pixel-defining layer 110 and the second photoresist 132 may also be removed.

[0190] FIGS. 17A to 17E illustrate cross-sectional views for explaining a third unit process of the organic light-emitting display apparatus 3 according to this embodiment.

[0191] The third unit process is similar to the second unit process described with reference to FIGS. 16A to 16E, except that a third self-assembled monolayer 153 is formed and finally removed, and thus, a detailed description of the third unit process will not be repeated.

[0192] Although not shown in the drawings, the organic light-emitting display apparatuses described above may further include a sealing member for sealing an organic emission layer. The sealing member may include a glass substrate, a metal foil, a thin film encapsulating layer in which an inorganic layer and an organic layer are mixed, or the like.

[0193] By way of summation and review, embodiments provide an organic light-emitting display apparatus with increased resolution and reduced defects and cost. Embodiments further provide a method of manufacturing the organic light-emitting display.

[0194] According to one or more embodiments as described above, an emission layer is formed without using a fine metal mask (FMM). Accordingly, a high resolution display panel may be formed.

[0195] A self-assembled monolayer may be formed between an anode and a lift-off layer. Accordingly, the self-assembled monolayer may prevent a residue of lift-off layer from remaining on the anode. Thus, quality of an organic light-emitting display apparatuses according to the embodiments may be improved.

[0196] Example embodiments have been disclosed herein, and although specific terms are employed, they are used and are to be interpreted in a generic and descriptive sense only and not for purpose of limitation. In some instances, as would be apparent to one of ordinary skill in the art as of the filing of the present application, features, characteristics, and/or elements described in connection with a particular embodiment may be used singly or in combination with features, characteristics, and/or elements described in connection with other em-

bodiments unless otherwise specifically indicated. Accordingly, it will be understood by those of skill in the art that various changes in form and details may be made without departing from the scope thereof as set forth in the following claims.

## Claims

1. An organic light-emitting display apparatus (1), comprising: a substrate (100); a first first electrode on the substrate (101); a first organic functional layer (141) on the first first electrode (101), the first organic functional layer (141) including a first emission layer; a first second electrode (181) on the first organic functional layer (141); a second first electrode (102) on the substrate, the second first electrode (102) being spaced apart from the first first electrode (101); a second organic functional layer (142) on the second first electrode (102), the second organic functional layer (142) including a second emission layer; a second second electrode (182) on the second organic functional layer (142); and a self-assembled layer (150) between the first organic functional layer (141) and the second organic functional layer (142), the self-assembled layer containing fluorine, wherein: the organic light-emitting display apparatus (1) further comprises a pixel-defining layer (110) including an insulating layer and covering an edge of the first first electrode (101) and an edge of the second first electrode (102); the self-assembled layer (150) is on the pixel-defining layer (110) and surrounds the first organic functional layer (141) and the second organic functional layer (142), and **characterised in that** the self-assembled layer (150) is spaced apart from end portions of the first organic functional layer (141) and the second organic functional layer (142) by a pre-set gap.
2. An organic light-emitting display apparatus (1) according to claim 1, wherein a color of light emitted from the first emission layer is different from a color of light emitted from the second emission layer.
3. An organic light-emitting display apparatus (1) according to claim 1 or claim 2, wherein each of the first organic functional layer (141) and the second organic functional layer (142) further includes at least one of a hole injection layer, a hole transport layer, an electron transport layer, and an electron injection layer.
4. An organic light-emitting display apparatus (1) according to any of claims 1 to 3, wherein an edge portion of the first organic functional layer (141) and an edge portion of the second organic functional layer (142) are on an inclined surface of the pixel-defining layer (110).

5. An organic light-emitting display apparatus (1) according to any one of claims 1 to 4, wherein the self-assembled layer (150) is under the pixel-defining layer (110) and surrounds peripheries of the first first electrode (101) and the second first electrode (102), optionally wherein the self-assembled layer (150) overlaps end portions of the first first electrode (101) and the second first electrode (102). 5
6. An organic light-emitting display apparatus (1) according to any one of claims 1 to 5, wherein the self-assembled layer (150) includes a fluorocarbon group (-CF<sub>3</sub>). 10
7. An organic light-emitting display apparatus (1) according to any one of claims 1 to 6, wherein the first first electrode (101) and the second first electrode (102) include a conductive oxide, optionally wherein the first first electrode (101) and the second first electrode (102) include at least one of indium tin oxide, indium zinc oxide, zinc oxide, indium oxide, indium gallium oxide, and aluminium zinc oxide. 15 20
8. An organic light-emitting display apparatus (1) according to any one of claims 1 to 7, further comprising a common electrode (180) integrally formed on the first second electrode (181) and the second second electrode (182). 25
9. A method of manufacturing an organic light-emitting display apparatus (1) as recited in claim 1, the method comprising: forming a first first electrode (101) and a second first electrode (102) on a substrate (100) so as to be spaced apart from each other; forming a self-assembled layer (150) containing fluorine on the first first electrode (101) and the second first electrode (102); sequentially forming a first lift-off layer (121) and a first photoresist (131) on the self-assembled layer (150); removing a portion of the first lift-off layer (121) and a portion of the first photoresist (131) in an area corresponding to the first first electrode (101) and allowing the self-assembled layer (150) to remain; removing a portion of the self-assembled layer (150) on the first first electrode (101) by performing first plasma heat treatment; and sequentially forming, on the first first electrode (101), a first organic functional layer (141) and a first second electrode (181), wherein the first organic functional layer (141) includes a first emission layer, and lifting off a remaining portion of the first lift-off layer (121). 30 35 40 45 50
10. A method according to claim 9, wherein the first lift-off layer (121) has a fluorine content ranging from 20 wt% to 60 wt%; and/or wherein the first organic functional layer (141) and the first second electrode (181) are formed by a deposition process; and/or wherein removing the portion of the first photoresist (131) includes performing a photolithography process; and/or wherein the first lift-off layer (121) is etched and removed by using a first solvent containing fluorine; and/or wherein the self-assembled layer (150) is formed by a vapor deposition method; and/or wherein the self-assembled layer (150) includes a hydrolyzable reactive group and a fluorine-containing functional group. 55
11. A method according to claim 9 or claim 10, further comprising: sequentially forming a second lift-off layer (122) and a second photoresist (132) after lifting off the remaining portion of the first lift-off layer (121); removing a portion of the second lift-off layer (122) and a portion of the second photoresist (132) in an area corresponding to the second first electrode (102) and allowing the self-assembled layer (150) to remain; removing a portion of the self-assembled layer (150) on the second first electrode (102) by performing second plasma heat treatment; sequentially forming a second organic functional layer (142) and the second second electrode (182) on the second first electrode (102), wherein the second organic functional layer (142) includes a second emission layer, and lifting off a remaining portion of the second lift-off layer (122).
12. A method according to any one of claims 9 to 11, further comprising forming, between the first first electrode (101) and the second first electrode (102), a pixel-defining layer (110) including an insulating layer, optionally wherein the self-assembled layer (150) is formed on the pixel-defining layer (110), or wherein the self-assembled layer (150) is formed under the pixel-defining layer (110).
13. A method according to claim 11 or 12, further comprising forming a common electrode (180) in an integral form on the first second electrode (181) and the second second electrode (182).
14. A method of manufacturing an organic light-emitting display apparatus (1) as recited in claim 1, the method comprising: forming a first first electrode (101) and a second first electrode (102) on a substrate so as to be spaced apart from each other; forming a first self-assembled layer (150) on the first first electrode (101) and the second first electrode (102); forming a first photoresist (131) on the first self-assembled layer (150); removing a portion of the first photoresist (131) in an area corresponding to the first first electrode (101) and allowing the first self-assembled layer (150) to remain; removing a portion of the first self-assembled layer (150) on the first first electrode (101) by performing first plasma heat treatment; and sequentially forming a first organic functional layer (141) and a first second electrode (181) on the first first electrode (101), wherein the first organic functional layer (141) includes a first emission

layer, and lifting off a remaining portion of the first photoresist (131) and a remaining portion of the first self-assembled layer (150).

## Patentansprüche

1. Organisches lichtemittierendes Anzeigegerät (1), Folgendes beinhaltend: ein Substrat (100); eine erste erste Elektrode an dem Substrat (101); eine erste organische Funktionsschicht (141) an der ersten Elektrode (101), wobei die erste organische Funktionsschicht (141) eine erste Emissionsschicht enthält; eine erste zweite Elektrode (181) an der ersten organischen Funktionsschicht (141); eine zweite erste Elektrode (102) an dem Substrat, wobei die zweite erste Elektrode (102) von der ersten ersten Elektrode (101) entfernt ist; eine zweite organische Funktionsschicht (142) an der zweiten ersten Elektrode (102), wobei die zweite organische Funktionsschicht (142) eine zweite Emissionsschicht enthält; eine zweite zweite Elektrode (182) an der zweiten organischen Funktionsschicht (142); und eine selbst organisierende Schicht (150) zwischen der ersten organischen Funktionsschicht (141) und der zweiten organischen Funktionsschicht (142), wobei die selbst organisierende Schicht Fluor enthält, wobei: das organische lichtemittierende Gerät (1) zudem eine Pixel definierende Schicht (110) beinhaltet, welche eine Isolationsschicht enthält und eine Kante der ersten ersten Elektrode (101) und eine Kante der zweiten ersten Elektrode (102) bedeckt; wobei die selbst organisierende Schicht (150) an der Pixel definierenden Schicht (110) liegt und die erste organische Funktionsschicht (141) und die zweite organische Funktionsschicht (142) umgreift, und **dadurch gekennzeichnet, dass** die selbst organisierende Schicht (150) von Endabschnitten der ersten organischen Funktionsschicht (141) und der zweiten organischen Funktionsschicht (142) durch einen vorgegebenen Spalt entfernt ist.
2. Organisches lichtemittierendes Anzeigegerät (1) nach Anspruch 1, bei welchem eine von der ersten Emissionsschicht emittierte Lichtfarbe sich von einer von der zweiten Emissionsschicht emittierten Lichtfarbe unterscheidet.
3. Organisches lichtemittierendes Anzeigegerät (1) nach Anspruch 1 oder 2, bei welchem jede der ersten organischen Funktionsschicht (141) und der zweiten organischen Funktionsschicht (142) zudem mindestens eine von einer Lochinjektionsschicht, einer Lochtransportschicht, einer Elektronentransportschicht und einer Elektroneninjectionsschicht umfasst.
4. Organisches lichtemittierendes Anzeigegerät (1)

nach einem der Ansprüche 1 bis 3, bei welchem ein Kantenabschnitt der ersten organischen Funktionsschicht (141) und ein Kantenabschnitt der zweiten organischen Funktionsschicht (142) an einer geeigneten Oberfläche der Pixel definierenden Schicht (110) liegen.

5. Organisches lichtemittierendes Anzeigegerät (1) nach einem der Ansprüche 1 bis 4, bei welchem die selbst organisierende Schicht (150) unter der Pixel definierenden Schicht (110) liegt und Peripherien der ersten ersten Elektrode (101) und der zweiten ersten Elektrode (102) umgreift, wobei optionsweise die selbst organisierende Schicht (150) Endabschnitte der ersten ersten Elektrode (101) und der zweiten ersten Elektrode (102) überlappt.
6. Organisches lichtemittierendes Anzeigegerät (1) nach einem der Ansprüche 1 bis 5, bei welchem die selbst organisierende Schicht (150) eine Fluorcarbongruppe (-CF<sub>3</sub>) enthält.
7. Organisches lichtemittierendes Anzeigegerät (1) nach einem der Ansprüche 1 bis 6, bei welchem die erste erste Elektrode (101) und die zweite erste Elektrode (102) ein leitfähiges Oxid enthalten, wobei optionsweise die erste erste Elektrode (101) und die zweite erste Elektrode (102) mindestens eines von Indiumzinnoxid, Indiumzinkoxid, Zinkoxid, Indiumoxid, Indium-Galliumoxid und Aluminiumzinkoxid enthalten.
8. Organisches lichtemittierendes Anzeigegerät (1) nach einem der Ansprüche 1 bis 7, zudem beinhaltend eine gemeinsame Elektrode (180), welche einstückig an der ersten zweiten Elektrode (181) und der zweiten zweiten Elektrode (182) gebildet ist.
9. Verfahren zum Herstellen eines organischen lichtemittierenden Anzeigegerätes (1) nach Anspruch 1, wobei das Verfahren Folgendes beinhaltet: Bilden einer ersten ersten Elektrode (101) und einer zweiten ersten Elektrode (102) an einem Substrat (100) in einer Weise, dass sie voneinander entfernt sind; Bilden einer selbst organisierenden Schicht (150), welche Fluor enthält, an der ersten ersten Elektrode (101) und der zweiten ersten Elektrode (102); sequenzielles Bilden einer ersten Abziehschicht (121) und eines ersten Fotoresists (131) an der selbst organisierenden Schicht (150); Entfernen eines Abschnittes der ersten Abziehschicht (121) und eines Abschnittes des ersten Fotoresists (131) in einem Bereich, welcher der ersten ersten Elektrode (101) entspricht und Versetzen der selbst organisierenden Schicht (150) in die Lage zu verbleiben; Entfernen eines Abschnittes der selbst organisierenden Schicht (150) an der ersten ersten Elektrode (101) durch Durchführen einer ersten Plasma-Wärmebe-



handlung; und sequenzielles Bilden, an der ersten ersten Elektrode (101), einer ersten organischen Funktionsschicht (141) und einer ersten zweiten Elektrode (181), wobei die erste organische Funktionsschicht (141) eine erste Emissionsschicht enthält, und Abziehen eines verbleibenden Abschnittes der Abziehschicht (121).

10. Verfahren nach Anspruch 9, bei welchem die erste Abziehschicht (121) einen Fluorgehalt in dem Bereich von 20 Gewichtsprozent bis 60 Gewichtsprozent aufweist; und/oder bei welchem die erste organische Funktionsschicht (141) und die erste zweite Elektrode (181) durch einen Ablagerungsprozess gebildet werden; und/oder wobei Entfernen des Abschnittes des ersten Fotoresists (131) Durchführen eines Fotolithografieprozesses umfasst; und/oder wobei die erste Abziehschicht (121) unter Verwendung eines ersten fluorhaltigen Lösemittels geätzt und entfernt wird; und/oder wobei die selbst organisierende Schicht (150) durch ein Dampfablagerungsverfahren gebildet wird; und/oder wobei die selbst organisierende Schicht (150) eine hydrolysierbare reaktive Gruppe und eine fluorhaltige Funktionsgruppe umfasst.

11. Verfahren nach Anspruch 9 oder 10, zudem Folgendes beinhaltend: sequenzielles Bilden einer zweiten Abziehschicht (122) und eines zweiten Fotoresists (132) nach Abziehen des verbleibenden Abschnittes der ersten Abziehschicht (121); Entfernen eines Abschnittes der zweiten Abziehschicht (122) und eines Abschnittes des zweiten Fotoresists (132) in einem Bereich, welcher der zweiten ersten Elektrode (102) entspricht und Versetzen der selbst organisierenden Schicht (150) in die Lage zu verbleiben; Entfernen eines Abschnittes der selbst organisierenden Schicht (150) an der zweiten ersten Elektrode (102) durch Durchführen einer zweiten Plasma-Wärmebehandlung; sequenzielles Bilden einer zweiten organischen Funktionsschicht (142) und der zweiten zweiten Elektrode (182) an der zweiten ersten Elektrode (102), wobei die zweite organische Funktionsschicht (142) eine zweite Emissionsschicht enthält, und Abziehen eines verbleibenden Abschnittes der zweiten Abziehschicht (122).

12. Verfahren nach einem der Ansprüche 9 bis 11, zudem beinhaltend Bilden, zwischen der ersten ersten Elektrode (101) und der zweiten ersten Elektrode (102), einer Pixel definierende Schicht (110), welche eine Isolationsschicht enthält, wobei optionsweise die selbst organisierende Schicht (150) an der Pixel definierenden Schicht (110) gebildet wird, oder wobei die selbst organisierende Schicht (150) unter der Pixel definierenden Schicht (110) gebildet wird.

13. Verfahren nach Anspruch 11 bis 12, zudem beinhal-

tend Bilden einer gemeinsamen Elektrode (180) in einer einstückigen Form an der ersten zweiten Elektrode (181) und der zweiten zweiten Elektrode (182).

14. Verfahren zum Herstellen eines organischen lichtemittierenden Anzeigegerätes (1) nach Anspruch 1, wobei das Verfahren Folgendes beinhaltet: Bilden einer ersten ersten Elektrode (101) und einer zweiten ersten Elektrode (102) an einem Substrat in einer Weise, dass sie voneinander entfernt sind; Bilden einer ersten selbst organisierenden Schicht (150) an der ersten ersten Elektrode (101) und der zweiten ersten Elektrode (102); Bilden eines ersten Fotoresists (131) an der selbst organisierenden Schicht (150); Entfernen eines Abschnittes des ersten Fotoresists (131) in einem Bereich, welcher der ersten ersten Elektrode (101) entspricht und Versetzen der ersten selbst organisierenden Schicht (150) in die Lage zu verbleiben; Entfernen eines Abschnittes der ersten selbst organisierenden Schicht (150) an der ersten ersten Elektrode (101) durch Durchführen einer ersten Plasma-Wärmebehandlung; und sequenzielles Bilden einer ersten organischen Funktionsschicht (141) und einer ersten zweiten Elektrode (181) an der ersten ersten Elektrode (101), wobei die erste organische Funktionsschicht (141) eine erste Emissionsschicht enthält, und Abziehen eines verbleibenden Abschnittes des ersten Fotoresists (131) und eines verbleibenden Abschnittes der ersten selbst organisierenden Schicht (150).

## Revendications

1. Appareil d'affichage électroluminescent organique (1), comprenant : un substrat (100) ; une première première électrode (101) sur le substrat ; une première couche fonctionnelle organique (141) sur la première première électrode (101), la première couche fonctionnelle organique (141) incluant une première couche d'émission ; une première seconde électrode (181) sur la première couche fonctionnelle organique (141) ; une seconde première électrode (102) sur le substrat, la seconde première électrode (102) étant espacée de la première première électrode (101) ; une seconde couche fonctionnelle organique (142) sur la seconde première électrode (102), la seconde couche fonctionnelle organique (142) incluant une seconde couche d'émission ; une seconde seconde électrode (182) sur la seconde couche fonctionnelle organique (142) ; et une couche auto-assemblée (150) entre la première couche fonctionnelle organique (141) et la seconde couche fonctionnelle organique (142), la couche auto-assemblée contenant du fluor, dans lequel : l'appareil d'affichage électroluminescent organique (1) comprend en outre une couche de définition de pixel(s) (110) qui inclut une couche isolante et qui recouvre

- un bord de la première première électrode (101) et un bord de la seconde première électrode (102) ; la couche auto-assemblée (150) est sur la couche de définition de pixel(s) (110) et elle entoure la première couche fonctionnelle organique (141) et la seconde couche fonctionnelle organique (142), et **caractérisé en ce que** la couche auto-assemblée (150) est espacée de parties d'extrémité de la première couche fonctionnelle organique (141) et de la seconde couche fonctionnelle organique (142) par un espace prédéfini.
2. Appareil d'affichage électroluminescent organique (1) selon la revendication 1, dans lequel une couleur de la lumière qui est émise depuis la première couche d'émission est différente d'une couleur de la lumière qui est émise depuis la seconde couche d'émission.
  3. Appareil d'affichage électroluminescent organique (1) selon la revendication 1 ou la revendication 2, dans lequel chaque couche prise parmi la première couche fonctionnelle organique (141) et la seconde couche fonctionnelle organique (142) inclut en outre au moins une couche prise parmi une couche d'injection de trous, une couche de transport de trous, une couche de transport d'électrons et une couche d'injection d'électrons.
  4. Appareil d'affichage électroluminescent organique (1) selon l'une quelconque des revendications 1 à 3, dans lequel une partie de bord de la première couche fonctionnelle organique (141) et une partie de bord de la seconde couche fonctionnelle organique (142) sont sur une surface inclinée de la couche de définition de pixel(s) (110).
  5. Appareil d'affichage électroluminescent organique (1) selon l'une quelconque des revendications 1 à 4, dans lequel la couche auto-assemblée (150) est au-dessous de la couche de définition de pixel(s) (110) et elle entoure des périphéries de la première première électrode (101) et de la seconde première électrode (102), en option dans lequel la couche auto-assemblée (150) chevauche des parties d'extrémité de la première première électrode (101) et de la seconde première électrode (102).
  6. Appareil d'affichage électroluminescent organique (1) selon l'une quelconque des revendications 1 à 5, dans lequel la couche auto-assemblée (150) inclut un groupe fluorocarbone (-CF<sub>3</sub>).
  7. Appareil d'affichage électroluminescent organique (1) selon l'une quelconque des revendications 1 à 6, dans lequel la première première électrode (101) et la seconde première électrode (102) incluent un oxyde conducteur, en option dans lequel la première première électrode (101) et la seconde première électrode (102) incluent au moins un parmi l'oxyde d'indium et d'étain, l'oxyde d'indium et de zinc, l'oxyde de zinc, l'oxyde d'indium, l'oxyde d'indium et de gallium et l'oxyde d'aluminium et de zinc.
  8. Appareil d'affichage électroluminescent organique (1) selon l'une quelconque des revendications 1 à 7, comprenant en outre une électrode commune (180) qui est formée intégralement sur la première seconde électrode (181) et sur la seconde seconde électrode (182).
  9. Procédé de fabrication d'un appareil d'affichage électroluminescent organique (1) tel que revendiqué selon la revendication 1, le procédé comprenant : la formation d'une première première électrode (101) et d'une seconde première électrode (102) sur un substrat (100) de manière à ce qu'elles soient espacées l'une de l'autre ; la formation d'une couche auto-assemblée (150) qui contient du fluor sur la première première électrode (101) et sur la seconde première électrode (102) ; séquentiellement, la formation d'une première couche sacrificielle à décollement (121) et d'une première photoréserve (131) sur la couche auto-assemblée (150) ; la suppression d'une partie de la première couche sacrificielle à décollement (121) et d'une partie de la première photoréserve (131) dans une zone qui correspond à la première première électrode (101) et la conservation de la couche auto-assemblée (150) ; la suppression d'une partie de la couche auto-assemblée (150) sur la première première électrode (101) en réalisant un premier traitement thermique assisté par plasma ; et séquentiellement, la formation, sur la première première électrode (101), d'une première couche fonctionnelle organique (141) et d'une première seconde électrode (181), dans lequel la première couche fonctionnelle organique (141) inclut une première couche d'émission, et le décollement sacrificiel d'une partie restante de la première couche sacrificielle à décollement (121).
  10. Procédé selon la revendication 9, dans lequel la première couche sacrificielle à décollement (121) présente une teneur en fluor qui s'inscrit à l'intérieur de la plage qui va de 20 % en poids à 60 % en poids ; et/ou dans lequel la première couche fonctionnelle organique (141) et la première seconde électrode (181) sont formées au moyen d'un processus de dépôt ; et/ou dans lequel la suppression de la partie de la première photoréserve (131) inclut la réalisation d'un processus de photolithographie ; et/ou dans lequel la première couche sacrificielle à décollement (121) est gravée et supprimée en utilisant un premier solvant qui contient du fluor ; et/ou dans lequel la couche auto-assemblée (150) est formée au moyen d'un procédé de dépôt en phase vapeur ;

et/ou dans lequel la couche auto-assemblée (150) inclut un groupe réactif hydrolysable et un groupe fonctionnel contenant du fluor.

11. Procédé selon la revendication 9 ou la revendication 10, comprenant en outre : séquentiellement, la formation d'une seconde couche sacrificielle à décollement (122) et d'une seconde photoréserve (132) après le décollement sacrificiel de la partie restante de la première couche sacrificielle à décollement (121) ; la suppression d'une partie de la seconde couche sacrificielle à décollement (122) et d'une partie de la seconde photoréserve (132) dans une zone qui correspond à la seconde première électrode (102) et la conservation de la couche auto-assemblée (150) ; la suppression d'une partie de la couche auto-assemblée (150) sur la seconde première électrode (102) en réalisant un second traitement thermique assisté par plasma ; séquentiellement, la formation d'une seconde couche fonctionnelle organique (142) et de la seconde seconde électrode (182) sur la seconde première électrode (102), dans lequel la seconde couche fonctionnelle organique (142) inclut une seconde couche d'émission, et le décollement sacrificiel d'une partie restante de la seconde couche sacrificielle à décollement (122).
 

5  
10  
15  
20  
25
12. Procédé selon l'une quelconque des revendications 9 à 11, comprenant en outre la formation, entre la première première électrode (101) et la seconde première électrode (102), d'une couche de définition de pixel(s) (110) qui inclut une couche isolante, en option dans lequel la couche auto-assemblée (150) est formée sur la couche de définition de pixel(s) (110), ou dans lequel la couche auto-assemblée (150) est formée au-dessous de la couche de définition de pixel(s) (110).
 

30  
35
13. Procédé selon la revendication 11 ou 12, comprenant en outre la formation d'une électrode commune (180) selon une forme intégrale sur la première seconde électrode (181) et sur la seconde seconde électrode (182).
 

40
14. Procédé de fabrication d'un appareil d'affichage électroluminescent organique (1) tel que revendiqué selon la revendication 1, le procédé comprenant : la formation d'une première première électrode (101) et d'une seconde première électrode (102) sur un substrat de manière à ce qu'elles soient espacées l'une de l'autre ; la formation d'une première couche auto-assemblée (150) sur la première première électrode (101) et sur la seconde première électrode (102) ; la formation d'une première photoréserve (131) sur la première couche auto-assemblée (150) ; la suppression d'une partie de la première photoréserve (131) dans une zone qui correspond à la première première électrode (101) et la conservation de
 

45  
50  
55

la première couche auto-assemblée (150) ; la suppression d'une partie de la première couche auto-assemblée (150) sur la première première électrode (101) en réalisant un premier traitement thermique assisté par plasma ; et séquentiellement, la formation d'une première couche fonctionnelle organique (141) et d'une première seconde électrode (181) sur la première première électrode (101), dans lequel la première couche fonctionnelle organique (141) inclut une première couche d'émission, et le décollement sacrificiel d'une partie restante de la première photoréserve (131) et d'une partie restante de la première couche auto-assemblée (150).

FIG. 1

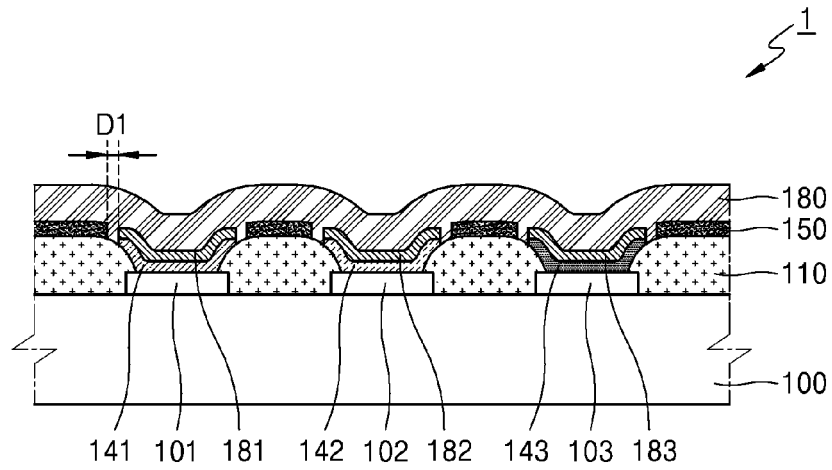


FIG. 2

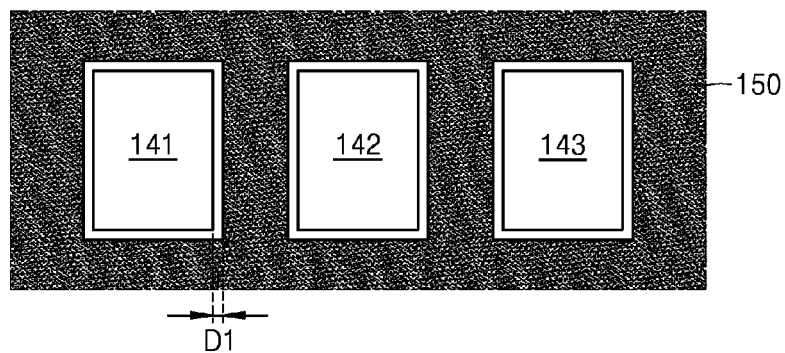


FIG. 3

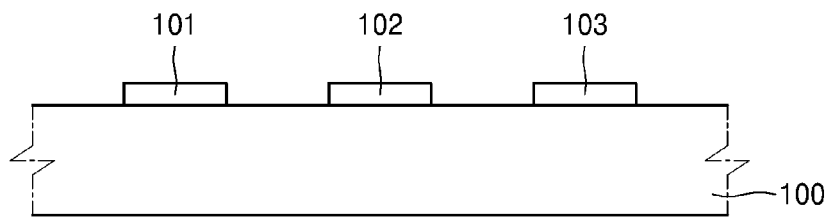


FIG. 4

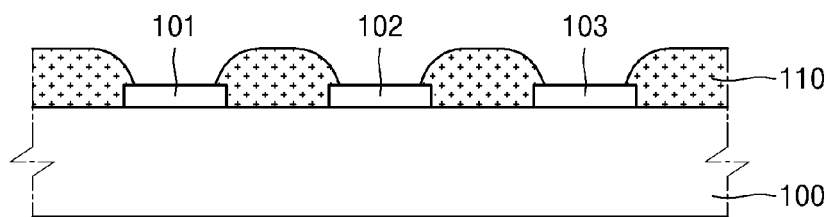


FIG. 5A

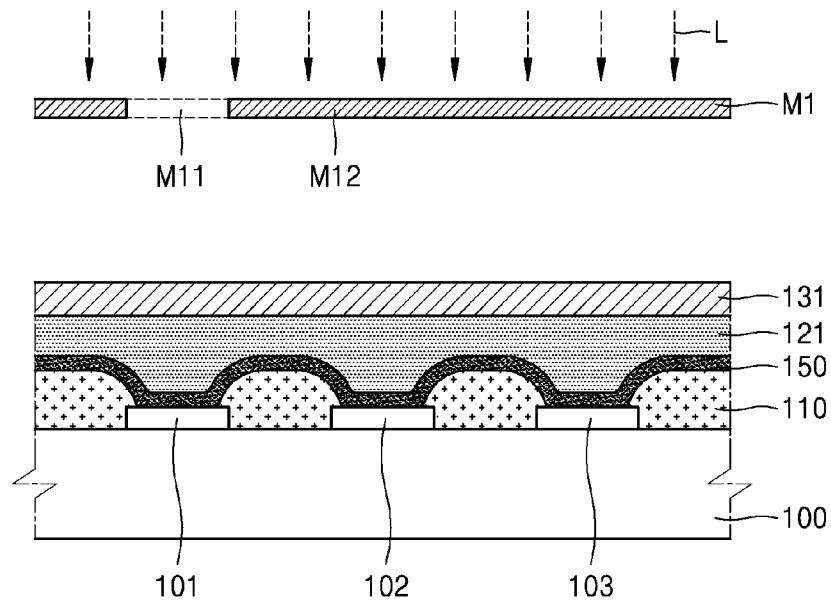


FIG. 5B

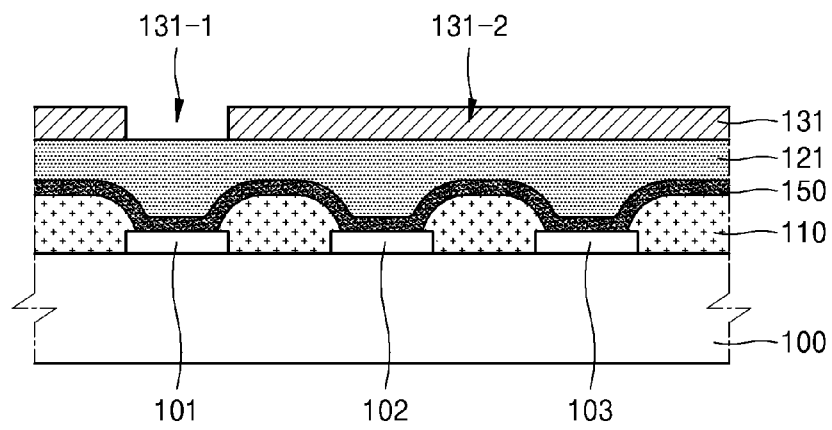


FIG. 5C

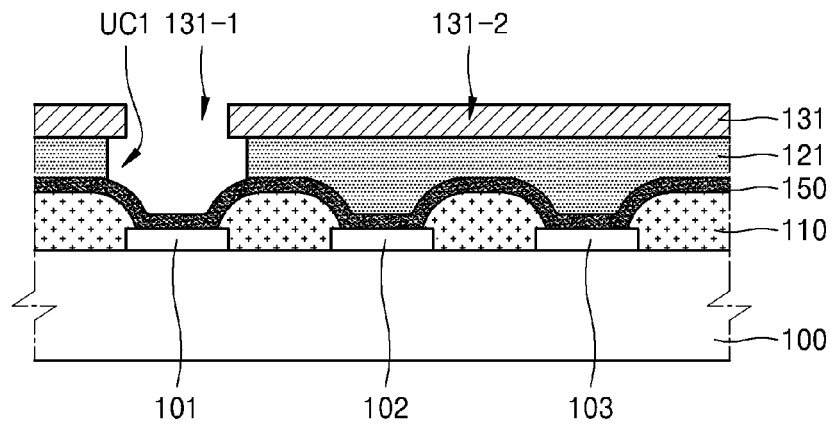


FIG. 5D

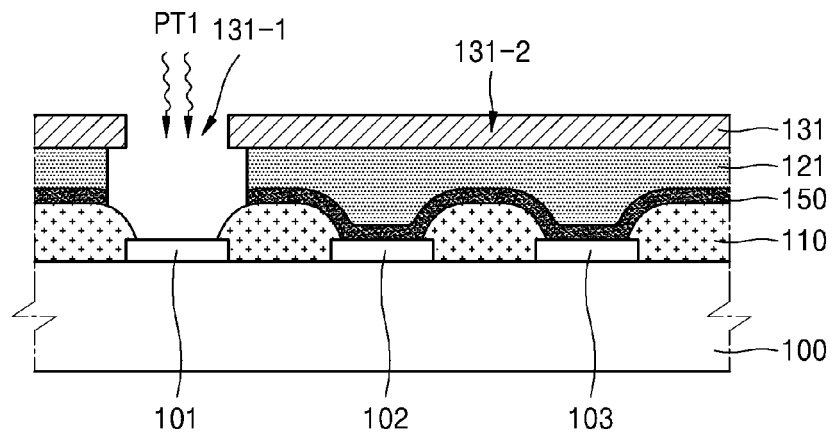


FIG. 5E

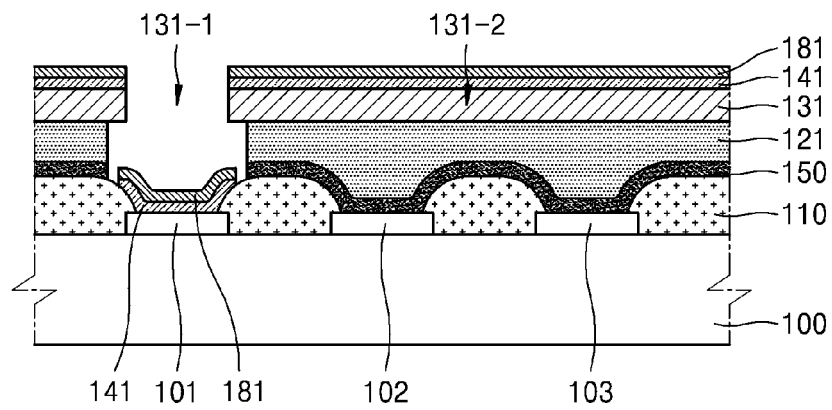


FIG. 5F

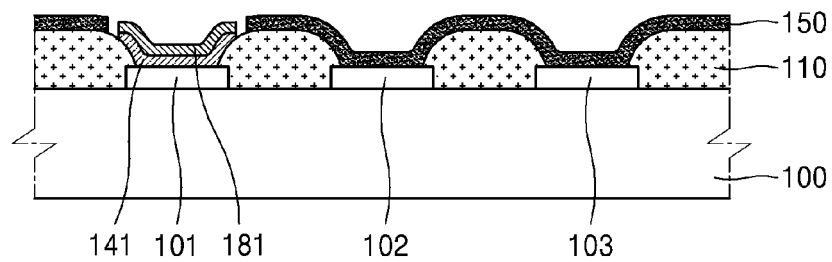




FIG. 6A

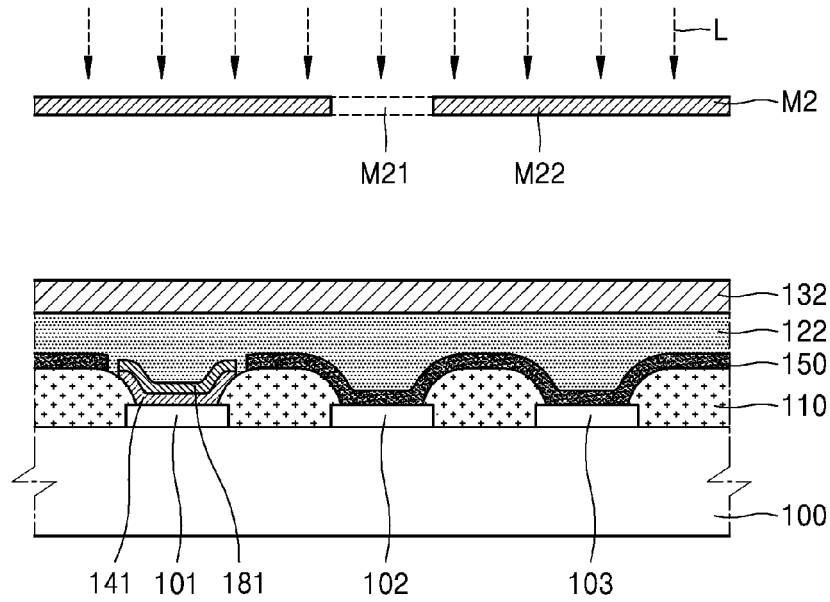


FIG. 6B

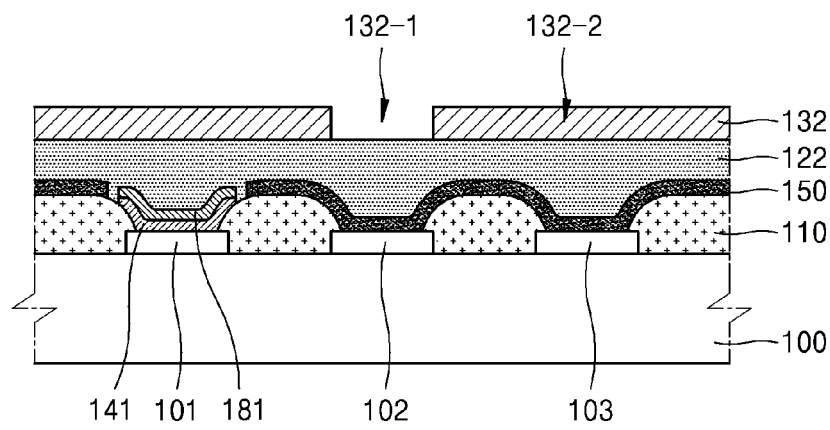


FIG. 6C

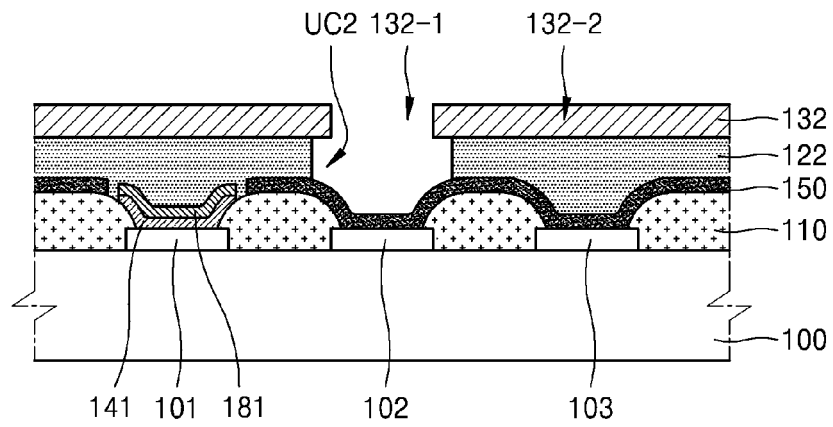


FIG. 6D

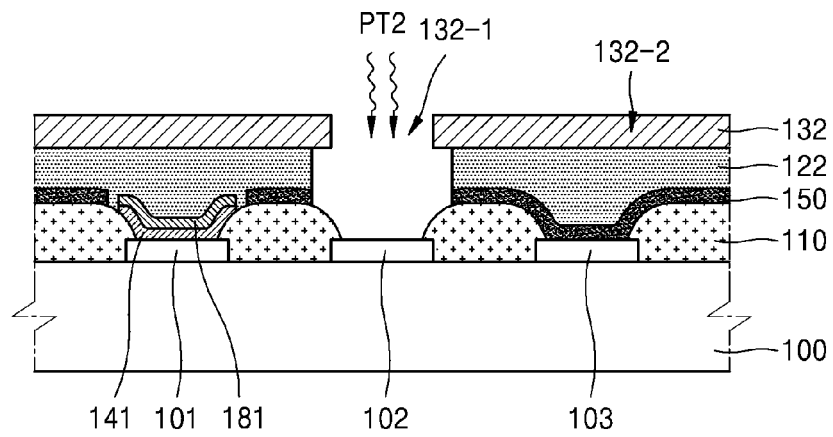


FIG. 6E

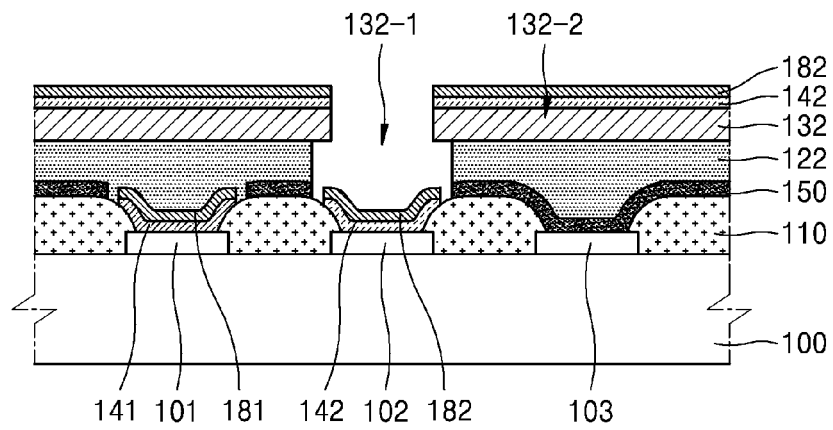


FIG. 6F

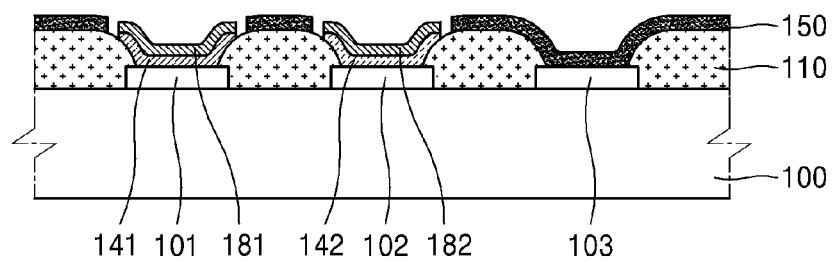


FIG. 7A

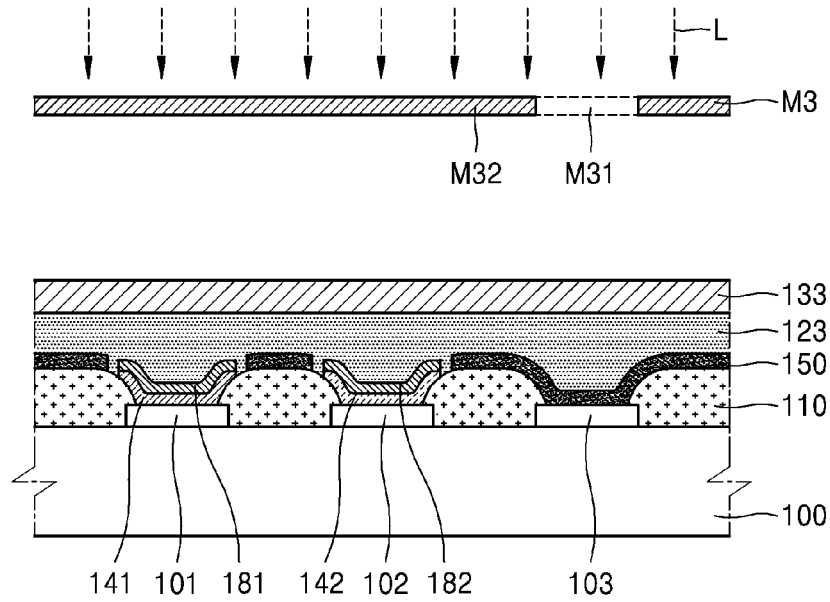


FIG. 7B

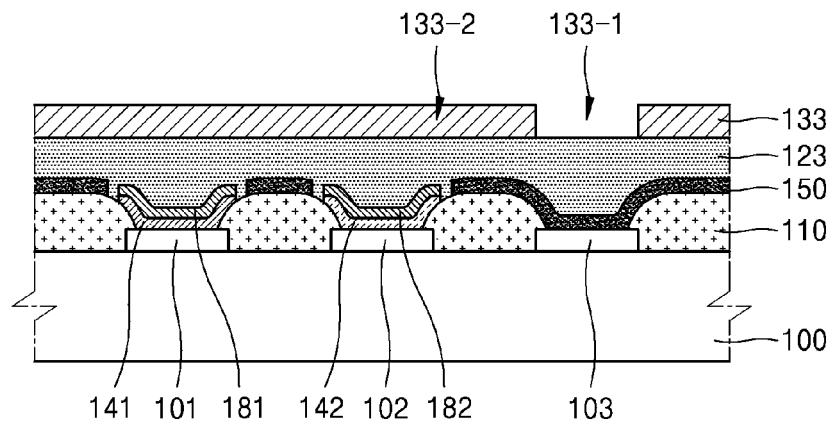


FIG. 7C

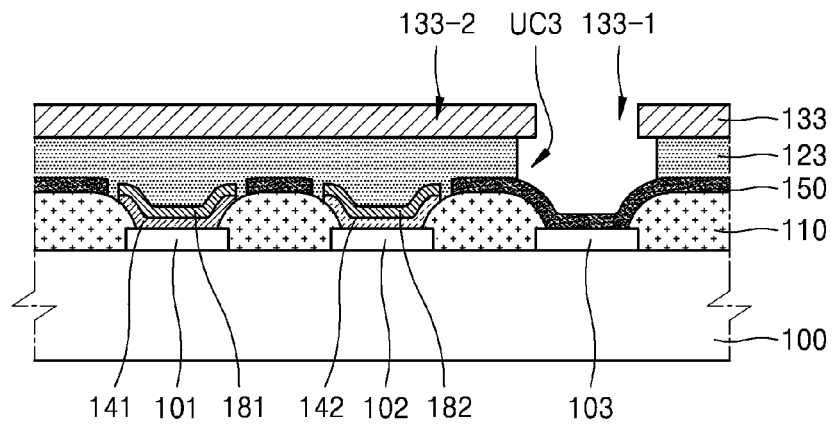


FIG. 7D

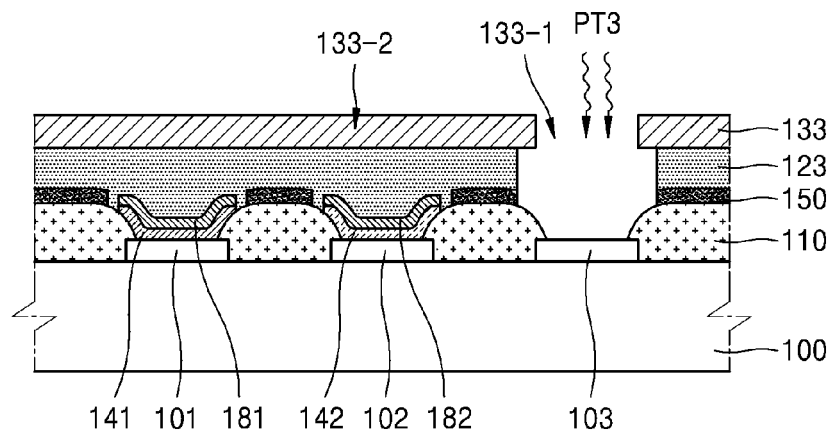


FIG. 7E

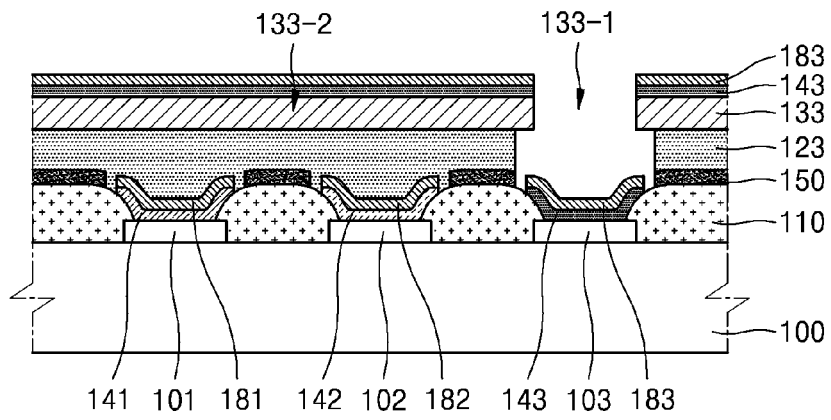


FIG. 7F

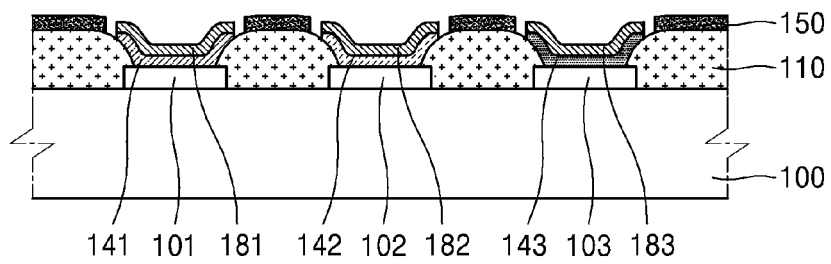


FIG. 8

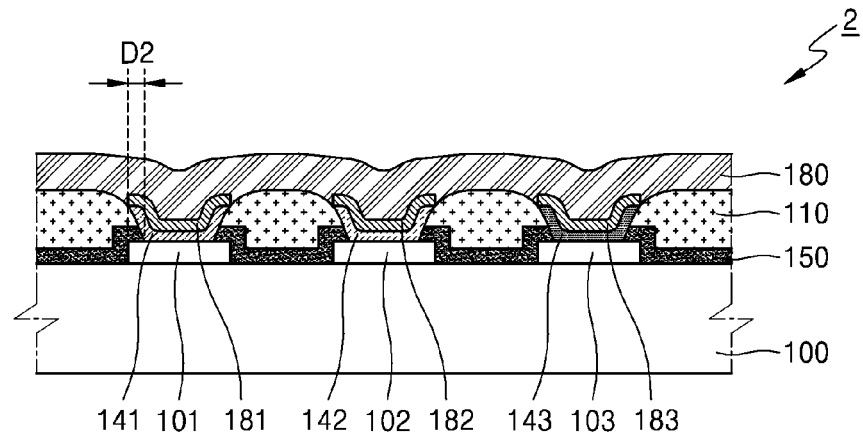


FIG. 9

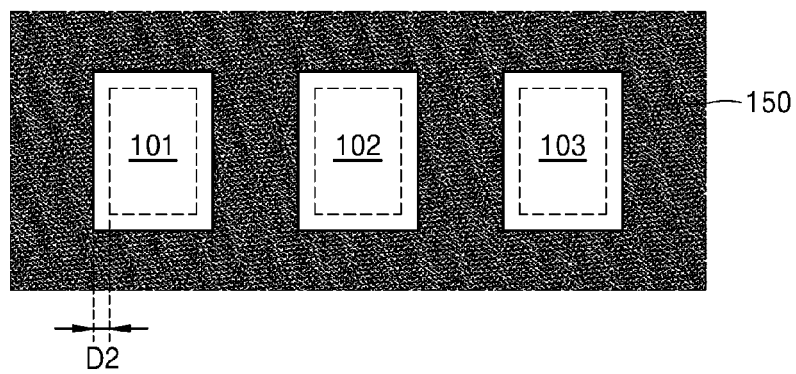


FIG. 10

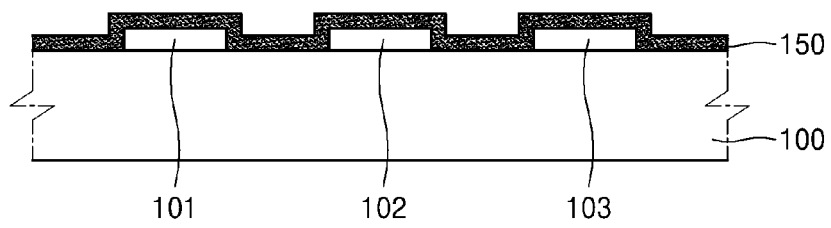


FIG. 11

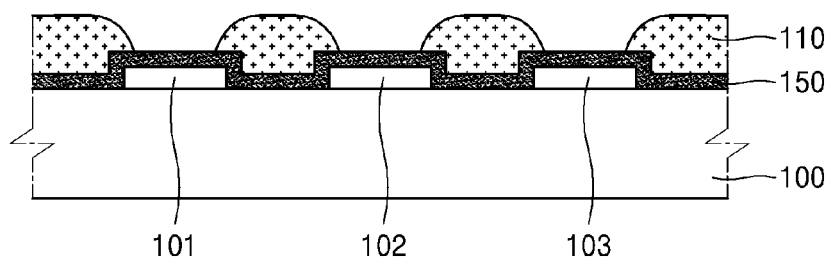




FIG. 12A

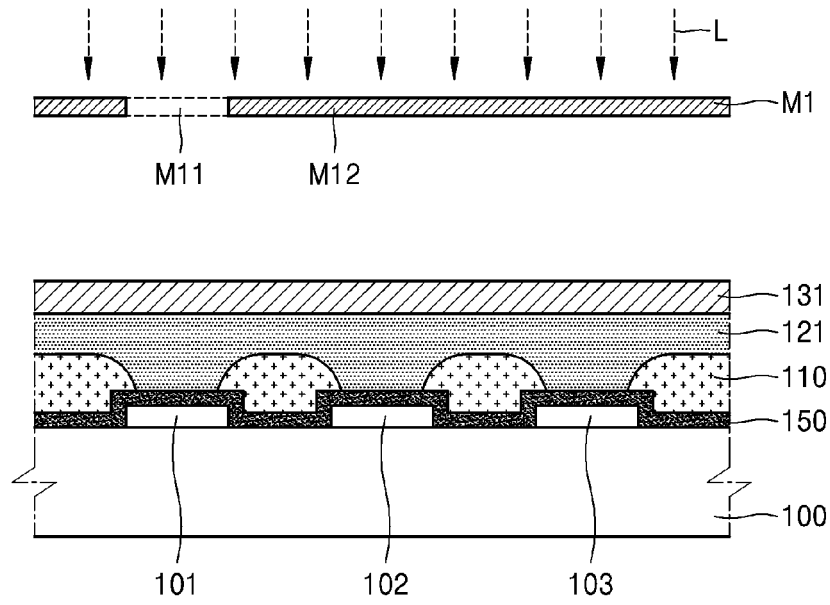


FIG. 12B

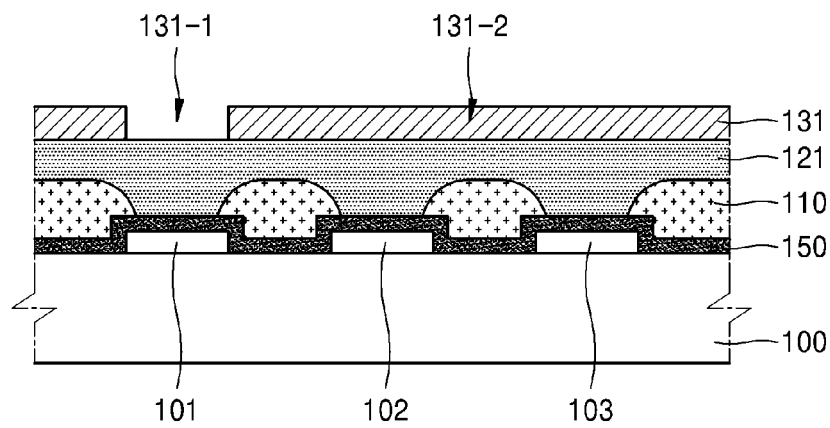


FIG. 12C

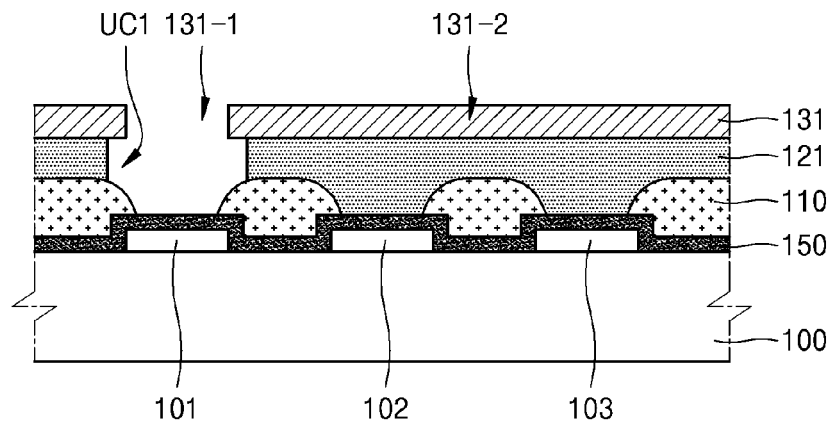


FIG. 12D

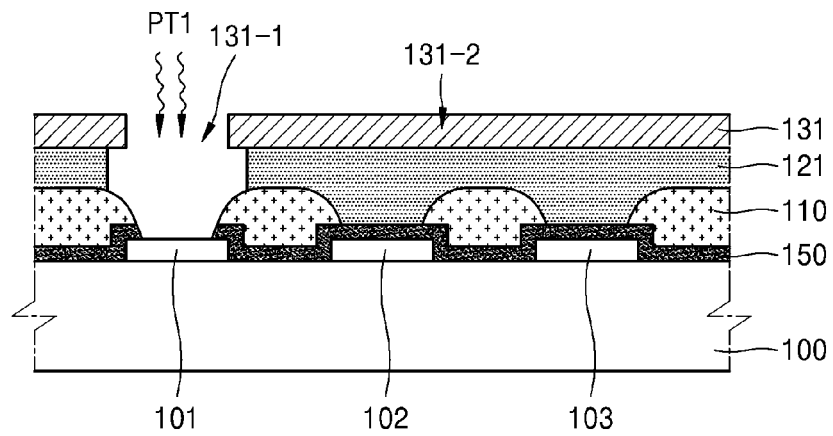


FIG. 12E

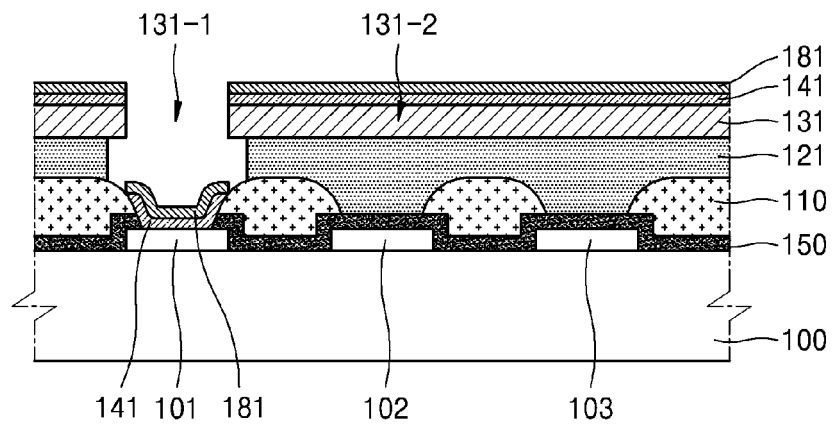


FIG. 12F

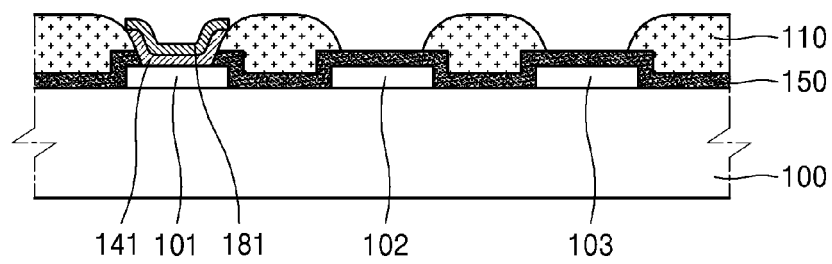


FIG. 13A

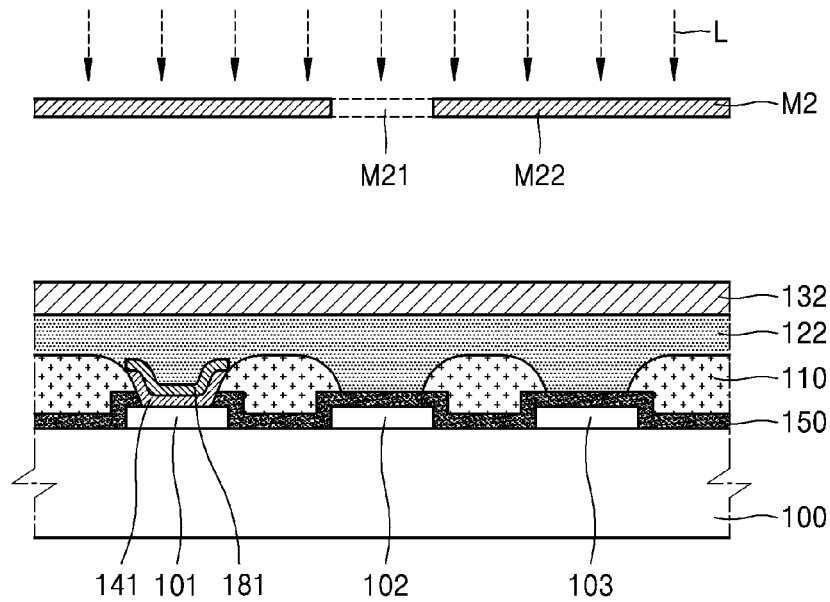


FIG. 13B

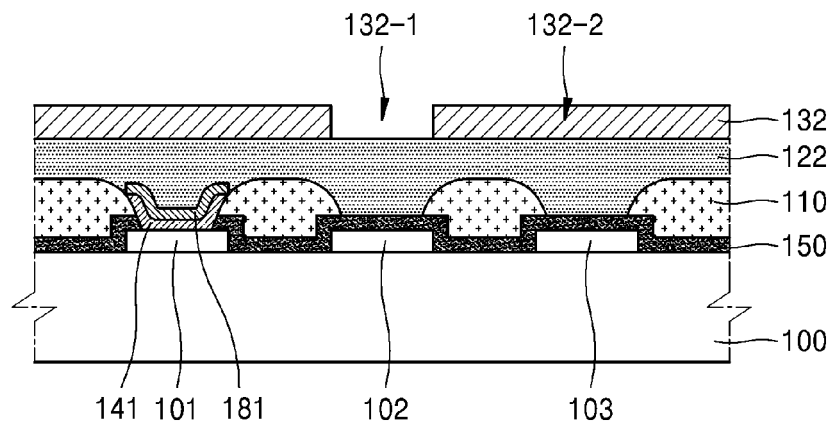


FIG. 13C

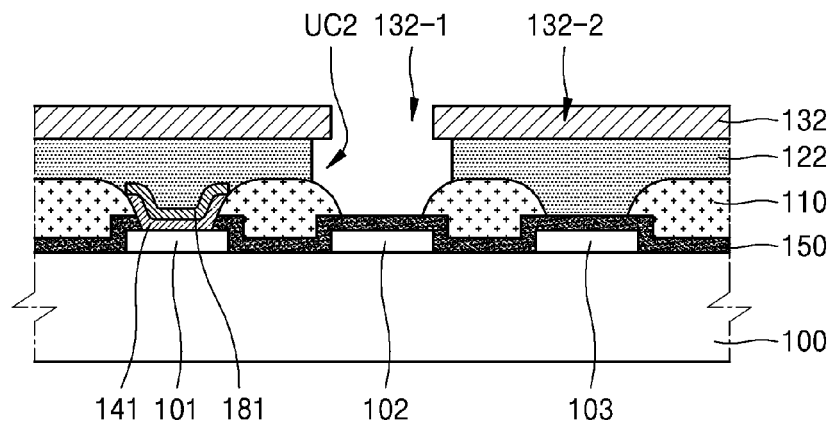


FIG. 13D

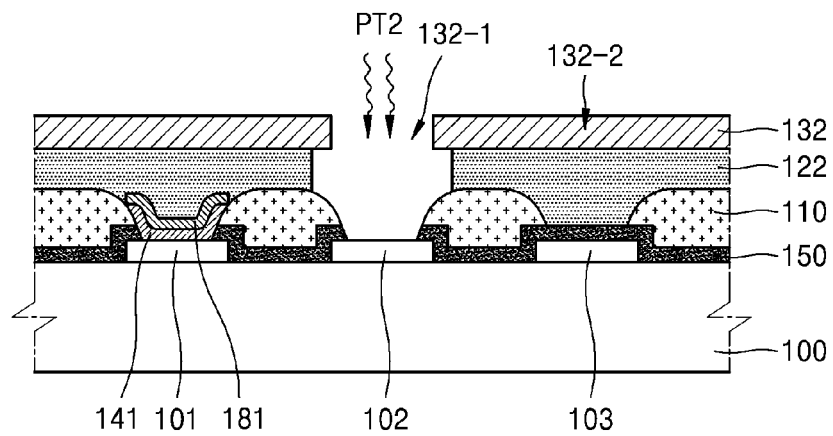


FIG. 13E

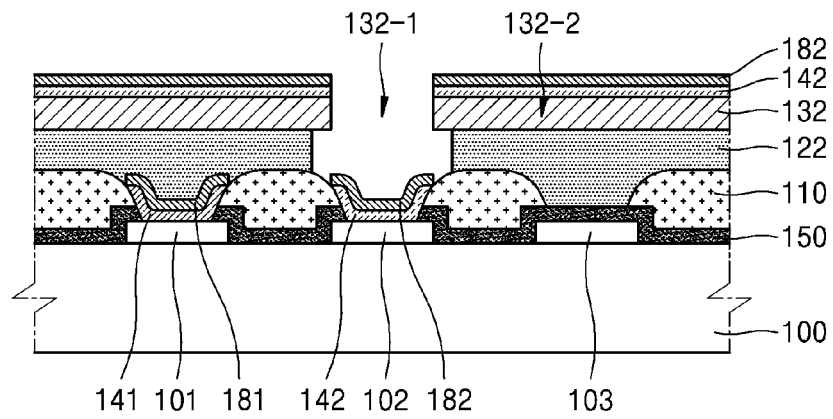


FIG. 13F

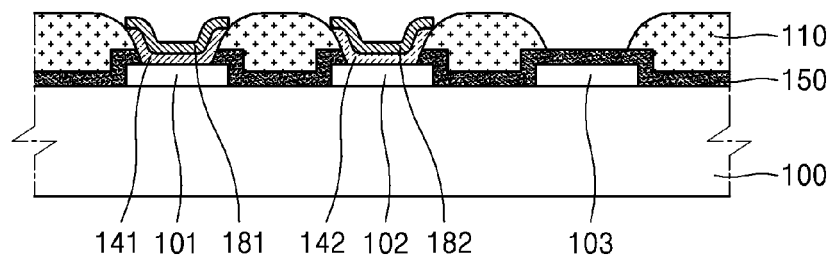


FIG. 14A

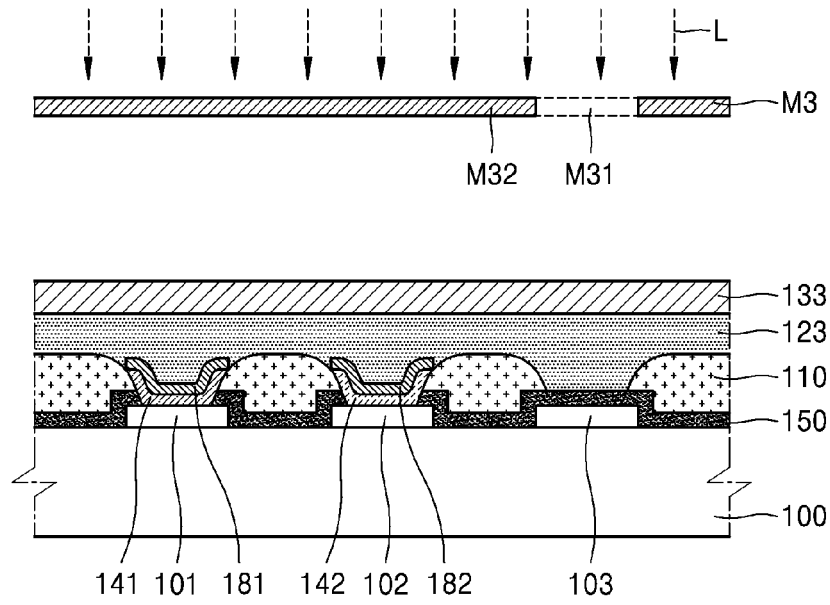


FIG. 14B

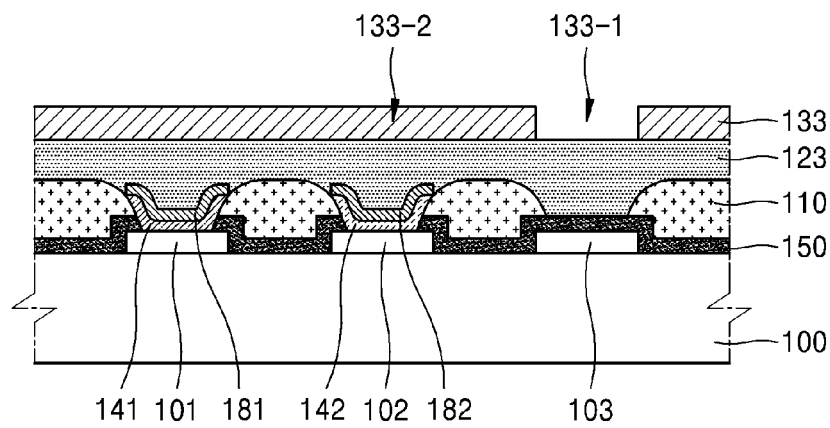


FIG. 14C

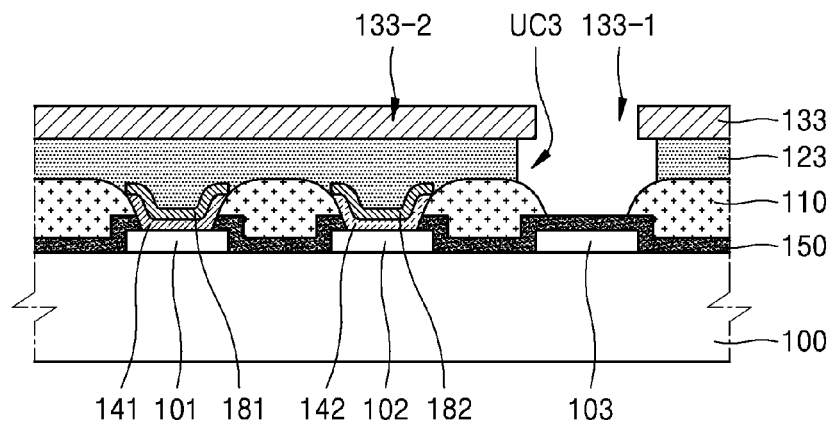


FIG. 14D

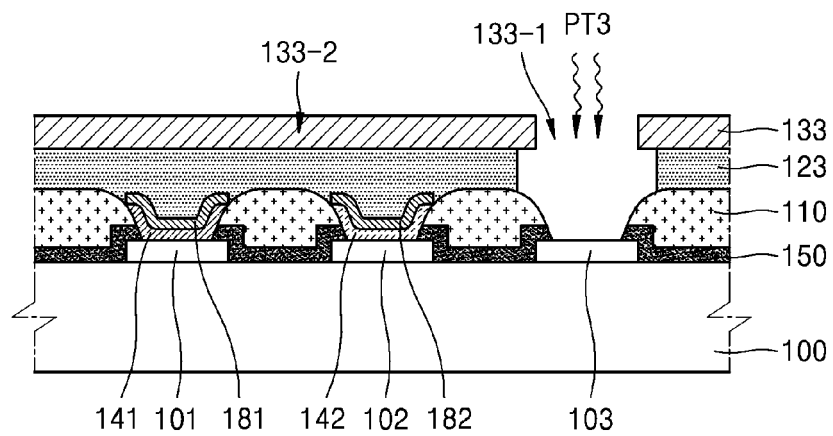




FIG. 14E

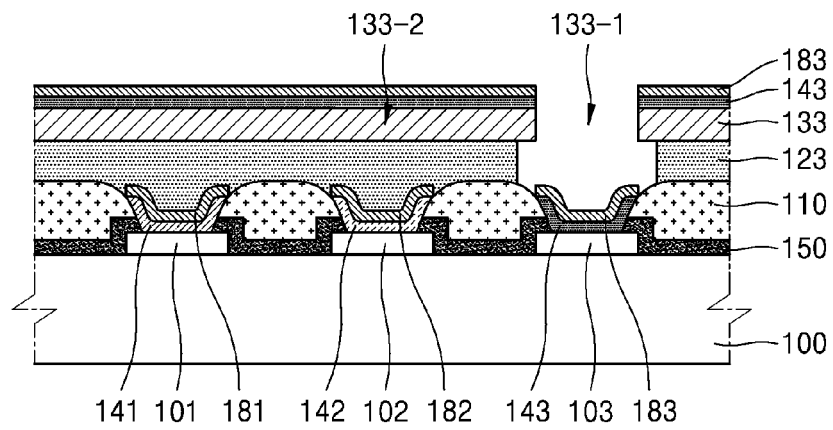


FIG. 14F

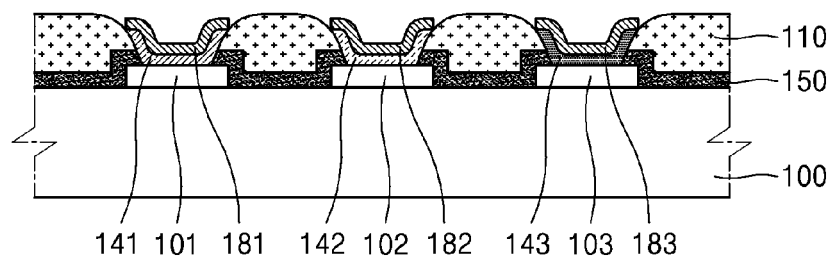


FIG. 15A

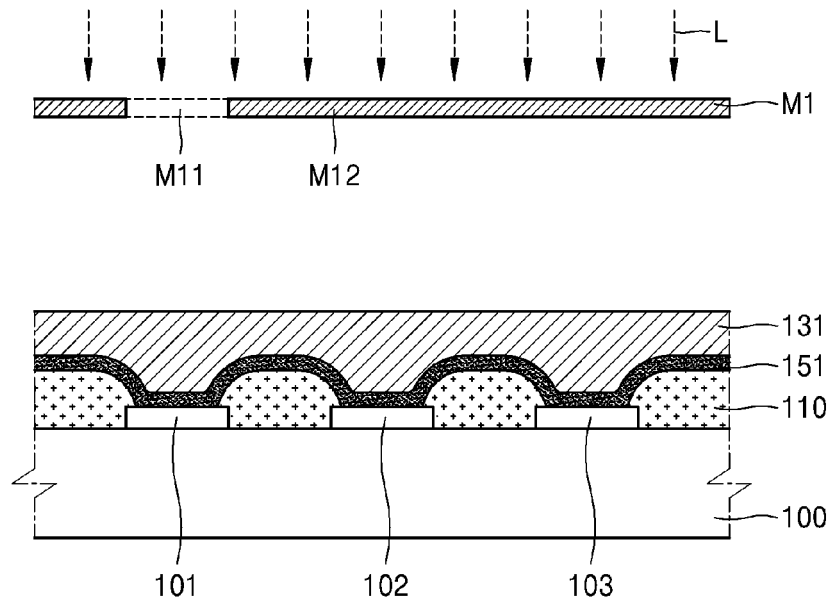


FIG. 15B

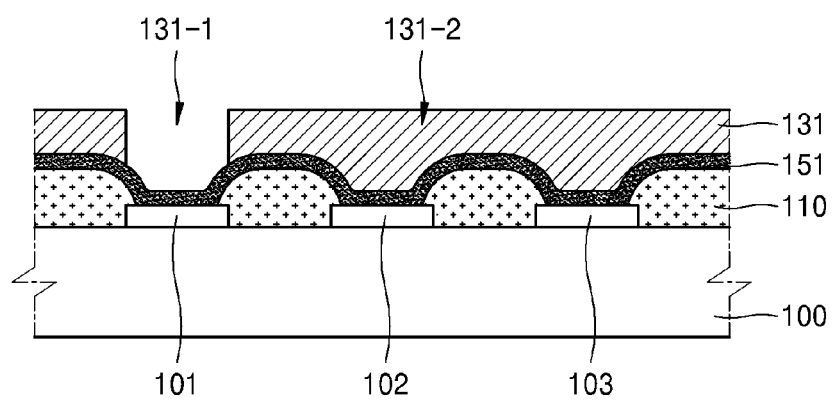


FIG. 15C

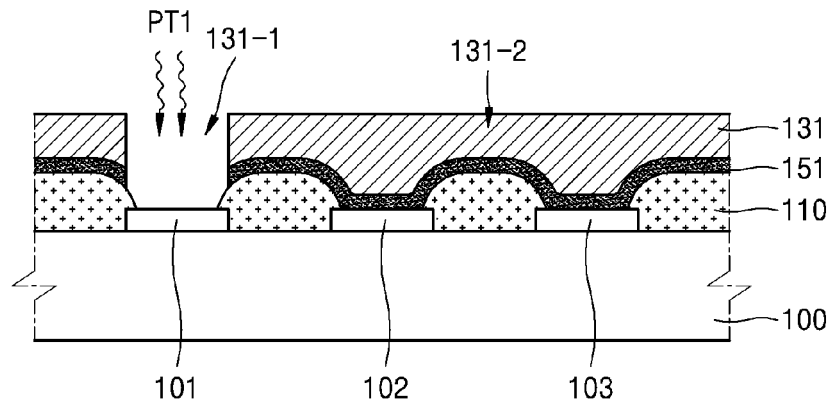


FIG. 15D

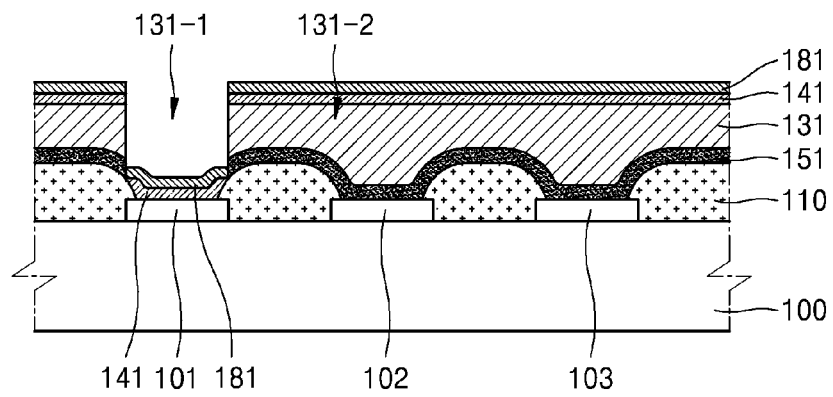


FIG. 15E

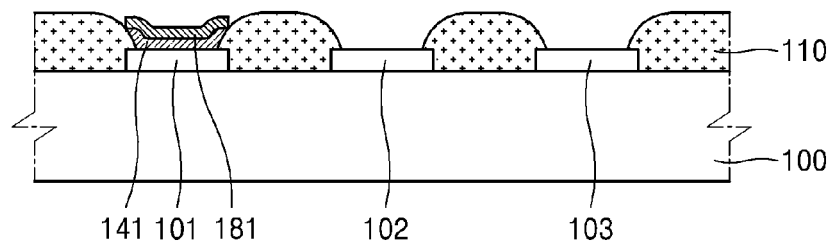


FIG. 16A

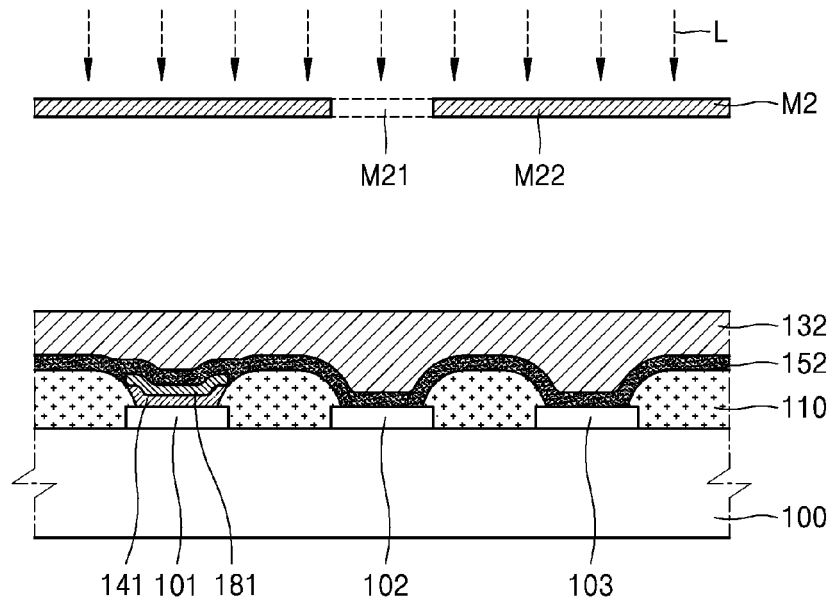


FIG. 16B

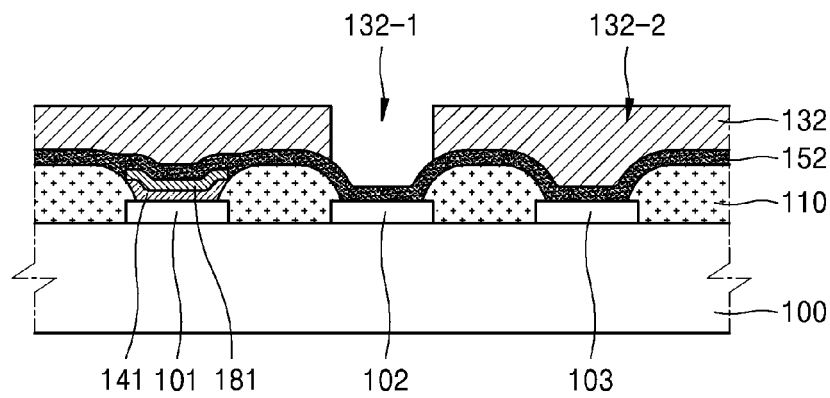


FIG. 16C

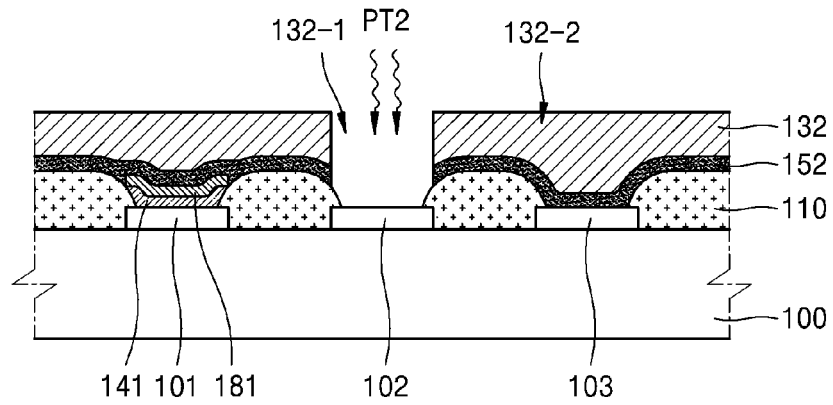


FIG. 16D

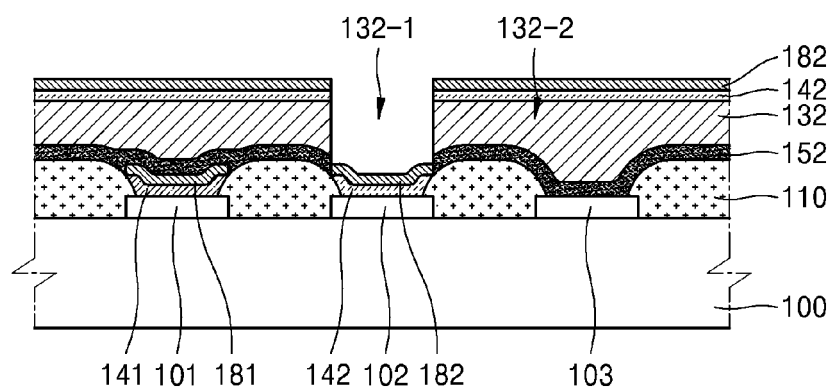


FIG. 16E

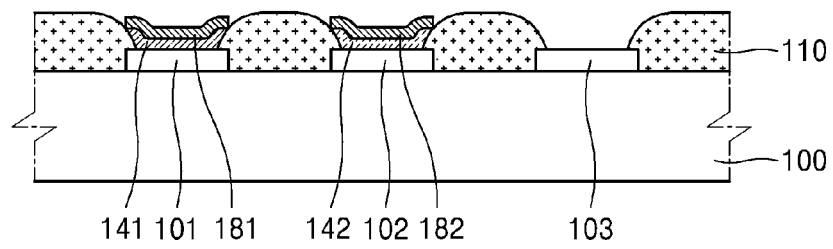


FIG. 17A

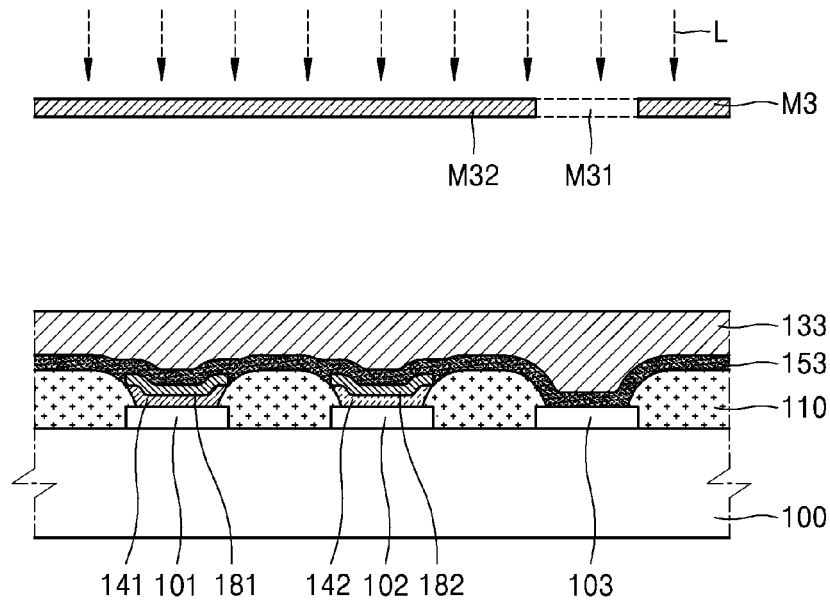


FIG. 17B

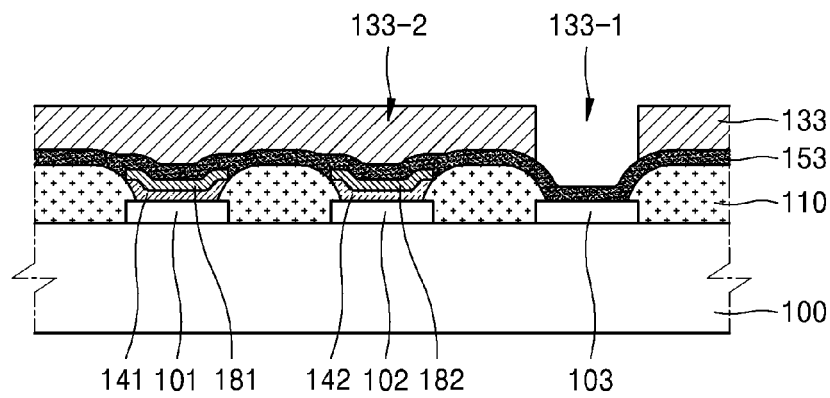




FIG. 17C

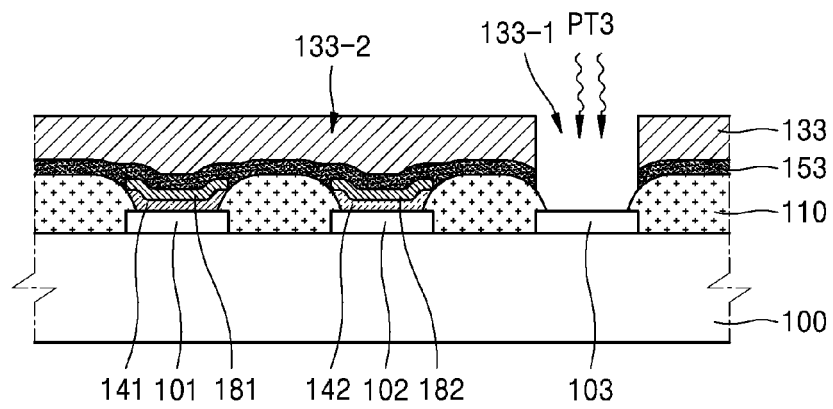


FIG. 17D

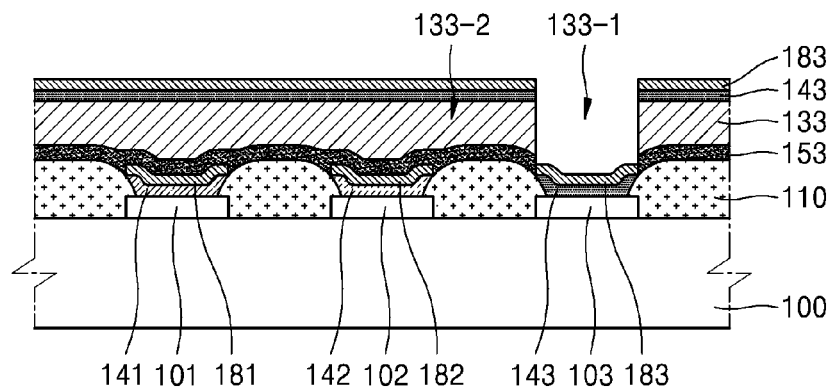


FIG. 17E

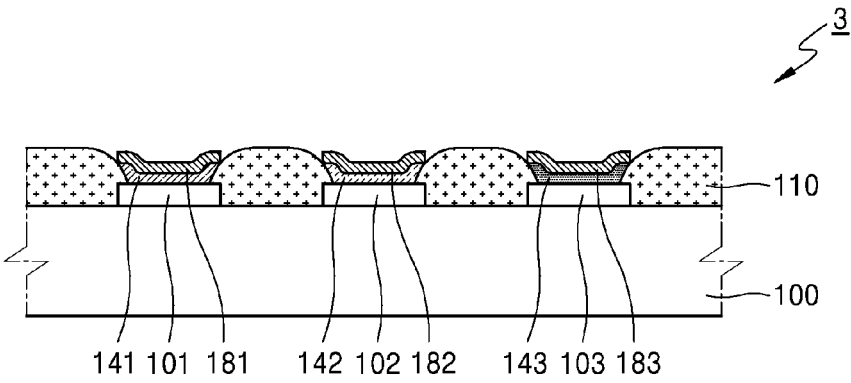


FIG. 18A

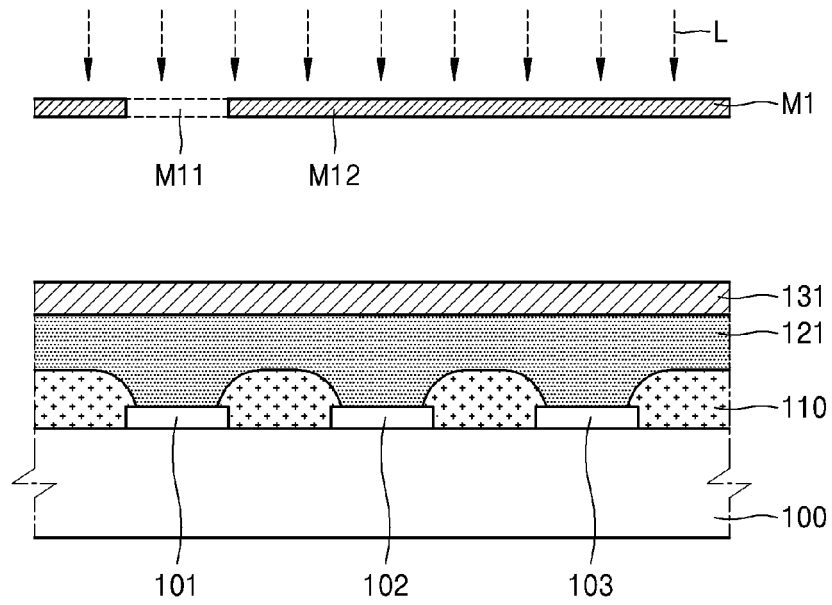


FIG. 18B

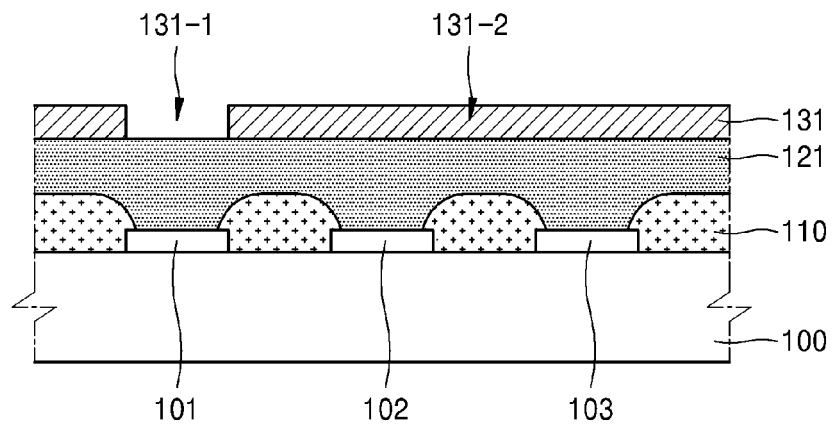


FIG. 18C

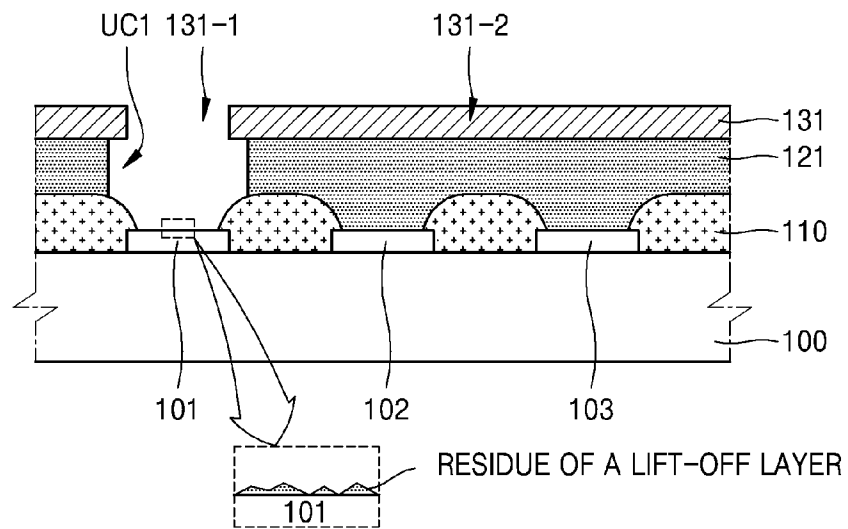


FIG. 18D

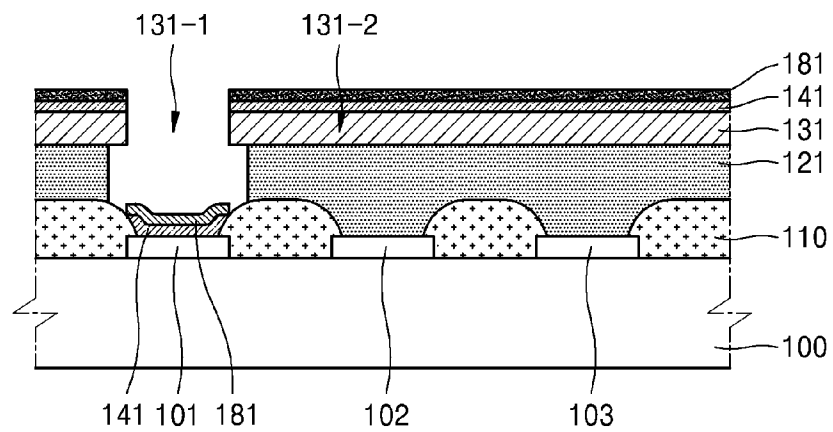


FIG. 18E

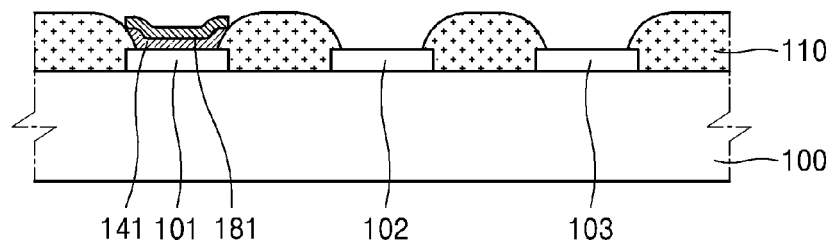


FIG. 19A

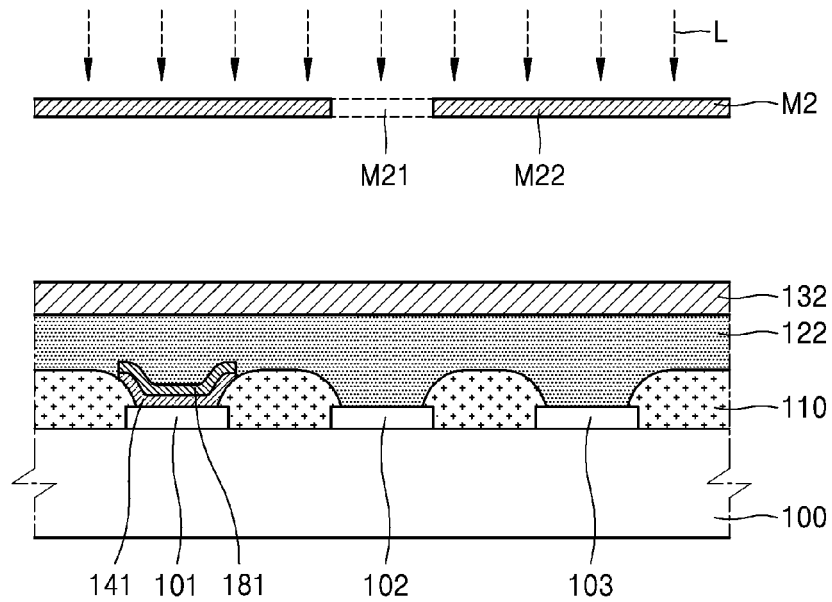


FIG. 19B

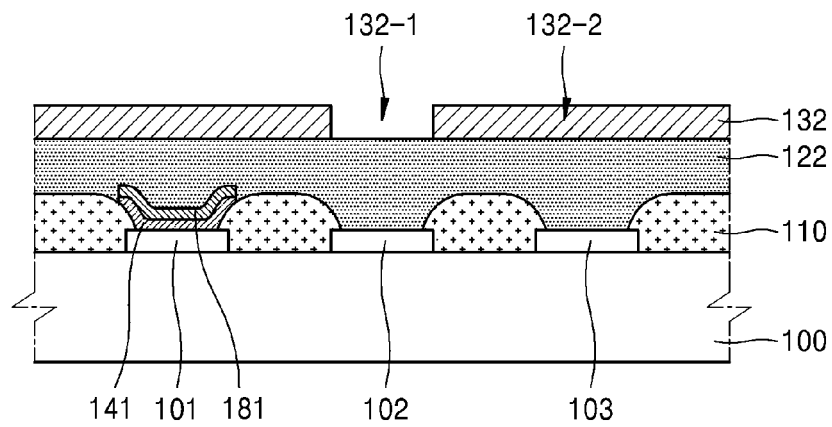


FIG. 19C

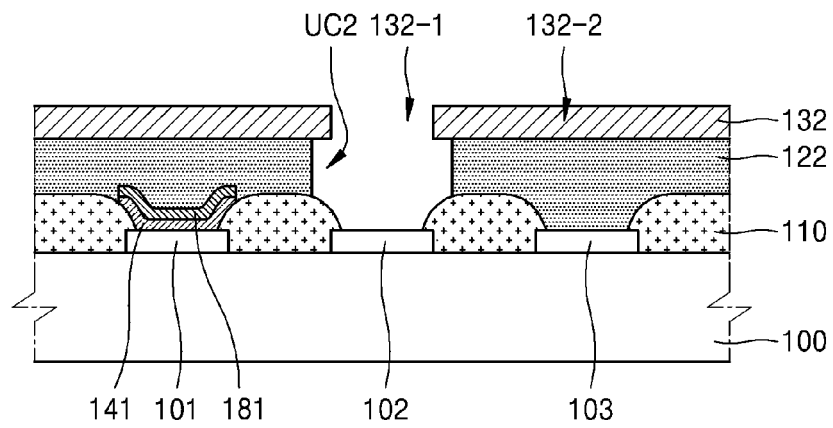


FIG. 19D

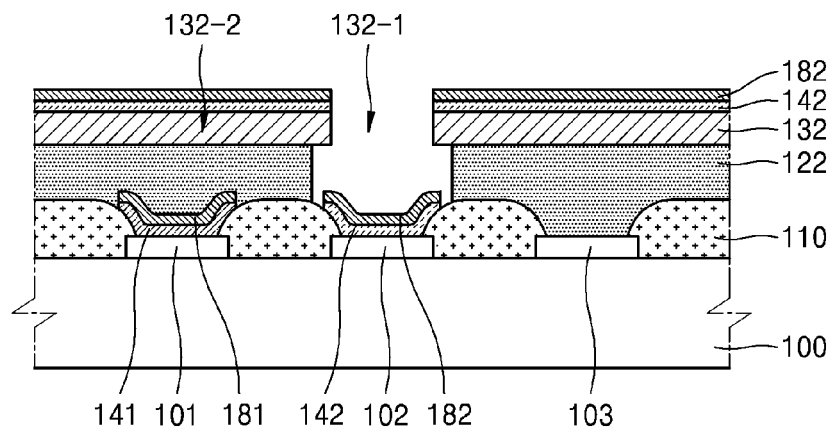


FIG. 19E

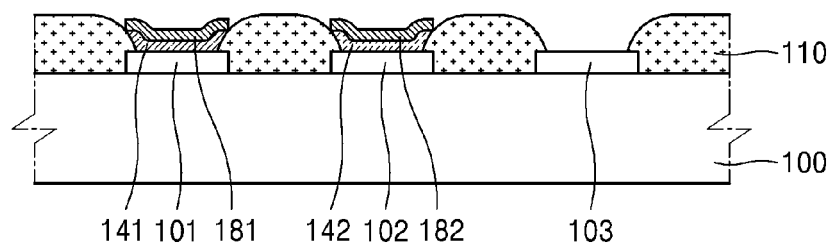




FIG. 20A

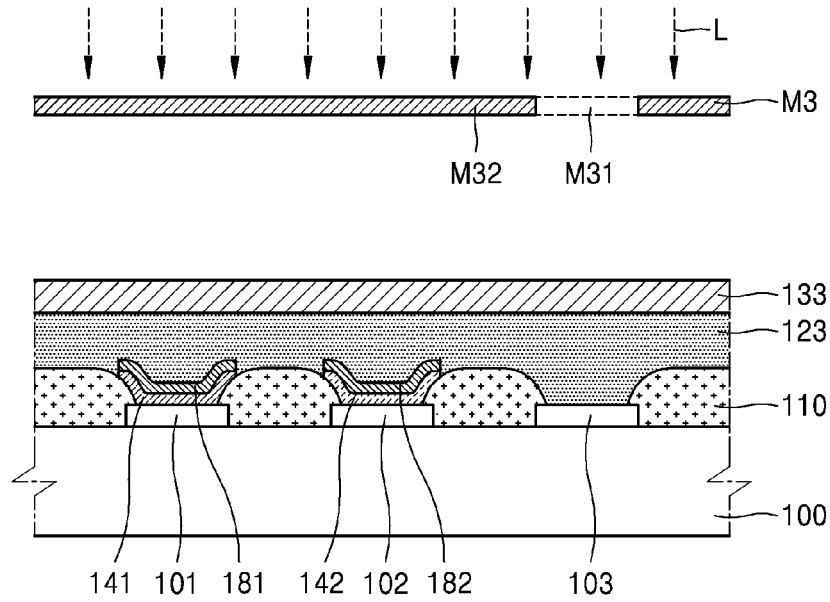


FIG. 20B

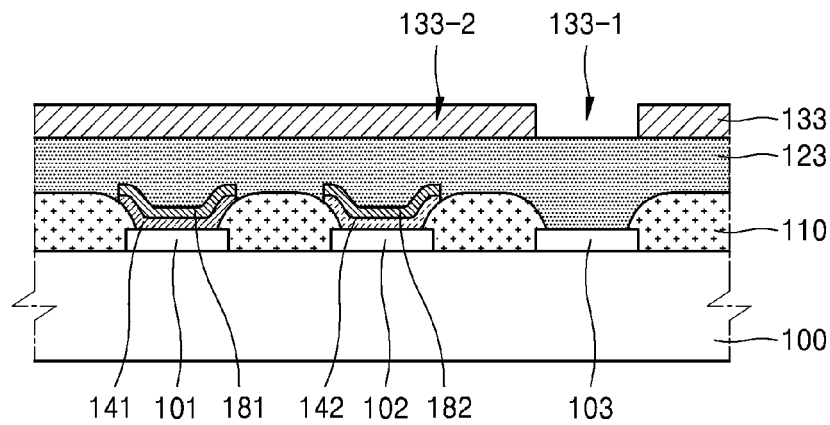


FIG. 20C

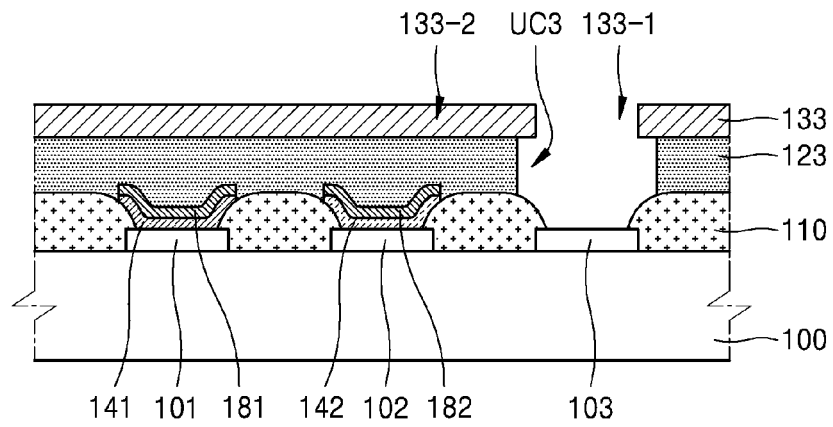


FIG. 20D

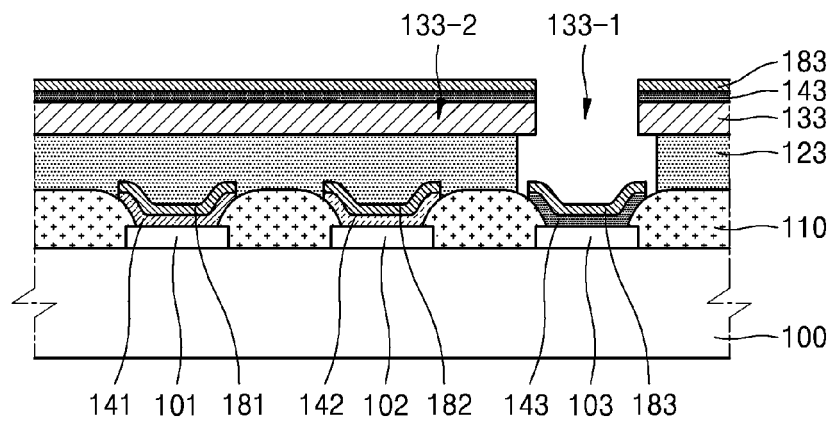


FIG. 20E


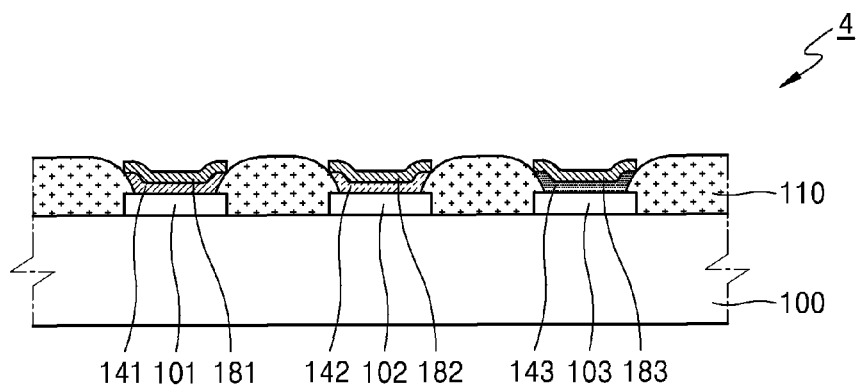


FIG. 21

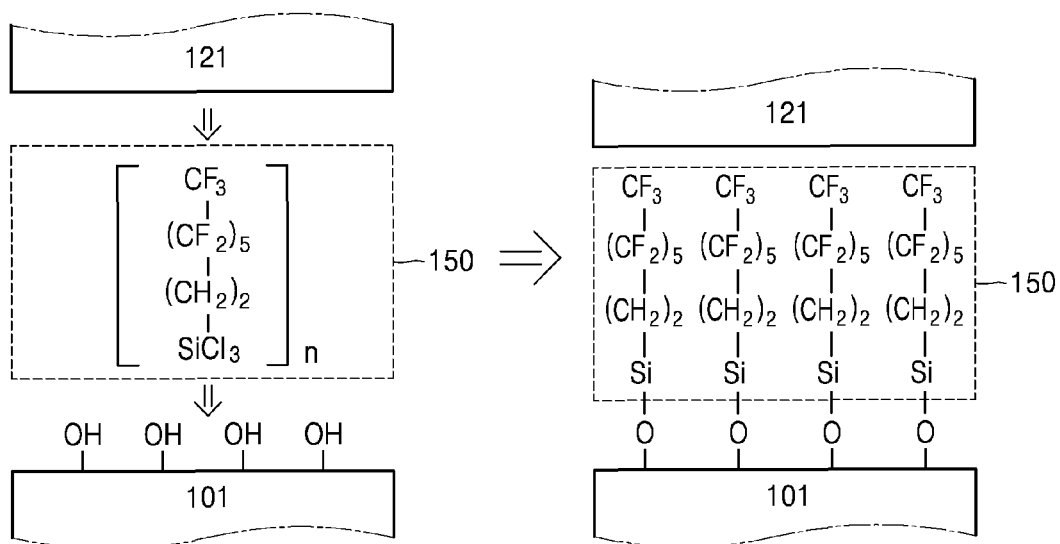

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US 20160020424 A1 [0003]
- US 20110156079 A [0003]
- JP 2002237383 B [0003]

|                |                                                                                                                             |         |            |
|----------------|-----------------------------------------------------------------------------------------------------------------------------|---------|------------|
| 专利名称(译)        | 有机发光显示装置及其制造方法                                                                                                              |         |            |
| 公开(公告)号        | <a href="#">EP3376550B1</a>                                                                                                 | 公开(公告)日 | 2019-12-25 |
| 申请号            | EP2018161103                                                                                                                | 申请日     | 2018-03-09 |
| [标]申请(专利权)人(译) | 三星显示有限公司                                                                                                                    |         |            |
| 申请(专利权)人(译)    | 三星DISPLAY CO. , LTD.                                                                                                        |         |            |
| 当前申请(专利权)人(译)  | 三星DISPLAY CO. , LTD.                                                                                                        |         |            |
| [标]发明人         | KIM JAESIK<br>LEE YEONHWA<br>LEE JOONGU<br>JEONG SEHOON                                                                     |         |            |
| 发明人            | KIM, JAESIK<br>LEE, YEONHWA<br>LEE, JOONGU<br>JEONG, SEHOON                                                                 |         |            |
| IPC分类号         | H01L51/56 H01L27/32                                                                                                         |         |            |
| CPC分类号         | H01L27/3246 H01L51/5253 H01L51/56 H01L51/0016 H01L2227/323 H01L51/0023 H01L51/5206<br>H01L51/5221 H01L2251/305 H01L2251/308 |         |            |
| 优先权            | 1020170030982 2017-03-13 KR                                                                                                 |         |            |
| 其他公开文献         | EP3376550A1                                                                                                                 |         |            |
| 外部链接           | <a href="#">Espacenet</a>                                                                                                   |         |            |

# 摘要(译)

一种有机发光显示装置，包括基板，在基板上的第一第一电极，在第一第一电极上的第一有机功能层，第一有机功能层包括第一发射层，在第一有机功能层上的第一第二电极层，衬底上的第二第一电极，第二第一电极与第一第一电极间隔开，第二第一电极上的第二有机功能层，第二有机功能层包括第二发射层，第二第二电极 第二有机功能层，以及在第一有机功能层和第二有机功能层之间的自组装层，该自组装层包含氟。

FIG. 1

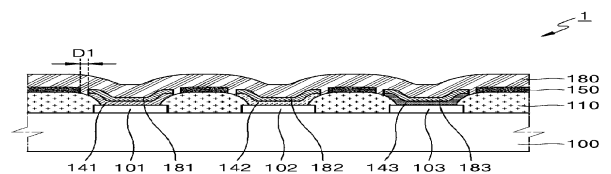


FIG. 2

