



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
22.01.2020 Bulletin 2020/04

(51) Int Cl.:
H01L 51/00 (2006.01) H01L 51/52 (2006.01)

(21) Application number: **19191487.8**

(22) Date of filing: **30.08.2016**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR

• **Kim, BongChul**
Daegu 41489 (KR)
• **Park, Jaewook**
Gyeonggi-do 10920 (KR)

(30) Priority: **31.08.2015 KR 20150123243**
23.12.2015 KR 20150184885

(74) Representative: **Ter Meer Steinmeister & Partner**
Patentanwälte mbB
Nymphenburger Straße 4
80335 München (DE)

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
16186330.3 / 3 136 459

Remarks:


This application was filed on 13-08-2019 as a divisional application to the application mentioned under INID code 62.

(71) Applicant: **LG Display Co., Ltd.**
SEOUL, 07336 (KR)

(72) Inventors:
• **Shin, JooHwan**
Gyeonggi-do 10325 (KR)

(54) **ORGANIC LIGHT-EMITTING DISPLAY DEVICE**

(57) Disclosed herein is an organic light-emitting display device having a first flexible substrate; a second flexible substrate facing the first flexible substrate; a plurality of organic light-emitting pixels on the first flexible substrate and between the first flexible substrate and the second flexible substrate; an encapsulation unit between the first flexible substrate and the second flexible substrate to protect the plurality of organic light-emitting pixels from oxygen and moisture; and an adhesive layer on the encapsulation unit to attach the first flexible substrate and the second flexible substrate together. The Young's modulus of the adhesive layer is equal to or larger than a certain value so that the first flexible substrate is not deformed by bending stress when it is rolled up.

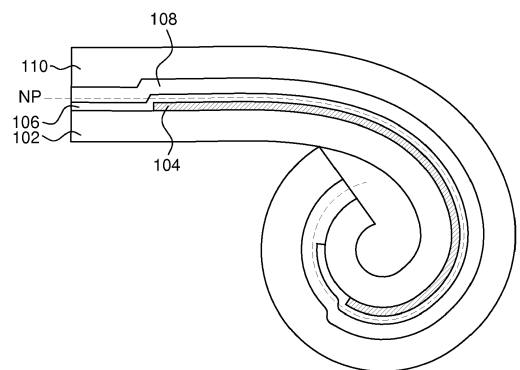

100

FIG. 1

Description

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims the priority of Korean Patent Application Nos. 10-2015-0123243 filed on August 31, 2015, and 10-2015-0184885 filed on and December 23, 2015, in the Korean Intellectual Property Office.

BACKGROUND

Technical Field

[0002] The present disclosure relates to a flexible organic light-emitting display device having a structure showing minimal deformation against bending stress.

Description of the Related Art

[0003] As the era of information technology has truly begun, the field of display devices has rapidly advanced. In accordance with this, research is ongoing into various display devices which are thinner, lighter and consume less power. Such display devices include a liquid crystal display (LCD) device, a plasma display panel (PDP) device, a field emission display (FED) device, an electro-wetting display (EWD) device, quantum dot displays, and an organic light-emitting display (OLED) device, etc.

[0004] Among others, an organic light-emitting display (OLED) device is capable of producing light and thus does not require an additional light source, as in a liquid crystal display (LCD) device. Therefore, an organic light-emitting display device can be made lighter and thinner than an LCD device. Further, an organic light-emitting display device has advantages in that it is driven with low voltage to consume less power, and in that it has shorter response time, wider viewing angle and higher contrast ratio (CR). For these reasons, an organic light-emitting display device is currently under development as the next generation display device. Despite such advantages, organic light-emitting display devices are less reliable than other display devices since organic light-emitting materials are especially vulnerable to moisture and oxygen.

[0005] An organic light-emitting display device includes an organic light-emitting element including an anode, an organic emission layer and a cathode. The organic emission layer emits light by combining holes from the anode and electrons from the cathode. The organic emission layer is very vulnerable to moisture and oxygen and thus an encapsulation structure is required.

[0006] A flexible organic light-emitting display device has been regarded as the next generation display device. Such flexible organic light-emitting display device is fabricated by forming a display area and various conductive lines on a flexible substrate made of plastic or the like so that it can display images even if it is bent like paper.

[0007] Applications of such flexible organic light-emitting display devices become wider, including computer monitors and televisions as well as personal portable devices. Accordingly, research is on-going into flexible organic light-emitting display devices having a larger display area with reduced volume and weight.

ting display devices become wider, including computer monitors and televisions as well as personal portable devices. Accordingly, research is on-going into flexible organic light-emitting display devices having a larger display area with reduced volume and weight.

SUMMARY

[0008] The inventor of the present disclosure has studied on flexible organic light-emitting display device capable of being rolled up (e.g. into a scroll-like form) and stored or retracted in such manner.

[0009] Such flexible organic light-emitting display devices may be kept in the form of a scroll for a long-term period (e.g., more than 100 hours) due to non-use, portability, or other reasons. When a flexible organic light-emitting display device is unrolled after being rolled up for such a long-term period, it may be deformed or other irregularities may occur.

[0010] The inventor of the present disclosure has analyzed the relationship among a various elements of the flexible organic light-emitting display device to find factors that contribute to such deformation.

[0011] An object of the present disclosure is to provide a flexible organic light-emitting display device capable of reducing the degree of deformation occurring when it is stored in a rolled-up form (e.g. like a scroll) for a long-term period.

[0012] Further, another object of the present disclosure is to provide a flexible organic light-emitting display device in which thickness of each substrate is optimized so that the flexible organic light-emitting display device can be rolled up (e.g. into a scroll) with minimal deformation.

[0013] Furthermore, the other object of the present disclosure is to provide a flexible organic light-emitting display device that has a resilience ability so that it is not deformed after being rolled up for a long-term period and has strength against impact (i.e., is not easily broken) by way of adjusting the Young's modulus of an encapsulation unit of the flexible organic light-emitting display device.

[0014] Moreover, the other object of the present disclosure is to provide a flexible organic light-emitting display device with improved reliability and durability of an encapsulation unit thereof.

[0015] It should be noted that objects of the present disclosure are not limited to the above-described objects, and other objects of the present disclosure will be apparent to those skilled in the art from the following descriptions. The objects are solved by the features of the independent claim.

[0016] According to an aspect of the present disclosure, there is provided an organic light-emitting display device. The organic light-emitting display device includes: a first flexible substrate; a second flexible substrate facing the first flexible substrate; a plurality of organic light-emitting pixels on the first flexible substrate

and interposed between the first flexible substrate and the second flexible substrate; an encapsulation unit between the first flexible substrate and the second flexible substrate to protect the plurality of organic light-emitting pixels from oxygen and moisture; and an adhesive layer on the encapsulation unit to adhere the first flexible substrate and the second flexible substrate. The plurality of organic light-emitting pixels is configured to be adjacent to a neutral plane. The adhesive layer has a Young's modulus that is equal to or larger than a certain value so that the first flexible substrate is not deformed by bending stress if it is retracted in a rolled up form for a certain period of time. The thickness of the adhesive layer is determined with respect to the thickness of the first flexible substrate, the curvature radius threshold of the first flexible substrate and the Young's modulus value of the adhesive layer.

[0017] According to another aspect of the present disclosure, there is provided an organic light-emitting display device. The organic light-emitting display device includes: a first flexible substrate; a second flexible substrate facing the first flexible substrate; a plurality of organic light-emitting pixels on the first flexible substrate and interposed between the first flexible substrate and the second flexible substrate; an encapsulation unit between the first flexible substrate and the second flexible substrate to protect the plurality of organic light-emitting pixels from oxygen and moisture; and an adhesive layer on the encapsulation unit to adhere the first flexible substrate and the second flexible substrate. The first flexible substrate may be capable of being rolled up to have a curvature radius equal to or larger than a minimum curvature radius that maintains an elastic deformation property, the second flexible substrate may be capable of being rolled up to have a curvature radius equal to or larger than a minimum curvature radius that maintains an elastic deformation property, the adhesive layer may have an elastic deformation property, and each of the first and second flexible substrates may have a Young's modulus that is larger than that of the adhesive layer.

[0018] Preferably, the first flexible substrate is configured to receive compressive stress and the second flexible substrate is configured to receive tensile stress, such that compressive stress is exerted on the first flexible substrate and tensile stress is exerted on the second flexible substrate when the first substrate is rolled up. Preferably, the second flexible substrate is made of a material having a higher breaking strength against tensile stress than that of the first flexible substrate. Preferably, the second flexible substrate is a metal plate having a thickness between 10 μm and 120 μm . Preferably, the first flexible substrate is made of a material having a higher breaking strength against compressive stress than that of the second flexible substrate. Preferably, the first flexible substrate is an etched glass substrate having a thickness between 30 μm and 100 μm . Preferably, the thickness of the adhesive layer is between 40 μm and 60 μm . Preferably, the adhesive layer further comprises a first

adhesive layer adjacent to the plurality of organic light-emitting pixels, and a second adhesive layer adjacent to the second flexible substrate and containing a moisture absorbent. Preferably, a thickness of the first adhesive layer is at least 5 μm , and a thickness of the second adhesive layer is equal to the thickness of the adhesive layer minus the thickness of the first adhesive layer. Preferably, the adhesive layer is made of an epoxy resin having the Young's modulus of 900 MPa or higher under cured status. Preferably, the first flexible substrate is capable of being rolled up to have a curvature radius equal to or larger than a minimum curvature radius that maintains an elastic deformation property. Preferably, the second flexible substrate is capable of being rolled up to have a curvature radius equal to or larger than a minimum curvature radius that maintains an elastic deformation property. Preferably, the adhesive layer has an elastic deformation property. Preferably, the Young's modulus of each of the first flexible substrate and the second flexible substrate is larger than that of the adhesive layer. Preferably, the first flexible substrate has a brittle property while having the elastic deformation property. Preferably, the first flexible substrate is capable of being rolled up such that the first flexible substrate receives a stress below a value that causes the brittle property. Preferably, the second flexible substrate has a plastic deformation property while having the elastic deformation property. Preferably, the second flexible substrate is capable of being rolled up such that the second flexible substrate receives a stress below a value that causes the plastic deformation property. The plurality of organic light-emitting pixels may be adjacent to a neutral plane. Preferably, the adhesive layer is made of an elastomer and has the Young's modulus between 5 MPa and 100 MPa. Preferably, a surface of the first flexible substrate is etched, and the etched surface is configured to receive tensile stress.

[0019] Particulars of the exemplary embodiments of the present disclosure will be described in the detail description with reference to the accompanying drawings.

[0020] According to an exemplary embodiment of the present disclosure, the degree of deformation of a flexible organic light-emitting display device when it is rolled into a scroll and kept in the form of the scroll can be reduced.

[0021] According to an exemplary embodiment of the present disclosure, the thickness of an encapsulation unit of a flexible organic light-emitting display device is reduced, thereby reducing the curvature radius threshold value that determines the limit of the diameter of the flexible organic light-emitting display device, in which can be rolled into.

[0022] It should be noted that effects of the present disclosure are not limited to those described above and other effects of the present disclosure will be apparent to those skilled in the art from the following descriptions.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023] The above and other aspects, features and other advantages of the present disclosure will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings, in which:

FIG. 1 is a schematic cross-sectional view of a flexible organic light-emitting display device according to an exemplary embodiment of the present disclosure;

FIG. 2 is a graph for illustrating thickness versus curvature radius threshold of the first flexible substrate of the flexible organic light-emitting display device according to an exemplary embodiment of the present disclosure;

FIG. 3 is a diagram for illustrating how to mitigate stress in terms of the thickness of the first flexible substrate and the thickness of the adhesive layer of the flexible organic light-emitting display device according to an exemplary embodiment of the present disclosure; and

FIG. 4 is a schematic cross-sectional view of a flexible organic light-emitting display device according to another exemplary embodiment of the present disclosure.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0024] Advantages and features of the present disclosure and methods to achieve them will become apparent from the descriptions of exemplary embodiments herein below with reference to the accompanying drawings. However, the present disclosure is not limited to exemplary embodiments disclosed herein but may be implemented in various different ways. The exemplary embodiments are provided for making the disclosure of the present disclosure thorough and for fully conveying the scope of the present disclosure to those skilled in the art. It is to be noted that the scope of the present disclosure can be defined by the claims.

[0025] The figures, dimensions, ratios, angles, the numbers of elements given in the drawings are merely illustrative and are not limiting. Like reference numerals denote like elements throughout the descriptions. Further, in describing the present disclosure, descriptions on well-known technologies may be omitted in order not to unnecessarily obscure the gist of the present disclosure. It is to be noticed that the terms "comprising," "having," "including" and so on, used in the description and claims, should not be interpreted as being restricted to the means listed thereafter unless specifically stated otherwise. Where an indefinite or definite article is used when referring to a singular noun, e.g. "a," "an," "the," this includes a plural of that noun unless specifically stated otherwise.

[0026] In describing elements, they are interpreted as including error margins even without explicit statements.

[0027] In describing positional relationship, such as "an element A on an element B", "an element A above an element B", "an element A below an element B" and "an element A adjacent to an element B" may allow another element C to be disposed between the elements A and B unless the term "directly" or "immediately" is explicitly used.

[0028] As used herein, a phrase "an element A on an element B" refers to that the element A may be disposed directly on the element B and/or the element A may be disposed indirectly on the element B via another element C.

[0029] Various physical properties such as Young's modulus, stress, pressure, viscosity, adhesive force and strength are measured at a room temperature unless stated otherwise. The room temperature may refer to approximately 15°C to 35°C, specifically approximately 20°C to 25°C, and more specifically 25°C.

[0030] The adhesive force refers to that measured on glass (or the particular material to which the adhesive acts on) unless stated otherwise.

[0031] The terms first, second and the like in the descriptions and in the claims are used for distinguishing between similar elements and not necessarily for describing a sequential or chronological order. These terms are used to merely distinguish one element from another. Accordingly, as used herein, a first element may be a second element within the technical idea of the present disclosure.

[0032] Like reference numerals denote like elements throughout the descriptions.

[0033] The drawings are not to scale and the relative dimensions of various elements in the drawings are depicted schematically and not necessarily to scale.

[0034] The features of various embodiments of the present disclosure can be partially or entirely bonded to or combined with each other and can be interlocked and/or operated in technically various ways as can be fully understood by a person having ordinary skill in the art, and the embodiments can be carried out independently of or in association with each other.

[0035] Hereinafter, exemplary embodiments of the present disclosure will be described in detail with reference to the accompanying drawings.

[0036] FIG. 1 is a schematic cross-sectional view of a flexible organic light-emitting display device according to an exemplary embodiment of the present disclosure.

[0037] Referring to FIG. 1, the organic light-emitting display device 100 according to an exemplary embodiment of the present disclosure includes a first flexible substrate 102, a plurality of organic light-emitting pixels 104, an encapsulation unit 106, an adhesive layer 108 and a second flexible substrate 110.

[0038] The first flexible substrate 102 has flexible characteristics. A plurality of organic light-emitting pixels 104 is disposed on the first flexible substrate 102. Images are

displayed by the plurality of organic light-emitting pixels 104. The encapsulation unit 106 is disposed on the plurality of organic light-emitting pixels 104 to protect the plurality of organic light-emitting pixels 104 from oxygen and moisture. The adhesive layer 108 attaches the encapsulation unit 106 of the first flexible substrate 102 to the second flexible substrate 110.

[0039] The flexible organic light-emitting display device 100 can be rolled into a scroll or otherwise configured into a more compact form. Here, the first flexible substrate 102 and the second flexible substrate 110 of the flexible organic light-emitting display device 100 can be made of different materials. The flexible organic light-emitting display device 100 can be rolled up such that the ends of the first and second flexible substrates 102, 110 are curved toward the first flexible substrate 102.

[0040] That is, the first flexible substrate 102 receives compressive stress when the organic light-emitting display device 100 is rolled up. Here, it can be said that the plurality of organic light-emitting pixels 104 is located on a neutral plane (NP). The encapsulation unit 106 has a certain minimum Young's modulus value so that it is not deformed by bending stress when it is kept in the form of a scroll or in some other compact form. The second flexible substrate 110 receives tensile stress when it is rolled up. The second flexible substrate 110 can be made of a material having a higher breaking strength versus tensile stress than that of the first flexible substrate 102.

[0041] FIG. 2 is a graph for illustrating thickness versus curvature radius threshold of the first flexible substrate 102 of the flexible organic light-emitting display device 100 according to an exemplary embodiment of the present disclosure.

[0042] Equation 1 shown below expresses thickness versus curvature radius threshold of the first flexible substrate of the flexible organic light-emitting display device according to the exemplary embodiment of the present disclosure.

[0043] Hereinafter, referring to FIGS. 1 and 2 and Equation 1, a way of determining the thickness of the first flexible substrate 102, so that the flexible organic light-emitting display device 100 according to the exemplary embodiment of the present disclosure can be rolled up, is described.

[0044] The first flexible substrate 102 has flexible characteristics. The first flexible substrate 102 may be made of, for example, an organic material or an inorganic material and may be optically-transparent, flexible and chemically resistant so that it is applicable to a deposition process at a high temperature. The first flexible substrate 102 may be, for example, a glass substrate that has excellent water vapor transmission rate (WVTR), is flexible and has transparency at the visible wavelengths (i.e. has see-through (e.g., transparent) characteristics). In order to achieve such characteristics, the thickness of the glass as the first flexible substrate 102 has to be thin. However, since the glass is easily broken or damaged, various factors have to be considered in determining the thickness

of the glass substrate, to enable it to be rolled into a scroll with sufficient strength.

[0045] For example, the radius of a circular shape when the flexible organic light-emitting display device 100 is rolled up into a scroll or cylinder as small as possible may be determined as 100 mm. Then, the curvature radius (i.e., the curvature radius 1 R is equivalent to 1 mm) of the first flexible substrate 102 is 100R.

[0046] In another example, the radius of the circle (i.e., the radius of circular shape) may be 50 mm. Then, the curvature radius of the first flexible substrate 102 is 50R.

[0047] It should be noted that the above-described examples with respect to the radius are merely illustrative and the present disclosure is not limited thereto.

[0048] The thickness of the first flexible substrate 102 may be determined based on a first bending stress threshold σ_{TH} and a Young's modulus E. The first bending stress threshold σ_{TH} and the Young's modulus E may be constant values of the material of the first flexible substrate 102.

[0049] For example, if the first flexible substrate 102 is made of glass, the first bending stress threshold σ_{TH} of the first flexible substrate 102 may be 50 MPa. Here, bending stress threshold of a component refers to a maximum possible bending stress before damaging the component, e.g. the first flexible substrate. In addition, the Young's modulus may be 71.5 GPa. If the curvature radius threshold R_{TH} of the first flexible substrate 102 is 100R, the maximum thickness of the first flexible substrate 102 may be determined using Equation 1 below:

[Equation 1]

$$\sigma_{TH} = \frac{(E \times T/2)}{R_{TH}}$$

where σ_{TH} denotes to the first bending stress threshold, E denotes the Young's modulus, T denotes the thickness of the first flexible substrate 102, and R_{TH} denotes the curvature radius threshold. Here, curvature radius threshold of a component refers to a maximum possible curvature radius before damaging the component, e.g. the first flexible substrate.

[0050] For example, in Equation 1, if the curvature radius threshold R_{TH} of the flexible organic light-emitting display device 100 is determined as 100R, the first bending stress threshold σ_{TH} may be 50 MPa and the Young's modulus may be 71.5 GPa. Accordingly, the thickness T of the first flexible substrate 102 is equal to approximately 0.14 mm or less.

[0051] For example, in Equation 1, if the curvature radius threshold R_{TH} of the flexible organic light-emitting display device 100 is determined as 50R, the first bending stress threshold σ_{TH} may be 50 MPa and the Young's modulus may be 71.5 GPa. Accordingly, the thickness T of the first flexible substrate 102 is equal to approximately 70 μ m or less.

[0052] It can be seen that the thickness of the first flexible substrate 102 is in proportion to the curvature radius threshold (R_{TH}) of the flexible organic light-emitting display device 100.

[0053] For example, the first flexible substrate 102 may be a substrate that is etched (or otherwise applied with certain surface treatment) to achieve a desired curvature radius threshold (R_{TH}). Specifically, during the process of forming the plurality of organic light-emitting pixels 104 on the first flexible substrate 102, the thickness of the substrate has to be at least 1 mm in order to maintain flatness. However, the thickness of the first flexible substrate 102 has to be reduced after forming the plurality of organic light-emitting pixels 104 in order to decrease the curvature radius threshold (R_{TH}). Accordingly, there is an advantage in processing or manufacturing in that the first flexible substrate 102 may be etched after forming the plurality of organic light-emitting pixels 104. However, the thickness of the first flexible substrate 102 is subject to the target curvature radius. Consequently, the thickness of the first flexible substrate 102 is merely illustrative and the present disclosure is not limited thereto.

[0054] For example, the thickness of the first flexible substrate 102 may be selected from 30 μm to 100 μm in consideration of the curvature radius threshold (R_{TH}).

[0055] For example, the first flexible substrate 102 may be made of a material having a higher breaking strength with respect to the compressive stress than that of the second flexible substrate 110.

[0056] That is, the first flexible substrate 102 before etching may have a first thickness during the process of forming the plurality of organic light-emitting pixels 104, and after forming the plurality of organic light-emitting pixels 104, may have a second thickness which is thinner than the first thickness. The plurality of organic light-emitting pixels 104 is disposed on the first flexible substrate 102 that has the thickness T determined based on a certain curvature radius threshold (R_{TH}). The plurality of organic light-emitting pixels 104 includes at least an organic light-emitting diode (OLED) and a driving circuitry. The organic light-emitting diode includes at least an anode, an organic emission layer and a cathode. A bank may be disposed between the organic light-emitting pixels (and/or sub-pixels) to separate them from one another. The anode may be patterned so that it is disposed in each of the organic light-emitting pixels and may be covered by the bank. The organic light-emitting diode may include a variety of layers such as an electron transport layer (ELT), an emission layer (EML) and a hole transport layer (HTL). Such layers may be independent or combined in their functionalities. A capping layer may be further disposed on the cathode. The driving circuitry includes a switching transistor, a driving transistor and a capacitor. Each of the transistors may include a gate electrode extended from a gate line, a source electrode and a drain electrode extended from a data line, and may adjust the amount of current flowing in the driving transistor in proportion to data voltage applied to the driving

transistor. The driving transistor may be connected to the anode of the organic light-emitting diode to supply current thereto.

[0057] The thickness of each of the plurality of organic light-emitting pixels 104 may be, for example, 1 μm to 10 μm . The thickness may be the sum of the thickness of lines of the driving circuitry, the thickness of a passivation layer, a planarization layer insulating the lines from one another, the height of the organic light-emitting diode and the height of the bank.

[0058] The neutral plane NP of the flexible organic light-emitting display device 100 is configured to be adjacent to the plane where the plurality of organic light-emitting pixels 104 is formed. Herein, the neutral plane NP may be defined as follows: when the flexible organic light-emitting display device 100 is bent, tensile stress is created on one side (e.g., a first side) of the neutral plane while compressive stress is created on the other side (e.g., a second side) of the neutral plane. Accordingly, there is a plane that is not under tensile stress and compressive stress, which is referred to as the neutral plane (NP). Thus, in theory, there is no bending stress at the neutral plane (NP).

[0059] By configuring the neutral plane NP at the location where the plurality of organic light-emitting pixels 104 is disposed, no stress is applied to the plurality of organic light-emitting pixels 104 when the flexible organic light-emitting display device 100 is bent. As a result, damage to the plurality of organic light-emitting pixels 104 can be reduced. However, this is merely illustrative and the present disclosure is not limited thereto. The neutral plane NP may be formed on the interface between the plurality of organic light-emitting pixels 104 and the adhesive layer 108. In that case, no stress is applied to the interface between the plurality of organic light-emitting pixels 104 and the adhesive layer 108, and thus no delamination takes place on the interface. More specifically, the neutral plane NP may be positioned in an area which is $\pm 15 \mu\text{m}$ away from the plurality of organic light-emitting pixels 104. However, this is merely illustrative and the present disclosure is not limited thereto. If the neutral plane NP is too far from the organic light-emitting pixels 104, stress is exerted on the organic light-emitting pixels 104. Accordingly, the neutral plane NP has to be configured near the organic light-emitting pixels 104.

[0060] The encapsulation unit 106 may be made of an inorganic material. For example, the encapsulation unit 106 may be made of silicon nitride (SiN_x), silicon oxide (SiO_x), aluminum oxide (Al_2O_3), etc. Namely, a material having good WVTR may be chosen.

[0061] The encapsulation unit 106 is disposed adjacent to the neutral plane NP. According to the above-described configuration, the bending stress exerted on the encapsulation unit 106 can be reduced, and thus the possibility that cracks or damages occurred in the inorganic layer of the encapsulation unit 106 may be drastically lowered. Accordingly, the durability of the flexible organic light-emitting display device 100 against bending

can be enhanced.

[0062] The encapsulation unit 106 may be made up of a single inorganic film. However, this is merely illustrative and the present disclosure is not limited thereto. The encapsulation unit 106 may be formed by forming a first inorganic film, disposing an overcoat layer on the first inorganic film to compensate for irregularity caused by foreign matters, forming a second inorganic film on the overcoat layer, and sealing the overcoat layer by the first and second inorganic film. In this manner, the encapsulation unit 106 can compensate for irregularity caused by foreign matters.

[0063] The adhesive layer 108 is disposed on the encapsulation unit 106. The adhesive layer 108 secures the first flexible substrate 102 to the second flexible substrate 110.

[0064] The adhesive layer 108 is configured with a certain thickness to achieve sufficient resilience so that it can be unrolled after being stored in the form of a scroll having a certain curvature radius for a long-term period, as well as sufficient strength so that it is not broken by external impact.

[0065] Firstly, the adhesive layer 108 has a certain adhesive force. The adhesive force of the adhesive layer 108 can be increased by a curing process. After the curing, the adhesive force of the adhesive layer 108 may be equal to 450 gf/10 mm or higher. If the adhesive force is too weak, the first flexible substrate 102 may be delaminated from the second flexible substrate 110. Accordingly, the adhesive layer 108 has a sufficient adhesive force so that no delamination takes place when it is rolled into a scroll.

[0066] Secondly, the adhesive layer 108 has a certain Young's modulus E . In addition, the Young's modulus of the adhesive layer 108 is smaller than that of the first flexible substrate 102. If the Young's modulus of the adhesive layer 108 is smaller than that of the first flexible substrate 102, there is an advantage in that the adhesive layer 108 can absorb the stress exerted on the first flexible substrate 102.

[0067] For example, the Young's modulus E of the adhesive layer 108 after curing may be 900 MPa or higher. For example, if the Young's modulus E is too low, there is a problem in that the flexible organic light-emitting display device may be easily deformed. That is, if the Young's modulus E is too low, the flexible organic light-emitting display device may be easily deformed, and when it is stored in the form of a scroll for a long-term period, the adhesive layer 108 may absorb the bending stress such that the organic light-emitting display device may remain bent. In particular, such a problem may be critical for a flexible organic light-emitting display device that can be rolled into a scroll.

[0068] For example, if the Young's modulus E of the adhesive layer after curing is low (e.g., 800 MPa) the adhesive layer 108 may absorb the stress well, and thus this may be regarded as an advantage in terms of bending characteristic. However, when the flexible organic

light-emitting display device is kept in the form of a scroll for a long-term period, the shape of the adhesive layer 108 may be deformed due to the stress exerted for the long time. Therefore, the adhesive layer having a Young's modulus of 800 MPa or less may not be applied to the flexible organic light-emitting display device that is rolled into a scroll.

[0069] Thirdly, the adhesive layer 108 has a certain thickness. For example, if the first flexible substrate 102 is made of glass, it may be easily broken by external impact. Specifically, if the first flexible substrate 102 is an etched glass, it is more vulnerable to external impact. In addition, if cracks take place in the first flexible substrate 102 or the first flexible substrate 102 is damaged, moisture and oxygen may permeate into the organic light-emitting pixels 104, resulting in defects.

[0070] However, if the first flexible substrate 102 is made of glass, it may have a flaw, a scratch, or a surface damage made during a manufacturing process. When the glass substrate is bent, the tensile stress is concentrated on such a surface flaw, a scratch or a surface damage. Accordingly, the substrate may be broken where a surface flaw, a scratch or a surface damage exists. However, by an etching processing, there is an advantage in that such surface flaws, scratches or surface damages can be etched too. Accordingly, there is an advantage in that reliability against the tensile stress can be increased even if the thickness of the first flexible substrate 102 is substantially reduced.

[0071] FIG. 3 is a diagram for illustrating how to mitigate stress in terms of the thickness of the first flexible substrate 102 and the thickness of the adhesive layer 108 of the flexible organic light-emitting display device 100 according to an exemplary embodiment of the present disclosure.

[0072] Equation 2 expresses stress according to the thickness of the first flexible substrate 102 and the thickness of the adhesive layer 108 of the flexible organic light-emitting display device 100 according to an exemplary embodiment of the present disclosure.

[0073] Hereinafter, a way of determining the thickness of the adhesive layer 108 of the flexible organic light-emitting display device 100 according to an exemplary embodiment of the present disclosure will be described with reference to FIG. 3 and Equation 2.

[0074] The adhesive layer 108 is configured to increase strength of the first flexible substrate 102 against external impact. For example, the strength may be measured by a ball drop test. The ball drop test is carried out by dropping an iron ball having a certain diameter from a predetermined height onto the flexible organic light-emitting display device 100, and measuring damage to the flexible organic light-emitting display device 100. This is related with the curvature radius threshold (R_{TH}) of the first flexible substrate 102. That is, as the first flexible substrate 102 becomes thinner in order to decrease the curvature radius threshold (R_{TH}), the strength of the flexible organic light-emitting display device 100 may be

weakened.

[Equation 2]

$$U_T \propto \frac{d^2}{a^4} E_g h_g^3 + \frac{d^5}{a} \frac{E_p}{h_p^3}$$

[0075] Referring to Equation 2, U_T denotes the total energy value generated when the iron ball having the predetermined diameter freefalls to collide with the flexible organic light-emitting display device 100, E_g denotes the Young's modulus E of the first flexible substrate 102, h_g denotes the thickness of the first flexible substrate 102, E_p denotes the Young's modulus E of the adhesive layer 108, h_p denotes the thickness of the adhesive layer 108. In FIG. 3 and Equation 2, a denotes the radius of the deformed area of the first flexible substrate 102. In FIG. 3 and Equation 2, d denotes the depth of the recessed part of the organic light-emitting display device 100 toward the adhesive layer 108 as the iron ball freefalls onto it. According to Equation 2, the total energy U_T is dispersed as the first flexible substrate 102 and the adhesive layer 108 are deformed. The first flexible substrate 102 is broken if the U_T value exceeds the threshold value that the first flexible substrate 102 can tolerate.

[0076] It can be seen from Equation 2 that the damage to the first flexible substrate 102 can be avoided by decreasing the Young's modulus E of the adhesive layer 108 or by increasing the thickness h_p of the adhesive layer 108. However, as described earlier, if the Young's modulus E_p of the adhesive layer 108 is low, it may be deformed when the flexible organic light-emitting display device 100 is stored in the form of the a scroll for a long-term period. Accordingly, the Young's modulus E_p of the adhesive layer 108 should be larger than a certain value. For example, the Young's modulus of the adhesive layer 108 may be configured to be at least 900 MPa in consideration of reducing the degree of deformation.

[0077] The thickness of the adhesive layer 108 should be increased with respect to the Young's modulus E_p . For example, the thickness of the adhesive layer 108 may be configured to be at least 40 μm . However, if the thickness of the adhesive layer 108 becomes larger than a certain value, the thickness of the flexible organic light-emitting display device 100 is also increased. Accordingly, the thickness may be configured to be equal to or less than 60 μm .

[0078] Referring back to FIG. 1, the second flexible substrate 110 has flexible characteristics. The second flexible substrate 110 is made of a material having a higher breaking strength with respect to tensile stress than that of the first flexible substrate 102. For example, the second flexible substrate 110 may be a metal plate. The second flexible substrate 110 may be a metal plate or a foil made of copper or aluminum.

[0079] In particular, if the flexible organic light-emitting

display device 100 is configured to be rolled toward the first flexible substrate 102, the second flexible substrate 110 receives tensile stress all the time.

[0080] If the first flexible substrate 102 and the second flexible substrate 110 are made of the same glass, the first flexible substrate 102 receives compressive stress while the second flexible substrate 110 receives tensile stress. However, glass may not be easily broken by compressive stress but it can be easily broken by tensile stress. Accordingly, if the second flexible substrate 110 is made of glass and is rolled into a scroll, the second flexible substrate 110 may be broken.

[0081] If the second flexible substrate 110 is a metal plate made of copper or aluminum, there is an advantage in that it is not easily broken by the tensile stress. Accordingly, the flexible organic light-emitting display device 100 according to an exemplary embodiment of the present disclosure is rolled toward the first flexible substrate 102, the first flexible substrate 102 and the second flexible substrate 110 are not easily broken by the tensile stress.

[0082] For example, the thickness of the second flexible substrate 110 may be determined between 10 μm and 120 μm .

[0083] FIG. 4 is a schematic cross-sectional view of a flexible organic light-emitting display device 200 according to another exemplary embodiment of the present disclosure.

[0084] In the following description, for convenience of description, a flexible organic light-emitting display device 200 according to another exemplary embodiment of the present disclosure will be described focusing on differences from the flexible organic light-emitting display device 100 according to the exemplary embodiment of the present disclosure, and the redundant features will be omitted.

[0085] Referring to FIG. 4, an adhesive layer 208 of the flexible organic light-emitting display device 200 includes at least two layers. A first adhesive layer 218 of the adhesive layer 208 is disposed closer to a first flexible substrate 202. A second adhesive layer 228 is disposed closer to a second flexible substrate 210. The second adhesive layer 228 contains moisture absorbents 238 (i.e., getters). The thickness of the adhesive layer 208 according to the exemplary embodiments of the present disclosure may be larger than the related art adhesive layers with respect to the bending characteristics and strength of the first flexible substrate. In addition, the adhesive layer 208 cannot sufficiently block moisture permeation, compared to the second flexible substrate 210. Accordingly, moisture may permeate through the side surfaces of the adhesive layer 208. In particular, the thicker the adhesive layer 208 is, the more likely moisture permeates through the side surfaces. For this reason, the second adhesive layer 228 contains the moisture absorbents 238. The moisture absorbents 238 may damage an encapsulation unit 206. Therefore, the first adhesive layer 218 is interposed between the moisture absorbents

238 and the encapsulation unit 206 to protect the encapsulation unit 206 from the moisture absorbents 238. Further, a plurality of organic light-emitting pixels 204 is disposed on the first flexible substrate 202.

[0086] For example, the first adhesive layer 218 may have a thickness between 5 μm and 8 μm so as to protect the encapsulation unit 206 from the moisture absorbents 238 of the second adhesive layer 228. In order to enhance the strength of the first flexible substrate 202 and suppress moisture from permeating through the side surfaces, the sum of the thickness of the first adhesive layer 218 and the thickness of the second adhesive layer 228 may be at least 40 μm to 60 μm . However, this is merely illustrative and the present disclosure is not limited thereto.

[0087] In some embodiments of the present disclosure, a flexible organic light-emitting display device may be disposed in a structure capable of scrolling the flexible organic light-emitting display device.

[0088] In some embodiments of the present disclosure, one side of the flexible organic light-emitting display device is fixed to a cylinder having a diameter such that it may be rolled or unrolled according to the rotation of the cylinder. However, the inventive concepts herein are not limited to display devices or screens that are fixed or operatively attached to a cylinder, as other types of support structures that allow different form factors (i.e. opening for usage and closing for stowage, etc.) are possible.

[0089] The exemplary embodiments of the present disclosure may be summarized as follows:

[0090] A flexible organic light-emitting display device according to exemplary embodiments of the present disclosure includes a first flexible substrate on which a plurality of organic light-emitting pixels is disposed; a second flexible substrate facing the plurality of organic light-emitting pixels on the first flexible substrate; and an adhesive layer configured to adhere the first flexible substrate to the second flexible substrate. A neutral plane is configured adjacent to the plurality of organic light-emitting pixels such that the stress by bending is not created when the flexible organic light-emitting display device is rolled toward the first flexible substrate, thereby protecting the organic light-emitting pixels from the stress.

[0091] The first flexible substrate of the flexible organic light-emitting display device according to the exemplary embodiments of the present disclosure is made of a material having a high Young's modulus so that the first flexible substrate can be unrolled flatly. For example, the first flexible substrate is made of an etched glass. According to the above-described configuration, there is an advantage in that the flatness of the substrate is maintained during a manufacturing process of the organic light-emitting pixels, so that desired yield and processing conditions can be achieved. In addition, there is an advantage in that a desired curvature radius threshold of the flexible organic light-emitting display device can be achieved since the substrate is etched to a certain thickness after forming the organic light-emitting pixels.

[0092] The adhesive layer of the flexible organic light-emitting display device according to the exemplary embodiments of the present disclosure is made of a material having a Young's modulus larger than a certain value so that it is not deformed when it is rolled into a scroll. In addition, in order to mitigate the compressive stress on the first flexible substrate, the adhesive layer has a Young's modulus smaller than that of the first flexible substrate. That is, the Young's modulus of the adhesive layer is smaller than that of the first flexible substrate and is larger than a certain value so that the flexible organic light-emitting display device is not deformed when it is kept in the form of a scroll for long hours.

[0093] The thickness of the adhesive layer of the flexible organic light-emitting display device according to the exemplary embodiments of the present disclosure is determined with respect to the thickness of the first flexible substrate and the strength of the flexible organic light-emitting display device. That is, the adhesive layer has a thickness larger than a certain value in order to achieve a desired strength of the flexible organic light-emitting display device. In addition, the adhesive layer has a thickness smaller than a certain value with respect to the curvature radius threshold of the flexible organic light-emitting display device. That is, the thickness of the adhesive layer is determined in a range that obtains a desired strength at a given thickness of the first flexible substrate without increasing the curvature radius threshold of the flexible organic light-emitting display device.

[0094] The second flexible substrate of the flexible organic light-emitting display device according to the exemplary embodiments of the present disclosure is made of a material having a high Young's modulus value so that the second flexible substrate can be unrolled flatly. Since the second flexible substrate receives tensile stress when it is rolled, the second flexible substrate is made of a material having better durability against tensile stress than that of the first flexible substrate. For example, the second flexible substrate is made of a metal material. According to the above-described configuration, it is possible to avoid damage by the tensile stress when the flexible organic light-emitting display device is rolled into a scroll.

[0095] In some embodiments of the present disclosure, the flexible organic light-emitting display device may be rolled into a circle having a curvature radius larger than the minimum curvature radius that maintains elastic deformation property.

[0096] Specifically, the first flexible substrate is rolled into a circle having a curvature radius larger than the minimum curvature radius that maintains an elastic deformation property. In addition, the second flexible substrate is rolled into a circle having a curvature radius larger than the minimum curvature radius that maintains the elastic deformation property. The term "elastic deformation" refers to a property that allows a layer to restore its original shape as soon as stress is removed even after it is rolled for long hours.

[0097] In addition, the adhesive layer between the first and second flexible substrates has an inelastic (anelastic) deformation property. The term "inelastic deformation" refers to a property that a layer does not restore its original shape even after stress is removed or restores its original shape if it is rolled and stored for a certain period.

[0098] The Young's modulus of each of the first and second flexible substrates may be larger than that of the adhesive layer. For example, the first flexible substrate and/or the second flexible substrate may be made of one of glass, metal and ceramic. The adhesive layer may be made of a polymer.

[0099] According to the above-described configuration, even when the flexible organic light-emitting display device is stored in the form of a scroll for a long-term period, the elastic deformation property can be maintained as the first and second flexible substrates are rolled into a circle having a curvature radius larger than the minimum curvature radius that maintains the elastic deformation property. On the other hand, the adhesive layer has an inelastic deformation property, and thus it may be deformed after it is rolled for a long-term period. However, since the Young's modulus of each of the first and second flexible substrates is larger than that of the adhesive layer, the adhesive layer can restore its flat shape by virtue of the first and second flexible substrates.

[0100] In some embodiments of the present disclosure, the flexible organic light-emitting display device may maintain the elastic deformation property while having a brittle property and a plastic deformation property.

[0101] Specifically, the first flexible substrate has the elastic deformation property in general and such property may be changed into a brittle property if a stress above a certain level is exerted thereon. The second flexible substrate has the elastic deformation property in general and such property may be changed into a plastic deformation property if a stress above a certain level is exerted thereon. The term "brittle property" refers to a property that if a layer is deformed by stress, the layer is rarely plastically deformed but is shattered (e.g., breaks). The term "plastic deformation" refers to a property that has the elastic deformation property in general and such property may be changed into the inelastic deformation property if a stress above a certain level is exerted thereon.

[0102] The first flexible substrate may be rolled such that it receives a stress below a value that causes brittle property. Further, the second flexible substrate may be rolled such that it receives a stress below a value that causes plastic deformation.

[0103] For example, the first flexible substrate is made of glass. In addition, the second flexible substrate may be made of metal.

[0104] According to the above-described configuration, even if the flexible organic light-emitting display device is stored in the form of a scroll for a long-term period, the elastic deformation property can be maintained as

the first and second flexible substrates are rolled into a circle having a curvature radius larger than the minimum curvature radius that can maintain the elastic deformation property.

[0105] In particular, if the first flexible substrate has brittle property, it has good resilience, and thus there is an advantage in that the flexible organic light-emitting display device is not deformed even after it is rolled for a long-term period.

[0106] In some embodiments of the present disclosure, the adhesive layer may be made of an elastomer. The term "elastomer" refers to a polymer with elastic deformation property, such as rubber (e.g., a very large deformation that can be restored at a low stress level). For example, the Young's modulus E_p of the adhesive layer made of an elastomer may be 5 MPa to 100 MPa. That is, elastomer can be easily deformed even with a small stress, and has excellent resilience. Accordingly, if the adhesive layer is made of elastomer, it has very low Young's modulus, and thus there is an advantage in that it does not affect the deformation of the flexible organic light-emitting display device.

[0107] In some embodiments of the present disclosure, at least a surface of the first flexible substrate may be etched. For example, a first surface of the first flexible substrate may be etched, thereby removing a defect, a scratch or damage on the first surface. In particular, the etched surface may be configured to endure tensile stress. According to the above-described configuration, there is an advantage in that the reliability of the flexible organic light-emitting display device can be improved even if at least one surface of the first flexible substrate is etched.

[0108] In some embodiments of the present disclosure, both surfaces of the first flexible substrate may be etched. For example, a first surface and a second surface of the first flexible substrate may be etched, thereby removing a defect, a scratch or damage on the first and second surfaces may be removed. According to the above-described configuration, there is an advantage in that the reliability of the flexible organic light-emitting display device can be improved by etching both surfaces of the first flexible substrate.

[0109] The exemplary embodiments of the present disclosure can also be described as follows:

[0110] According to an aspect of the present disclosure, there is provided an organic light-emitting display device. The organic light-emitting display device includes: a first flexible substrate; a second flexible substrate facing the first flexible substrate; a plurality of organic light-emitting pixels on the first flexible substrate and interposed between the first flexible substrate and the second flexible substrate; an encapsulation unit between the first flexible substrate and the second flexible substrate to protect the plurality of organic light-emitting pixels from oxygen and moisture; and an adhesive layer on the encapsulation unit to adhere the first flexible substrate and the second flexible substrate. The plurality of

organic light-emitting pixels is configured to be adjacent to a neutral plane. The adhesive layer has a Young's modulus that is equal to or larger than a certain value so that the first flexible substrate is not deformed by bending stress if it is retracted in a rolled up form for a certain period of time. The thickness of the adhesive layer is determined with respect to the thickness of the first flexible substrate, the curvature radius threshold of the first flexible substrate and the Young's modulus of the adhesive layer.

[0111] The first flexible substrate may be configured to receive compressive stress and the second flexible substrate may be configured to receive tensile stress, such that compressive stress is applied to the first flexible substrate and tensile stress is applied to the second flexible substrate when the first substrate is rolled up.

[0112] The second flexible substrate may be made of a material having a higher breaking strength against tensile stress than that of the first flexible substrate.

[0113] The second flexible substrate may be a metal plate having a thickness between 10 μm and 120 μm .

[0114] The first flexible substrate may be made of a material having a higher breaking strength against compressive stress than that of the second flexible substrate.

[0115] The first flexible substrate may be an etched glass substrate having a thickness between 30 μm and 100 μm .

[0116] The thickness of the adhesive layer may be between 40 μm and 60 μm .

[0117] The adhesive layer may further include a first adhesive layer adjacent to the plurality of organic light-emitting pixels, and a second adhesive layer adjacent to the second flexible substrate and containing a moisture absorbent.

[0118] The thickness of the first adhesive layer may be equal to at least 5 μm , and the thickness of the second adhesive layer may be equal to the thickness of the adhesive layer minus the thickness of the first adhesive layer.

[0119] The adhesive layer may be made of an epoxy resin having the Young's modulus of 900 MPa or higher under cured status, and the plurality of organic light-emitting pixels is configured to be adjacent to a neutral plane.

[0120] The first flexible substrate may be capable of being rolled up to have a curvature radius equal to or larger than a minimum curvature radius that maintains an elastic deformation property, the second flexible substrate may be rolled into a circle having a curvature radius equal to or larger than a minimum curvature radius that maintains the elastic deformation property, the adhesive layer may have inelastic deformation property, and the Young's modulus of each of the first flexible substrate and the second flexible substrate may be larger than that of the adhesive layer.

[0121] The first flexible substrate may have a brittle property while having the elastic deformation property, the first flexible substrate may be capable of being rolled up so that it receives a stress below a value that causes

the brittle property, the second flexible substrate may have a plastic deformation property while having the elastic deformation property, the second flexible substrate may be capable of being rolled up so that it receives a stress below a value that causes the plastic deformation property.

[0122] The adhesive layer may be made of an elastomer and may have the Young's modulus between 5 MPa and 100 MPa.

[0123] A surface of the first flexible substrate may be etched, and the etched surface may be configured to receive tensile stress.

[0124] According to another aspect of the present disclosure, there is provided an organic light-emitting display device. The organic light-emitting display device includes: a first flexible substrate; a second flexible substrate facing the first flexible substrate; a plurality of organic light-emitting pixels on the first flexible substrate and between the first flexible substrate and the second flexible substrate; an encapsulation unit between the first flexible substrate and the second flexible substrate to protect the plurality of organic light-emitting pixels from oxygen and moisture; and an adhesive layer on the encapsulation unit to adhere the first flexible substrate and the second flexible substrate together.

[0125] The first flexible substrate may be capable of being rolled up to have a curvature radius equal to or larger than a minimum curvature radius that maintains an elastic deformation property, the second flexible substrate may be capable of being rolled up to have a curvature radius equal to or larger than a minimum curvature radius that maintains an elastic deformation property, the adhesive layer may have an elastic deformation property, and each of the first and second flexible substrates may have a Young's modulus that is larger than that of the adhesive layer.

[0126] Thus far, exemplary embodiments of the present disclosure have been described in detail with reference to the accompanying drawings. However, the present disclosure is not limited to the exemplary embodiments, and modifications and variations can be made thereto without departing from the technical idea of the present disclosure. Accordingly, the exemplary embodiments described herein are merely illustrative and are not intended to limit the scope of the present disclosure. The technical idea of the present disclosure is not limited by the exemplary embodiments. The scope of protection sought by the present disclosure is defined by the appended claims and all equivalents thereof are construed to be within the true scope of the present disclosure.

[0127] It follows a list of examples:

1. A flexible organic light-emitting display device comprising:

a first flexible substrate;
a second flexible substrate facing the first flexi-

- ble substrate;
 a plurality of organic light-emitting pixels on the first flexible substrate and interposed between the first flexible substrate and the second flexible substrate;
 an encapsulation unit between the plurality of organic light-emitting pixels and the second flexible substrate and configured to protect the plurality of organic light-emitting pixels from oxygen and moisture; and
 an adhesive layer on the encapsulation unit attaching the first flexible substrate and the second flexible substrate to each other, and wherein a Young's modulus of the first flexible substrate is larger than that of the adhesive layer.
2. The flexible organic light-emitting display device of example 1, wherein the first flexible substrate is configured to receive compressive stress and the second flexible substrate is configured to receive tensile stress, when the first substrate is rolled up.
3. The flexible organic light-emitting display device of example 1 or 2, wherein the second flexible substrate is made of a material having a higher breaking strength against tensile stress than that of the first flexible substrate.
4. The flexible organic light-emitting display device according to any one of the preceding examples, wherein the second flexible substrate includes a metal plate.
5. The flexible organic light-emitting display device according to any one of the preceding examples, wherein the second flexible substrate has a thickness between 10 μm and 120 μm .
6. The flexible organic light-emitting display device according to any one of the preceding examples, wherein the first flexible substrate is made of a material having a higher breaking strength against compressive stress than that of the second flexible substrate.
7. The flexible organic light-emitting display device according to any one of the preceding examples, wherein the first flexible substrate includes a glass substrate.
8. The flexible organic light-emitting display device according to any one of the preceding examples, wherein the first flexible substrate has a thickness between 30 μm and 100 μm .
9. The flexible organic light-emitting display device according to any one of the preceding examples,

wherein the thickness of the adhesive layer is between 40 μm and 60 μm .

10. The flexible organic light-emitting display device according to any one of the preceding examples, wherein the adhesive layer comprises a first adhesive layer adjacent to the plurality of organic light-emitting pixels, and a second adhesive layer adjacent to the second flexible substrate, the second adhesive layer containing a moisture absorbent.

11. The flexible organic light-emitting display device of example 10, wherein a thickness of the first adhesive layer is at least 5 μm .

12. The flexible organic light-emitting display device according to any one of the preceding examples, wherein the adhesive layer includes an epoxy resin or an elastomer.

13. The flexible organic light-emitting display device according to any one of the preceding examples, wherein the adhesive layer has a Young's modulus of 900 MPa or higher in a cured state or wherein the adhesive layer has a Young's modulus between 5 MPa and 100 MPa.

14. The flexible light-emitting display device according to any one of the preceding examples, wherein a Young's modulus of the second flexible substrate is larger than that of the adhesive layer.

15. The flexible organic light-emitting display device according to any one of the preceding examples, wherein the first flexible substrate includes an etched surface opposite to a surface of the first flexible substrate on which the plurality of organic light-emitting pixels is disposed, wherein the plurality of organic light-emitting pixels is adjacent to a neutral plane of the flexible organic light-emitting display device.

Claims

1. A flexible organic light-emitting display device comprising:
- a first flexible substrate;
 - a second flexible substrate facing the first flexible substrate;
 - a plurality of organic light-emitting pixels on the first flexible substrate and interposed between the first flexible substrate and the second flexible substrate; and
 - an adhesive layer configured to adhere the first flexible substrate to the second flexible substrate,
- wherein the flexible organic light-emitting display device

- play device is in a rolled-up form when the first and second flexible substrates are curved toward the first flexible substrate;
wherein the second flexible substrate is made of a metal plate having a higher breaking strength against tensile stress than that of the first flexible substrate and a Young's modulus of the first flexible substrate and a Young's modulus of the second flexible substrate are larger than that of the adhesive layer such that the second flexible substrate is configured to be unrolled flatly.
2. The flexible organic light-emitting display device of claim 1, wherein the first flexible substrate is configured to receive compressive stress and the second flexible substrate is configured to receive tensile stress, when the flexible organic light-emitting display device is rolled up.
 3. The flexible organic light-emitting display device according to claims 1 or 2, wherein the second flexible substrate has a thickness between 10 μm and 120 μm .
 4. The flexible organic light-emitting display device according to any one of the preceding claims, wherein the first flexible substrate includes a glass substrate.
 5. The flexible organic light-emitting display device according to any one of the preceding claims, wherein the first flexible substrate has a thickness between 30 μm and 100 μm .
 6. The flexible organic light-emitting display device according to any one of the preceding claims, wherein the thickness of the adhesive layer is between 40 μm and 60 μm .
 7. The flexible organic light-emitting display device according to any one of the preceding claims, wherein the adhesive layer comprises a first adhesive layer adjacent to the plurality of organic light-emitting pixels, and a second adhesive layer on the second flexible substrate, the second adhesive layer containing a moisture absorbent.
 8. The flexible organic light-emitting display device of claim 7, wherein a thickness of the first adhesive layer is at least 5 μm .
 9. The flexible organic light-emitting display device according to any one of the preceding claims, wherein a thickness of the second adhesive layer is equal to a thickness of the adhesive layer minus the thickness of the first adhesive layer.
 10. The flexible organic light-emitting display device according to any one of the preceding claims, wherein the first flexible substrate and the second flexible substrate have elastic deformation property allowing restoration of their original flat shape as soon as stress is removed after the flexible organic light-emitting display device is rolled up with a curvature radius equal to or larger than a minimum curvature radius, and wherein the adhesive layer has an inelastic deformation property.
 11. The flexible organic light-emitting display device according to any one of the preceding claims, wherein the adhesive layer has a Young's modulus of 900 MPa or higher in a cured state for reducing a degree of deformation when the flexible organic light-emitting display device is stored in the form of scroll.
 12. The flexible organic light-emitting display device according to any one of the preceding claims, wherein a neutral plane is provided adjacent to the plurality of organic light-emitting pixels such that the stress by bending is not created when the flexible organic light-emitting display device is rolled toward the first flexible substrate, thereby protecting the organic light-emitting pixels from the stress.
 13. The flexible organic light-emitting display device according to any one of the preceding claims, wherein the flexible organic light-emitting display device is configured to be stored in the form of scroll for at least 100 hours.
 14. The flexible organic light-emitting display device according to any one of the preceding claims, further comprising an encapsulation unit between the plurality of organic light-emitting pixels and the second flexible substrate, the encapsulation unit being configured to protect the plurality of organic light-emitting pixels from oxygen and moisture.

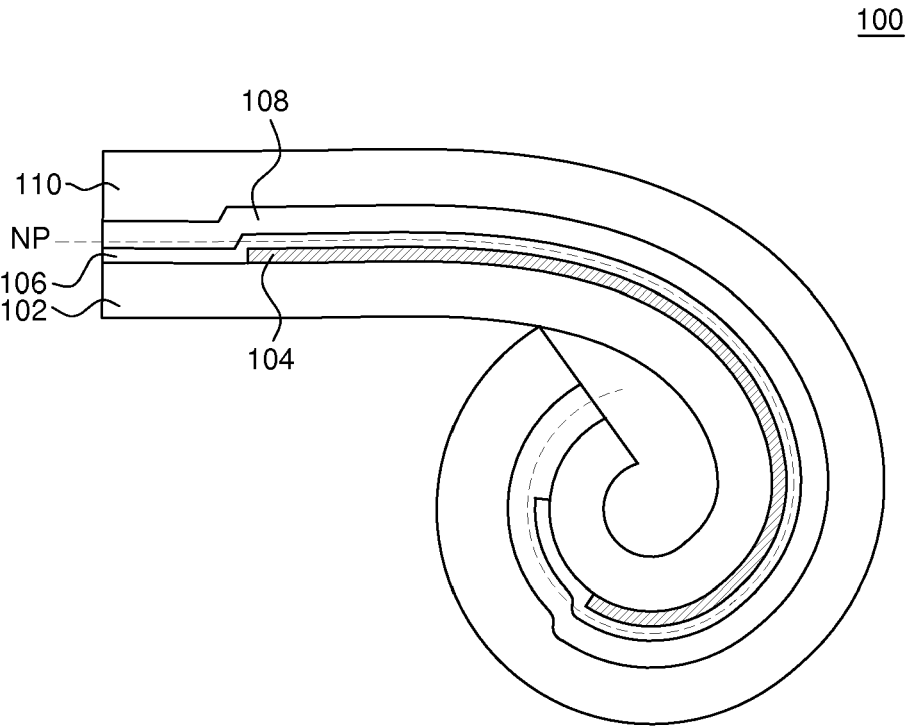


FIG. 1

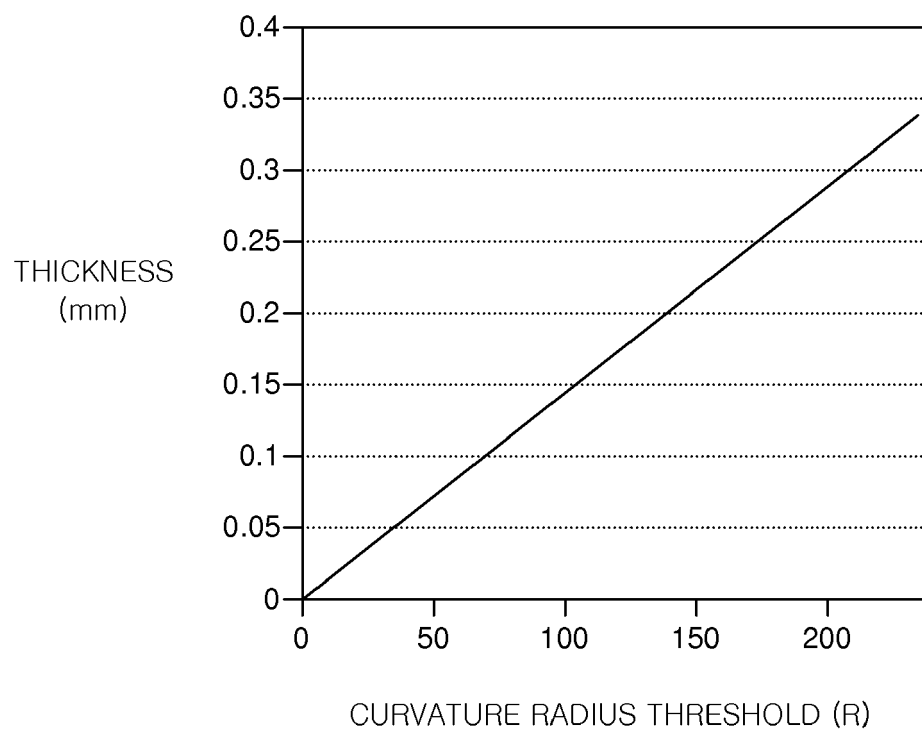


FIG. 2

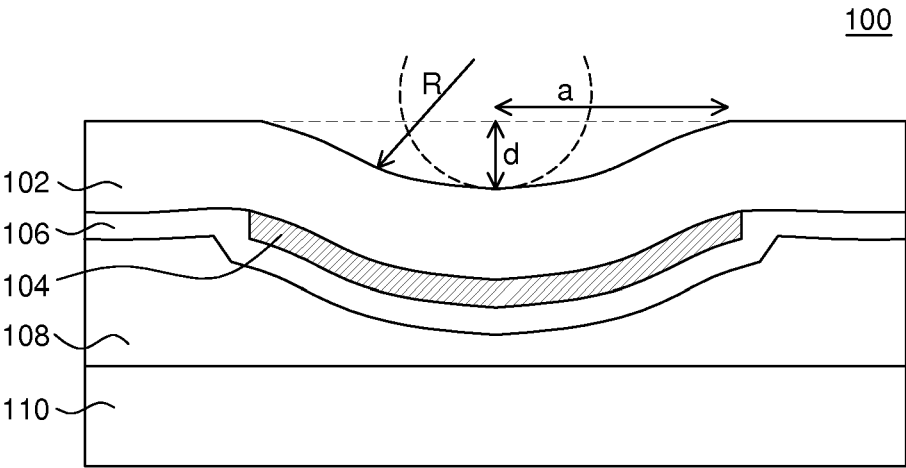


FIG. 3

200

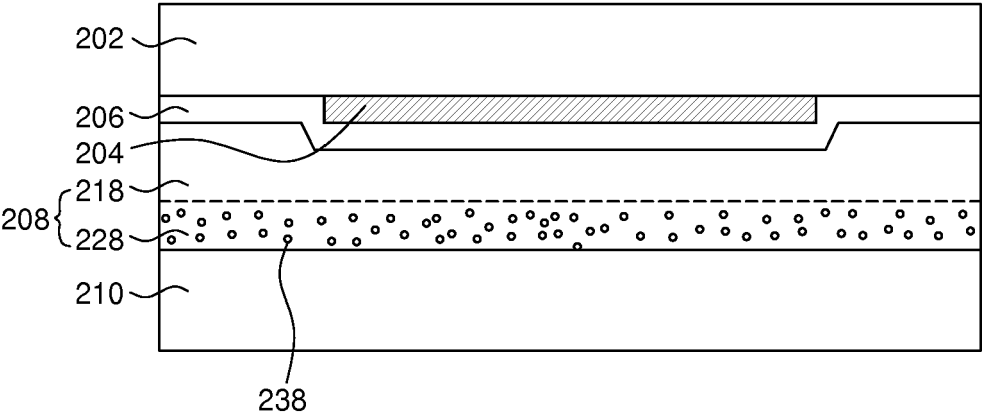


FIG. 4



EUROPEAN SEARCH REPORT

 Application Number
 EP 19 19 1487

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	WO 2014/136259 A1 (PIONEER CORP [JP]) 12 September 2014 (2014-09-12) * figures 2,3,9; examples 2,4 * -& US 2016/028032 A1 (OKADA TAKERU [JP]) 28 January 2016 (2016-01-28) * figures 2,3,9; examples 2,4 * -----	1	INV. H01L51/00 H01L51/52
X	US 2015/048349 A1 (KAWATA TAKUYA [JP] ET AL) 19 February 2015 (2015-02-19) * paragraphs [0009] - [0020], [0069], [0071] - [0098]; figures 2-3 * -----	1-3,5-14	TECHNICAL FIELDS SEARCHED (IPC) H01L
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 18 November 2019	Examiner Wolfbauer, Georg
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
 EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 19 1487

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

18-11-2019

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2014136259 A1	12-09-2014	CN 105009689 A	28-10-2015
		CN 108511615 A	07-09-2018
		EP 2966937 A1	13-01-2016
		JP 6126681 B2	10-05-2017
		JP WO2014136259 A1	09-02-2017
		KR 20150126019 A	10-11-2015
		KR 20180129992 A	05-12-2018
		KR 20190120451 A	23-10-2019
		US 2016028032 A1	28-01-2016
US 2016028032 A1	28-01-2016	WO 2014136259 A1	12-09-2014
		CN 105009689 A	28-10-2015
		CN 108511615 A	07-09-2018
		EP 2966937 A1	13-01-2016
		JP 6126681 B2	10-05-2017
		JP WO2014136259 A1	09-02-2017
		KR 20150126019 A	10-11-2015
		KR 20180129992 A	05-12-2018
		KR 20190120451 A	23-10-2019
US 2015048349 A1	19-02-2015	US 2016028032 A1	28-01-2016
		WO 2014136259 A1	12-09-2014
		JP 6423387 B2	14-11-2018
		JP 6535798 B2	26-06-2019
		JP 2015062060 A	02-04-2015
		JP 2016212423 A	15-12-2016
		JP 2019008305 A	17-01-2019
		JP 2019191593 A	31-10-2019
		KR 20150021000 A	27-02-2015
US 2016343781 A1		US 2015048349 A1	19-02-2015
		US 2016343781 A1	24-11-2016

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- KR 1020150123243 [0001]
- KR 1020150184885 [0001]

专利名称(译)	有机发光显示装置		
公开(公告)号	EP3598514A1	公开(公告)日	2020-01-22
申请号	EP2019191487	申请日	2016-08-30
[标]申请(专利权)人(译)	乐金显示有限公司		
申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	LG DISPLAY CO. , LTD.		
[标]发明人	SHIN JOOHWAN KIM BONGCHUL PARK JAEWOOK		
发明人	SHIN, JOOHWAN KIM, BONGCHUL PARK, JAEWOOK		
IPC分类号	H01L51/00 H01L51/52		
CPC分类号	H01L27/32 H01L51/0097 H01L51/5237 H01L51/5253 H01L2251/5338 Y02E10/549 Y02P70/521 H01L51/5246 H01L51/5259 H01L2251/558		
优先权	1020150123243 2015-08-31 KR 1020150184885 2015-12-23 KR		
外部链接	Espacenet		

摘要(译)

在此公开了一种有机发光显示装置，其具有第一柔性基板。面对第一柔性基板的第二柔性基板；在第一柔性基板上以及在第一柔性基板和第二柔性基板之间的多个有机发光像素；在第一柔性基板和第二柔性基板之间的封装单元，以保护多个有机发光像素免受氧气和湿气的影响；封装层上的粘合剂层，用于将第一柔性基板和第二柔性基板粘合在一起。粘合层的杨氏模量等于或大于特定值，使得第一柔性基板在卷起时不会因弯曲应力而变形。

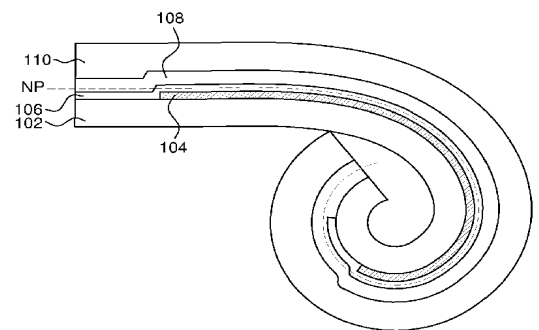


FIG. 1