



(11)

EP 1 321 922 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
20.08.2008 Bulletin 2008/34

(51) Int Cl.:
G09G 3/32^(2006.01)

(21) Application number: **02258554.1**

(22) Date of filing: **11.12.2002**

(54) **Pixel circuit for light emitting element**

Pixelschaltung für ein lichtemittierendes Element

Circuit pixel pour un élément émetteur de lumière

(84) Designated Contracting States:
DE FR GB

(30) Priority: **13.12.2001 JP 2001379714**

(43) Date of publication of application:
25.06.2003 Bulletin 2003/26

(60) Divisional application:
07075009.6 / 1 777 692
07075927.9 / 1 921 596

(73) Proprietor: **Seiko Epson Corporation**
Shinjuku-ku
Tokyo 163-0811 (JP)

(72) Inventor: **Miyazawa, Takashi,**
c/o Seiko Epson Corporation
Suwa-shi,
Nagano-ken 392-8502 (JP)

(74) Representative: **Sturt, Clifford Mark et al**
Miller Sturt Kenyon
9 John Street
London
WC1N 2ES (GB)

(56) References cited:
EP-A- 1 061 497 **WO-A-99/38148**
WO-A-99/65012 **WO-A-02/071379**

- **PATENT ABSTRACTS OF JAPAN** vol. 2000, no. 02, 29 February 2000 (2000-02-29) & JP 11 311970 A (SONY CORP), 9 November 1999 (1999-11-09) -& US 6 369 786 B1 (SUZUKI YOSHIO) 9 April 2002 (2002-04-09)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 321 922 B1

Description

[0001] The present invention pertains to a technology for a pixel circuit for a current-driven light emitting element.

[0002] Electrooptical devices that use organic EL (electroluminescent) elements have been developed in recent years. Because an organic EL element is a self-emitting element and does not require a back light, it is expected to enable the production of display devices having low power consumption, a wide field angle and a high contrast ratio. In this specification, an "electrooptical device" means a device that converts electrical signals into light. The most common implementation of an electrooptical device is a device that converts electrical signals that represent an image into light that represents an image, and this type of device is preferred for display devices in particular.

[0003] Existing types of organic EL element pixel circuits include pixel circuits that use the voltage programming method that sets the light emission tone based on the voltage value and pixel circuits that use the current programming method that sets the light emission tone based on the current value. "Programming" refers to the process to set the light emission tone in the pixel circuit. The voltage programming method is relatively fast, but it can result in somewhat inaccurate light emission tone setting. On the other hand, the current programming method sets the light emission tone accurately, but can require a relatively long time to execute.

[0004] Accordingly, a pixel circuit that uses a method different from either of the conventional methods has been desired. This demand exists not only for display devices that use organic EL elements, but also for display devices or electrooptical devices that use current-driven light emitting elements other than organic EL elements.

[0005] Document WO99/38148 discloses a method to program a holding capacitor which is attached to the driving transistor of a light emitting element. The external signal generator for the data column first generates a voltage to charge up the column line and the holding capacitor quickly to nearly the final voltage level. After that, the external signal generator automatically switches to a current driving mode, and it applies the data current to the same column line in order to program the voltage of the holding capacitor accurately. WO99/38148 combines fast but inaccurate voltage programming with slow but accurate current programming of the holding capacitor.

[0006] An object of the present invention is to provide a technology for setting the light emission tone of a current-driven light emitting element using a method different from the methods of the conventional art.

[0007] According to an aspect of the invention, there is provided an electronic device as recited in claim 10.

[0008] According to a second aspect of the present invention, there is provided an electronic apparatus comprising such an electronic device.

[0009] A third aspect of the invention involves a driving

method for an electronic device, as set forth in claim 10.

[0010] The present invention can be implemented in various forms. For example, it can be implemented in the form of a pixel circuit, an electrooptical device or display device that uses such pixel circuits, an electronic device or electronic mechanism that includes such electrooptical device or display device, a driving method for such device or mechanism, a computer program that implements the functions of such method, a recording medium on which such computer program is recorded, or data signals that include such computer program and are embodied in a carrier wave.

[0011] These and other objects, features, aspects, and advantages of the present invention will become more apparent from the following detailed description of the preferred embodiments with the accompanying drawings.

[0012] Embodiments of the invention will now be described by way of further example only and with reference to the accompanying drawings, in which:-

Fig. 1 is a block diagram showing the basic construction of a display device constituting a first embodiment of the present invention.

Fig. 2 is a block diagram showing the internal constructions of a display matrix area 200 and a data line driver 400.

Fig. 3 is a circuit diagram showing the internal constructions of a pixel circuit 210 and a single-line driver 410 of the first embodiment.

Fig. 4 is a circuit diagram of an equivalent circuit to the pixel circuit 210 where the transistor 251 is in the ON state and the transistor 252 is in the OFF state. Figs. 5(a)-5(f) are timing charts showing the normal operation of the pixel circuit 210 of the first embodiment.

Fig. 6 is a circuit diagram showing the internal constructions of a pixel circuit 210a and a single-line driver 410 of a second embodiment.

Figs. 7(a)-7(f) are timing charts showing the operation of the pixel circuit 210a of the second embodiment.

Fig. 8 is a circuit diagram showing the internal constructions of a pixel circuit 210b and a single-line driver 410b of a third embodiment.

Figs. 9(a)-9(f) are timing charts showing the operation of the pixel circuit 210b of the third embodiment.

Fig. 10 is a circuit diagram showing the internal constructions of a pixel circuit 210c and a single-line driver 410c of a fourth embodiment.

Figs. 11(a)-11(f) are timing charts showing the operation of the pixel circuit 210c of the fourth embodiment.

Fig. 12 is a circuit diagram showing the internal constructions of a pixel circuit 210d and a single-line driver 410d included as an example.

Figs. 13(a)-13(e) are timing charts showing the operation of the pixel circuit 210d of the example.

Fig. 14 is a circuit diagram showing the construction of a variation of the example.

[0013] Embodiments of the present invention will be described below in the following order.

- A. First embodiment
- B. Second embodiment
- C. Third embodiment
- D. Fourth embodiment
- E. Example
- F. Other variations

A. First embodiment

[0014] Fig. 1 is a block diagram showing the basic construction of a display device that comprises a first embodiment of the present invention. This display device has a controller 100, a display matrix area 200 (also termed the "pixel region"), a gate driver 300 and a data line driver 400. The controller 100 generates gate line drive signals and data line drive signals to enable display in the display matrix area 200, and supplies the signals to the gate driver 300 and the data line driver 400, respectively.

[0015] Fig. 2 shows the internal constructions of the display matrix area 200 and the data line driver 400. The display matrix area 200 has a plurality of pixel circuits 210 arranged in a matrix fashion, and each pixel circuit 210 has an organic EL element 220. A plurality of data lines X_m (m is an integer ranging from 1 to M) that extend in the column direction and a plurality of gate lines Y_n (n is an integer ranging from 1 to N) that extend in the row direction are connected to the matrix of the pixel circuits 210. The data lines are also termed "source lines", while the gate lines are also termed "scan lines". In this specification, the pixel circuits 210 are also termed "unit circuits" or simply "pixels". The transistors in the pixel circuits 210 are typically TFTs (thin film transistors).

[0016] The gate driver 300 selectively drives one of the plurality of gate lines Y_n and selects one row of pixel circuits. The data line driver 400 has a plurality of single-line drivers 410 that individually drive the data lines X_m . These single-line drivers 410 supply data signals to the pixel circuits 210 over the data lines X_m . When the internal state (to be described below) of each pixel circuit 210 is set via these data signals, the value of the current flowing to each organic EL element 220 is controlled based on such setting, and as a result, the tone of the light emission from each organic EL element is controlled.

[0017] Fig. 3 is a circuit diagram showing the internal constructions of a pixel circuit 210 and a single-line driver 410 of a first embodiment. This pixel circuit 210 is dis-

posed at the intersection of an m^{th} data line X_m and an n^{th} gate line Y_n . One data line X_m includes two sub-data lines U_1 and U_2 , and one gate line Y_n includes three sub-gate lines V_1 - V_3 .

[0018] The single-line driver 410 has a voltage generating circuit 411 and a current generating circuit 412. The voltage generating circuit 411 supplies voltage signals V_{out} to the pixel circuit 210 via the first sub-data line U_1 . The current generating circuit 412 supplies current signals I_{out} to the pixel circuit 210 via the second sub-data line U_2 .

[0019] The pixel circuit 210 includes a current programming circuit 240, and two additional switching transistors 251 and 252. The current programming circuit 240 is a circuit that adjusts the tone of the organic EL element 220 based on the value of the current flowing in the second sub-data line U_2 .

[0020] Fig. 4 shows an equivalent circuit to the pixel circuit 210 where the transistor 251 is in the ON state and the other transistor 252 is in the OFF state (that is, an equivalent circuit to the current programming circuit 240). The current programming circuit 240 has, in addition to the organic EL element 220, four transistors 221-224 and a holding capacitor (also termed a "holding condenser" or a "storage capacitor") 230. The holding capacitor 230 maintains an electric charge commensurate with the current value of the current signal I_{out} supplied thereto via the second sub-data line U_2 , and thereby adjusts the tone of the light emission from the organic EL element 220. In this example, the first through third transistors 211-213 are n-channel FETs, while the fourth transistor 214 is a p-channel FET. Because the organic EL element 220 is a current infusion (current-driven) type light-emitting element similar to a photodiode, it is expressed in the figure using a diode symbol.

[0021] The drain of the first transistor 211 is connected to the source of the second transistor 212, the drain of the third transistor 213 and the drain of the fourth transistor 214. The drain of the second transistor 212 is connected to the gate of the fourth transistor 214. The holding capacitor 230 is connected to a node between the source and the gate of the fourth transistor 214. The source of the fourth transistor 214 is also connected to a power supply potential V_{dd} . The source of the first transistor 212 is connected to the current generating circuit 412 via the second sub-data line U_2 . The organic EL element 220 is connected between the source of the third transistor 213 and a ground potential. The gates of the first and second transistors 211 and 212 are both connected to the second sub-gate line V_2 . The gate of the third transistor 213 is connected to the third sub-gate line V_3 .

[0022] The first and second transistors 211 and 212 are switching transistors used when a charge is being accumulated in the holding capacitor 230 via the second sub-data line U_2 . The third transistor 213 is a switching transistor that is maintained in the ON state during light emission from the organic EL element 220. The fourth transistor 214 is a drive transistor that regulates the value

of the current flowing to the organic EL element 220. The value of the current flowing to the fourth transistor 214 is regulated by the amount of charge (amount of accumulated charge) held by the holding capacitor 230.

[0023] The pixel circuit 210 shown in Fig. 3 differs from the equivalent circuit shown in Fig. 4 in the following respects:

- (1) A switching transistor 251 is added between the holding capacitor 230 and the connection point CP1 which connects the drain of the second transistor 212 and the gate of the fourth transistor (see Fig. 4).
- (2) Another switching transistor 252 is added between the first sub-data line U1 and the connection point CP2 which connects the holding capacitor 230 and the switching transistor 251.
- (3) A sub-gate line V1 is added that is commonly connected to the gates of the added transistors 251 and 252.
- (4) Voltage signals Vout can be supplied from the voltage generating circuit 411 to the holding capacitor 230 via the first sub-data line U1, and current signals Iout can be supplied from the current generating circuit 412 to the holding capacitor 230 via the second sub-data line U2.

[0024] In the discussion below, the added transistors 251 and 252 are termed "voltage programming transistors 251 and 252." In the example shown in Fig. 3, the first voltage programming transistor 251 is a p-channel FET, while the second voltage programming transistor 252 is an n-channel FET.

[0025] The first and second transistors 211 and 212 of the current programming circuit 240 have the function of controlling whether or not the holding capacitor 230 should be charged using the current signal Iout, or the function of defining a current programming period. They correspond to the "first switching transistor" in the present invention. The second voltage programming transistor 252 has the function of controlling whether or not the holding capacitor 230 should be charged using the voltage signal Vout, or the function of defining a voltage programming period. The transistor 252 corresponds to the "second switching transistor" in the present invention. The first voltage programming transistor 251 corresponds to the "third switching transistor" in the present invention. The first voltage programming transistor 251 may be omitted, however.

[0026] Figs. 5(a)-5(f) are timing charts showing the operation of the pixel circuit 210, and show the voltage values of the sub-gate lines V1-V3 (termed "gate signals V1-V3" below), the current value Iout of the second sub-data line U2, and the value of the current IEL that flows to the organic EL element 220.

[0027] The drive period Tc is divided into a programming period Tpr and a light emission period Tel. The "drive period Tc" is the period during which the tone of the light emission is refreshed for all organic EL elements

220 in the display matrix area 200, and is identical to the so-called frame period. Tone refresh is carried out for each row of pixel circuits, and is sequentially executed for the N rows of pixel circuits during the drive period Tc. For example, where the tone of all pixel circuits is refreshed at a frequency of 30 Hz, the drive period Tc is approximately 33 ms.

[0028] The programming period Tpr is the period during which the tone of light emission from the organic EL element 220 is set in the pixel circuit 210. In this specification, the setting of the tone in the pixel circuit 210 is termed "programming". For example, where the drive cycle Tc is 33 ms and the total number N of gate lines Yn (i.e., the number of rows in the pixel circuit matrix) is 480, the programming period Tpr is no more than about 69 μ s (= 33 ms / 480).

[0029] During the programming period Tpr, the second and third gate signals V2 and V3 are initially set to L level to maintain the first and third transistors 211 and 213 in the OFF state. The first gate signal V1 is then set to H level to set the first voltage programming transistor 251 to the OFF state and the second voltage programming transistor 252 to the ON state. The voltage generating circuit 411 (Fig. 3) then generates a voltage signal Vout having a voltage value that corresponds to the light emission tone. However, a signal having a fixed voltage value irrespective of the light emission tone may be used as the voltage signal Vout. When this voltage signal Vout is supplied to the holding capacitor 230 via the second programming transistor 252, charge corresponding to the voltage signal Vout is accumulated in the holding capacitor 230.

[0030] When programming via the voltage signal Vout as described above has ended, the first gate signal V1 is lowered to L level to set the first voltage programming transistor 251 to the ON state and the second voltage programming transistor 252 to the OFF state. When this is done, the pixel circuit 210 becomes the equivalent circuit shown in Fig. 4. In this state, the second gate signal V2 is set to H level to set the first and second transistors 211 and 212 to the ON state while a current value Im corresponding to the light emission tone is sent to the second sub-data line U2 (Figs. 5(b), 5(e)). The current generating circuit 412 (Fig. 3) functions as a fixed-current source that supplies a fixed current value Im corresponding to the light emission tone. As shown in Fig. 5(e), this current value Im is set to a value corresponding to the tone of the light to be emitted from the organic EL element 220 within a predetermined current value range RI.

[0031] As a result of the programming executed using the current value Im, the holding capacitor 230 enters a state in which it maintains a charge corresponding to the current value Im flowing through the fourth transistor (drive transistor) 214. In this state, the voltage stored in the holding capacitor 230 is applied between the source and the gate of the fourth transistor 214. In this specification, the current value Im of the data signal Iout used for programming is termed the "programming current val-

ue Im."

[0032] When the programming executed using the current signal lout is completed, the gate driver 300 sets the second gate signal V2 to L level to set the first and second transistors 211 and 212 to the OFF state, and the current generating circuit 412 stops the current signal lout.

[0033] During the light emission period Tel, the first gate signal V1 is maintained at L level to set the pixel circuit 210 to the equivalent circuit state shown in Fig. 4. In addition, while the second gate signal V2 is maintained at L level to keep the first and second transistors in the OFF state, the third gate signal V3 is set to H level to set the third transistor 213 to the ON state. Because the voltage corresponding to the programming current value Im is stored in advance in the holding capacitor 230, a current that is essentially equivalent to the programming current value Im flows to the fourth transistor 214. Therefore, a current that is essentially equivalent to the programming current value Im also flows to the organic EL element 220, which emits light having a tone corresponding to this current value Im.

[0034] Because the pixel circuit 210 of the first embodiment executes programming via a current signal lout after execution of programming via a voltage signal Vout, as described above, the light emission tone can be set more accurately than it can via programming using a voltage signal Vout only. Furthermore, the light emission tone can be set more quickly than it can when programming via a current signal lout only is executed. In other words, the pixel circuit 210 enables the light emission tone to be set more quickly and more accurately than in the conventional art.

B. Second embodiment

[0035] Fig. 6 is a circuit diagram showing the internal constructions of a pixel circuit 210a and a single-line driver 410 of a second embodiment. Except for the addition of a second holding capacitor 232, the construction of the pixel circuit 210a is identical to that of the pixel circuit 210 of the first embodiment. The second holding capacitor 232 is disposed between the power supply Vdd and the connection point CP1 which connects the drain of the second transistor 212 and the gate of the fourth transistor.

[0036] Figs. 7(a)-7(f) are timing charts showing the operation of the pixel circuit 210a of the second embodiment. In the second embodiment, a period during which the first gate signal V1 and the second gate signal V2 are both at H level exists during the programming period Tpr. While the first gate signal V1 is at H level, the second voltage programming transistor 252 is in the ON state and programming of the first holding capacitor 230 is executed via the voltage signal Vout. While the second gate signal V2 is at H level, the first and second switching transistors 211 and 212 incorporated in the current programming circuit 240 are in the ON state and programming of the second holding capacitor 232 is executed via the current signal lout. While both the first and second

gate signals V1 and V2 are at H level, because the first voltage programming transistor 251 is maintained in the OFF state, the voltage programming of the first holding capacitor 230 and the current programming of the second holding capacitor 232 are executed in a parallel fashion.

[0037] Thereafter, when the first gate signal V1 falls to L level before the second gate signal V2, voltage programming is completed, and programming (current programming) of the two holding capacitors 230 and 232 is continued. When this is done, because the first holding capacitor 230 is programmed in advance using voltage, the amount of time necessary in order to maintain an appropriate charge amount in the two holding capacitors 230 and 232 can be reduced.

[0038] As can be understood from the second embodiment, programming via the voltage signal Vout may be executed simultaneously with programming via the current signal lout. The light emission tone can be set more accurately if current programming is completed after the completion of voltage programming, as shown in Figs. 7(a)-7(f). In other words, it is preferred that current programming be executed at least after voltage programming has ended.

C. Third embodiment

[0039] Fig. 8 is a circuit diagram showing the internal constructions of a pixel circuit 210b and a single-line driver 410b of a third embodiment. The voltage generating circuit 411b and the current generating circuit 412b of this single-line driver 410b are connected to the power supply potential Vdd.

[0040] The pixel circuit 210b of the third embodiment includes a so-called Sarnoff current programming circuit 240b and two voltage programming transistors 251b and 252b. The current programming circuit 240b has an organic EL element 220b, four transistors 211b-214b, and a holding capacitor 230b. The four transistors 211b-214b in this embodiment are p-channel FETs.

[0041] The second transistor 212b, the holding capacitor 230b, the first voltage programming transistor 251b, the first transistor 211b and the organic EL element 220b are serially connected to the second sub-data line U2 in the order described. The drain of the first transistor 211b is connected to the organic EL element 220b. The second sub-gate line V2 is commonly connected to the gates of the first and second transistors 211b and 212b.

[0042] The third transistor 213b, the fourth transistor 214b and the organic EL element 220b are serially connected between the power supply potential Vdd and a ground potential. The drain of the third transistor 213b and the source of the fourth transistor 214b are also connected to the drain of the second transistor 212b. The third gate line V3 is connected to the gate of the third transistor 213, and the gate of the fourth transistor 214b is connected to the source of the first transistor 211b.

[0043] The holding capacitor 230b and the first voltage programming transistor 251b are serially connected be-

tween the source and the gate of the fourth transistor 214b. Because the first voltage programming transistor 251b is maintained in the ON state during light emission from the organic EL element 220b, the voltage between the source and the gate of the fourth transistor 214b is determined in accordance with the amount of charge accumulated in the holding capacitor 230b.

[0044] The first and second transistors 211b and 212b are switching transistors used when a desired amount of charge is to be accumulated in the holding capacitor 230b. The third transistor 213b is a switching transistor that is maintained in the ON state during light emission from the organic EL element 220b. The fourth transistor 214b is a drive transistor that regulates the value of the current flowing to the organic EL element 220b.

[0045] The first and second transistors 211b and 212b of the current programming circuit 240b have the function of controlling whether or not the holding capacitor 230b should be charged with the current signal Iout, or the function of defining a current programming period. These transistors 211b, 212b are equivalent to the "first switching transistor" in the present invention. Similarly, the second voltage programming transistor 252b has the function of controlling whether or not the holding capacitor 230b should be charged with the voltage signal Vout, or the function of defining a voltage programming period. This transistor 252b is equivalent to the "second switching transistor" in the present invention. Furthermore, the first voltage programming transistor 251b is equivalent to the "third switching transistor" in the present invention. The first voltage programming transistor 251b may be omitted, however.

[0046] Figs. 9(a)-9(f) are timing charts showing the operation of the pixel circuit 210b of the third embodiment. In this operation, the logic of the second and third gate signals V2 and V3 is reversed in relation to the operation of the first embodiment shown in Figs. 5(b) and 5(c). In addition, in the third embodiment, the programming current Im flows to the organic EL element 220b via the second and fourth transistors 212b and 214b during the programming period Tpr, as can be seen from the circuit construction shown in Fig. 8. Therefore, in the third embodiment, light is emitted from the organic EL element 220b during the programming period Tpr as well. As described above, light may be emitted from the organic EL element during the programming period Tpr, or alternatively, light need not be emitted during this period, as in the first and second embodiments.

[0047] The third embodiment has the same effect as the first and second embodiments. In other words, because both voltage programming and current programming are carried out, the light emission tone can be set more accurately than if only voltage programming is performed. Furthermore, the light emission tone can be set more quickly than if only current programming is carried out.

D. Fourth embodiment

[0048] Fig. 10 is a circuit diagram showing the internal constructions of a pixel circuit 210c and a single-line driver 410c of a fourth embodiment. The voltage generating circuit 411c and the current generating circuit 412c incorporated in the single-line driver 410c are each connected to a negative polarity power supply potential -Vee.

[0049] The pixel circuit 210c of the fourth embodiment includes a current programming circuit 240c and two voltage programming transistors 251c and 252c. The current programming circuit 240c has an organic EL element 220c, four transistors 211c-214c, and a holding capacitor 230c. In this example, the first and second transistors 211c and 212c are n-channel FETs, and the third and fourth transistors 213c and 214c are p-channel FETs.

[0050] The first and second transistors 211c and 212c are serially connected to the second sub-data line U2 in that order. The drain of the second transistor 212c is connected to the gates of the third and fourth transistors 213c and 214c. In addition, the drain of the first transistor 211c and the source of the second transistor 212c are connected to the drain of the third transistor 213c. The drain of the fourth transistor 214c is connected to the power supply potential -Vee via the organic EL element 220b. The sources of the third and fourth transistors 213c and 214c are grounded. The first voltage programming transistor 251c and the holding capacitor 230c are serially connected between the gate and the source of the third and fourth transistors 213c and 214c. When the first voltage programming transistor 251c is in the ON state, the holding capacitor 230c sets the voltage between the source and the gate of the fourth transistor 214c, which is the drive transistor for the organic EL element 220c. Therefore, the tone of light emission from the organic EL element 220c is determined in accordance with the amount of charge accumulated in the holding capacitor 230c. The second voltage programming transistor 252c is connected between one terminal of the holding capacitor 230c and the first sub-data line U1.

[0051] The first sub-gate line V1 is commonly connected to the gates of the two voltage programming transistors 251c and 252c. The second and third sub-gate lines V2 and V3 are respectively connected to the gates of the first and second transistors 211c and 212c.

[0052] The first and second transistors 211c and 212c are transistors used when a desired amount of charge is to be accumulated in the holding capacitor 230c. The fourth transistor 214c is a drive transistor used to control the value of the current flowing to the organic EL element 220c. The third and fourth transistors 213c and 214c constitute a so-called current mirror circuit, and the value of the current flowing to the third transistor 213c and the value of the current flowing to the fourth transistor 214c have a prescribed proportional relationship. Therefore, when a programming current Im is supplied to the third transistor 213c via the second sub-data line U2, a current proportional to this current flows to the fourth transistor

214c and the organic EL element 220c. The ratio between these two current values is equivalent to the ratio between the gain factors β of the two transistors 213c and 214c. As is well known, the gain factor β is defined as $\beta = (\mu C_0 W/L)$. Here, μ is the mobility of the carrier, C_0 is the gate capacity, W is the channel width, and L is the channel length.

[0053] The first and second transistors 211c and 212c of the current programming circuit 240c have the function of controlling whether or not the holding capacitor 230c should be charged via the current signal Iout, or the function of defining a current programming period. These transistors 211c, 212c are equivalent to the "first switching transistor" in the present invention. Similarly, the second voltage programming transistor 252c has the function of controlling whether or not the holding capacitor 230c should be charged via the voltage signal Vout, or the function of defining a voltage programming period. This transistor 252c is equivalent to the "second switching transistor" in the present invention. Furthermore, the first voltage programming transistor 251c is equivalent to the "third switching transistor" in the present invention. The first voltage programming transistor 251c may be omitted, however.

[0054] Figs. 11(a)-11(f) are timing charts showing the operation of the pixel circuit 210c of the fourth embodiment. During the programming period Tpr, only the first gate signal V1 is initially set to H level, and therefore the first and second voltage programming transistors 251c and 252c are set to the OFF and ON state, respectively. When this is done, the voltage generating circuit 411c executes voltage programming by supplying a voltage signal Vout to the holding capacitor 230c via the first sub-data line U1. Next, the first gate signal V1 falls to L level, and the second and third gate signals V2 and V3 switch to H level. While the second and third gate signals V2 and V3 are at H level, the first and second switching transistors 211c and 212c of the current programming circuit 240c switch to the ON state, and programming of the holding capacitor 230c via a current signal Iout is executed. At the same time, a current value Ima proportional to the current value Im of the current signal Iout also flows to the fourth transistor 214c and the organic EL element 220c (Fig. 11(f)). When this occurs, a charge corresponding to the operating state of the third and fourth transistors 213c and 214c is accumulated in the holding capacitor 230c. Consequently, even after the second and third gate signals V2 and V3 have fallen to L level, a current value Ima corresponding to the amount of charge accumulated in the holding capacitor 230c flows to the fourth transistor 214c and the organic EL element 220c.

[0055] The fourth embodiment has the same effect as the other embodiments described above. In other words, because both voltage programming and current programming are carried out, the light emission tone can be set more accurately than if only voltage programming is performed, and the light emission tone can be set more quickly than if only current programming is carried out.

E. Example

[0056] Fig. 12 is a circuit diagram showing, the internal constructions of a pixel circuit 210d and a single-line driver 410d. These are included purely as an example and do not form part of the present invention as claimed. This pixel circuit 210d is identical to the circuit shown in Fig. 4. In other words, the example does not have the two switching transistors 251 and 252 that were present in the first embodiment (see Fig. 3). Furthermore, the sub-gate line V1 used for the transistors 251 and 252 is also omitted. The single-line driver 410d and its internal circuits 411d and 412d are identical to the equivalent circuits in the first embodiment shown in Fig. 3. However, the example differs from the first embodiment in that the voltage generating circuit 411d and the current generating circuit 412d are commonly connected to the pixel circuit 210d via a single data signal line Xm.

[0057] Figs. 13(a)-13(e) are timing charts showing the operation of the pixel circuit 210d of the example. During the first half of the programming period Tpr, voltage programming is executed through the supply of a voltage signal Vout (see Fig. 13(c)) from the voltage generating circuit 411d to the data line Xm. When this is done, the data line Xm is charged or discharged and the holding capacitor 230 is charged or discharged accordingly. During the second half of the programming period Tpr, the holding capacitor 230 is accurately programmed through the supply of a current signal Iout (Fig. 13(d)) from the current generating circuit 412d. In the example, because the switching transistor 211 is set to the ON state for both voltage programming and current programming, the gate signal V2 is maintained at H level in both cases.

[0058] As described above, even where a pixel circuit identical to the conventional pixel circuit is used, if both voltage programming and current programming are executed, the light emission tone can be set more accurately than if only voltage programming is performed, and can be set more quickly than if only current programming is performed. In the example in particular, current programming is executed after the completion of voltage programming using the same single data line Xm. During voltage programming, a kind of pre-charge is executed with respect to both the data line Xm and the holding capacitor 230, whereupon current programming is executed. Therefore, the light emission tone can be set more accurately and quickly than is possible using the pixel circuit of the conventional art.

[0059] Fig. 14 is a circuit diagram showing a variation of the example. It differs from the construction shown in Fig. 12 in that the voltage generating circuit 411d is disposed on the power supply voltage Vdd side. The same effect obtained with the circuit shown in Fig. 12 is obtained with this circuit as well.

[0060] Where voltage programming and current programming are carried out using the same data line Xm, as with the example, the voltage programming period and the current programming period may partially over-

lap. In order to accurately set the light emission tone, it is preferred that the timing of the voltage and current signals be adjusted such that current programming (i.e., the supply of a current signal) is executed at least in a period after voltage programming (i.e., the supply of a voltage signal) has completed.

F. Other variations

Variation F1:

[0061] In the various embodiments described above, programming was executed for each row of pixel circuits (i.e., in the order of pixel row lines), but programming may instead be carried out for each pixel (i.e., in the order of pixel dots). Where programming is carried out in pixel dot sequence, there is no need for a single-line driver (i.e., data signal generating circuit) 410 to exist for each data line set X_m (U1, U2), and one single-line driver 410 may be used for the entire pixel circuit matrix. In this case, the single-line driver 410 is constructed such that the data signals (i.e., the voltage signals V_{out} and current signals I_{out}) are output to the one data line set that governs the pixel circuit to be programmed. In order to realize such a construction, a switching circuit that switches among the connections between the single-line driver 410 and the plurality of data line sets is provided.

Variation F2

[0062] In the various embodiments described above, all of the transistors constituted FETs, but all or some of the transistors may instead constitute bipolar transistors or other types of switching elements. The gate electrode of an FET and the base electrode of a bipolar transistor are equivalent to the "control electrode" in the present invention. The various types of transistors described above may be silicon base transistors instead of thin film transistors (TFT).

Variation F3

[0063] In the pixel circuit in the various embodiments described above, the programming period T_{pr} and the light emission period T_{el} did not overlap, but pixel circuits in which the programming period T_{pr} and the light emission period T_{el} partially overlap may be used instead. For example, during the operations shown in Figs. 9(a)-9(f) and Figs. 11(a)-11(f), the current I_{EL} is flowing to the organic EL element even during the programming period T_{pr} , thereby triggering light emission. Therefore, a partial overlap of the programming period T_{pr} and the light emission period T_{el} may be deemed to exist in these operations.

Variation F4

[0064] In the various embodiments described above,

the active-matrix driving method was employed, but the present invention can also be applied where the organic EL element is driven using the passive-matrix method. However, because the need for high-speed driving is greater in a display device capable of multiple tones or a display device that uses the active-matrix driving method, the effect of the present invention is more remarkable in such a device. Furthermore, the present invention is not limited to a display device in which the pixel circuits are disposed in a matrix fashion, and can also be applied where a different pixel arrangement is used.

Variation F5

[0065] In the embodiments and variations described above, a display device using organic EL elements was described as an example, but the present invention can also be applied in a display device or electronic device using light emitting elements other than organic EL elements. For example, the present invention can be applied to a device having a different type of light emitting elements (such as LEDs or FEDs (Field Emission Displays)) that permit adjustment of the tone of light emission in accordance with the drive current.

Variation F6

[0066] The operations described in connection with the various embodiments above are merely examples, and different operations can be executed with respect to the pixel circuit of the present invention. For example, the pattern by which the gate signals V_1 - V_3 are changed may be set to a different pattern than that used in the examples described above. Furthermore, it is acceptable if a determination is made regarding whether or not voltage programming is required and voltage programming is thereafter executed only if it is determined to be necessary. For example, the data signal that is supplied as a voltage signal may have a voltage value that corresponds to one of the available tones of the light emitting element. Alternatively, the number of available data signal voltage values may be smaller than the number of available light emission tones. In this case, one voltage value comprising a data signal corresponds to a range of light emission tones.

Variation F7

[0067] The pixel circuit of the various embodiments described above can be applied in the display devices of various types of electronic equipment, such as a personal computer, a cellular telephone, a digital still camera, a television, a viewfinder type or monitor screen type video tape recorder, a car navigation device, a pager, an electronic notebook, a calculator, a word processor, a workstation, a TV phone, a POS terminal or a device that includes a touch panel.

Claims

1. An electronic device including:

a scanning line (Y_1 - Y_N),
 a first data line (X_1 - X_N , U2),
 a current generating circuit (412) for generating a current signal (Iout) through the first data line, and
 an electronic circuit, which includes a diode (220), a driving transistor (214) for controlling a current level of a driving current that is to be supplied to the diode, a holding capacitor (230) that is connected to a gate of the driving transistor and is arranged to maintain a charge in accordance with a signal level of the current signal, and a first switching transistor (211) that is connected between the holding capacitor and the first data line and is arranged to control an electrical connection between the holding capacitor and the first data line,
characterized in that:

the electronic device further comprises:

a second data line (X_1 - X_N , U1);
 a voltage generating circuit (411) for generating a voltage signal (Vout) through the second data line, and
 a second switching transistor (252) that is connected between the holding capacitor and the second data line and is arranged to control an electrical connection between the holding capacitor and the second data line,
 the electronic device being configured such that:
 the first and second switching transistors are controlled to connect the holding capacitor to the first and second data lines, respectively, in respective current and voltage programming steps.

2. The electronic device according to claim 1, wherein a signal level of the current signal (Iout) corresponds to the current level of the driving current.

3. The electronic device according to claim 1 or claim 2, wherein the second data line (X_m , U1) is charged by the voltage signal.

4. The electronic device according to any one of the preceding claims, wherein the holding capacitor (230) is precharged by the voltage signal.

5. The electronic device according to any one of the

preceding claims, wherein

a programming current is supplied as the current signal, and
 the programming current flows through the driving transistor.

6. The electronic device according to claim 5, wherein the programming current flows between a power supply potential (Vdd) and the current generating circuit (412) through the first data line (X_m , U2).

7. The electronic device according to any one of the preceding claims, wherein the electronic circuit further includes a third switching transistor (212) that controls an electrical connection between a drain of the driving transistor (214) and the gate of the driving transistor (214).

8. The electronic device according to any one of the preceding claims, wherein the voltage signal is supplied to the second data line as a predetermined voltage.

9. An electronic apparatus comprising an electronic device according to any one of the preceding claims.

10. A driving method for driving an electronic device including:

a scanning line (Y_1 - Y_N),
 first and second data lines (X_1 - X_N , U1, U2),
 a current generating circuit (412) for generating a current signal (Iout) through the first data line during a current programming step;
 a voltage generating circuit (411) for generating a voltage signal (Vout) through the second data line during a voltage programming step and
 an electronic circuit, which includes a diode (220), a driving transistor (214) that controls a current level of a driving current that is to be supplied to the diode, a holding capacitor (230) that is connected to a gate of the driving transistor and is arranged to maintain a charge in accordance with a signal level of the current signal, and first and second switching transistors (211, 252) that are connected between the holding capacitor and the first and second data lines, respectively, and are arranged to control an electrical connection between the holding capacitor and the first and second data lines, respectively;
 the driving method **characterized by** the steps of:

causing the holding capacitor (230) to charge in accordance with a signal level of the voltage signal (Vout) by supplying the voltage signal to the holding capacitor

through the second data line and the second switching transistor (211); and subsequently causing the holding capacitor (230) to charge in accordance with a signal level of the current signal (Iout) by supplying the current signal to the holding capacitor through the first data line and the first switching transistor (211).

11. The method according to claim 10, wherein the electronic circuit further includes a third switching transistor (212) that controls an electrical connection between a drain of the driving transistor (214) and the gate of the driving transistor.
12. The method according to claim 10 or claim 11, wherein the voltage signal is supplied to the second data line as a predetermined voltage.
13. The method according to claim 11 or claim 12, wherein the electronic circuit is precharged by the voltage signal.

Patentansprüche

1. Elektronische Vorrichtung, enthaltend eine Abtastleitung (Y_1 bis Y_N), eine erste Datenleitung (X_1 bis X_N , U2), einen Stromerzeugungsschaltkreis (412) zum Erzeugen eines Stromsignals (Iout) durch die erste Datenleitung, und einen elektronischen Schaltkreis, der eine Diode (220), einen Treibertransistor (214) zum Steuern eines Strompegels eines Antriebsstroms, der zu der Diode geleitet wird, einen Haltekondensator (230), der an ein Gate des Treibertransistors angeschlossen ist und dazu ausgebildet ist, eine Ladung entsprechend einem Signalpegel des Stromsignals zu halten, und einen ersten Schalttransistor (211), der zwischen dem Haltekondensator und der ersten Datenleitung angeschlossen ist und dazu ausgebildet ist, eine elektrische Verbindung zwischen dem Haltekondensator und der ersten Datenleitung zu steuern, enthält,
dadurch gekennzeichnet, dass:

die erste elektronische Vorrichtung des Weiteren umfasst:

eine zweite Datenleitung (X_1 bis X_N , U1); einen Spannungserzeugungsschaltkreis (411) zum Erzeugen eines Spannungssignals (Vout) durch die zweite Datenleitung, und

einen zweiten Schalttransistor (252), der zwischen dem Haltekondensator und der zweiten Datenleitung angeschlossen ist und dazu ausgebildet ist, eine elektrische Verbindung zwischen dem Haltekondensator und der zweiten Datenleitung zu steuern, wobei die elektronische Vorrichtung derart konfiguriert ist, dass:

der erste und zweite Schalttransistor so gesteuert werden, dass der Haltekondensator an die erste beziehungsweise zweite Datenleitung in einem Strombeziehungsweise Spannungsprogrammierungsschritt angeschlossen ist.

2. Elektronische Vorrichtung nach Anspruch 1, wobei ein Signalpegel des Stromsignals (Iout) dem Strompegel des Antriebsstroms entspricht.
3. Elektronische Vorrichtung nach Anspruch 1 oder Anspruch 2, wobei die zweite Datenleitung (X_m , U1) durch das Spannungssignal geladen wird.
4. Elektronische Vorrichtung nach einem der vorangehenden Ansprüche, wobei der Haltekondensator (230) durch das Spannungssignal vorgeladen wird.
5. Elektronische Vorrichtung nach einem der vorangehenden Ansprüche, wobei ein Programmierungsstrom als Stromsignal zugeleitet wird und der Programmierungsstrom durch den Treibertransistor fließt.
6. Elektronische Vorrichtung nach Anspruch 5, wobei der Programmierungsstrom zwischen einem Stromversorgungspotenzial (Vdd) und dem Stromerzeugungsschaltkreis (412) durch die erste Datenleitung (X_m , U2) fließt.
7. Elektronische Vorrichtung nach einem der vorangehenden Ansprüche, wobei der elektronische Schaltkreis des Weiteren einen dritten Schalttransistor (212) enthält, der eine elektrische Verbindung zwischen einem Drain des Treibertransistors (214) und dem Gate des Treibertransistors (214) steuert.
8. Elektronische Vorrichtung nach einem der vorangehenden Ansprüche, wobei das Spannungssignal der zweite Datenleitung als vorbestimmte Spannung zugeleitet wird.
9. Elektronisches Gerät, umfassend eine elektronische Vorrichtung nach einem der vorangehenden An-

sprüche.

10. Antriebsverfahren zum Antreiben einer elektronischen Vorrichtung, enthaltend:

eine Abtastleitung (Y_1 bis Y_N),
erste und zweite Datenleitungen (X_1 bis X_N , U1, U2),
einen Stromerzeugungsschaltkreis (412) zum Erzeugen eines Stromsignals (I_{out}) durch die erste Datenleitung während eines Stromprogrammierungsschritts;
einen Spannungserzeugungsschaltkreis (411) zum Erzeugen eines Spannungssignals (V_{out}) durch die zweite Datenleitung während eines Spannungsprogrammierungsschritts, und
einen elektronischen Schaltkreis, der eine Diode (220), einen Treibertransistor (214) zum Steuern eines Strompegels eines Antriebsstroms, der zu der Diode geleitet wird, einen Haltekondensator (230), der an ein Gate des Treibertransistors angeschlossen ist und dazu ausgebildet ist, eine Ladung entsprechend einem Signalpegel des Stromsignals zu halten, und einen ersten und zweiten Schalttransistor (211, 252), die zwischen dem Haltekondensator und der ersten beziehungsweise zweiten Datenleitung angeschlossen sind und dazu ausgebildet sind, eine elektrische Verbindung zwischen dem Haltekondensator und der ersten beziehungsweise zweiten Datenleitung zu steuern, enthält, wobei das Antriebsverfahren durch folgende Schritte **gekennzeichnet** ist:

Veranlassen des Haltekondensators (230) entsprechend einem Signalpegel des Spannungssignals (V_{out}) zu laden, indem das Spannungssignal dem Haltekondensator durch die zweite Datenleitung und den zweiten Schalttransistor (211) zugeführt wird; und anschließend
Veranlassen des Haltekondensators (230) entsprechend einem Signalpegel des Stromsignals (I_{out}) zu laden, indem das Stromsignal dem Haltekondensator durch die erste Datenleitung und den ersten Schalttransistor (211) zugeführt wird.

11. Verfahren nach Anspruch 10, wobei der elektronische Schaltkreis des Weiteren einen dritten Schalttransistor (212) enthält, der eine elektrische Verbindung zwischen einem Drain des Treibertransistors (214) und dem Gate des Treibertransistors steuert.
12. Verfahren nach Anspruch 10 oder Anspruch 11, wobei das Spannungssignal der zweiten Datenleitung als

vorbestimmte Spannung zugeleitet wird.

13. Verfahren nach Anspruch 11 oder Anspruch 12, wobei der elektronische Schaltkreis durch das Spannungssignal vorgeladen wird.

Revendications

1. Dispositif électronique comprenant :

une ligne de balayage (Y_1 - Y_N),
une première ligne de données (X_1 - X_N , U2),
un circuit de génération de courant (412) pour générer un signal de courant (I_{out}) dans la première ligne de données, et
un circuit électronique, lequel comprend une diode (220), un transistor d'attaque (214) pour contrôler un niveau de courant d'un courant d'attaque devant alimenter la diode, un condensateur de maintien (230) connecté à une grille du transistor d'attaque et étudié pour maintenir une charge en fonction d'un niveau de signal du signal de courant, et un premier transistor de commutation (211) connecté entre le condensateur de maintien et la première ligne de données et étudié pour contrôler une connexion électrique entre le condensateur de maintien et la première ligne de données,

caractérisé en ce que :

le dispositif électronique comprend en outre par ailleurs :

une deuxième ligne de données (X_1 - X_N , U1),
un circuit de génération de tension (411) pour générer un signal de tension (V_{out}) dans la deuxième ligne de données, et
un deuxième transistor de commutation (252) connecté entre le condensateur de maintien et la deuxième ligne de données et étudié pour contrôler une connexion électrique entre le condensateur de maintien et la deuxième ligne de données,
le dispositif électronique étant configuré de manière à ce que :

les premier et le deuxième transistors de commutation soient contrôlés pour connecter respectivement le condensateur de maintien aux première et deuxième lignes de données, au cours d'étapes respectives de programmation du

courant et de la tension.

2. Dispositif électronique selon la revendication 1, un niveau de signal du signal de courant (Iout) correspondant au niveau de courant du courant d'attaque. 5
3. Dispositif électronique selon la revendication 1 ou la revendication 2, la deuxième ligne de données (Xm, U1) étant chargée grâce au signal de tension. 10
4. Dispositif électronique selon l'une quelconque des revendications précédentes, le condensateur de maintien (230) étant préchargé grâce au signal de tension. 15
5. Dispositif électronique selon l'une quelconque des revendications précédentes, un courant de programmation étant fourni en tant que signal de courant, et le courant de programmation circulant à travers le transistor d'attaque. 20
6. Dispositif électronique selon la revendication 5, le courant de programmation circulant entre un potentiel d'alimentation (Vdd) et le circuit de génération de courant (412) à travers la première ligne de données (Xm, U2). 25
30
7. Dispositif électronique selon l'une quelconque des revendications précédentes, le circuit électronique comprenant par ailleurs un troisième transistor de commutation (212) qui contrôle une connexion électrique entre un drain du transistor d'attaque (214) et la grille du transistor d'attaque (214). 35
8. Dispositif électronique selon l'une quelconque des revendications précédentes, le signal de tension alimentant la deuxième ligne de données en tant que tension prédéterminée. 40
9. Appareil électronique comprenant un dispositif électronique selon l'une quelconque des revendications précédentes. 45
10. Procédé de commande pour commander un dispositif électronique incluant : 50
une ligne de balayage (Y_1 - Y_N),
une première et une deuxième ligne de données (X_1 - X_N , U1, U2),
un circuit de génération de courant (412) pour générer un signal de courant (Iout) dans la première ligne de données pendant une étape de programmation du courant ;
un circuit de génération de tension (411) pour

générer un signal de tension (Vout) dans la deuxième ligne de données pendant une étape de programmation de tension, et un circuit électronique, lequel comprend une diode (220), un transistor d'attaque (214) qui contrôle un niveau de courant d'un courant d'attaque devant alimenter la diode, un condensateur de maintien (230) connecté à une grille du transistor d'attaque et étudié pour maintenir une charge en fonction d'un niveau de signal du signal de courant, et des premier et deuxième transistors de commutation (211, 252) qui sont connectés respectivement entre le condensateur de maintien et les première et deuxième lignes de données, et qui sont étudiés pour contrôler une connexion électrique respectivement entre le condensateur de maintien et les première et deuxième lignes de données ; le procédé de commande **se caractérisant par** les étapes suivantes :

faire en sorte que le condensateur de maintien (230) se charge en fonction d'un niveau de signal du signal de tension (Vout) en fournissant le signal de tension au condensateur de maintien via la deuxième ligne de données et le deuxième transistor de commutation (211) ; et ensuite, faire en sorte que le condensateur de maintien (230) se charge en fonction d'un niveau de signal du signal de courant (Iout) en fournissant le signal de courant au condensateur de maintien via la première ligne de données et le premier transistor de commutation (211).

11. Procédé selon la revendication 10, le circuit électronique comprenant par ailleurs un troisième transistor de commutation (212) qui contrôle une connexion électrique entre un drain du transistor d'attaque (214) et la grille du transistor d'attaque. 55
12. Procédé selon la revendication 10 ou la revendication 11, le signal de tension alimentant la deuxième ligne de données en tant que tension prédéterminée.
13. Procédé selon la revendication 11 ou la revendication 12, le circuit électronique étant préchargé grâce au signal de tension.

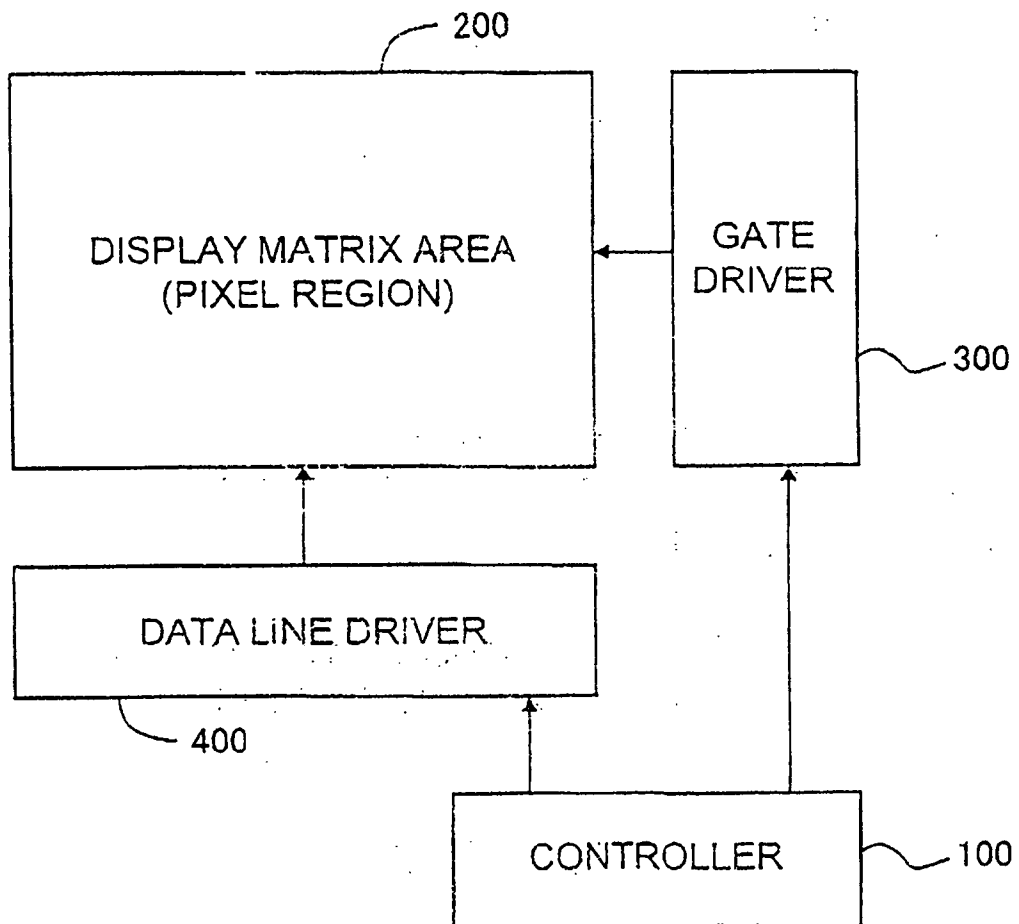


Fig.1

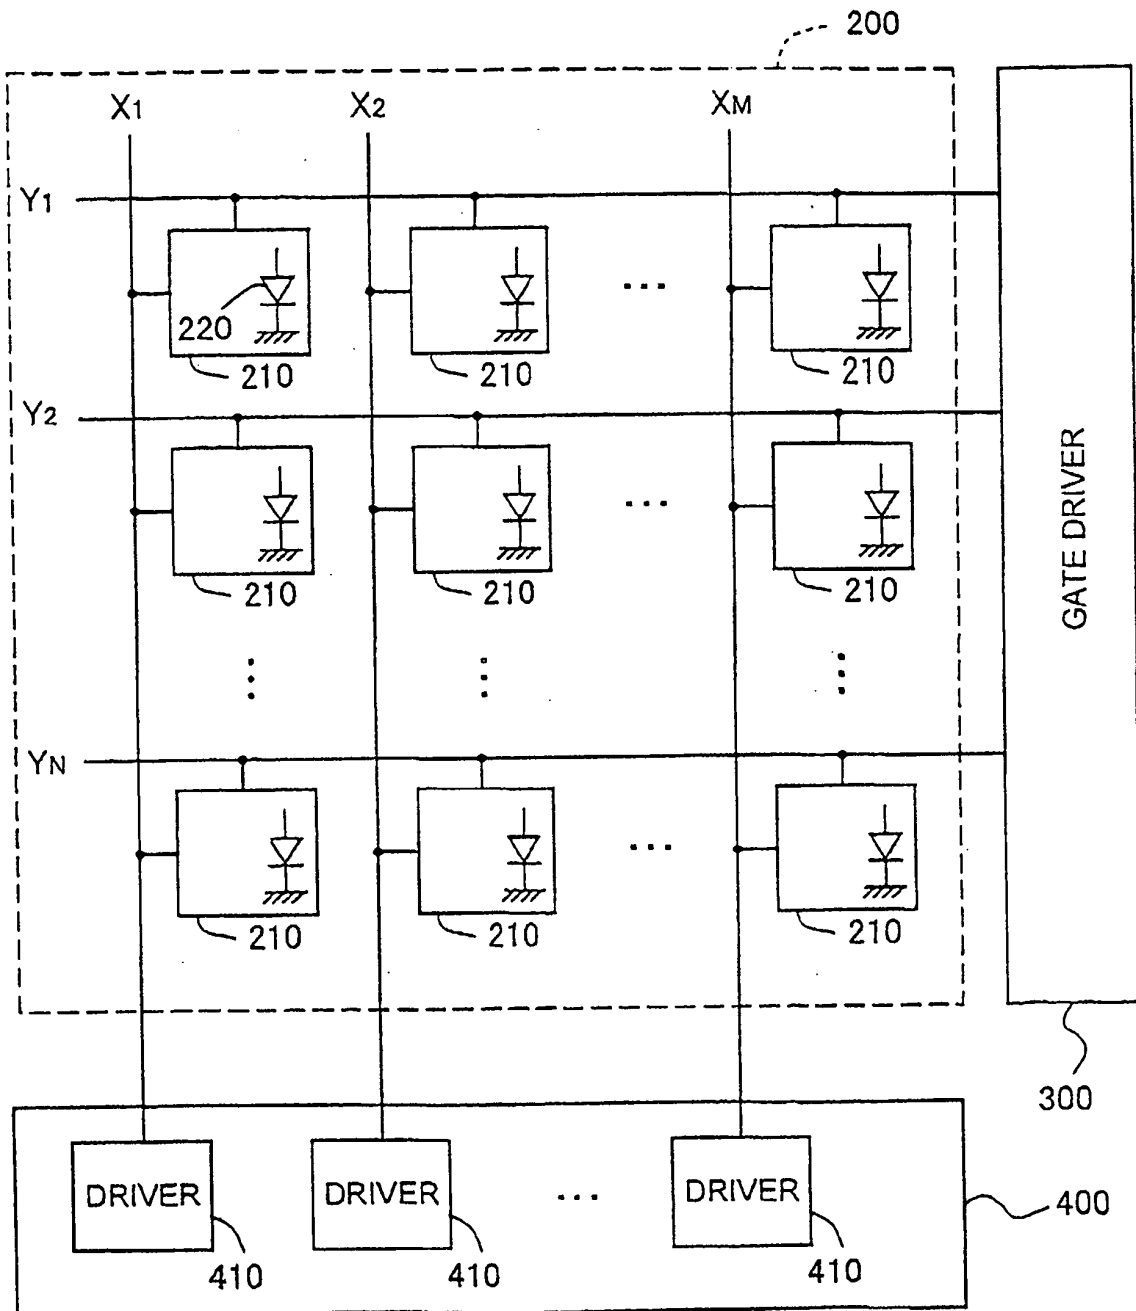
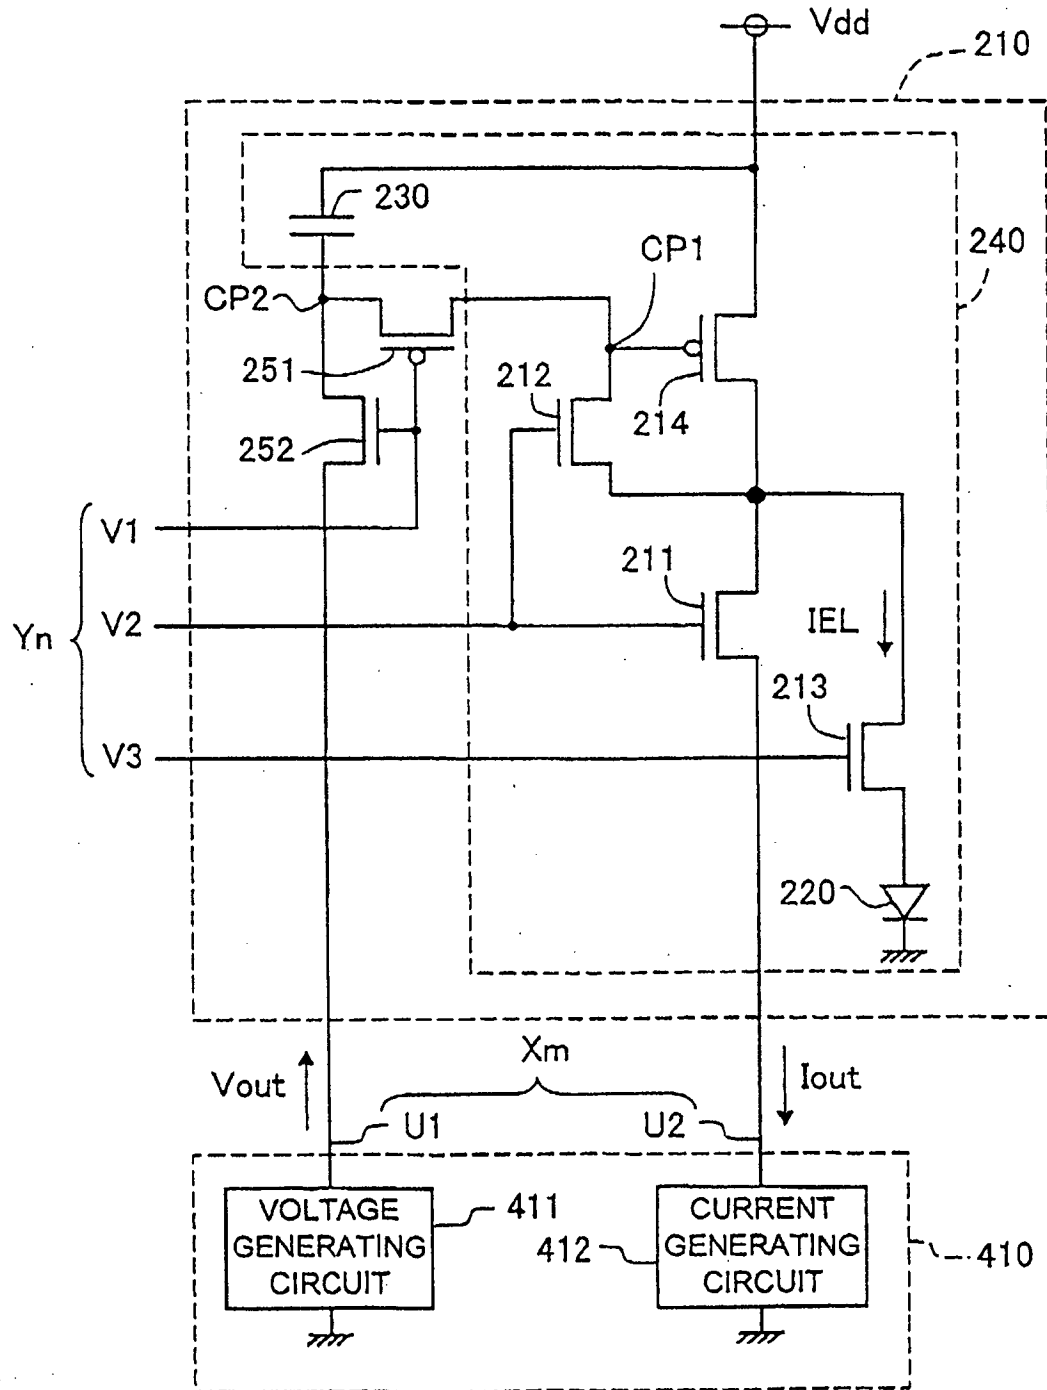


Fig.2

Fig.3



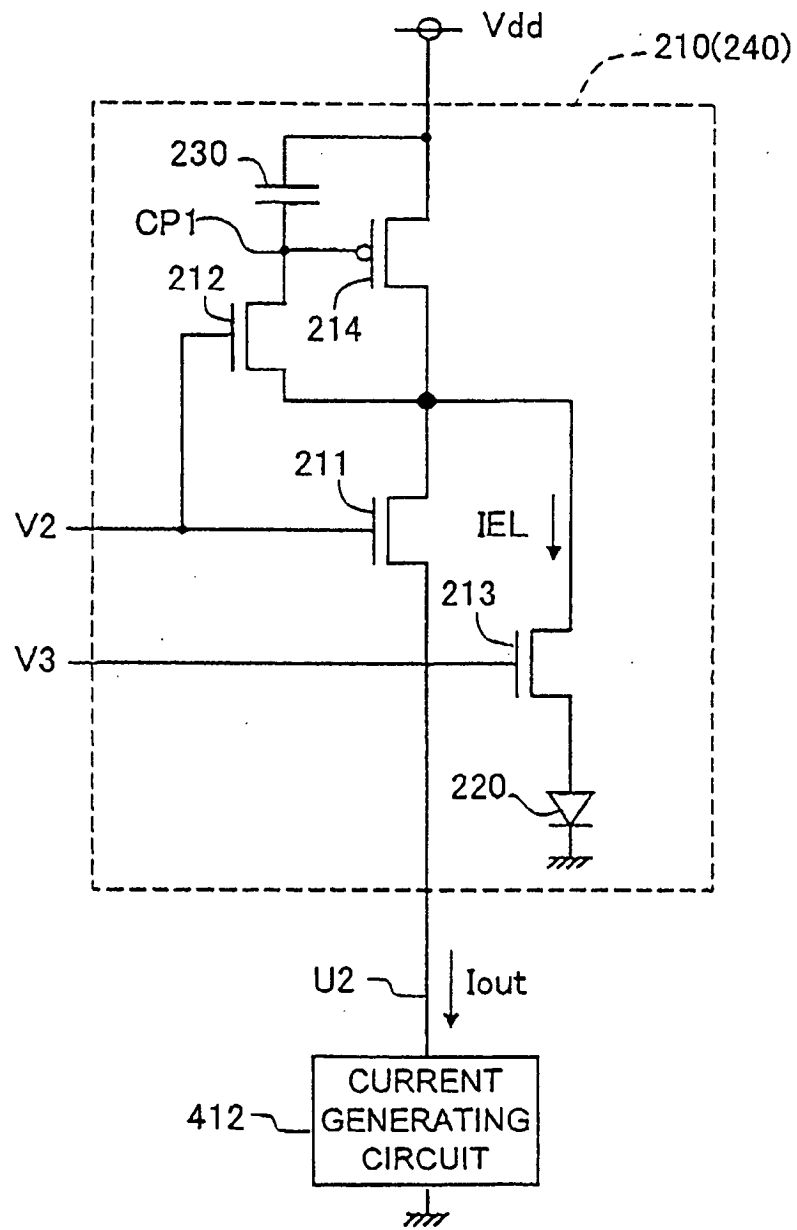


Fig.4

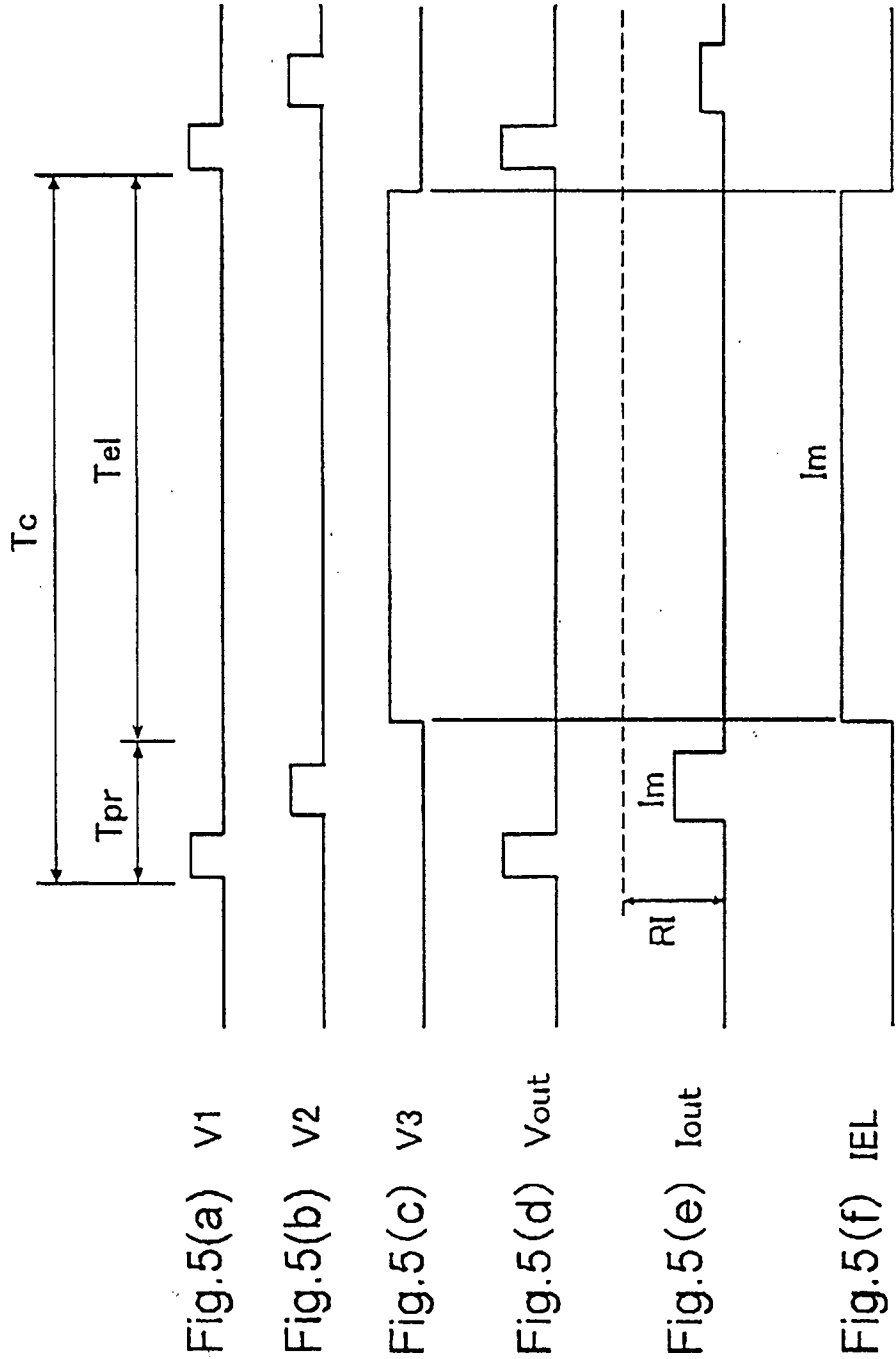
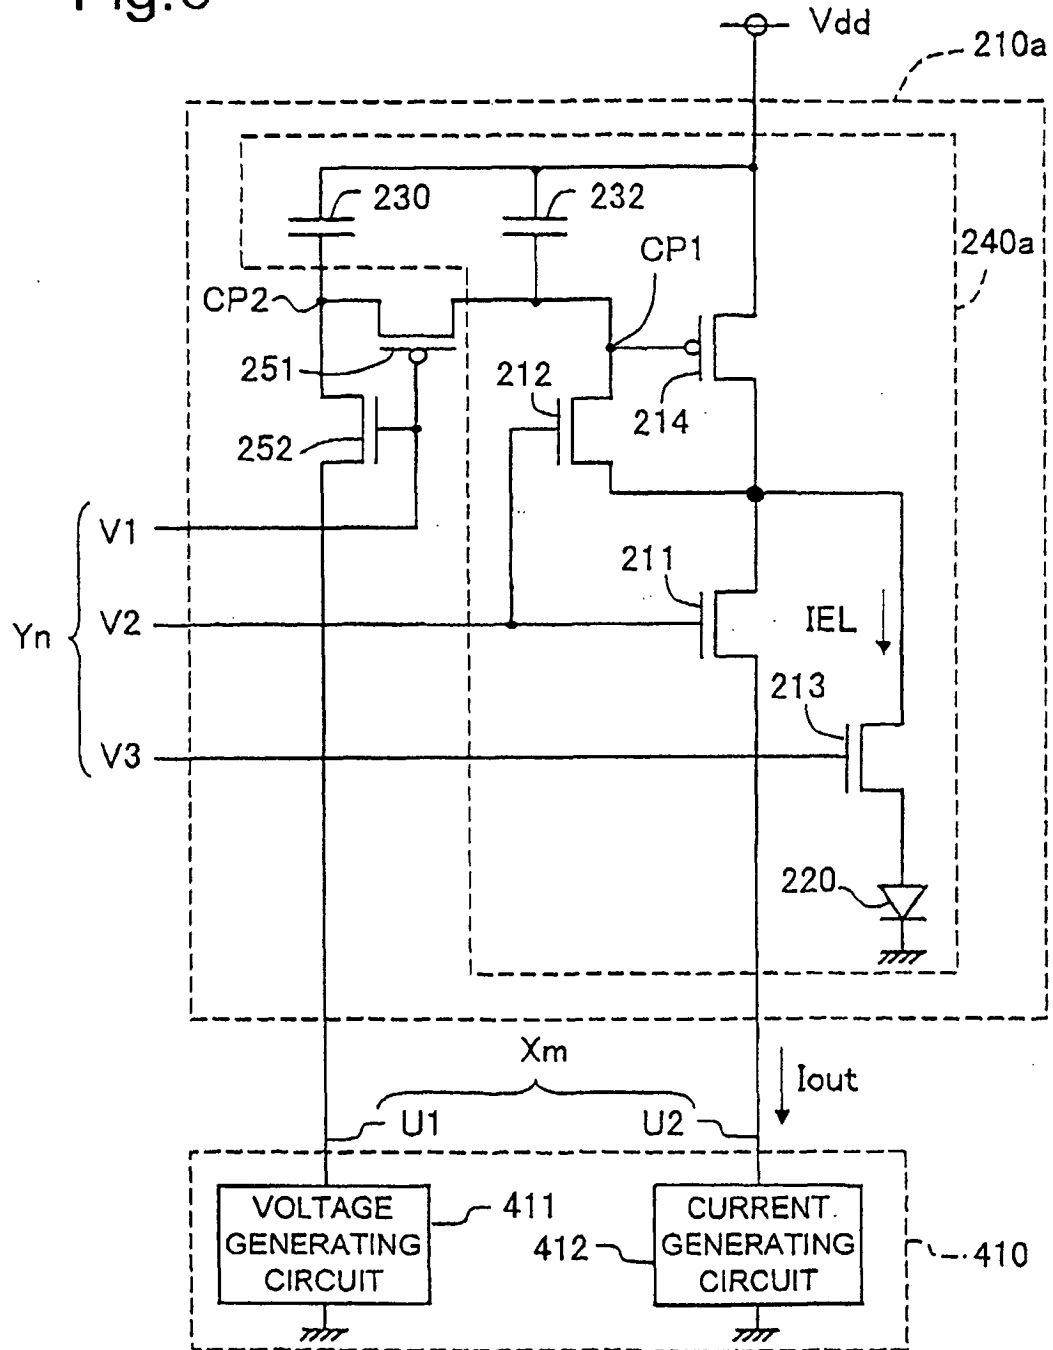
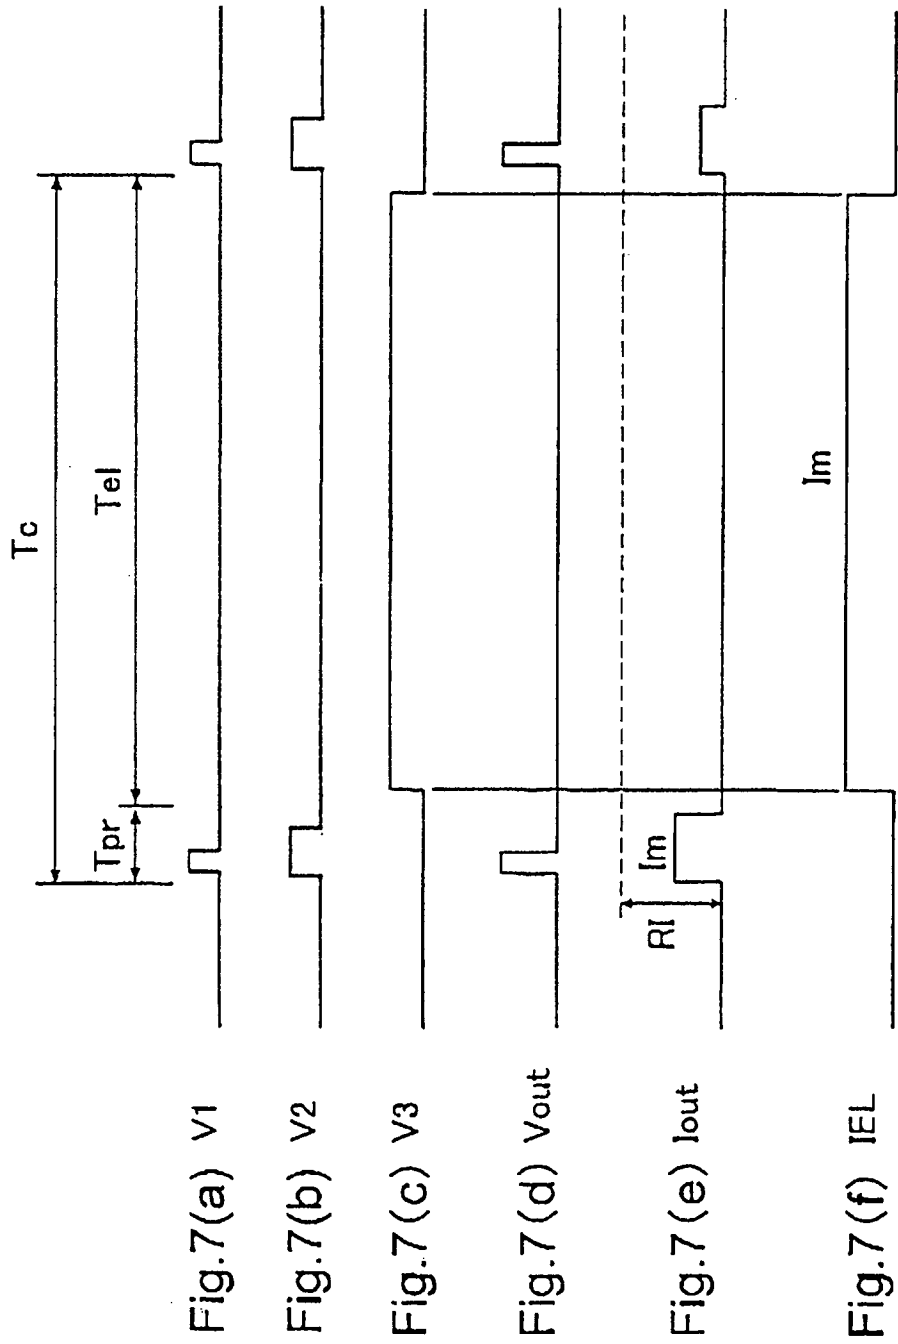


Fig.6





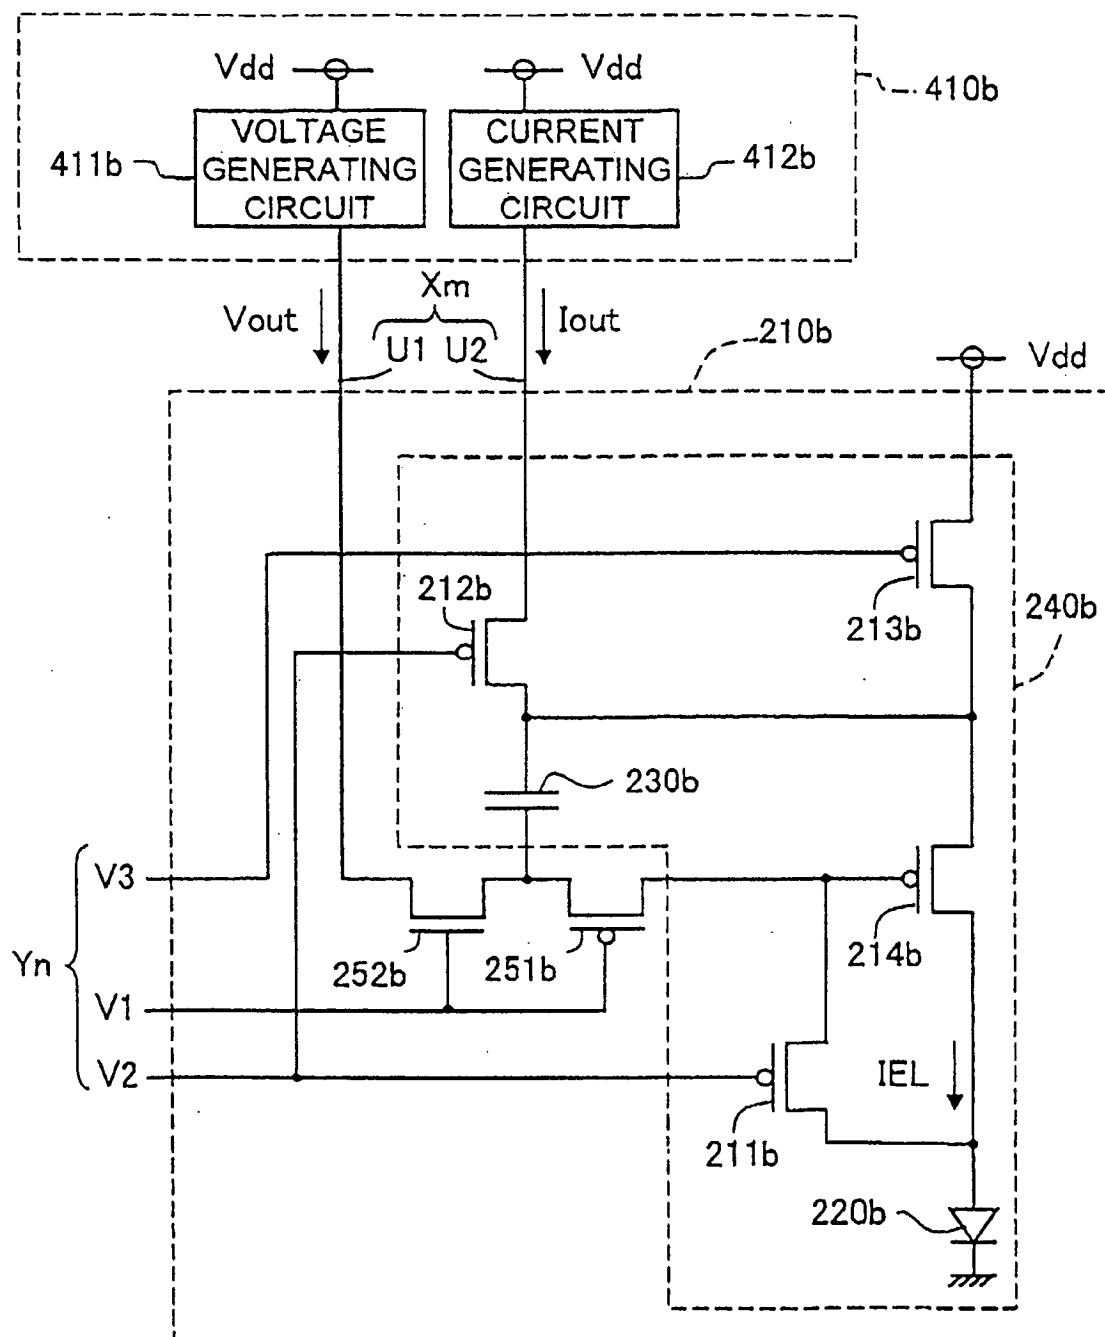


Fig.8

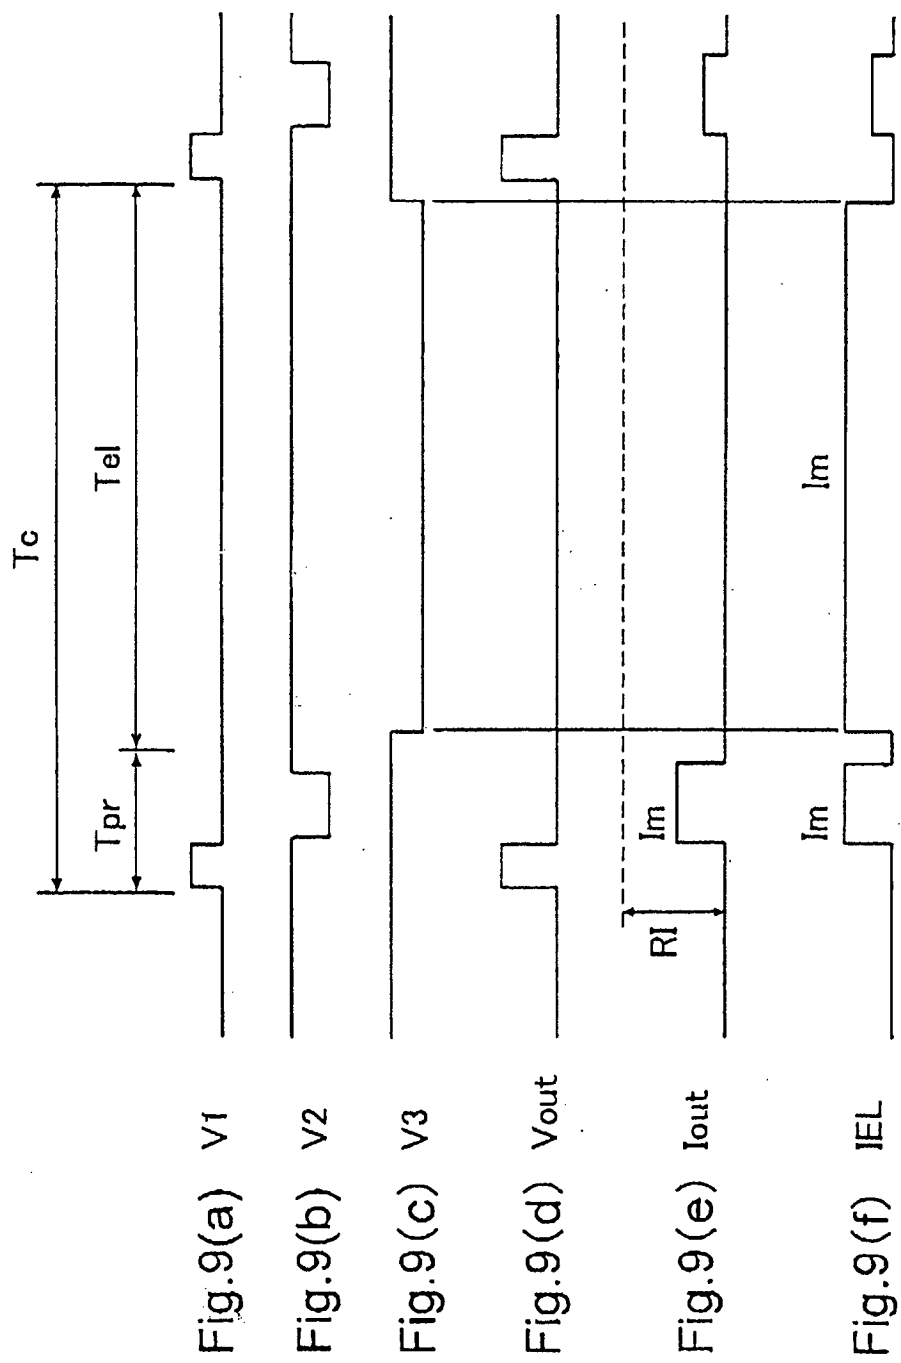
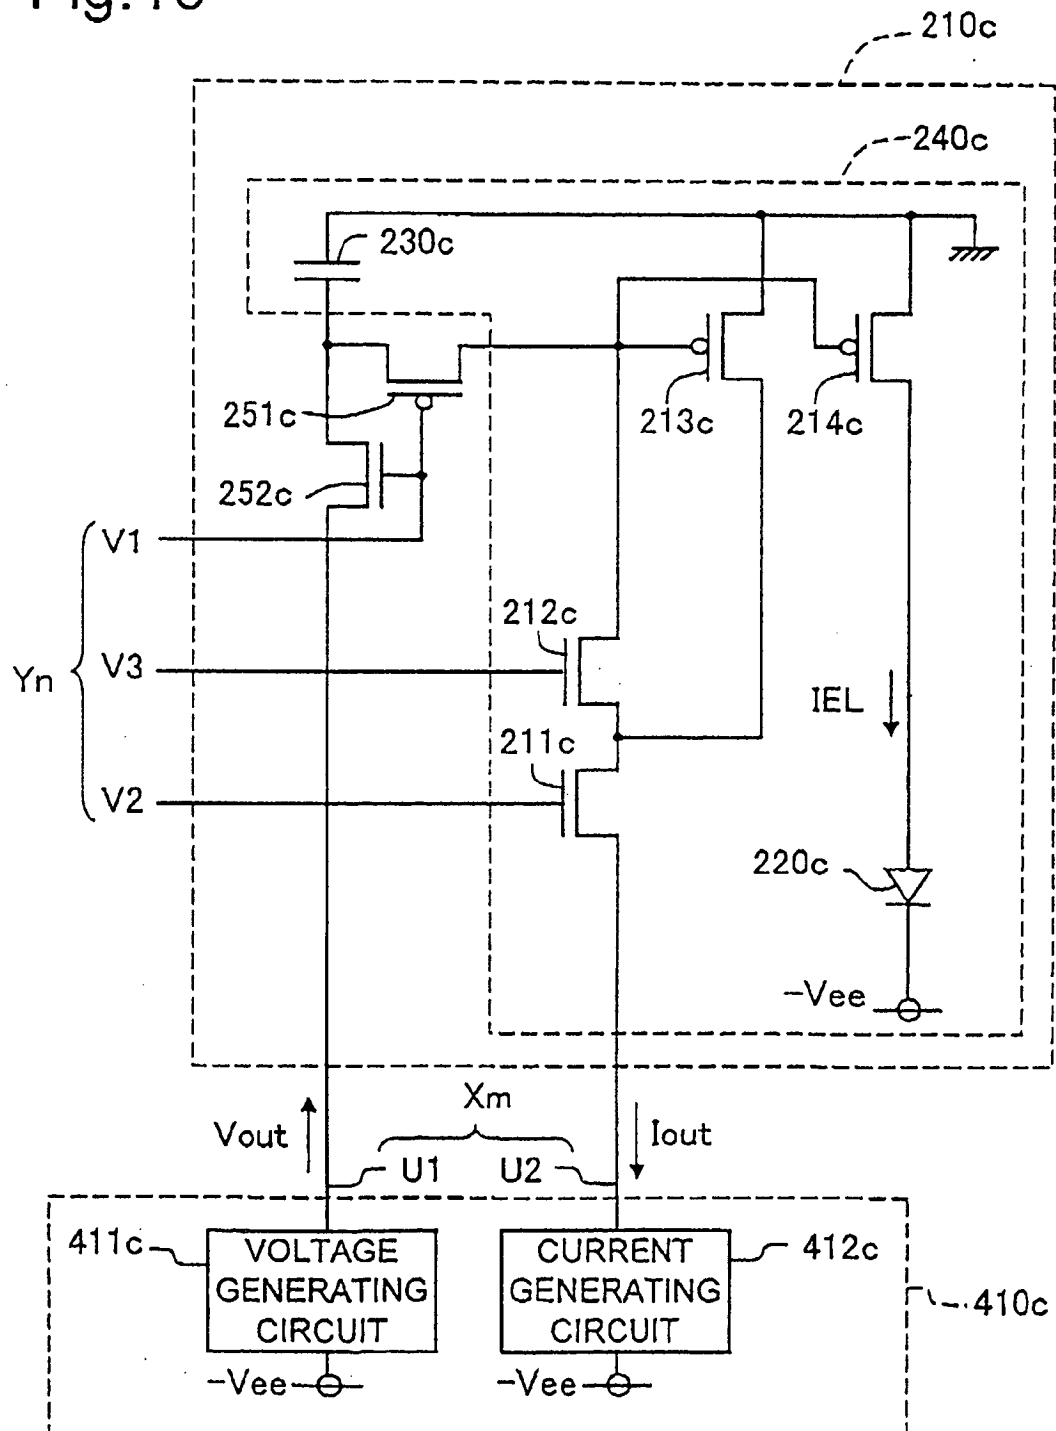


Fig.10



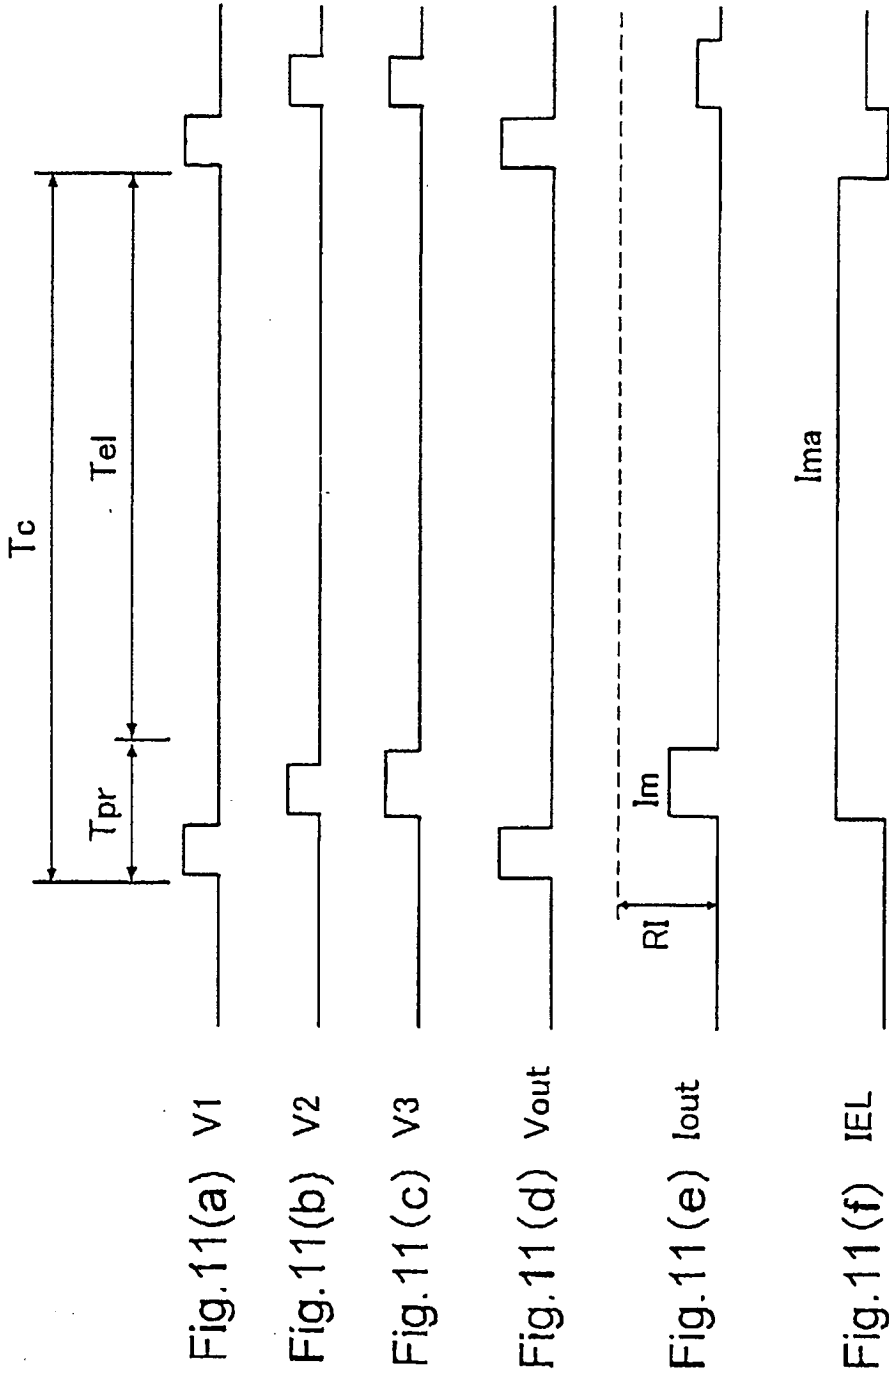
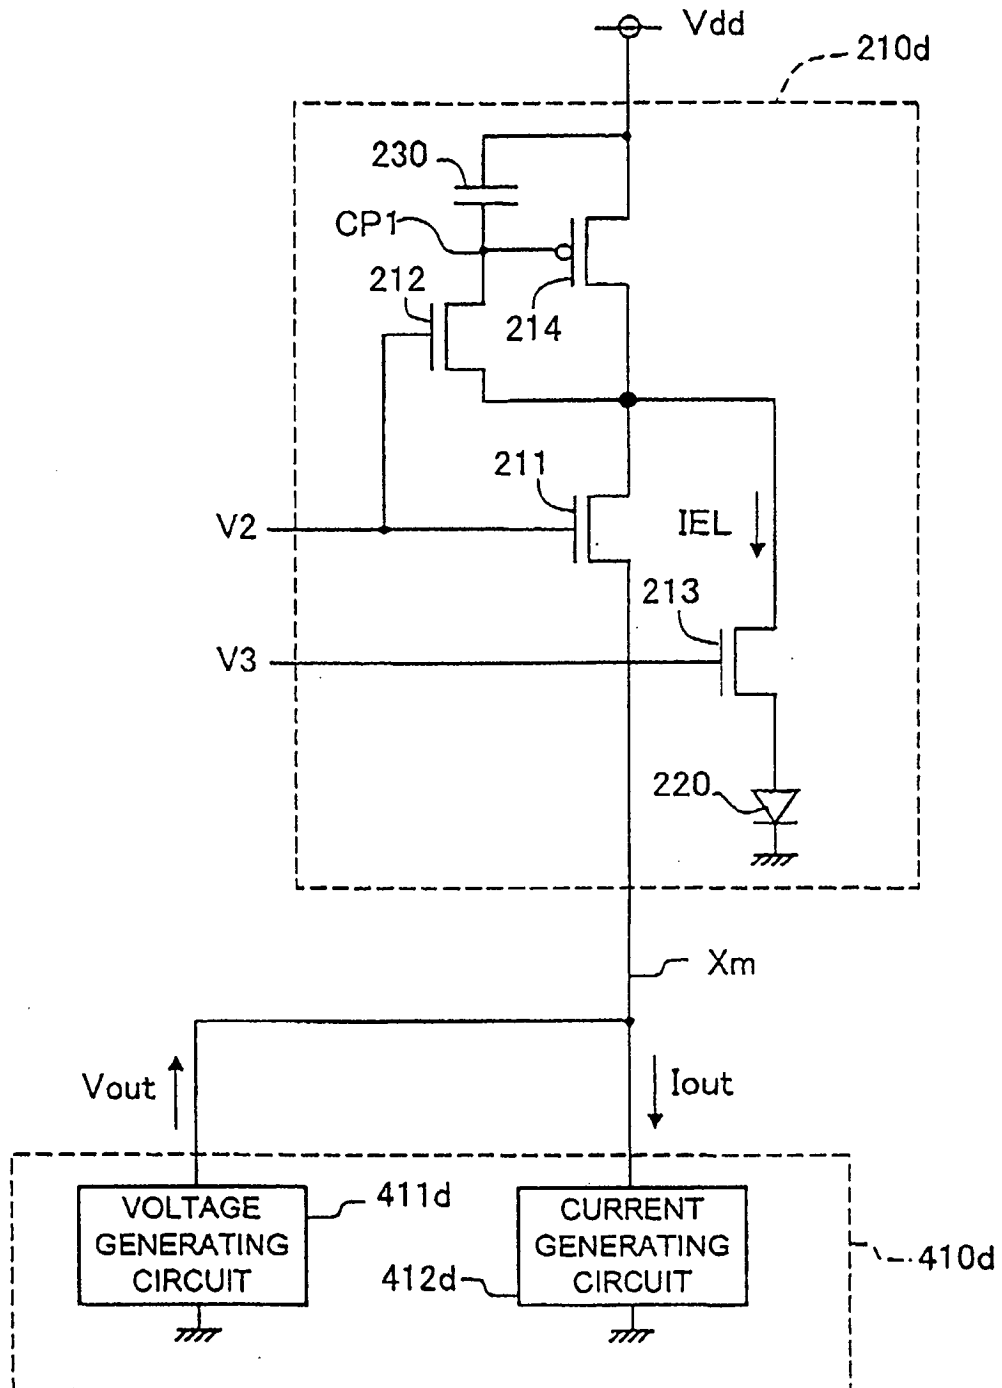


Fig.12



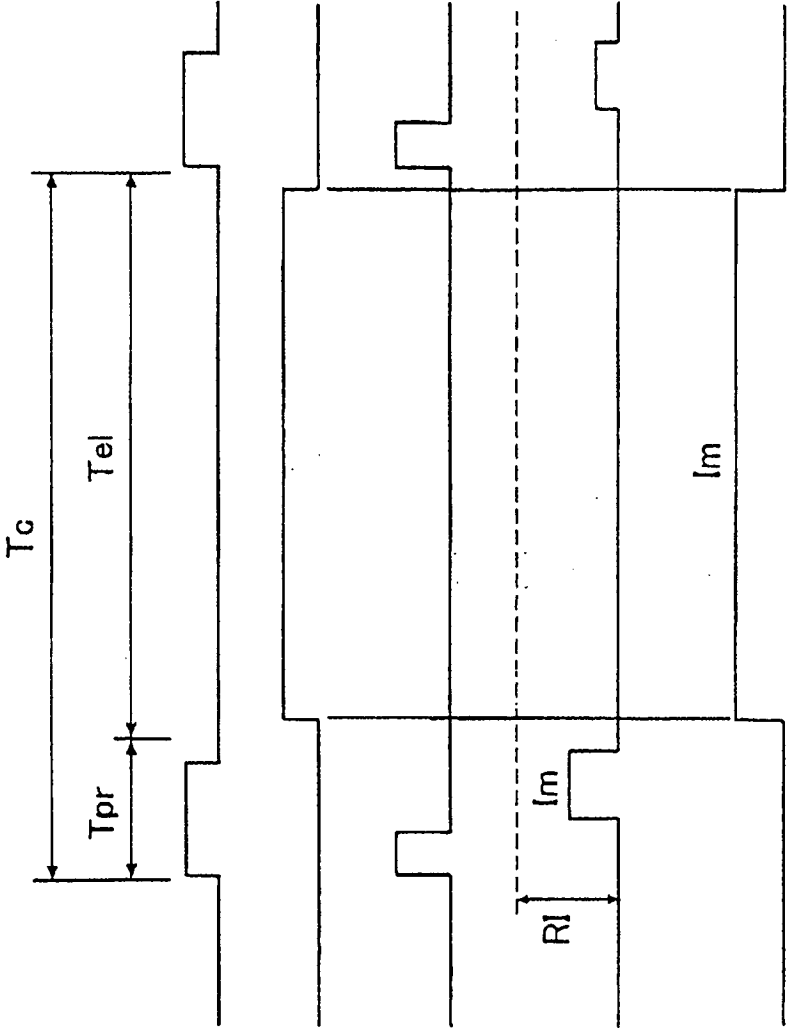


Fig.13(a) V1


Fig.13(b) V2

Fig.13(c) V3

Fig.13(d) Vout

Fig.13(e) Iout

Fig.14

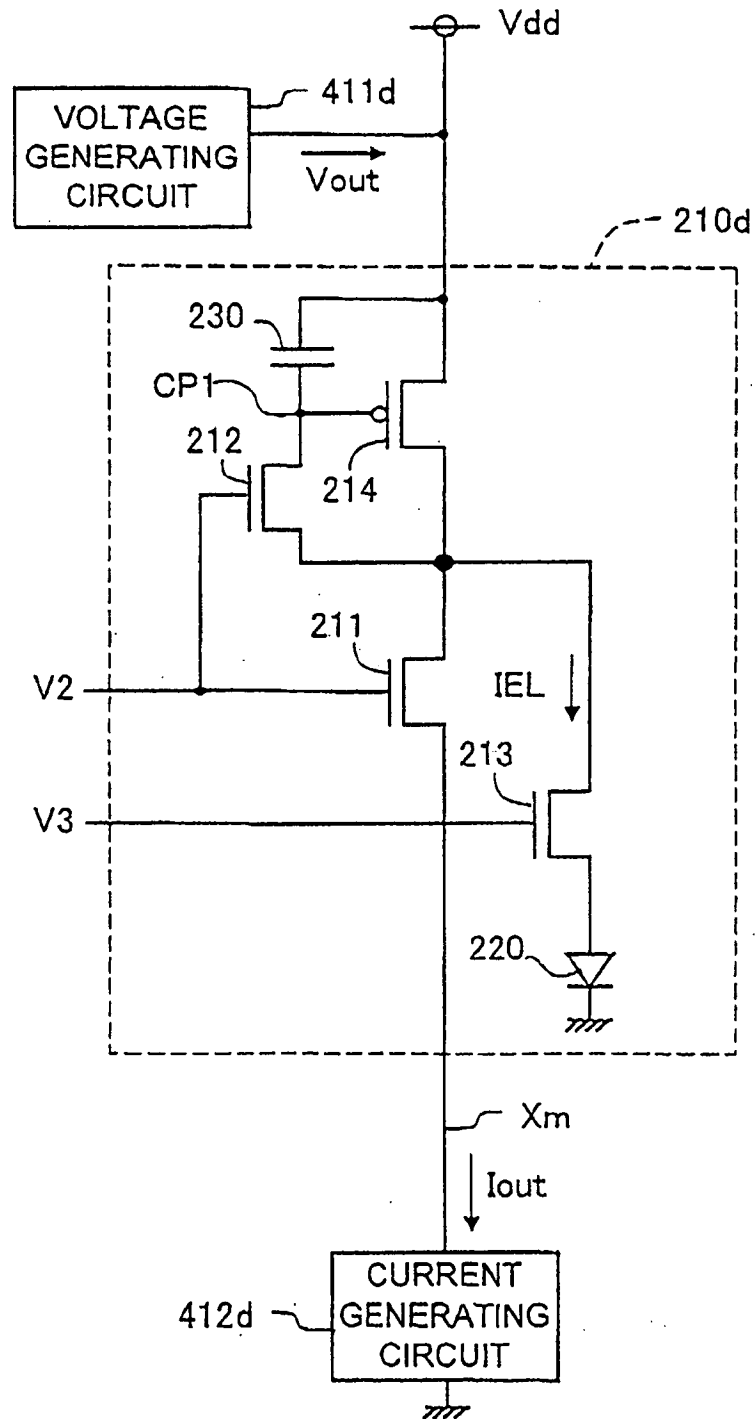

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 9938148 A [0005] [0005]

专利名称(译)	用于发光元件的像素电路		
公开(公告)号	EP1321922B1	公开(公告)日	2008-08-20
申请号	EP2002258554	申请日	2002-12-11
[标]申请(专利权)人(译)	精工爱普生株式会社		
申请(专利权)人(译)	SEIKO EPSON CORPORATION		
当前申请(专利权)人(译)	SEIKO EPSON CORPORATION		
[标]发明人	MIYAZAWA TAKASHI C O SEIKO EPSON CORPORATION		
发明人	MIYAZAWA, TAKASHI, C/O SEIKO EPSON CORPORATION		
IPC分类号	G09G3/32 H01L51/50 G09F9/30 G09G3/20 G09G3/22 G09G3/30 H01L27/32		
CPC分类号	G09G3/3233 G09G3/22 G09G2300/0842 G09G2300/0852 G09G2300/0861 G09G2310/0251 G09G2320/0223 G09G2320/0252 G09G2320/029		
代理机构(译)	斯特，CLIFFORD MARK		
优先权	2001379714 2001-12-13 JP		
其他公开文献	EP1321922A2 EP1321922A3		
外部链接	Espacenet		

摘要(译)

像素电路210包括电流编程电路240和电压编程晶体管251和252。为了设置来自有机EL元件220的光发射的色调，第一和第二电压编程晶体管251和252被设置为OFF和分别为ON状态，并且使用电压信号Vout执行电压编程。接下来，切换第一和第二电压编程晶体管251和252的状态，并且使用电流信号Iout执行电流编程。

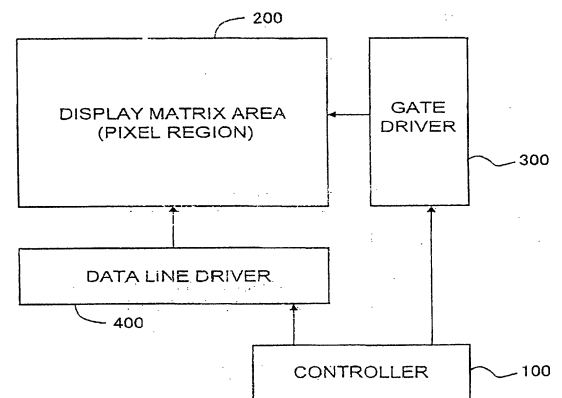


Fig.1