

(19)



(11)

EP 1 594 347 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
08.12.2010 Bulletin 2010/49

(51) Int Cl.:
H01L 27/32 ^(2006.01)

(21) Application number: **03705089.5**

(86) International application number:
PCT/JP2003/001464

(22) Date of filing: **13.02.2003**

(87) International publication number:
WO 2004/073356 (26.08.2004 Gazette 2004/35)

(54) **DISPLAY APPARATUS AND MANUFACTURING METHOD THEREOF**

ANZEIGEVORRICHTUNG UND HERSTELLUNGSVERFAHREN DAFÜR

APPAREIL D'AFFICHAGE ET PROCEDE DE FABRICATION CORRESPONDANT

(84) Designated Contracting States:
DE FR GB

(74) Representative: **HOFFMANN EITLE**
Patent- und Rechtsanwälte
Arabellastraße 4
81925 München (DE)

(43) Date of publication of application:
09.11.2005 Bulletin 2005/45

(73) Proprietor: **FUJIFILM Corporation**
Minato-ku
Tokyo (JP)

(56) References cited:
EP-A- 1 006 588 WO-A1-99/20080
JP-A- 60 218 626 JP-A- 2001 085 162
JP-A- 2001 085 162 JP-A- 2002 215 063
JP-A- 2002 221 917 US-A1- 2002 070 909
US-B1- 6 456 013

(72) Inventor: **SAKAMOTO, Yoshiaki,**
FUJITSU LIMITED
Kawasaki-shi, Kanagawa 211-8588 (JP)

EP 1 594 347 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The present invention relates to display devices that use organic EL (Electro-Luminescence), and more particularly, is applied to a bottom emission type, active matrix organic EL panel.

Background Art

[0002] In recent years, organic EL displays that employ an organic EL system in which carriers are injected into an organic solid from an electrode to emit light from a flat surface have actively been developed as light-emitting type displays. The organic EL displays can be divided into passive matrix type and active matrix type, for example, depending on how the displays are driven. The former type display allows pixels arranged in a matrix to emit light by line-at-a-time driving method. The latter type

has a switching element for each of pixels arranged in a matrix and the switching elements are controlled to drive the pixels so that they emit light individually.

[0003] According to the driving method by the active matrix type organic EL display, the switching circuits control light emission of the pixels on a pixel basis, and therefore the display has attracted attention particularly as an optimum display for moving picture. There are bottom emission type displays that extract emitted light toward the glass substrate and the top emission type displays that extract emitted light to the opposite side to the glass substrate.

[0004] A bottom emission type, active matrix organic EL panel is provided with a switching circuit on a pixel basis, and light is emitted toward the glass substrate. Therefore, the part of the switching circuits that occupies half the area of the pixel inevitably becomes a non-light emitting region. In addition, three light emitting regions for three colors R (red), G (green), and B (blue) that are necessary for full color display are produced by coloring the organic EL light emitting layer discretely corresponding to the colors. Therefore, a registration margin (dm) for discrete coloring between adjacent light emitting regions in different colors is necessary, and this dm portion constitutes a non-light emitting region.

[0005] In a conventional display, the three light emitting regions for R, G, and B and the switching circuit portions are arranged continuously based on the colors (see Fig. 4 for the arrangement in the horizontal (X-) direction). As the registration margin (dm) depends on the registration precision by the pixel film deposition device and the processing precision of the patterning mask, how much the registration margin (dm) can be reduced is limited, and the minimum value for the margin dm is generally 20 μm (corresponding to $\pm 10 \mu\text{m}$). In this case, the width of each light emitting region is smaller as the resolution increases. However, the minimum value for dm is fixed, and therefore the ratio of dm occupied in the pixel in-

creases, which lowers the ratio of the light emitting regions (aperture ratio) if higher resolution is to be achieved. With a smaller aperture ratio, the luminance is lowered, and therefore the amount of current that contributes to the light emission should be increased to keep the luminance in a necessary level. This gives rise to increase in power consumption.

[0006] EP 1 006 588 A2 discloses a display device having an active matrix organic panel comprising an organic light emitting layer provided between electrodes where the light emitting regions are disposed in a zigzag manner and kept from contacting each other.

[0007] The present invention was devised in view of the above described problems, and it is an object of the present invention to provide a display device having a bottom emission type, active matrix organic EL panel that efficiently secures a sufficient aperture ratio, has pixel arrangement in which the aperture ratio is hardly a trade off for higher resolution, and can operate with reduced power consumption for obtaining necessary luminance and contribute to downsizing of the driving circuit and the device as a whole, and a manufacturing method that allows the configuration of such a display device to be readily provided with reliability.

Summary of the Invention

[0008] A display device according to the invention includes an active matrix organic EL panel having first and second electrodes provided on a substrate and an organic EL light emitting layer provided between the first and second electrodes. The organic EL light emitting layer includes a light emitting region, a plurality of the light emitting regions are arranged in a zigzag manner, and adjacent ones of the light emitting regions are kept from contacting each other wherein three kinds of said light emitting regions corresponding to R, G, and B and three switching circuits corresponding to the three kinds of said light emitting regions are arranged in a matrix, and in six segments arranged in two rows and three columns, said light emitting regions are arranged in three of said segments positioned in a zigzag manner and said three switching circuits are arranged in the three remaining segments.

[0009] By a method of manufacturing a display device according to the invention, a display device is produced that includes an active matrix organic EL panel having first and second electrodes provided on a substrate and an organic EL light emitting layer provided between the first and second electrodes. The organic EL light emitting layer includes a light emitting region. At the time of forming a plurality of the light emitting regions, the organic EL light emitting layers corresponding to the respective light emitting regions are formed by mask vapor deposition so that they are arranged in a zigzag manner and adjacent ones of the light emitting regions are kept from contacting each other, wherein three kinds of said light emitting regions corresponding to R, G, and B and three

switching circuits corresponding to the three kinds of said light emitting regions are arranged in a matrix, and in six segments arranged in two rows and three columns, said light emitting regions are arranged in three of said segments positioned in a zigzag manner and said three switching circuits are arranged in the three remaining segments.

Brief Description of the Drawings

[0010]

Fig. 1 is a schematic sectional view of an organic EL layer in an organic EL display according to an embodiment of the invention.

Fig. 2 is a schematic plan view of an organic EL light emitting layer, a main part of the organic EL display according to the embodiment, showing its surface as being enlarged.

Fig. 3 is a schematic plan view of the pixel unit in Fig. 2 as being enlarged.

Fig. 4 is a schematic plan view of an example of pixel arrangement in a conventional bottom emission type, active matrix organic EL display.

Fig. 5 is a graph showing a result of examining the relation between increase in the pixel resolution and the aperture ratio in comparison with the conventional example (comparative example).

Figs. 6A to 6G are schematic sectional views showing main steps in the process of manufacturing the organic EL display according to the embodiment in the order of the steps.

Fig. 7 is a schematic plan view of an organic EL light emitting layer, a main part of an organic EL display according to Modification 1, showing its surface as being enlarged.

Fig. 8 is a schematic plan view of an organic EL light emitting layer, a main part of an organic EL display according to Modification 2.

Detailed Description of the Preferred Embodiments

[0011] Hereinafter, specific embodiments of the invention will be described in detail with reference to the accompanying drawings.

[0012] Now, a preferred embodiment of the invention will be described in detail with reference to the accompanying drawings. The embodiment is mainly directed to a display device including a bottom emission type, active matrix organic EL panel (bottom emission type, active matrix organic EL display).

- Specific Configuration of Organic EL Display -

[0013] Fig. 1 is a schematic sectional view of the configuration of the panel of the organic EL display according to the embodiment, Fig. 2 is a schematic plan view of an organic EL light emitting layer, a main component of the organic EL display according to the embodiment, showing its surface as being enlarged, and Fig. 3 is a schematic plan view of pixels in Fig. 2 as being enlarged. Here, Fig. 1 shows a section taken along the line I-I' in Fig. 3.

[0014] As shown in Fig. 1, the organic EL display includes a TFT (Thin Film Transistor) element 12 as a switching circuit that controls light emission, for example, on a glass substrate 1 as a transparent substrate. The TFT element 12 and the interconnection lines are protected and insulated by a flattening film 10 that forms a flat surface on which an organic EL element is to be stacked. A plurality of first electrodes 2 made of a material containing, for example, an indium tin oxide (ITO) alloy as transparent electrodes, a plurality of organic EL layers 3 corresponding to the respective first electrodes 2, and a second electrode 4 made of a material containing aluminum or the like and covering the entire surface are stacked on the flat surface. The organic EL layers 3 are held between the associated first electrodes 2 and the second electrode 4, and the first electrode 2 and the TFT element 12 are connected by a through hole provided at part of the flattening film 10. In this case, the area of the organic EL layer 3 is formed to be larger than the area of the first electrode 2. At the time of driving, light is emitted from the organic EL layer 3 through the first electrode 2 and the glass substrate 1.

[0015] As shown in Fig. 2, a plurality of pixels 21 are arranged in a matrix, and the pixels 21 each include a plurality of light emitting regions 11R, 11G, and 11B corresponding to R, G, and B, and a plurality of TFT elements 12 provided corresponding to the light emitting regions and serving as switching circuits that control light emission from the respective light emitting regions. Here, the overlapping parts between the first electrodes 2 and the organic EL layers 3 are the light emitting regions 11R, 11G, and 11B. The light emitting regions 11R, 11G, and 11B are arranged in a zigzag manner, and non-light emitting regions 13 provided at corners of the light emitting regions prevent adjacent ones among the light emitting regions 11R, 11G, and 11B from contacting each other. One pixel 21 is in the shape of a regular square of $P \times P$. The pixels 21 are each divided in two in the vertical direction and three in the horizontal direction into six segments 22a to 22c and 23a to 23c. The light emitting regions 11R, 11G, and 11B are provided in the three zigzagged segments 22a to 22c, and the TFT elements 12 are in the remaining three segments 23a to 23c. Herein, the light emitting regions in the same color are aligned in the vertical direction (Y-direction) with each TFT element 12 interposed therebetween.

[0016] Now, as a comparative example to the embod-

iment, pixel arrangement in a conventional bottom emission type, active matrix organic EL display is shown in Fig. 4.

[0017] As can be seen, in the conventional example, the light emitting regions 101R, 101G, and 101B constituting the pixel 111 are aligned in the horizontal direction (X-direction), and therefore adjacent light emitting regions are separated by the non-light emitting regions 103 provided at vertical sides of the light emitting regions and the TFT elements 102. Therefore, how much the area of the non-light emitting regions 103 can be reduced is necessarily limited.

[0018] In comparison, according to the embodiment, the light emitting regions 11R, 11G, and 11B are provided with notches, in C-chamfer shape in this example (though they may be rounded), as the non-light emitting regions 13 at their respective four corners. The non-light emitting regions 13 and the TFT circuits 12 keep adjacent light emitting regions from contacting one another. The non-light emitting regions 13 formed at the corners of the light emitting regions occupy only an extremely small area, and the aperture ratio can be improved significantly over that of the example in Fig. 4.

[0019] Based on this pixel arrangement, a size for a resolution of 160 ppi will be described with reference to Fig. 3. It is understood that the size is simply by way of example and the invention is not limited thereto.

[0020] When the resolution is 160 ppi, $P = 159 \mu\text{m}$, and therefore the regions occupied by the colors R, G, and B are each $159 \mu\text{m} \times 53 \mu\text{m}$, half the area, $79.5 \mu\text{m} \times 53 \mu\text{m}$ is the area occupied by a TFT element 12, and the remaining $79.5 \mu\text{m} \times 53 \mu\text{m}$ is the area occupied by each light emitting region. So-called C-chamfers are provided as non-light emitting regions 13 at the corners of the light emitting regions in order to secure registration margins necessary for discrete coloring in three colors and a space for various interconnection lines for switching circuits. The registration margin dm necessary for discrete coloring is $20 \mu\text{m}$ ($\pm 5 \mu\text{m}$ for the registration margin by the pixel film deposition device plus $\pm 5 \mu\text{m}$ for the processing precision for the R, G, and B patterning mask). The necessary interconnection lines include a data line 31, a scanning line 32, a power supply line 33, and a storage capacitor line 34, and these lines each have a width in the range of from $5 \mu\text{m}$ to $15 \mu\text{m}$. The data line 31 is provided in the Y-direction, and the scanning line 32, the power supply line 33, and the storage capacitor line 34 are provided in the X-direction. These interconnection lines in the TFT element 12 are formed in different layers formed as multiple film layers and connected with each other by a through hole 35 provided in interlayer insulating films. Therefore, a chamfer of $C15 \mu\text{m}$ provided at the corner of each light emitting region allows the registration margin and the space for the interconnection lines to be secured.

[0021] In order to form the light emitting regions, the first electrode 2 as the transparent electrode on the glass substrate has a rectangular shape of $79.5 \mu\text{m} \times 53 \mu\text{m}$,

and each corner is chamfered by $C15 \mu\text{m}$. Consequently, the segment for each color has an area of $159 \mu\text{m} \times 53 \mu\text{m} = 8427 \mu\text{m}^2$, while the area of the effective light emitting region is $79.5 \mu\text{m} \times 53 \mu\text{m} - C15 \mu\text{m} \times 4 = 3763.5 \mu\text{m}^2$. The aperture ratio is $(3763.5/8427) \times 100 = 44.7\%$.

[0022] In contrast, in the comparative example of Fig. 4, the segment width of each of the R, G, and B light emitting regions is $P/3$ relative to the pixel pitch P , and if the registration margin dm for discrete coloring is secured, the width of the light emitting region is $P/3 - dm$. If the lower limit for the registration margin dm for discrete coloring is applied to design higher resolution arrangement, the ratio of reduction in the width of the light emitting region by dm increases as the pitch P is reduced, and the aperture ratio is reduced.

[0023] When, for example, $P = 318 \mu\text{m}$ (for a resolution of 80 ppi), and $dm = 20 \mu\text{m}$, the size of the light emitting region $L \times W = 159 \mu\text{m} \times 86 \mu\text{m}$, and the aperture ratio is 40.6%. When $P = 159 \mu\text{m}$ (for a resolution of 160 ppi), and $dm = 20 \mu\text{m}$, $L \times W = 79.5 \mu\text{m} \times 33 \mu\text{m}$ and the aperture ratio is 31.1%. This means that the aperture ratio is greatly reduced by the registration margin dm if higher resolution is to be obtained.

[0024] The organic EL display according to the embodiment having the above-described configuration was compared to the conventional example (the comparative example described above) regarding the relation between increase in the pixel resolution and the aperture ratio. The result is given in Fig. 5. As can be seen, when the registration margin dm necessary for discrete coloring is $20 \mu\text{m}$, the aperture ratio in the configuration according to the present embodiment is significantly greater than that of the conventional example regardless of the value of the resolution. It has been found that the configuration according to the embodiment considerably, effectively improves the aperture ratio in the bottom emission type, active matrix organic EL panel.

[0025] In this way, the present embodiment can improve the aperture ratio by 13.6% over the comparative example. Therefore, according to the embodiment, a display having a bottom emission type, active matrix organic EL panel that efficiently secures a sufficient aperture ratio, has pixel arrangement in which the aperture ratio is hardly a trade off for higher resolution, and can operate with reduced power consumption for obtaining necessary luminance and contribute to downsizing of the driving circuit and the device as a whole can be provided.

- Specific Example of Method of Manufacturing Organic EL Display -

[0026] Figs. 6A to 6G are schematic sectional views showing main steps in the process of manufacturing the organic EL display according to the embodiment in the order of the steps. In Figs. 6A to 6G, the left side on the surface of the sheet corresponds to a section taken along the line II-II' in Fig. 3, and the right side corresponds to a section taken along line III-III' in Fig. 3.

[0027] Now, as shown in Fig. 6A, on the surface of, for example, a glass substrate 1 as a transparent substrate, a TFT element 12 serving as a switching circuit, and various interconnection lines such as a data line 31, a scanning line 32, a power supply line 33, and a storage capacitor line 34 are formed, and then a flattening film 10 made of a transparent resin is formed to cover them. Here, the TFT elements 12 are formed in the parts corresponding to the segments 23a to 23c of the pixel 21 as described above.

[0028] Then, as shown in Fig. 6B, a film of an indium tin oxide (ITO) alloy as a transparent electrode is deposited at the effective light emitting portion described above, and thus first electrodes 2 are formed.

[0029] Then, light emitting regions 11R, 11G, and 11B forming the pixels 21 are sequentially formed.

[0030] More specifically, as shown in Fig. 6C, a vapor deposition mask 5 with an opening 5a corresponding to a region to form a light emitting region is used. The vapor deposition mask 5 is placed on the surface of the glass substrate 1 so that the opening 5a is placed only in the position of the organic EL layer 3 corresponding to the light emitting region 11R, and the organic EL layer 3 corresponding to the light emitting region 11R is formed in the segment 22a by vapor deposition. At the time, the first electrode 2 is completely covered with the organic EL layer 3 for the light emitting region 11R, and the organic EL layer 3 does not overlap the first electrodes 2 for the other colors.

[0031] Then, as shown in Fig. 6D, using the same vapor deposition mask 5, the mask 5 is moved and placed on the surface of the glass substrate 1 so that the opening 5a is placed only in the position to form an organic EL layer 3 corresponding to the light emitting region 11G and the organic EL layer 3 corresponding to the light emitting region 11G is formed in the segment 22b by vapor deposition. At the time, the first electrode 2 is completely covered with the organic EL layer 3 for the light emitting region 11G, and the organic EL layer 3 does not overlap the first electrodes 2 for the other colors.

[0032] Then, as shown in Fig. 6E, using the same vapor deposition mask 5, the mask 5 is moved and placed on the surface of the glass substrate 1 so that the opening 5a is placed only in the position to form the organic EL layer 3 corresponding to the light emitting region 11B and the organic EL layer 3 corresponding to the light emitting region 11B is formed in the segment 22c by vapor deposition. At the time, the first electrode 2 is completely covered with the organic EL layer 3 for the light emitting region 11B, and the organic EL layer 3 does not overlap the first electrodes 2 for the other colors.

[0033] In this way, through the process steps in Figs. 6C to 6E, C-chamfer shaped (or rounded) non-light emitting regions 13 are formed at the four corners of the light emitting regions 11R, 11G, and 11B. These non-light emitting regions 13 as well as the segments 23a to 23c for the TFT elements 12 are non-light emitting regions, the organic EL layers 3 are formed so that adjacent light

emitting regions are kept from contacting one another in a pixel 21 and a plurality of such pixels 21 are provided in a matrix. The organic EL layers 3 corresponding to the light emitting regions 11R, 11G, and 11B are each formed to have an area greater than the corresponding first electrode 2 and cover the same, so that the registration margins for forming the light emitting regions can be secured. In addition, the TFT element region can be used for securing the registration margin necessary for achieving higher resolution. In this way, the aperture ratio can be improved.

[0034] The light emitting regions for the same colors are aligned with each TFT element 12 interposed therebetween so that the light emitting regions 11R, 11G, and 11B are evenly provided in a plane without contacting one another.

[0035] Then, as shown in Fig. 6F, a vapor deposition mask 6 with openings 6a to expose all the light emitting regions is used and placed on the surface of the glass substrate 1, and an aluminum alloy film is deposited by vapor deposition, thereby forming a second electrode 4 to cover all the light emitting regions.

[0036] As shown in Fig. 6G, a plate 7 made of glass or the like that prevents moisture penetration is adhesively fixed, for example, with an adhesive 8 to cover the second electrode 4, so that the organic EL layers 3 are prevented from deteriorating by moisture and the like. Various conductive members formed on the glass substrate 1 are connected to a driving circuit (not shown) through the interconnection line 9 of an FPC (Flexible Printed Circuit).

[0037] Then, after various post-processing steps, a bottom emission type, active matrix organic EL display, for example, with a resolution of 160 ppi and an aperture ratio of 44.7% is produced.

[0038] As in the foregoing, according to the embodiment, at the time of manufacturing the organic EL display having the above-described configuration, mask vapor deposition technique is applied to form the organic EL layers 3 corresponding to the respective light emitting regions 11R, 11G, and 11B, and the same vapor deposition mask 5 is sequentially moved to form these light emitting regions. Therefore, the single vapor deposition mask 5 can readily be formed using a single film deposition chamber, low molecular organic EL can be deposited by vapor deposition, and an organic EL display having the above-described configuration can readily be provided with reliability.

- Modifications of Embodiment -

[0039] Now, modifications of the embodiment will be described.

(Modification 1)

[0040] Fig. 7 is a schematic plan view of an organic EL light emitting layer, a main part of an organic EL display

according to Modification 1, showing its surface as being enlarged.

[0041] In the organic EL display, the areas of the light emitting regions 11R, 11G, and 11B in the pixel 21 are each greater than the area of the TFT element 12. In this case, the registration margins necessary for discrete coloring into the three colors can be included in the segments of the TFT elements 12, so that the aperture ratio can be increased.

(Modification 2)

[0042] Fig. 8 is a schematic plan view of an organic EL light emitting layer, a main part of an organic EL display according to Modification 2, showing its surface as being enlarged.

[0043] In this organic EL display, the areas of the light emitting regions 11R, 11G, and 11B in the pixel 21 are each smaller than the area of the TFT element 12. In this case, adjacent TFT elements 12 separate adjacent light emitting regions, and therefore there is no necessity for providing non-light emitting regions in association with the light emitting regions, so that the aperture ratio can be increased (in the shown example, the segments for the TFT elements 12 are in contact with each other).

Industrial Applicability

[0044] According to the invention, a display device having a bottom emission type, active matrix organic EL panel that efficiently secures a sufficient aperture ratio, has pixel arrangement in which the aperture ratio is hardly a trade off for higher resolution, and can operate with reduced power consumption for obtaining necessary luminance and contribute to downsizing of the driving circuit and the device as a whole, and a manufacturing method that allows the configuration of such a device to be readily provided can be provided with reliability.

Claims

1. A display device having an active matrix organic EL panel comprising:

first and second electrodes provided on a substrate, and

an organic EL light emitting layer provided between said first and second electrodes, wherein said organic EL light emitting layer includes light emitting regions, arranged in a zigzag manner, and adjacent ones of said light emitting regions are kept from contacting each other, wherein,

three kinds of said light emitting regions corresponding to R, G, and B and three switching circuits corresponding to the three kinds of said light emitting regions are arranged in a matrix,

and

in six segments arranged in two rows and three columns, said light emitting regions are arranged in three of said segments positioned in a zigzag manner and said three switching circuits are arranged in the three remaining segments.

2. The display device according to claim 1, wherein said light emitting regions for the same color are aligned with said switching circuit interposed therebetween.

3. The display device according to claim 1, wherein the area of said organic EL light emitting layer is greater than the area of said first electrode.

4. The display device according to claim 1, wherein a non-light emitting region is formed at a corner of said light emitting region, and adjacent ones of said light emitting regions are separated by said non-light emitting region.

5. The display device according to claim 1, wherein the area of said light emitting region is greater than the area of said switching circuit.

6. The display device according to claim 1, wherein said light emitting region has an area smaller than the area of said switching circuit and is separated from adjacent one of said light emitting regions with said switching circuit interposed therebetween.

7. A method of manufacturing a display device having an active matrix organic EL panel comprising first and second electrodes provided on a substrate and an organic EL light emitting layer provided between said first and second electrodes, wherein said organic EL light emitting layer includes a light emitting region, the method comprising the step of forming a plurality of said light emitting regions by mask vapor deposition, wherein said organic EL light emitting layers corresponding to each of said light emitting regions are arranged in a zigzag manner and adjacent ones of said light emitting regions are kept from contacting each other, wherein:

three kinds of said light emitting regions corresponding to R, G, and B and said three switching circuits corresponding to the three kinds of said light emitting regions are arranged in a matrix; in six segments arranged in two rows and three columns, said light emitting regions are arranged in three of said segments positioned in a zigzag manner and said three switching circuits are arranged in the three remaining segments.

8. The method of manufacturing a display device according to claim 7, wherein the same mask is sequentially moved to form said organic EL light emitting layers corresponding to each of said light emitting regions.
9. The method of manufacturing a display device according to claim 7, wherein said light emitting regions for the same color are aligned with said switching circuit interposed therebetween.
10. The method of manufacturing a display device according to claim 7, wherein said organic EL light emitting layer is formed to have a greater area than the area of said first electrode.
11. The method of manufacturing a display device according to claim 7, wherein said light emitting region is formed to have a corner part serving as a non-light emitting region.
12. The method of manufacturing a display device according to claim 7, wherein said light emitting region is formed to have a greater area than the area of said switching circuit.
13. The method of manufacturing a display device according to claim 7, wherein said light emitting region has an area smaller than the area of said switching circuit and is separated from adjacent one of said light emitting regions with said switching circuit interposed therebetween.

Patentansprüche

1. Anzeigevorrichtung, die eine organische Aktivmatrix-EL-Panale aufweist, umfassend:

erste und zweite Elektroden, die auf einem Substrat vorgesehen sind, und
 eine organische lichtemittierende EL-Schicht, die zwischen den ersten und zweiten Elektroden vorgesehen ist, worin
 die organische lichtemittierende EL-Schicht lichtemittierende Bereiche umfasst, die auf zick-zack-artige Weise angeordnet sind, wobei vermieden wird, dass benachbarte lichtemittierende Bereiche in Kontakt miteinander kommen, worin drei Arten der lichtemittierenden Bereiche, die Rot, Grün und Blau entsprechen, und drei Schaltkreise, die den drei Arten von lichtemittierenden Bereichen entsprechen, in einer Matrix angeordnet sind, und
 in sechs Segmenten, die in zwei Reihen und drei Spalten angeordnet sind, die lichtemittierenden Bereiche in drei der Segmente, die auf zick-

zack-artige Weise positioniert sind, angeordnet sind, und die drei Schaltkreise in den drei verbleibenden Segmenten angeordnet sind.

2. Anzeigevorrichtung gemäss Anspruch 1, worin die lichtemittierenden Bereiche für die gleiche Farbe mit dem Schaltkreis hierzwischen zwischengelagert ausgerichtet sind.
3. Anzeigevorrichtung gemäss Anspruch 1, worin die Fläche der organischen lichtemittierenden EL-Schicht grösser ist als die Fläche der ersten Elektrode.
4. Anzeigevorrichtung gemäss Anspruch 1, worin ein nicht-lichtemittierender Bereich in einer Ecke des lichtemittierenden Bereichs gebildet ist und benachbarte lichtemittierende Bereiche durch den nicht-lichtemittierenden Bereich voneinander getrennt sind.
5. Anzeigevorrichtung gemäss Anspruch 1, worin die Fläche des lichtemittierenden Bereichs grösser ist als die Fläche des Schaltkreises.
6. Anzeigevorrichtung gemäss Anspruch 1, worin der lichtemittierende Bereich eine Fläche aufweist, die kleiner ist als die Fläche des Schaltkreises, und er von einem benachbarten lichtemittierenden Bereich getrennt ist, wobei der Schaltkreis hierzwischen zwischengelagert ist.
7. Verfahren zur Herstellung einer Anzeigevorrichtung, die eine organische Aktivmatrix-EL-Panale aufweist, umfassend erste und zweite Elektroden, die auf einem Substrat vorgesehen sind, und eine organische lichtemittierende EL-Schicht, die zwischen den ersten und zweiten Elektroden vorgesehen ist, worin die organische lichtemittierende EL-Schicht einen lichtemittierenden Bereich umfasst, wobei das Verfahren die Schritte umfasst:

Bilden einer Vielzahl der lichtemittierenden Bereiche durch Masken-Gasphasenabscheidung, worin die organischen lichtemittierenden EL-Schichten, die jedem der lichtemittierenden Bereiche entsprechen, auf zick-zack-artige Weise angeordnet sind und vermieden wird, dass benachbarte lichtemittierende Bereiche in Kontakt miteinander stehen, worin:
 die drei Arten der lichtemittierenden Bereiche, die Rot, Grün und Blau entsprechen, und die drei Schaltkreise, die den drei Arten der lichtemittierenden Bereiche entsprechen, in einer Matrix angeordnet sind;
 in sechs Segmenten, die in zwei Reihen und drei Spalten angeordnet sind, wobei die lichtemittierenden Bereiche in drei der Segmente angeord-

net sind, die auf eine zick-zack-artige Weise positioniert sind, und die drei Schaltkreise in den drei verbleibenden Segmenten angeordnet sind.

8. Verfahren zur Herstellung einer Anzeigevorrichtung gemäss Anspruch 7, worin die gleiche Maske sequentiell bewegt wird, um die organischen lichtemittierenden EL-Schichten, die jedem der lichtemittierenden Bereiche entsprechen, zu bilden.

9. Verfahren zur Herstellung einer Anzeigevorrichtung gemäss Anspruch 7, worin die lichtemittierenden Bereiche für die gleiche Farbe mit den Schaltkreisen hierzwischen zwischengelagert ausgerichtet sind.

10. Verfahren zur Herstellung einer Anzeigevorrichtung gemäss Anspruch 7, worin die organische lichtemittierende EL-Schicht so gebildet ist, dass sie eine grössere Fläche als die erste Elektrode aufweist.

11. Verfahren zur Herstellung einer Anzeigevorrichtung gemäss Anspruch 7, worin der lichtemittierende Bereich so gebildet ist, dass er einen Eckteil aufweist, der als nicht-lichtemittierender Bereich dient.

12. Verfahren zur Herstellung einer Anzeigevorrichtung gemäss Anspruch 7, worin der lichtemittierende Bereich so gebildet ist, dass er eine grössere Fläche als die Fläche des Schaltkreises aufweist.

13. Verfahren zur Herstellung einer Anzeigevorrichtung gemäss Anspruch 7, worin der lichtemittierende Bereich eine Fläche aufweist, die kleiner ist als die Fläche des Schaltkreises, und von einem angrenzenden der lichtemittierenden Bereiche mit dem Schaltkreis hierzwischen zwischengelagert getrennt ist.

Revendications

1. Dispositif d'affichage comportant un panneau électroluminescent organique à matrice active comprenant :

des première et deuxième électrodes prévues sur un substrat, et
une couche d'émission de lumière électroluminescente organique prévue entre lesdites première et deuxième électrodes, dans lequel ladite couche d'émission de lumière électroluminescente organique comprend des régions d'émission de lumière, agencées en zigzag, et les régions adjacentes parmi lesdites régions d'émission de lumière sont empêchées de venir en contact les unes avec les autres, dans lequel, trois types desdites régions d'émission de lumière correspondant à R, G et B et trois circuits

de commutation correspondant aux trois types desdites régions d'émission de lumière sont agencés en une matrice, et
dans six segments agencés en deux rangées et trois colonnes, lesdites régions d'émission de lumière sont agencées dans trois desdits segments positionnés en zigzag et lesdits trois circuits de commutation sont agencés dans les trois segments restants.

2. Dispositif d'affichage selon la revendication 1, dans lequel lesdites régions d'émission de lumière pour la même couleur sont alignées avec ledit circuit de commutation interposé entre elles.

3. Dispositif d'affichage selon la revendication 1, dans lequel l'aire de ladite couche d'émission de lumière électroluminescente organique est plus grande que l'aire de ladite première électrode.

4. Dispositif d'affichage selon la revendication 1, dans lequel une région de non émission de lumière est formée au niveau d'un coin de ladite région d'émission de lumière, et les régions adjacentes parmi lesdites régions d'émission de lumière sont séparées par ladite région de non émission de lumière.

5. Dispositif d'affichage selon la revendication 1, dans lequel l'aire de ladite région d'émission de lumière est plus grande que l'aire dudit circuit de commutation.


6. Dispositif d'affichage selon la revendication 1, dans lequel ladite région d'émission de lumière a une aire plus petite que l'aire dudit circuit de commutation et est séparée de la région adjacente parmi lesdites régions d'émission de lumière avec ledit circuit de commutation interposé entre elles.

7. Procédé de fabrication d'un dispositif d'affichage comportant un panneau électroluminescent organique à matrice active comprenant des première et deuxième électrodes prévues sur un substrat et une couche d'émission de lumière électroluminescente organique prévue entre lesdites première et deuxième électrodes, dans lequel ladite couche d'émission de lumière électroluminescente organique comprend une région d'émission de lumière, le procédé comprenant l'étape consistant à former une pluralité desdites régions d'émission de lumière par dépôt d'un masque en phase vapeur, dans lequel lesdites couches d'émission de lumière électroluminescentes organiques correspondant à chacune desdites régions d'émission de lumière

sont agencées en zigzag et les régions adjacentes parmi lesdites régions d'émission de lumière sont empêchées de venir en contact les unes avec les autres, dans lequel :

- 5
- trois types desdites régions d'émission de lumière correspondant à R, G et B et lesdits trois circuits de commutation correspondant aux trois types desdites régions d'émission de lumière sont agencés en une matrice ;
- 10
- dans six segments agencés en deux rangées et trois colonnes, lesdites régions d'émission de lumière sont agencées dans trois desdits segments positionnés en zigzag et lesdits trois circuits de commutation sont agencés dans les
- 15
- trois segments restants.
8. Procédé de fabrication d'un dispositif d'affichage selon la revendication 7, dans lequel le même masque est déplacé séquentiellement pour former lesdites couches d'émission de lumière électroluminescentes organiques correspondant à chacune desdites régions d'émission de lumière.
- 20
9. Procédé de fabrication d'un dispositif d'affichage selon la revendication 7, dans lequel lesdites régions d'émission de lumière pour la même couleur sont alignées avec ledit circuit de commutation interposé entre elles.
- 25
- 30
10. Procédé de fabrication d'un dispositif d'affichage selon la revendication 7, dans lequel ladite couche d'émission de lumière électroluminescente organique est formée de manière à avoir une aire plus grande que l'aire de ladite première électrode.
- 35
11. Procédé de fabrication d'un dispositif d'affichage selon la revendication 7, dans lequel ladite région d'émission de lumière est formée de manière à avoir une partie de coin servant en tant que région de non émission de lumière.
- 40
12. Procédé de fabrication d'un dispositif d'affichage selon la revendication 7, dans lequel ladite région d'émission de lumière est formée de manière à avoir une aire plus grande que l'aire dudit circuit de commutation.
- 45
13. Procédé de fabrication d'un dispositif d'affichage selon la revendication 7, dans lequel ladite région d'émission de lumière a une aire plus petite que l'aire dudit circuit de commutation et est séparée de la région adjacente parmi lesdites régions d'émission de lumière avec ledit circuit de commutation interposé entre elles.
- 50
- 55

FIG. 1

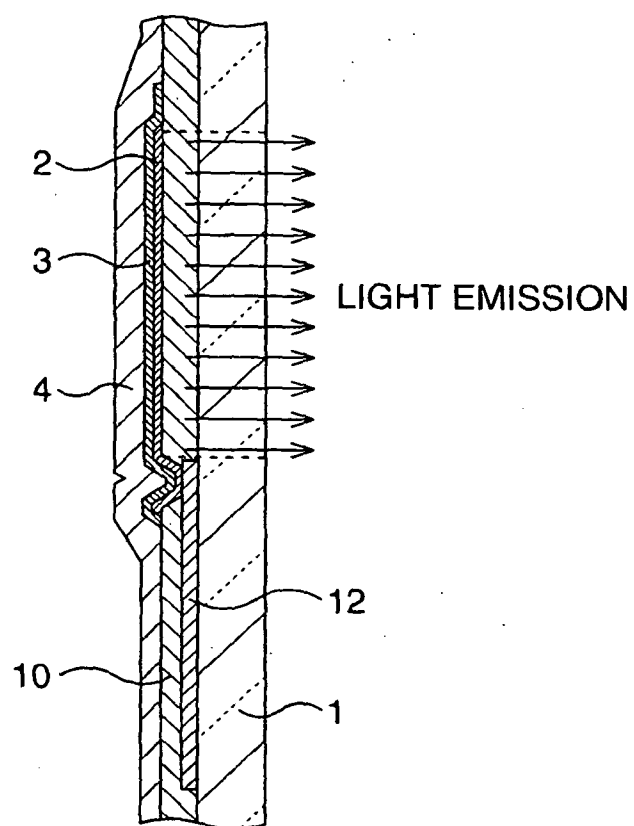

I - I' SECTION

FIG. 2

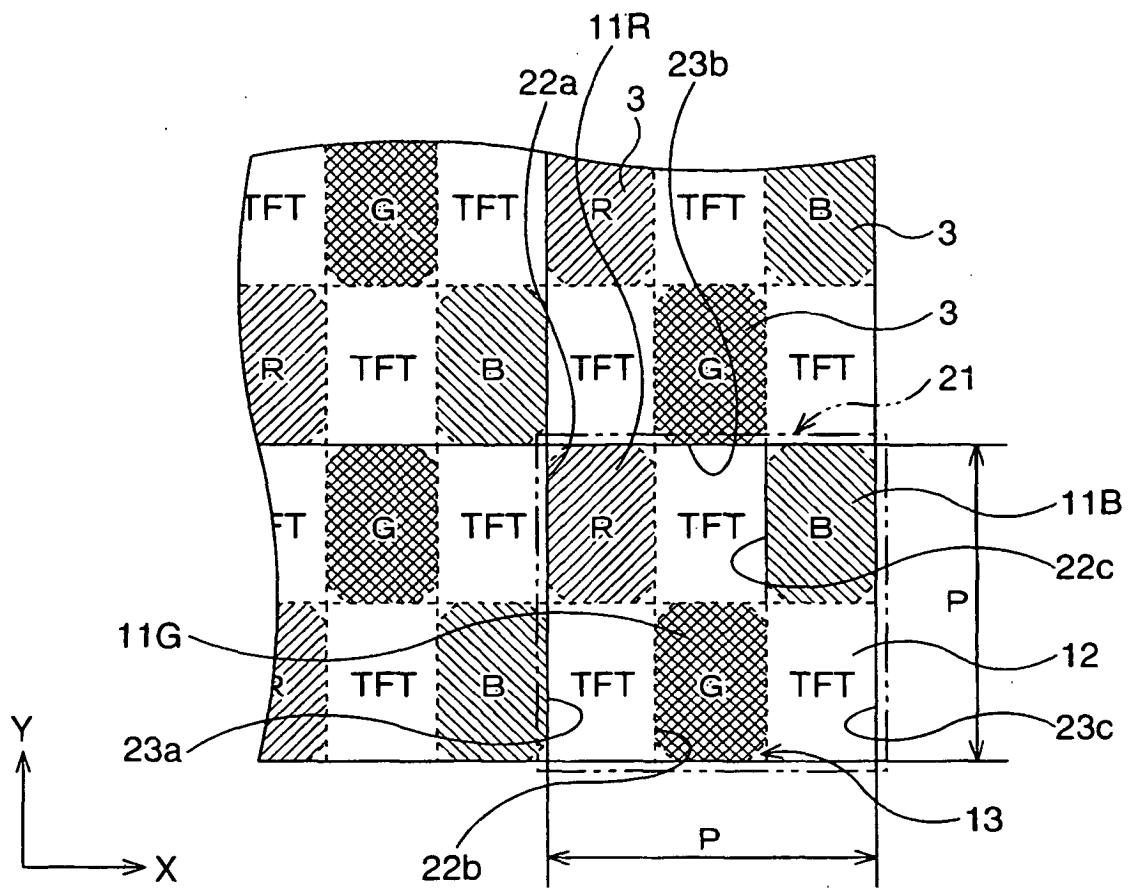


FIG. 3

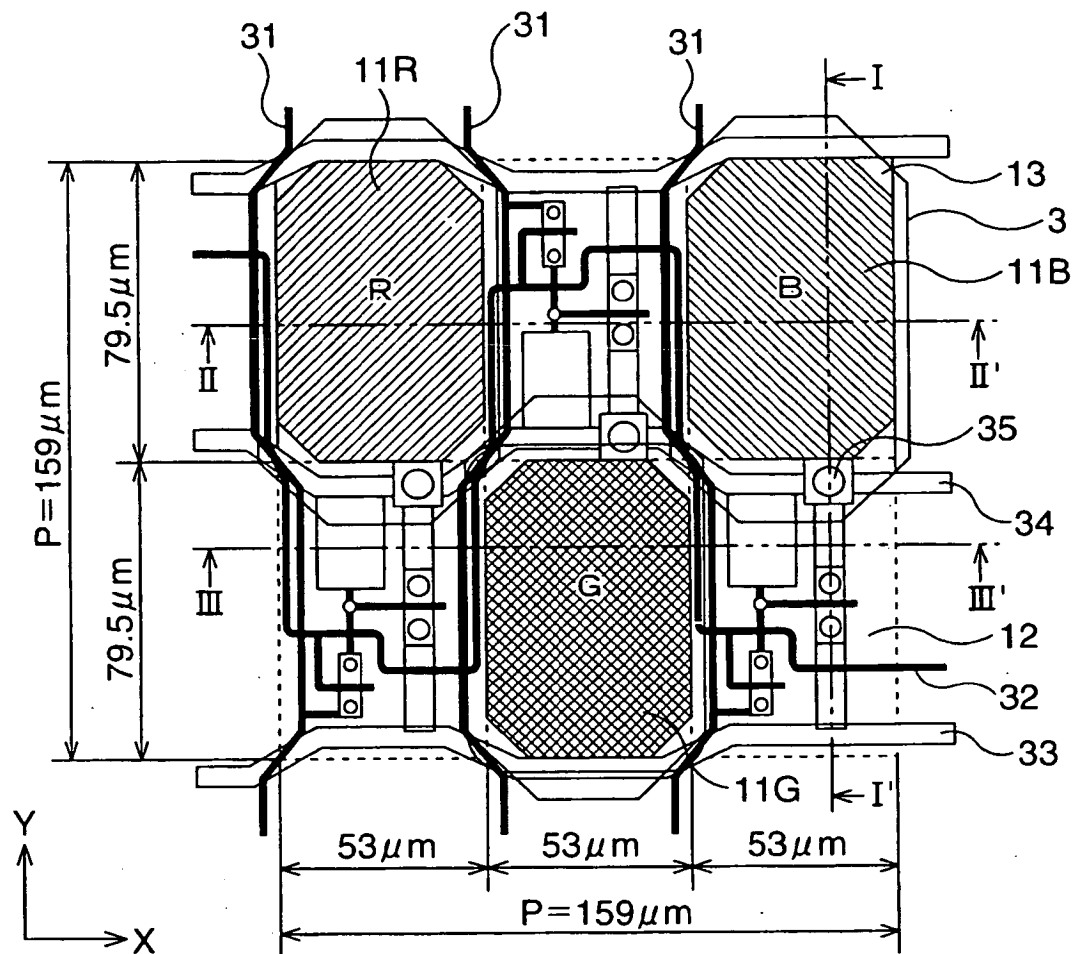


FIG. 4

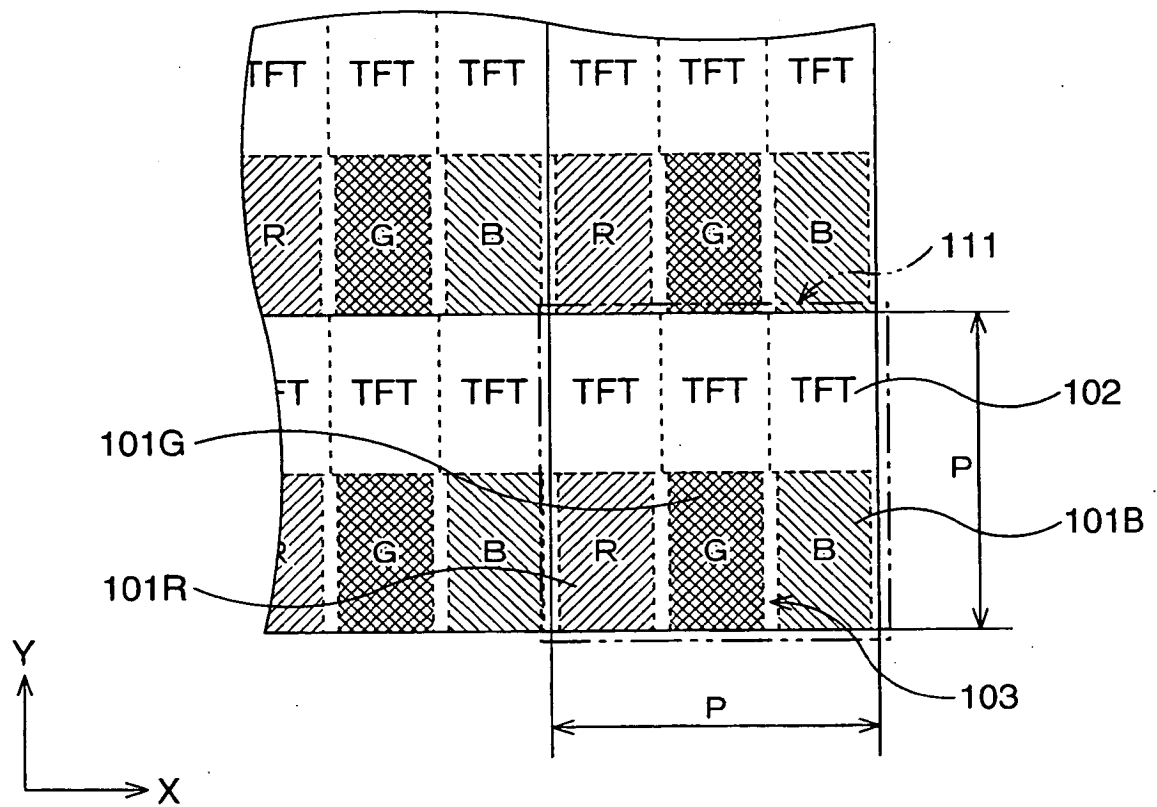


FIG. 5

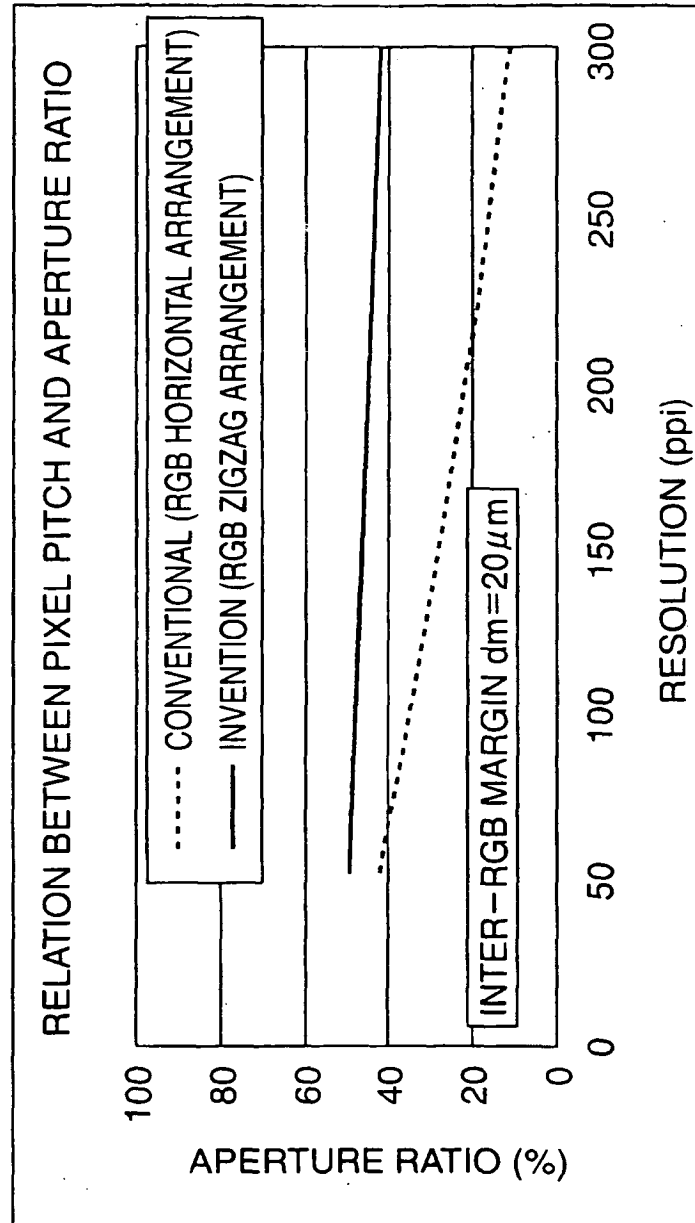


FIG. 6A

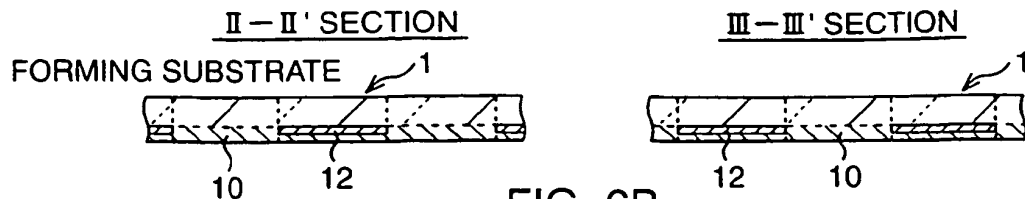


FIG. 6B

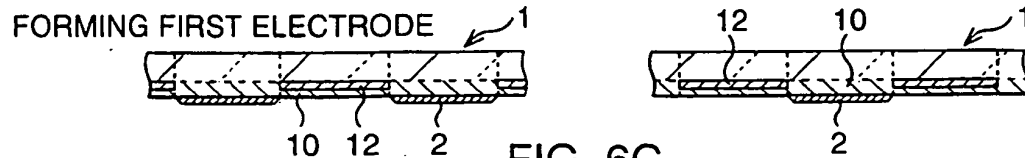


FIG. 6C

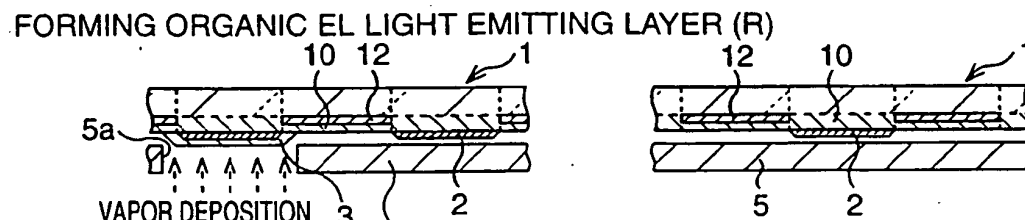


FIG. 6D

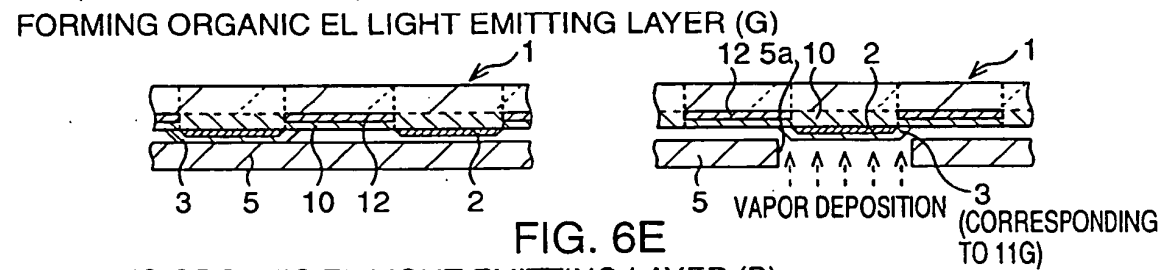


FIG. 6E

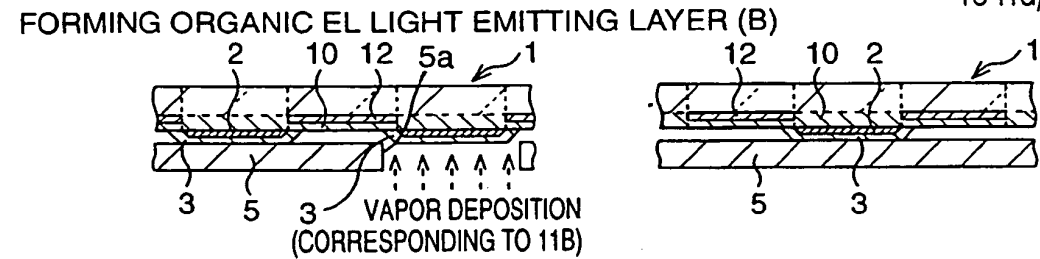


FIG. 6F

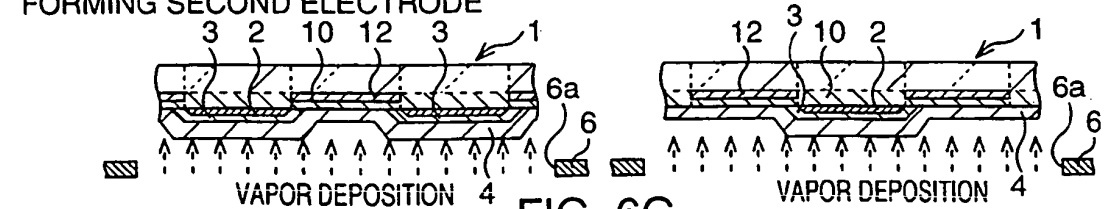


FIG. 6G

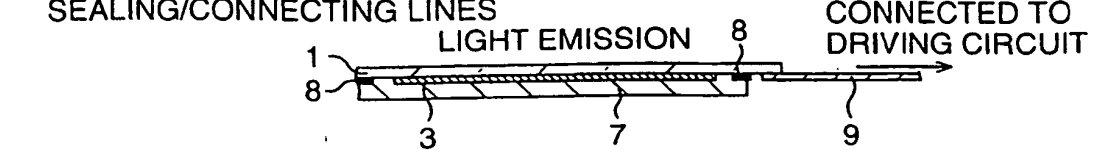


FIG. 7


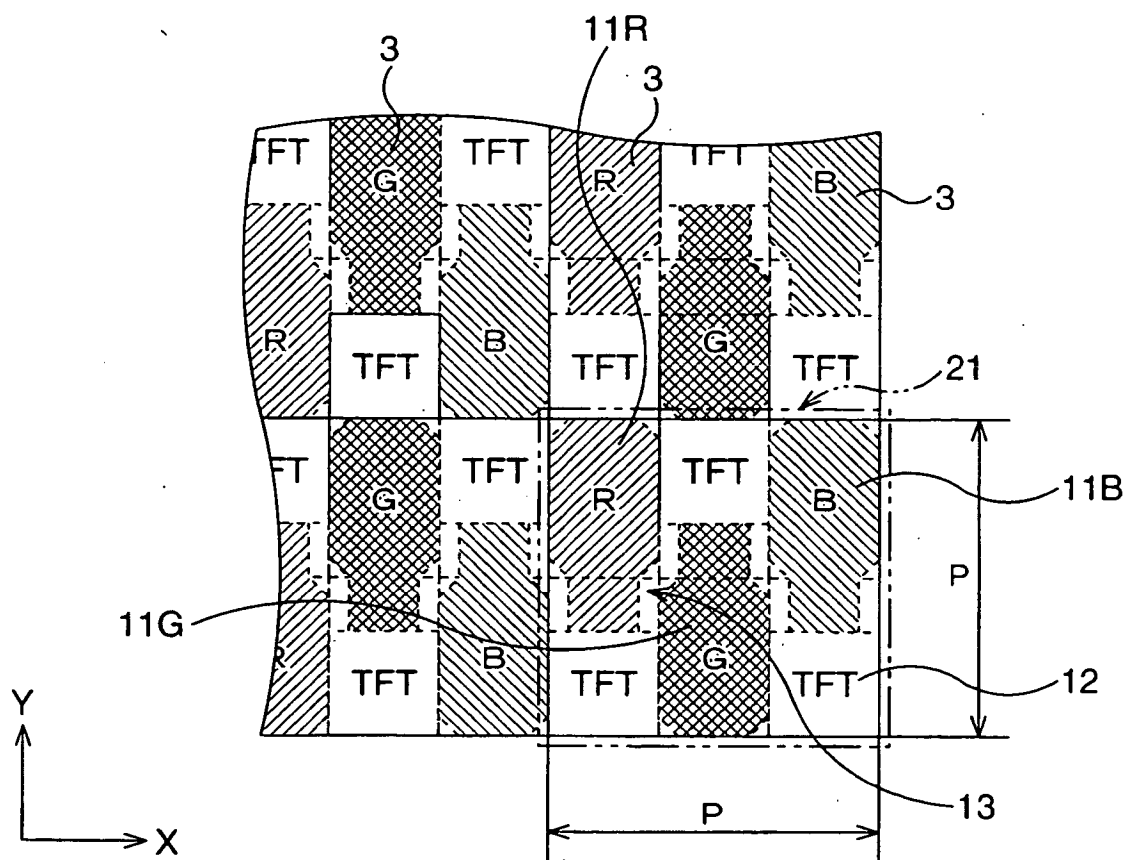


FIG. 8

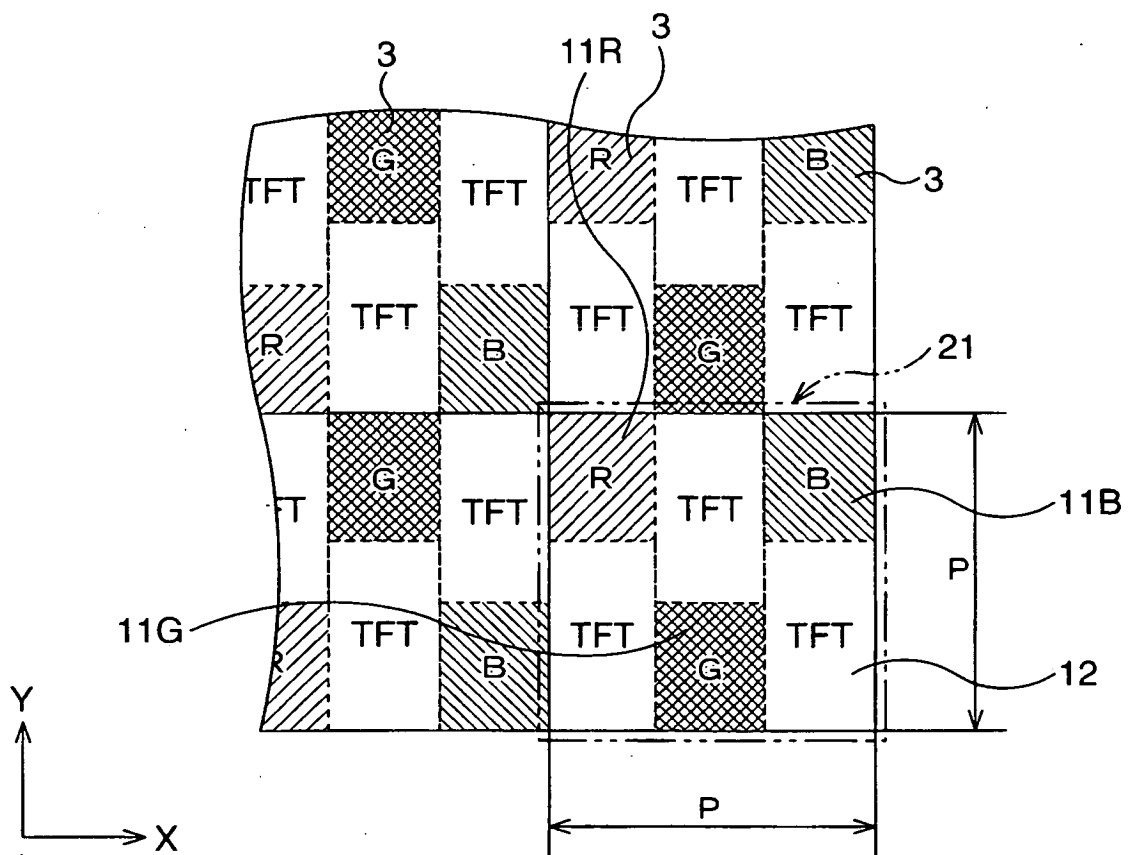

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 1006588 A2 [0006]

专利名称(译)	显示装置及其制造方法		
公开(公告)号	EP1594347A4	公开(公告)日	2008-03-19
申请号	EP2003705089	申请日	2003-02-13
[标]申请(专利权)人(译)	富士通株式会社		
申请(专利权)人(译)	FUJITSU LIMITED		
当前申请(专利权)人(译)	FUJITSU LIMITED		
[标]发明人	SAKAMOTO YOSHIAKI FUJITSU LIMITED		
发明人	SAKAMOTO, YOSHIAKI, FUJITSU LIMITED		
IPC分类号	H01L27/32 G09F9/30 H05B33/00 H05B33/10 H05B33/12 H05B33/14 H05B33/26		
CPC分类号	H01L27/3244 H01L27/3211		
其他公开文献	EP1594347A1 EP1594347B1		
外部链接	Espacenet		

摘要(译)

每个像素 (21) 包括多个发光区域 (11R, 11G和11B), 其对应的R, G和B各自具有有机EL层 (3), 并且多个TFT元件 (12) 对应于用于控制各个发光区域中的发光的发光区域。发光区域以Z字形方式设置, 并且相邻的发光区域保持彼此不接触。每个像素 (21) 被分成六个区段 (22a 至22c和23a至23c), 并且发光区域以Z字形方式布置在三个区段 (22a 至22c) 中。以这种方式, 在底部发射型有源矩阵有机EL显示器中, 可以有效地确保足够的孔径比, 并且可以布置像素使得孔径比难以折衷以获得更高的分辨率。因此, 可以降低用于获得必要亮度的功耗, 并且这可以有助于整个驱动电路和器件的小型化。

