



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
14.05.2014 Bulletin 2014/20

(51) Int Cl.:
H01L 51/52 (2006.01) H01L 27/32 (2006.01)

(21) Application number: **13181447.7**

(22) Date of filing: **23.08.2013**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(72) Inventors:
• **Song, Seung-Yong**
446-711 Yongin-City (KR)
• **Jung, Sun-Young**
446-711 Yongin-City (KR)

(30) Priority: **13.11.2012 KR 20120128267**

(74) Representative: **Gulde & Partner**
Patent- und Rechtsanwaltskanzlei mbB
Wallstraße 58/59
10179 Berlin (DE)


(71) Applicant: **Samsung Display Co., Ltd.**
Yongin-City, Gyeonggi-Do, 446-711 (KR)

(54) **Organic light emitting display apparatus and method of manufacturing the same**

(57) An organic light emitting display apparatus includes a base substrate (200), a light emitting unit (EU1) on the base substrate (200) and including an organic light emitting element, a driving unit (DU1) on the base substrate (200), a sealing substrate (100) opposite from the

base substrate (200), and a sealing unit (300, 300-1, 300-2, 300-3) located between the base and sealing substrates (200, 100) and enclosing the light emitting unit (EU1), the sealing unit (300, 300-1, 300-2, 300-3) being at least partially overlapping the driving unit (DU1).

FIG. 1

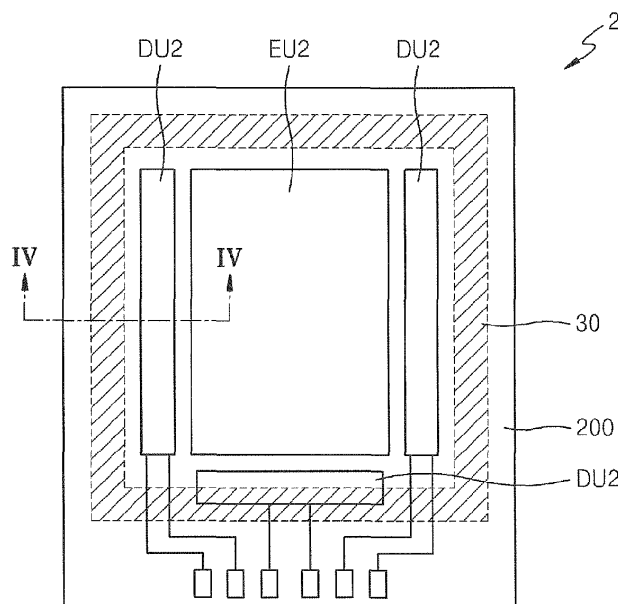

Description

BACKGROUND

1. Field

[0001] Embodiments of the present invention relate to an organic light emitting display apparatus and method of manufacturing the same.

2. Description of the Related Art

[0002] An organic light emitting display apparatus is a self-emission display having a high response speed, as well as a wide angle of field, and high contrast, and therefore attracts attention as a next generation display apparatus.

[0003] The organic light emitting display apparatus includes a thin film layer configured of at least one or more organic layers between two electrodes. When exposed to moisture or oxygen, the organic layers deteriorate, causing dark spots that do not emit light.

[0004] To reduce or prevent the deterioration of the organic layers, a base substrate on which the organic layers are formed, and a sealing substrate, which seals the organic layers, are adhered to each other with a sealing material. An adhesive containing an organic material to prevent moisture permeation may be used as the sealing material. More commonly, nowadays, frit is used instead as the sealing material, which is an inorganic material that is excellent in blocking of moisture permeation.

[0005] Hereinafter, referring to FIGS. 1 and 2, comparative examples of the prior art in which a sealing unit is made of frit will be described. FIG. 1 is a schematic plan view illustrating an organic light emitting display apparatus according to a comparative example of the prior art, and FIG. 2 is a cross-sectional view taken along the line IV-IV in FIG. 1. Referring FIGS. 1 and 2, a light emitting unit UE2 and a driving unit DU2 are formed on a base substrate 200.

[0006] The light emitting unit EU2 includes at least one organic light emitting element that emits light when a power supply voltage is applied to an organic layer laminated between positive and negative electrodes. In FIG. 2, the light emitting unit EU2 is illustrated to emit red R, green G and blue B light as an example for convenience's sake.

[0007] The base substrate 200 may be a substrate that is normally used in the organic light emitting display apparatus, or may be a glass substrate having excellent mechanical strength, thermal stability, transparency, surface smoothness, tractability and water-resistance. Furthermore, the sealing substrate 100 may adopt a glass substrate like the base substrate 200.

[0008] A driving unit DU2 is located outside the light emitting unit EU2 on the base substrate 200. The foregoing driving unit DU2 includes TFTs and various electrical elements. To protect the light emitting unit EU2 from the outside (e.g., an exterior environment), the

sealing substrate 100 is located to be opposite to the base substrate and the sealing substrate 100 is bonded to the base substrate 200 with a sealing unit 30 made of the frit, which is excellent in reducing or preventing moisture permeation. The sealing substrate 100 may be bonded to the base substrate 200 with a laser. Because a temperature of frit irradiated with the laser sharply increases (e.g., effectively instantly) and damages the driving unit DU2 around the frit, the sealing unit 30 is separated from the driving unit DU2 by a predetermined interval.

[0009] Nowadays, as customer's demand for a slim display apparatus increases, efforts are directed toward reducing a dead space. When the sealing unit is not separated from, but instead overlaps, the driving unit, the driving unit can be moved to the outskirts of the base substrate. Then an area of the light emitting unit increases, and the overall dead space can be reduced.

[0010] However, when the base substrate 200 and sealing substrate 100 are bonded with the sealing unit 30 made of frit, the temperature of the frit irradiated with a high-output laser may go higher than 600°C, as in the exemplary embodiment of Figs. 1 and 2. Therefore the driving unit DU2 is separated from the sealing unit 30 to avoid damage from the high temperature. Accordingly, a dead space between an edge of the base substrate 200 and the light emitting unit EU2 is barely or minimally reduced.

SUMMARY

[0011] Embodiments of the present invention provide an organic light emitting display apparatus and method of manufacturing the same to enhance capability of blocking moisture permeation and to reduce a dead space.

[0012] According to an aspect of embodiments of the present invention, there is provided an organic light emitting display apparatus including a base substrate, a light emitting unit on the base substrate and including an organic light emitting element, a driving unit on the base substrate, a sealing substrate opposite from the base substrate, and a sealing unit between the base and sealing substrates and enclosing the light emitting unit, the sealing unit being at least partially on the driving unit.

[0013] The sealing unit may include a low melting inorganic material having a low temperature phase transition (LPT) characteristic.

[0014] The phase transition temperature of the low melting inorganic material is a temperature at which the low melting inorganic material is fluid.

[0015] A phase transition temperature of the low melting inorganic material may be lower than a temperature at which electrical characteristics of elements of the driving unit are changed.

[0016] A phase transition temperature of the low melting inorganic material may be lower than a temperature at which physical and chemical characteristics of a ma-

terial of the light emitting unit are changed.

[0017] A phase transition temperature of the low melting inorganic material may be from about 80°C to about 120°C.

[0018] The low melting inorganic material may include at least one of tin oxide, stannous fluoride, phosphorous oxide, niobium oxide, boron phosphate, zinc oxide, or tungsten oxide.

[0019] The sealing unit may directly contact the driving unit.

[0020] The sealing unit may further include a dam unit at both sides of the sealing unit.

[0021] The dam unit may include a glass tube.

[0022] The sealing unit may further include frit at a side of the sealing substrate stacked with the low melting inorganic material, the low melting inorganic material being at a side of the base substrate.

[0023] The sealing substrate may be recessed in a central region facing the light emitting unit, and includes a protruding unit protruding along an edge of the sealing substrate, and the low melting inorganic material may be located at the protruding unit.

[0024] The base substrate and the sealing substrate may include a glass material.

[0025] According to another aspect of embodiments of the present invention, there is provided a method of manufacturing an organic light emitting display apparatus, the method including forming a light emitting unit including an organic light emitting element on a base substrate, and forming a driving unit located outside the light emitting unit on the base substrate, forming a sealing unit including a low melting inorganic material having a low temperature phase transition (LPT) characteristic to enclose the light emitting unit on a sealing substrate, aligning the base and sealing substrates so that the sealing unit at least partially overlaps the driving unit, and bonding the base and sealing substrates such that the low melting inorganic material is at least partially directly joined to the driving unit by heating the low melting inorganic material to a phase transition temperature.

[0026] The forming of the sealing unit may include forming a dam unit at both sides of the sealing unit, and filling an inside of the dam unit with the low melting inorganic material.

[0027] The forming of the dam unit may include welding a glass tube to the sealing substrate.

[0028] The forming of the sealing unit may include forming frit on the sealing substrate, forming a pyrolysis adhesive on the frit, and forming a pallet including the low melting inorganic material on the pyrolysis adhesive.

[0029] The forming of the sealing unit may include irradiating the frit with a laser, decomposing the pyrolysis adhesive with heat, and laminating the frit and low melting inorganic material to directly contact each other.

[0030] The pyrolysis adhesive may include at least one of ethyl cellulose, polyimide, or a polyvinyl adhesive.

[0031] The method may further include etching a recess unit in the sealing substrate to face the light emitting

unit, and forming a protruding unit protruding from an edge of the sealing substrate, before the forming of the sealing unit.

[0032] The method may further include forming a pallet including the low melting inorganic material on the protruding unit after the forming of the sealing substrate.

[0033] The phase transition temperature of the low melting inorganic material may be a temperature at which fluidity occurs in the low melting inorganic material.

[0034] In the heating of the low melting inorganic material to a phase transition temperature, the phase transition temperature of the low melting inorganic material may be lower than a temperature at which electrical characteristics of elements of the driving unit change.

[0035] In the heating of the low melting inorganic material to a phase transition temperature, the phase transition temperature of the low melting inorganic material may be lower than a temperature at which physical and chemical characteristics of a material of the light emitting unit change.

[0036] In the heating of the low melting inorganic material to a phase transition temperature, the phase transition temperature of the low melting inorganic material is from about 80°C to about 120°C.

[0037] The low melting inorganic material may include at least one of tin oxide, stannous fluoride, phosphorous oxide, niobium oxide, boron phosphate, zinc oxide, or tungsten oxide.

[0038] According to the organic light emitting display apparatus and method of manufacturing the same of embodiments of the present invention, because of a sealing unit including a low melting inorganic material, the electrical elements of the driving unit, or the electrical elements and light emitting material of the light emitting unit are not extensively damaged by moisture or oxygen. Therefore the sealing unit can overlap the driving unit to reduce a dead space.

BRIEF DESCRIPTION OF THE DRAWINGS

[0039] The above and other aspects of embodiments of the present invention will become more apparent by describing in detail exemplary embodiments thereof with reference to the attached drawings in which:

[0040] FIG. 1 is a schematic plan view illustrating an organic light emitting display apparatus according to an embodiment of the prior art.

[0041] FIG. 2 is a cross-sectional view taken along the line IV-IV in FIG. 1;

[0042] FIG. 3 is a schematic plan view illustrating an organic light emitting display apparatus according to an embodiment of the present invention;

[0043] FIG. 4 is a cross-sectional view taken along the line II-II in FIG. 3;

[0044] FIGS. 5A to 5C are schematic plan views illustrating a method of manufacturing an organic light emitting display apparatus according to a first embodiment of the present invention;

[0045] FIGS. 6A to 6E are schematic plan views illustrating a method of manufacturing an organic light emitting display apparatus according to a second embodiment of the present invention; and

[0046] FIGS. 7A to 7C are schematic plan views illustrating a method of manufacturing an organic light emitting display apparatus according to a third embodiment of the present invention.

DETAILED DESCRIPTION

[0047] Embodiments of the present invention will now be described more fully with reference to the accompanying drawings, in which exemplary embodiments of the invention are shown. The invention may, however, be embodied in many different forms, and should not be construed as being limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the concept of the invention to those skilled in the art. Like reference numerals in the drawings denote like elements, and thus repetition of their description will be omitted. In the various embodiments, like elements are representatively described in a first embodiment with like reference numerals. In other embodiments, configurations of the elements other than those of the first embodiment are described.

[0048] In the drawings, the thicknesses of layers and regions may be exaggerated for clarity. It will also be understood that when a part such as a layer, a film, a region, or a plate is referred to as being "on" another part or substrate, it can be directly on the other part or substrate, or one or more intervening parts may also be present.

[0049] It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

[0050] As used herein, the term "and/or" includes any and all combinations of one or more of the associated listed items. Expressions such as "at least one of," when preceding a list of elements, modify the entire list of elements, and do not modify the individual elements of the list.

[0051] FIG. 3 is a schematic plan view illustrating an organic light emitting display apparatus according to an embodiment of the present invention, and FIG. 4 is a cross-sectional view taken along the line II-II in FIG. 3.

[0052] Referring to FIGS. 3 and 4, a light emitting unit EU1 and a driving unit DU1 are formed on a base substrate 200.

[0053] The light emitting unit EU1 includes at least one organic light emitting element that emits light when a power supply voltage is applied to an organic layer laminated between positive and negative electrodes. In FIG. 4, the

light emitting unit EU1 is illustrated to emit red R, green G and blue B light as an example for the sake of convenience.

[0054] The base substrate 200 beneath the light emitting unit EU1 may further include a display unit comprising a plurality of transistors and capacitors for driving the organic light emitting unit. The base substrate 200 may be a substrate which is normally used in the organic light emitting display apparatus, or may be a glass substrate that is excellent in mechanical strength, thermal stability, transparency, surface smoothness, tractability and water-resistance.

[0055] The driving unit DU1 is located outside the light emitting unit EU1 on the base substrate 200. For example, the driving unit DU1 transfers an electrical signal to the display unit coupled to the light emitting unit EU1 like a scan driver or a data driver.

[0056] In embodiments of the present invention, the term driving unit DU1 is not limited only to the scan driver and data driver, but may include other kinds of circuit units located on the base substrate 200 outside the light emitting unit EU1 that are electrically coupled to the display unit including a power supply, which provides a power source to the organic light emitting unit.

[0057] In addition, even though the driving unit DU1 is illustrated as located at the left and right sides of, and beneath, the base substrate 200 in FIG.3, the present invention is not limited thereto, and there may be at least one or more driving units DU1 located on the base substrate 200.

[0058] Although not illustrated in detail, the foregoing driving unit DU1 includes Thin Film Transistors (TFTs) and various electrical elements.

[0059] When exposed to vapour (e.g., moisture) or oxygen in the air, the organic layer in the organic light emitting unit 1 deteriorates to progressively generate dark spots. Therefore the light emitting unit EU1 in which the organic layer is formed should be sealed thoroughly

[0060] To insulate the light emitting unit EU1 from the outside, a seal substrate 100 is located opposite to the base substrate 200, and is bonded to the base substrate 200 with a sealing unit 300.

[0061] Like the foregoing base substrate 200, the seal substrate 100 may comprise a substrate normally used in the organic light emitting display unit, or a glass substrate having excellent mechanical strength, thermal stability, transparency, surface smoothness, tractability and water-resistance.

[0062] When an adhesive containing an organic material is used as the sealing unit 300, moisture blocking capability (for avoiding moisture permeation) is lowered. Therefore frit, which is an inorganic material, may be used as a sealing material. However, when using frit as a sealing material the sealing unit must be separated from the driving unit by a predetermined interval and a dead space cannot be reduced.

[0063] Referring to FIGS. 3 and 4, the present embodiment adopts a low melting inorganic material (e.g., a

material having a low temperature phase transition characteristic) instead of frit as the sealing unit 300. Here, a phase transition temperature of the low melting inorganic material indicates the minimum temperature at which fluidity occurs in the low melting inorganic material. Furthermore, the phase transition temperature of the low melting inorganic material may be lower than a temperature at which electrical characteristics of elements configuring the driving unit DU1 begin to change. For example, the phase transition temperature of the low melting inorganic material may be from about 80°C to about 120°C.

[0064] The low melting inorganic material may include for example, one or more kinds of tin oxide, such as SnO, stannous fluoride, such as SnF₂, phosphorous oxide, such as P₂O₅, niobium oxide, such as NbO, boron phosphate, such as BPO₄, zinc oxide, such as ZnO, and tungsten oxide, such as WO₃.

[0065] Because the sealing unit 300 of the present embodiment softens at a low temperature, and because the bonding of the base substrate 200 and the sealing substrate 100 is also performed at a low temperature, even with use of a laser, the driving unit DU1 and light emitting unit EU1 are not damaged by heat. Accordingly, as shown in FIGS. 3 and 4, the sealing unit 300 is formed to overlap a portion of the driving unit DU1.

[0066] Compared to the comparative examples as shown in FIGS. 1 and 2, the driving unit DU1 may be located closer to the sealing unit 300, thus enabling the dead space to be reduced. Even though only portions of the sealing unit 300 and driving unit DU1 overlap each other in the drawings, the overlapping may be performed in a wider range. As the overlapping region is widened, the area of the light emitting unit EU1 is increased, and the dead space can be further reduced.

[0067] According to the present embodiments, because it is not necessary to prepare a separate protection member between the sealing unit 300 and driving unit DU1 to protect the driving unit DU1 from high temperature (e.g., heat applied to the sealing unit 300), the driving unit DU1 can directly contact the sealing unit 300. Therefore, the manufacturing process is simplified.

[0068] However, adhesion between the driving unit DU1 and sealing unit 300 may become weak. Here, the low melting inorganic materials may be mixed, for example, in ratios as follows:

[0069] i) powder mixture (mole %) of 40% SnF₂ + 40% SnO + 20% P₂O₅;

[0070] ii) mixture (mole %) of 40% SnF₂ + 40% SnO + 18% P₂O₅ + 2% Nb₂O₅;

[0071] iii) mixture (mole %) of 40% SnO + 40% P₂O₅ + 20% ZnO;

[0072] iv) mixture (mole %) of 40% SnO + 40% P₂O₅ + 18% ZnO + 2% FeO.

[0073] Adhesion of the sealing unit 300 according to the present embodiment was tested. As the test results, the adhesions of the samples were i) 15 kgf/mm, ii) 27 kgf/mm, iii) 7 kgf/mm, iv) 20 kgf/mm, respectively, confirming that the samples had sufficient adhesions.

[0074] Hereinafter various methods for manufacturing an organic light emitting display apparatus will be described.

[0075] FIGS. 5A to 5C are schematic plan views illustrating a method of manufacturing an organic light emitting display apparatus according to a first embodiment of the present invention.

[0076] Referring to FIGS. 5A to 5C, a double dam unit 310 is formed on the sealing substrate 100 (e.g., the dam unit 310 is formed to build both sides of the sealing unit 300) to enclose the light emitting unit EU1 of the base substrate 200 and to overlap a portion of the driving unit DU1 (see FIG. 3) along an outskirt of a joined line (e.g., a continuous line, or an enclosing structure). The dam unit 310 may be formed by welding a glass tube to the sealing substrate 100.

[0077] Next, as shown in FIG. 5B, the inside of the dam unit 310 is filled with the low melting inorganic material 320 in a powder state. Then, as shown in FIG. 5C, the base substrate 200 and the sealing substrate 100 are aligned so that the sealing unit 300-1 at least partially overlaps the driving unit DU1 (see FIG. 3).

[0078] After the alignment, the low melting inorganic material 320 is heated at a phase transition temperature, and the base substrate 200 and the sealing substrate 100 are bonded by the low melting inorganic material 320, which is at least partially directly joined to the driving unit DU1 (see FIG. 3). Since a low melting inorganic material 320 in the powder state is difficult to contain, or to maintain as a certain shape, the dam unit 310 is formed to contain the powder, and the powder is put into the dam unit 310 and then heated.

[0079] Because high energy is not necessary to glassify (e.g., make into glass) the low melting inorganic material 320 in the powder state, the sealing unit 300-1 including the low melting inorganic material 320 does not damage electrical elements included in the driving unit DU1 (see FIG. 3). Therefore it is possible to design the driving unit DU1 (see FIG. 3) to overlap the sealing unit 300-1, thereby reducing the dead space.

[0080] FIGS. 6A to 6E are schematic plan views illustrating a method of manufacturing an organic light emitting display apparatus according to a second embodiment of the present invention.

[0081] Referring to FIG. 6A, a frit 400 is formed on the sealing substrate 100.

[0082] Referring to FIG. 6B, a pyrolysis adhesive 500 is formed on the frit 400. The pyrolysis adhesive 500 may be made of at least one of ethyl cellulose, polyimide and a polyvinyl adhesive.

[0083] Referring to FIG. 6C, a pallet 600 containing the low melting inorganic material is formed on the pyrolysis adhesive 500.

[0084] Referring to FIG. 6D, before the sealing substrate 100 is bonded to the base substrate 200, the temperature of the frit 400 is raised by irradiating the frit 400 of the sealing substrate 100 with the laser L. The pyrolysis adhesive 500 is at least partly decomposed by the heat

from the frit 400, and a portion of the pallet 600, which contains the low melting inorganic material and touches the frit 400, melts to be integrated to the frit 400, and forms a sealing unit 300-2.

[0085] Referring to FIG. 6E, the base substrate 200 and sealing substrate 100 are aligned for a joined line of the sealing unit 300-2 to at least partially overlap the driving unit DU1 (see FIG. 3).

[0086] After the alignment, the low melting inorganic material 600 is heated at a phase transition temperature, and the base substrate 200 and the sealing substrate 100 are bonded for the low melting inorganic material 600 to be at least partially and directly joined to the driving unit DU1 (see FIG. 3).

[0087] FIGS. 7A to 7C are schematic plan views illustrating a method of manufacturing an organic light emitting display apparatus according to a third embodiment of the present invention.

[0088] Referring to FIG. 7A, a recess unit 100-1a and protruding unit 100-1b are formed in the sealing substrate 100-1. The recess unit 100-1a is formed in a region facing the light emitting unit EU1 to be described later, and the protruding unit 100-1b is formed along a joined line (e.g., at a joined line continuously formed at an edge of the sealing substrate 100-1). The foregoing process may be performed by etching.

[0089] Referring to FIG. 7B, a sealing unit 300-3 of a pallet form that contains the low melting inorganic material is formed on the protruding unit 100-1b.

[0090] Referring to FIG. 7C, the base substrate 200 and sealing substrate 100 are aligned so that a joined line of the sealing unit 300-3 at least partially overlaps the driving unit DU1 (see FIG. 3).

[0091] After the alignment, the sealing unit 300-3 containing the low melting inorganic material is heated at a phase transition temperature, and the base substrate 200 and the sealing substrate 100 are bonded by the sealing unit 300-3, which is at least partially directly joined to the driving unit DU1 (see FIG. 3).

[0092] According to the foregoing first to third embodiments, because the sealing unit containing the low melting inorganic material is used, the electrical elements of the driving unit, and electrical elements of a light emitting material, are not damaged even though heat is applied while bonding the base substrate to the sealing substrate.

[0093] Therefore the sealing unit can be formed to overlap the driving unit, thereby reducing the dead space. In addition, it is not necessary to form a protection member to protect the driving unit between the driving unit and the sealing unit, thereby simplifying the manufacturing process.

[0094] While embodiments of the present invention have been particularly shown and described with reference to exemplary embodiments thereof, it will be understood by those of ordinary skill in the art that various changes in form and details may be made therein without departing from the scope of the present invention as defined by the following claims, and their equivalents.

Claims

1. An organic light emitting display apparatus comprising:
 - a base substrate (200);
 - a light emitting unit (EU1) on the base substrate (200) and comprising an organic light emitting element;
 - a driving unit (DU1) on the base substrate (200);
 - a sealing substrate (100) opposite from the base substrate (200); and
 - a sealing unit (300, 300-1, 300-2, 300-3) between the base and sealing substrates (200, 100) and enclosing the light emitting unit (EU1), the sealing unit (300) being at least partially overlapping the driving unit (DU1).
2. The organic light emitting display apparatus according to claim 1, wherein the sealing unit (300, 300-1, 300-2, 300-3) comprises a low melting inorganic material having a low temperature phase transition (LPT) characteristic.
3. The organic light emitting display apparatus according to claim 2, wherein a phase transition temperature of the low melting inorganic material ranges from 80°C to 120°C.
4. The organic light emitting display apparatus according to claim 2, wherein the low melting inorganic material comprises at least one of tin oxide, stannous fluoride, phosphorous oxide, niobium oxide, boron phosphate, zinc oxide, or tungsten oxide.
5. The organic light emitting display apparatus according to one of the preceding claims, wherein the sealing unit (300) directly contacts the driving unit (DU1).
6. The organic light emitting display apparatus according to one of the preceding claims, wherein the sealing unit (300-1) further comprises a dam unit (310) at both sides of the sealing unit (300-1).
7. The organic light emitting display apparatus according to claim 9, wherein the dam unit (310) comprises a glass tube.
8. The organic light emitting display apparatus according to one of claims 1 to 4, wherein the sealing unit (300-2) further comprises frit (400) at a side of the sealing substrate (100) stacked with the low melting inorganic material, the low melting inorganic material being located at a side of the sealing unit (300-2) facing the base substrate (200).
9. The organic light emitting display apparatus according to one of claims 1 to 4, wherein the sealing sub-

strate (100-1) comprises a recess (100-1a) in a central region facing the light emitting unit (EU1), and comprises a protruding unit (100-1b) protruding along an edge of the sealing substrate (100-1), and wherein the low melting inorganic material is located on the protruding unit (100-1b).

10. A method of manufacturing an organic light emitting display apparatus according to one of the preceding claims, the method comprising:

forming a light emitting unit (EU1) comprising an organic light emitting element on a base substrate (200), and forming a driving unit (DU1) located outside the light emitting unit (EU1) on the base substrate (200);
forming a sealing unit (300, 300-1, 300-2, 300-3) comprising a low melting inorganic material having a low temperature phase transition (LPT) characteristic to enclose the light emitting unit on a sealing substrate;
aligning the base and sealing substrates (200, 100) so that the sealing unit (300, 300-1, 300-2, 300-3) at least partially overlaps the driving unit (DU1); and
bonding the base and sealing substrates (200, 100) so that the low melting inorganic material is at least partially directly joined to the driving unit (DU1) by heating the low melting inorganic material to a phase transition temperature.

11. The method of manufacturing an organic light emitting display apparatus according to claim 10, wherein the forming of the sealing unit (300-1) comprises:

forming a dam unit (310) comprising two sides of the sealing unit (300-1); and
filling an inside of the dam unit (310) with the low melting inorganic material.

12. The method of manufacturing an organic light emitting display apparatus according to claim 11, wherein the forming of the dam unit (310) comprises welding a glass tube to the sealing substrate (100).

13. The method of manufacturing an organic light emitting display apparatus according to claim 10, wherein the forming of the sealing unit (300-2) comprises:

forming frit (400) on the sealing substrate (100);
forming a pyrolysis adhesive (500) on the frit (400);
forming a pallet (600) including the low melting inorganic material on the pyrolysis adhesive (500);
irradiating the frit (400) with a laser;
decomposing the pyrolysis adhesive (500) with heat; and

laminating the frit (400) and low melting inorganic material (600) to directly contact each other.

14. The method of manufacturing an organic light emitting display apparatus according to claim 13, wherein the pyrolysis adhesive (500) comprises at least one of ethyl cellulose, polyimide, or a polyvinyl adhesive.

15. The method of manufacturing an organic light emitting display apparatus according to claim 10, further comprising:

etching a recess unit (100-1a) in a side of the sealing substrate (100-1) to face the light emitting unit (EU1); and
forming a protruding unit (100-1b) protruding from an edge of the sealing substrate (100-1), before the forming of sealing unit (300-3).

16. The method of manufacturing an organic light emitting display apparatus according to claim 15, further comprising forming a pallet comprising the low melting inorganic material on the protruding unit (100-1b) after the forming of the sealing substrate (100-1).

FIG. 1

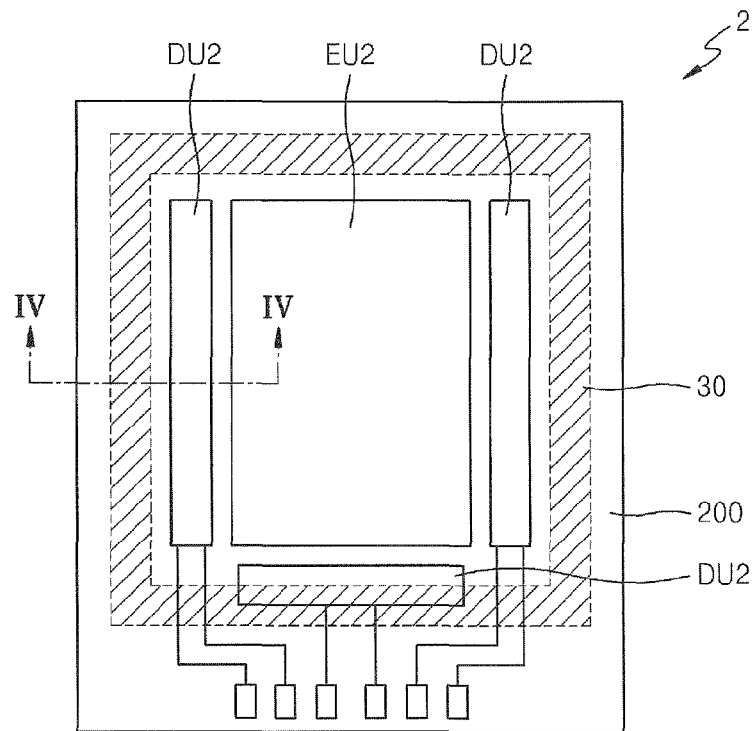


FIG. 2

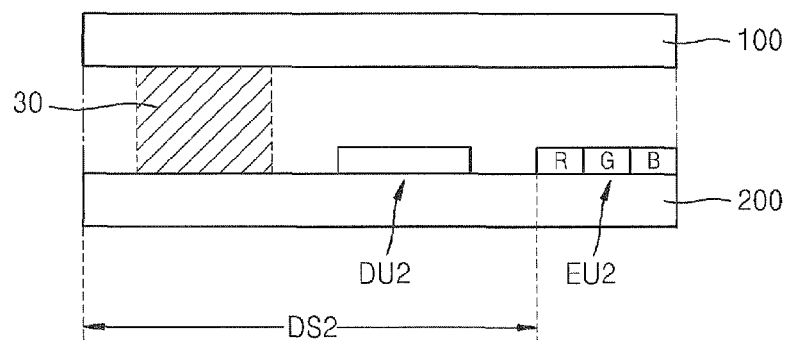


FIG. 3

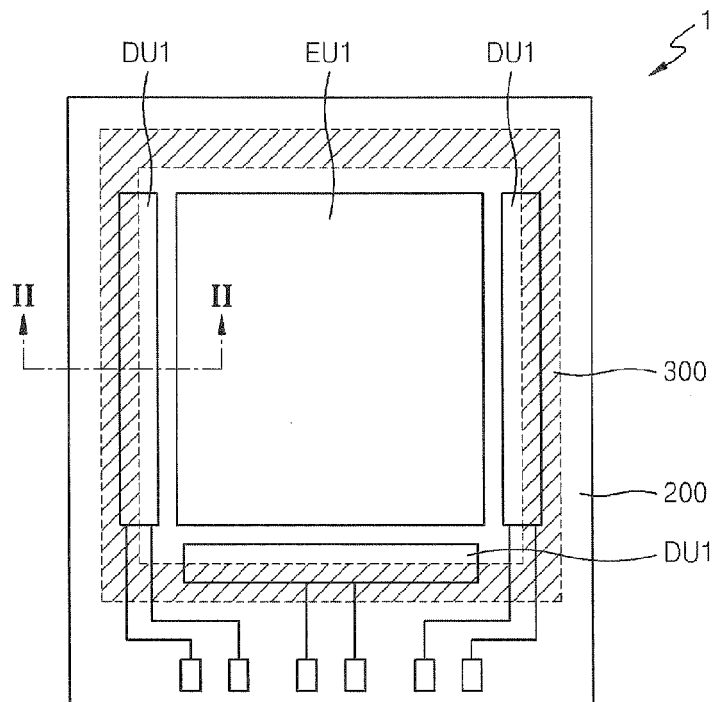


FIG. 4

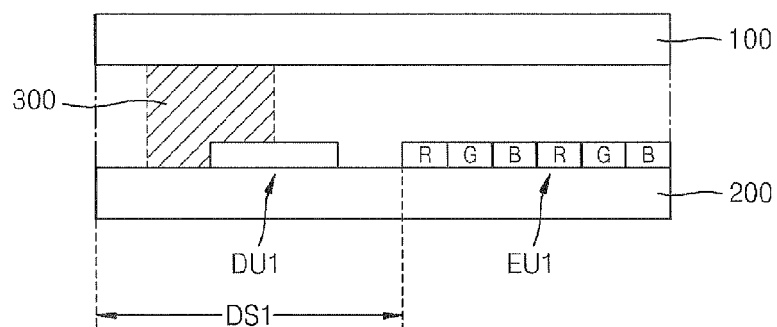


FIG. 5A

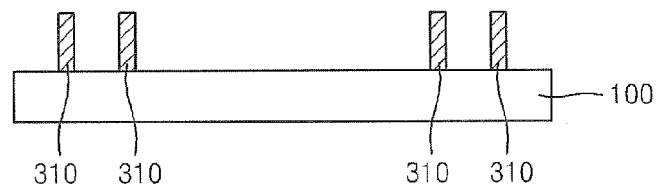


FIG. 5B

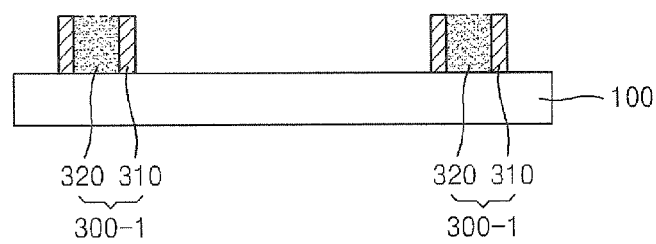


FIG. 5C

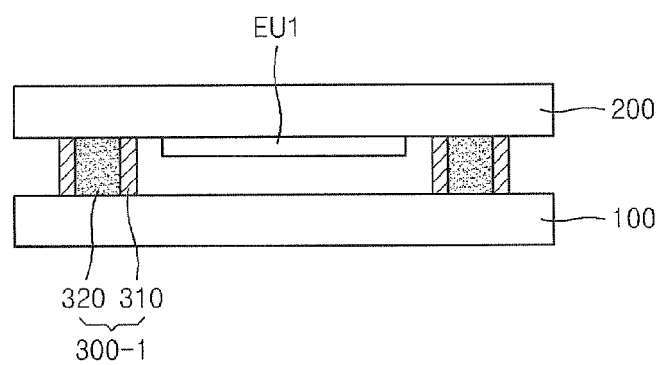


FIG. 6A

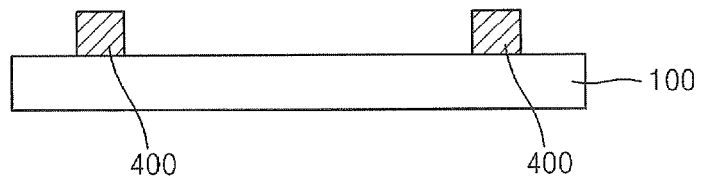


FIG. 6B

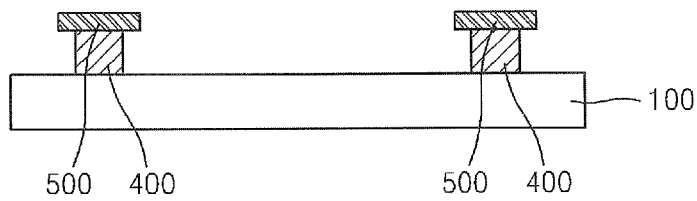


FIG. 6C

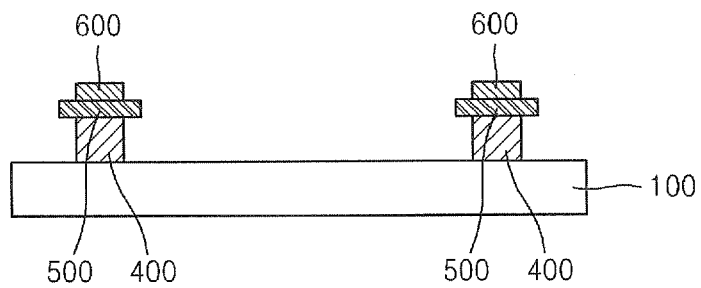


FIG. 6D

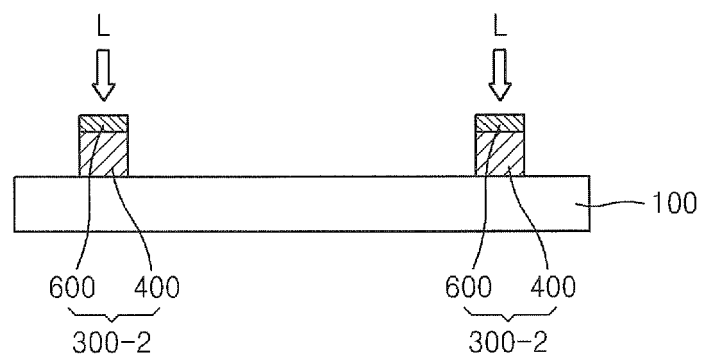


FIG. 6E

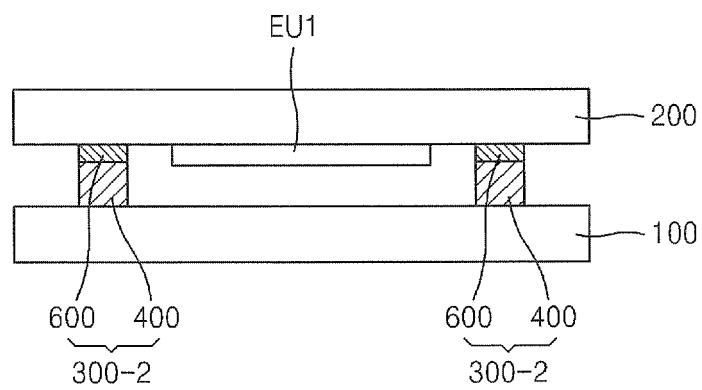


FIG. 7A

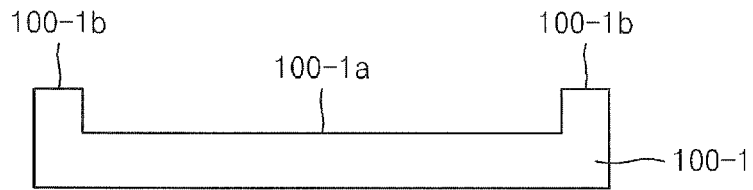


FIG. 7B


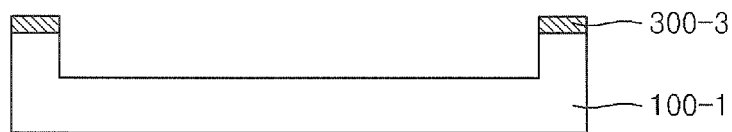


FIG. 7C

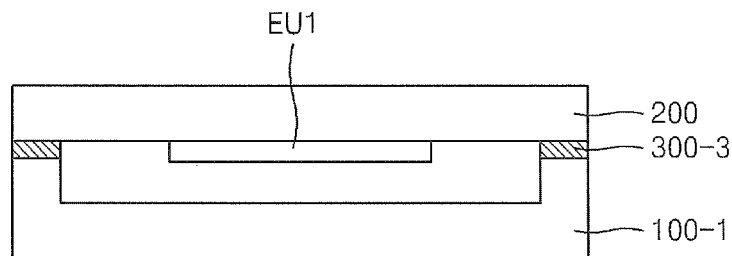

专利名称(译)	有机发光显示装置及其制造方法		
公开(公告)号	EP2731157A2	公开(公告)日	2014-05-14
申请号	EP2013181447	申请日	2013-08-23
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	SONG SEUNG YONG JUNG SUN YOUNG		
发明人	SONG, SEUNG-YONG JUNG, SUN-YOUNG		
IPC分类号	H01L51/52 H01L27/32		
CPC分类号	H05B33/04 H01L27/32 H01L51/524 H05B33/10		
优先权	1020120128267 2012-11-13 KR		
其他公开文献	EP2731157A3		
外部链接	Espacenet		

摘要(译)

有机发光显示装置包括基础基板(200),基础基板(200)上的发光单元(EU1),包括有机发光元件,基础基板(200)上的驱动单元(DU1),与基础基板(200)相对的密封基板(100),以及位于基底和密封基板(200,100)之间并封闭光的密封单元(300,300-1,300-2,300-3)在发射单元(EU1)中,密封单元(300,300-1,300-2,300-3)至少部分地与驱动单元(DU1)重叠。

FIG. 1

