



(11) **EP 1 744 380 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
10.12.2008 Bulletin 2008/50

(51) Int Cl.:
H01L 51/50 (2006.01) H01L 51/00 (2006.01)

(21) Application number: **06117203.7**

(22) Date of filing: **14.07.2006**

(54) **Organic light emitting display device**

OLED Anzeigevorrichtung

Dispositif d'affichage électroluminescent organique

(84) Designated Contracting States:
DE FR GB

(30) Priority: **15.07.2005 KR 2005064354**

(43) Date of publication of application:
17.01.2007 Bulletin 2007/03

(73) Proprietor: **Samsung SDI Co., Ltd.**
Suwon-si
Gyeonggi-do (KR)

(72) Inventors:
• **Lee, Jun-Yeob**
SAmsung SDI Co.,Ltd.
Gyeonggi-do (KR)
• **Chun, Min-Seung**
Samsung SDI Co., Ltd.
Gyeonggi-do (KR)

• **Choi, Yong-Joong**
Samsung SDI Co., Ltd.
Gyeonggi-do (KR)

(74) Representative: **Hengelhaupt, Jürgen et al**
Gulde Hengelhaupt Ziebig & Schneider
Patentanwälte - Rechtsanwälte
Wallstrasse 58/59
10179 Berlin (DE)

(56) References cited:
WO-A-20/05042667 JP-A- 6 033 047
US-A1- 2005 095 454

• **S. PFEIFER, ET AL.: "Vinylene-bridged**
Triphenylamine Dimers as an Emitting Material in
Trilayer Organic Electroluminescent Devcies"
PROCEEDINGSOF SPIE, vol. 3476, December
1998 (1998-12), pages 258-266, XP002398323

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 744 380 B1

Description

BACKGROUND OF THE INVENTION

5 Field

[0001] The present invention relates to an organic light emitting display device (OLED) and, more particularly, to an OLED including a green emission layer whose life span is improved.

10 Description of the Related Technology

[0002] An OLED includes an anode, a cathode, and an organic layer including an emission layer (or light-emitting layer) disposed between the anode and the cathode. The OLED is an emissive display which applies a voltage to the two electrodes so as to supply holes and electrons into the emission layer, and emits light by recombination of the holes and electrons supplied to the emission layer. Accordingly, the OLED does not need a backlight like an LCD, and thus can be made light and thin. Also, the OLED has attracted attention as a next generation display because it has low-voltage drivability, high luminous efficiency, wide viewing angle, and fast response speed, thereby realizing a high-quality moving picture. Such an OLED can realize full-color by forming a plurality of sub-pixels therein including red, green and blue emission layers. The emission layer may be formed of only a host material or a dopant. However, this configuration is not preferable because efficiency and brightness of the emission layer are very low, and an excimer property and the original property simultaneously occur owing to a self-packing phenomenon between molecules. Thus, the emission layer may be formed by doping a host material with a dopant.

[0003] As for a green emission material, the host material may be tri(8-hydroxyquinolato)aluminum (hereinafter abbreviated as "Alq3") or a stilbene derivative. The organic emission layer may be formed by doping the host material with a quinacridone derivative. In the case of using Alq3, interaction between molecules is so great that it causes cohesion between the molecules, thereby decreasing stability of the device. In the case of using the stilbene derivative, its efficiency is excellent but its thermal stability and thin film property are not, which again decreases the stability of the device. As a result, the device may have a short lifespan.

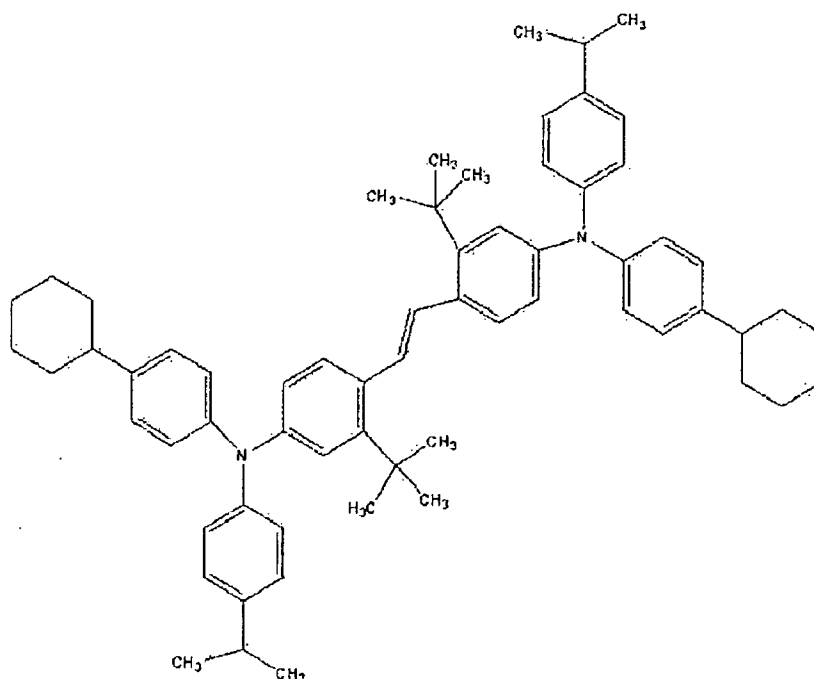
[0004] WO 2005/042667 A1 discloses an OLED comprising a light-emitting layer including a host and a fluorescent dye. The host material may be a binaphthyl anthracene derivate. The fluorescent emitting material may be a stilbene compound.

[0005] Pfeifer et al. (Vinylene-bridged Triphenylamine Dimers as an Emitting Material in Trilayer Organic Electroluminescent Devices, Part of SPIE Conference on Organic Light-Emitting Materials and Devices II, San Diego, California, July 1998, page 250ff.) disclose an OLED comprising vinylene-bridged triphenylamine (TPA) as a fluorescent material compound of a host/dopant emissive layer.

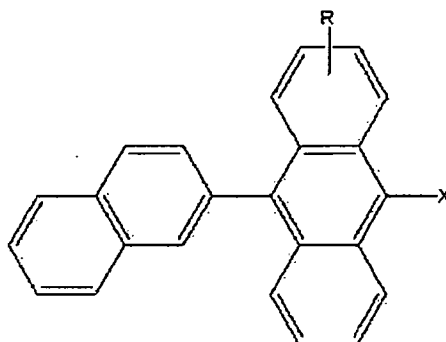
[0006] US 2005/0095454 A1 discloses an OLED comprising a blue luminescent layer including a host and two dopants. A first dopant may be a stilbene compound.

SUMMARY

[0007] One aspect of the invention provides an organic light emitting display device (OLED), comprising: an emission layer comprising a host and a dopant, the dopant comprising a compound represented by Formula 2:

Formula 2

[0008] The host comprises a compound represented by Formula 3:

Formula 3

wherein R is one selected from the group consisting of a hydrogen atom, a halogen atom, a substituted or unsubstituted C_1 to C_{20} alkyl group, a substituted or unsubstituted C_1 to C_{20} alkoxy group, a substituted or unsubstituted C_5 to C_{20} aryl group, a C_3 to C_{30} heterocyclic group, and an aliphatic C_3 to C_{30} hydrocarbon group, and wherein X is one selected from the group consisting of a naphthyl group, a biphenyl group, phenylnaphthalene, phenylantracene and their derivatives.

[0009] The host may comprise binaphthyl methylantracene. The dopant may be in an amount from about 1wt% to about 20wt% with reference to the total weight of the host and the dopant. The OLED may further comprise at least one layer selected from the group consisting of a hole injection layer, a hole transport layer, an electron transport layer and an electron injection layer, the at least one layer being interposed between the first and second electrodes. The emission layer may be a green light emitting layer.

[0010] The organic light emitting display device (OLED), may further comprise: a substrate; and an array of pixels formed over the substrate, each of the pixels comprising sub-pixels configured to emit light of different colors, and at least one of the sub-pixels comprising the emission layer.

[0011] Another of the sub-pixels may comprise an emission layer which comprises a host and a dopant, the dopant

comprising a red light-emitting material. Another of the sub-pixels may comprise an emission layer which comprises a host and a dopant, the dopant comprising a blue light-emitting material. Each of the sub-pixels may further comprise a first electrode and a second electrode such that the emission layer is interposed therebetween, and the second electrodes of the sub-pixels may be electrically connected to one another. At least one of the sub-pixels may further comprise a hole injection layer and/or a hole transport layer between the first electrode and the emission layer. At least one of the sub-pixels may further comprise an electron transport layer and/or an electron injection layer between the second electrode and the emission layer.

[0012] Another aspect of the invention provides a method of making an organic light emitting display device. The method comprises: forming a first electrode over a substrate; forming an organic layer over the substrate, the organic layer comprising a host; doping the organic layer with a dopant; and forming a second electrode over the organic layer, wherein the dopant comprises a compound represented by Formula 2 and a host represented by Formula 3 as mentioned above.

[0013] In the method, the dopant may be in an amount from about 1wt% to about 20wt% with reference to the total weight of the host and the dopant.

[0014] Another aspect of the invention provides an electronic device comprising the OLED described above.

[0015] Finally, another aspect of the invention focuses on the use of the compound represented by Formula 2 as mentioned above as a dopant for an emission layer of an organic light emitting display device (OLED).

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The above and other features of the invention will be described in reference to certain exemplary embodiments thereof with reference to the attached drawings in which:

FIG. 1 is a cross-sectional view of an organic light emitting display device (OLED) according to a first exemplary embodiment;

FIG. 2 is a cross-sectional view of an OLED according to a second exemplary embodiment; and

FIG. 3 is a cross-sectional view of a full-color OLED according to a third exemplary embodiment.

DETAILED DESCRIPTION

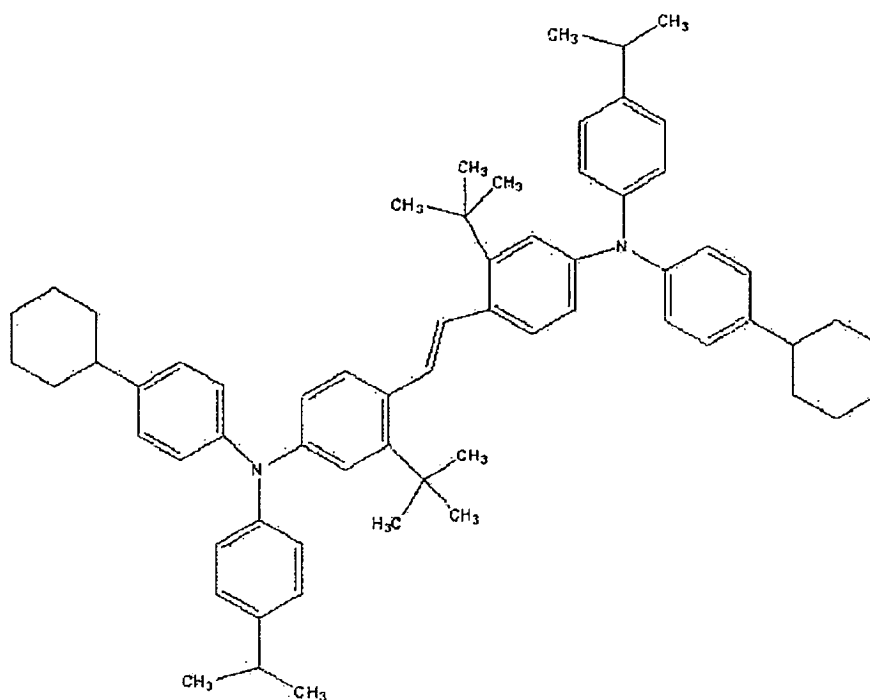
[0017] The present embodiment will now be described more fully hereinafter with reference to the accompanying drawings, in which exemplary embodiments of the invention are shown.

[0018] FIG. 1 is a cross-sectional view of an organic light emitting display device (OLED) according to a first exemplary embodiment. Referring to FIG. 1, a substrate 100 is disposed. The substrate 100 is an insulating or conductive substrate, which includes glass, plastic or metal. In this exemplary embodiment, the substrate 100 includes, but is not limited to, these materials.

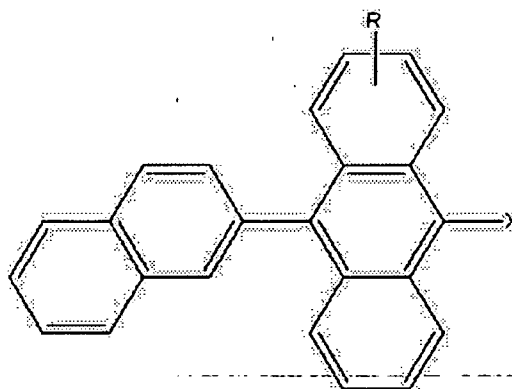
[0019] A first electrode 110 is formed on the substrate 100. The first electrode 110 may be an anode or a cathode. When the first electrode 110 is an anode, the first electrode 110 may be a transparent electrode including either ITO or IZO. Alternatively, the first electrode 110 may be a reflective electrode including either Pt, Cr, Ag, Ni, Al or an alloy thereof. On the other hand, when the first electrode 110 is a cathode, the first electrode 110 may be a thin transparent electrode or a thick reflective electrode which includes one selected from the group consisting of Mg, Ca, Al, Ag, Ba, and an alloy thereof. The first electrode 110 may be formed by vacuum deposition but is not limited thereto.

[0020] An emission layer 120 is formed on the first electrode 110. The emission layer 120 may include a host and a dopant, which can improve luminous efficiency by energy transition.

[0021] The dopant may be a green dopant. The green dopant may be a material represented by Formula 2.

Formula 2

[0022] The host includes one of naphthylanthracene derivatives represented by Formula 3.

Formula 3

[0023] In Formula 3, R may be one selected from the group consisting of a hydrogen atom, a halogen atom, a substituted or unsubstituted C₁ to C₂₀ alkyl group, a substituted or unsubstituted C₁ to C₂₀ alkoxy group, a substituted or unsubstituted C₅ to C₂₀ aryl group, a C₃ to C₃₀ heterocyclic group, and an aliphatic C₃ to C₃₀ hydrocarbon group. X may be one selected from the group consisting of a naphthyl radical, a biphenyl radical, phenylnaphthalene, phenylanthracene and their derivatives.

[0024] The naphthylanthracene derivatives of Formula 3 can reduce interaction between molecules so as to prevent cohesion of the molecules, and have superior thermal stability and thin film property. In addition, the derivatives can prevent crystallization, thereby increasing the lifespan of the device. Furthermore, charges injected into an emission layer are bound in the emission layer, thereby more improving the stability of the device. In one embodiment, the host may be binaphthyl methylantracene. In one embodiment, the host material may be doped to have a dopant concentration of about 1 to about 20%.

[0025] When the emission layer 120 is formed by doping the green dopant represented by Formula 1 into the naphthylanthracene derivative, the resulting OLED is less crystallized, has improved lifespan, and has superior thermal stability and luminous efficiency.

[0026] The emission layer 120 may be formed by any suitable fabrication method. For example, the emission layer may be formed by one of vacuum deposition, spin coating and laser induced thermal imaging.

[0027] A second electrode 130 is formed on the emission layer 120. The second electrode 130 may be a cathode when the first electrode 110 is an anode. Here, the second electrode 130 may be a conductive metal having a lower work function than the material for the first electrode 110. For example, the second electrode 130 may be a thick reflective electrode which includes one material selected from the group consisting of Mg, Ca, Al, Ag and an alloy thereof.

[0028] On the other hand, when the first electrode 110 is a cathode, the second electrode 130 may be a metal having a higher work function than the material for the first electrode 110. The second electrode may be a transparent electrode including ITO or IZO, or a reflective electrode including Pt, Au, Ir, Cr, Mg, Ag, Ni, Al or an alloy thereof.

[0029] Subsequently, the OLED may be finished by encapsulating the substrate including the first electrode, the emission layer, and the second electrode with an encapsulation substrate.

[0030] FIG. 2 is a cross-sectional view of an OLED according to a second exemplary embodiment. The second exemplary embodiment has the same structure and reference numerals as the first exemplary embodiment, except that the second exemplary embodiment further includes at least one organic layer in addition to an emission layer, and thus the detailed description thereof will be omitted.

[0031] Referring to FIG. 2, a first electrode 110 is formed on a substrate 100. A second electrode 130 is formed over the first electrode 100 with at least one organic layer interposed therebetween. The first electrode 110 may be an anode, and the second electrode 130 may be a cathode.

[0032] In the illustrated embodiment, a hole injection layer 140 may be formed on the first electrode 110. The hole injection layer 140 may be formed of a material having low ionization energy and high interfacial adhesive strength with the first electrode 110 to facilitate the injection of holes and to increase lifespan of the device. The hole injection layer 140 may include one or more of an aryl amine-based compound, a phophyrine-based metal complex, starburst amines and so on. In one embodiment, the hole injection layer 140 may include one or more of 4,4',4"-tris(3-methylphenylphenylamino)triphenylamine (m-MTDATA), 4,4',4"-tris(N,N-diphenylamino)triphenylamine (TDATA), and copper phthalocyanine (CuPc).

[0033] A hole transport layer 150 may be formed on the hole injection layer 140. The hole transport layer 150 serves to easily convey holes to an emission layer 120 which will be described later, and inhibit electrons generated from the second electrode 130 from moving to an emission region, thereby increasing luminous efficiency. The hole transport layer 150 may be formed of an arylene diamine derivative, a starburst compound a biphenyl diamine derivative having a spiro group and a ladder compound. In one embodiment, the hole transport layer 150 may be formed of N,N-diphenyl-N,N'-bis(4-methylphenyl)-1,1'-biphenyl-4,4'-diamine (TPD) or 4,4'-bis[N-(1-naphthyl)-N-phenyl-amino]biphenyl (NPB).

[0034] The emission layer 120 may be formed on the hole transport layer 150 as described in the first exemplary embodiment.

[0035] An electron transport layer 160 may be formed on the emission layer 120. The electron transport layer 160 may include a metal compound such that the emission layer 120 can accept electrons. For example, Alq3 can stably transport electrons supplied from the second electrode 130.

[0036] An electron injection layer 170 may be formed on the electron transport layer 160. The electron injection layer 170 may be formed of at least one selected from the group consisting of a 1,3,4-oxdiazol derivative, a 1,2,4-triazol derivative and LiF. Such an organic layer may be formed by any suitable method including, but not limited to, spin coating or vacuum deposition.

[0037] Subsequently, as in the first exemplary embodiment, the second electrode 130 is formed on the electron injection layer 170.

[0038] In this embodiment, the first electrode is an anode. In certain embodiments where the first electrode is a cathode, an electron injection layer, an electron transport layer, an emission layer, a hole transport layer and a hole injection layer may be sequentially formed on the first electrode.

[0039] In FIG. 2, the electron injection layer, the electron transport layer, the hole transport layer and the hole injection layer in addition to the emission layer are formed. A skilled artisan will appreciate that at least one of the organic layers may be omitted.

[0040] FIG. 3 is a cross-sectional view of a full-color OLED according to a third exemplary embodiment. In the illustrated embodiment, the full-color OLED is formed with red, blue and green emission regions, wherein the green emission layer is the green emission layer of the first exemplary embodiment. Here, parts that are the same as in the first exemplary embodiment are denoted by the same reference numerals and their descriptions will not be repeated.

[0041] Referring to FIG. 3, a substrate 100 is disposed. A first electrode 110 patterned for each unit pixel is disposed on the substrate 100. As described above, the first electrode 110 may be an anode or a cathode. A pixel defining layer 200 defining each unit pixel is formed on the first electrode 110. The pixel defining layer 200 includes an opening exposing

a portion of the first electrode 110. Here, the pixel defining layer 200 may include one or more selected from the group consisting of acryl-based resin, benzocyclobutene (BCB) and polyimide (PI).

[0042] Red, green and blue emission layers 120R, 120G and 120B are formed on the first electrodes 110 defined by the pixel defining layer 200, respectively. Here, the red and blue emission layers may be formed of a typical material but are not limited thereto.

[0043] In one embodiment, the green emission layer 120G may be formed by doping one of materials represented by Formula 1 into the naphthylanthracene derivative as a host material, as described in the first exemplary embodiment.

[0044] The red emission layer 120R may include a carbazole-based organic material as a host material. In one embodiment, the carbazole-based material may be carbazole biphenyl. A dopant material for the red emission layer 120R may be a phosphorescent dopant, a fluorescent dopant, or a composite dopant thereof. For example, the phosphorescent dopant may be one or more selected from the group consisting of PIQIr (acac), PQIr (acac), PQIr (tris(1-phenylquinoline)iridium) and platinum octaethylporphine (PtOEP). Also, the fluorescent dopant may be one or more selected from the group consisting of 4-dicyanomethylene-6-cp-julolidinostyryl-2-tert-butyl-4H-pyran (DCJTB), 3-dicyanomethylene-5,5-dimethyl-1-(4-N,N-dimethyl amino-styryl)-cyclohexene (DCDDC), AAAP, diketopyrrolopyrroles (DPP) and BSN. In other embodiments, any suitable red emission material may be used for the red emission layer 120R.

[0045] The blue emission layer 120B may include one or more compounds selected from the group consisting of 4,4'-bis(2,2'-diphenylvinyl)-biphenyl (DPVBi), spiro-DPVBi, spiro-6P, distilbene (DSB) and distirlyarylene (DSA) as a low molecular material, or a PFO or PPV-based polymer. To increase luminous efficiency, the blue emission layer 120B may be doped with a fluorescent dopant, for example, perylene or 4,4'-(Bis(9-ethyl-3-carbazovinylylene)-1,1'-biphenyl (BCzVBi). In other embodiments, any suitable blue emission material may be used for the blue emission layer 120B. Each of the emission layers may be formed by vacuum deposition, spin coating, or laser induced thermal imaging.

[0046] Next, a second electrode 130 is formed on each emission layer as a common layer. In addition, at least one layer selected from the group consisting of a hole injection layer, a hole transport layer, a hole blocking layer, an electron transport layer and an electron injection layer may be formed on or under each emission layer.

[0047] Hereinafter, Examples will be described.

Example 1

[0048] A Corning™ 15 Ω/cm^2 (1200Å) ITO glass substrate was cut to dimensions of 50mm x 50mm x 0.7mm, ultrasonically cleaned in isopropyl alcohol and pure water for 5 minutes, cleaned using UV rays and ozone for 30 minutes, and used as an anode.

[0049] N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPD) was vacuum-deposited on the substrate to thereby form a hole transport layer having a thickness of 600Å. The compound of Formula 2 was vacuum-deposited to a concentration of 5%, and an emission layer was formed to have a thickness of about 400Å on the hole transport layer using binaphthyl-(methylantracene) (available from E-ray Company) as a host. An electron transport material, Alq3, was deposited on the emission layer thereby forming an electron transport layer of about 300Å. An LiF/A1 electrode was formed by sequentially vacuum-depositing an LiF 10Å electron injection layer and an Al 1000Å cathode on the electron transport layer, and thus an OLED was completed.

[0050] The device exhibited a driven lifespan of 4000 hours at a luminous efficiency of 18 cd/A and a luminance of 5000 cd/m^2 .

Comparative Example 1

[0051] A Corning™ 15 Ω/cm^2 (1200Å) ITO glass substrate was cut to dimensions of 50mm x 50mm x 0.7mm, ultrasonically cleaned in isopropyl alcohol and pure water for 5 minutes, cleaned using UV rays and ozone for 30 minutes, and used as an anode.

[0052] N,N'-di(1-naphthyl)-N,N'-diphenylbenzidine (NPD) was vacuum-deposited on the substrate to thereby form a hole transport layer having a thickness of 600Å. A C545T compound (available from Hayashibara Company) was vacuum-deposited to a concentration of 1%, and an emission layer was formed to have a thickness of about 400Å on the hole transport layer using binaphthyl-(methylantracene) (available from E-ray Company) as a host. An electron transport material, Alq3, was deposited on the emission layer thereby forming an electron transport layer of about 300Å. An LiF/A1 electrode was formed by sequentially vacuum-depositing an LiF 10Å electron injection layer and an A1 1000Å cathode on the electron transport layer, and thus an OLED was completed. The device exhibited a driven lifespan of 1500 hours at a luminous efficiency of 12 cd/A and a luminance of 5000 cd/m^2 .

[0053] As a result, the green OLED having excellent luminous efficiency and improved lifespan could be fabricated.

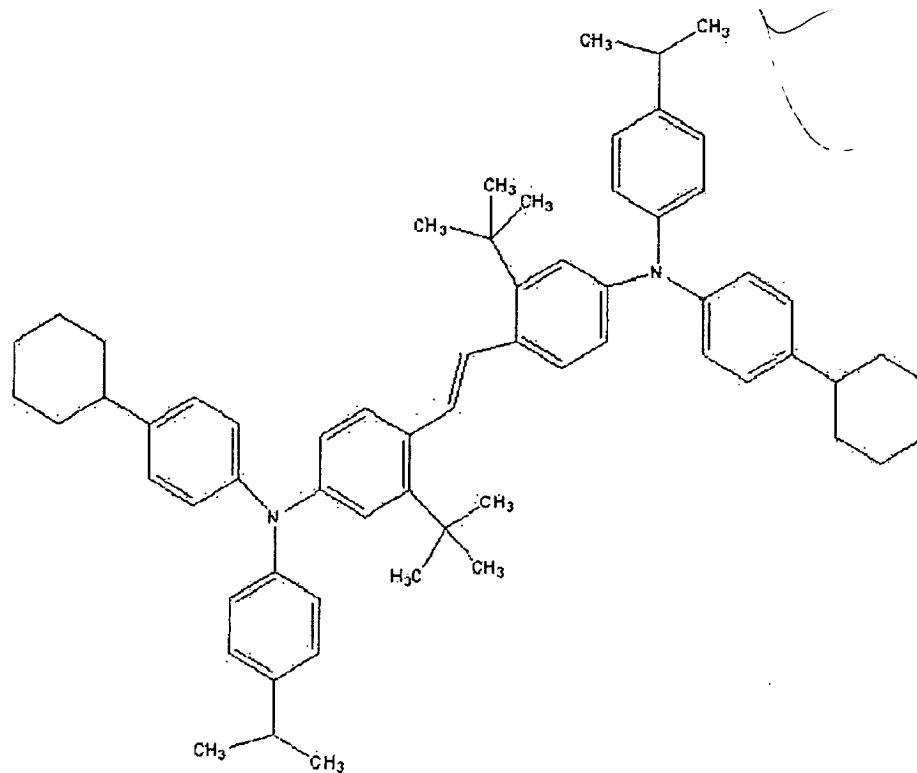
[0054] According to the embodiments, an emission layer is formed using a dopant including a material represented by Formula 1 and a host having a naphthylanthracene derivative, thereby fabricating a green OLED having excellent luminous efficiency and improved lifespan.

Claims

1. An organic light emitting display device (OLED), comprising:

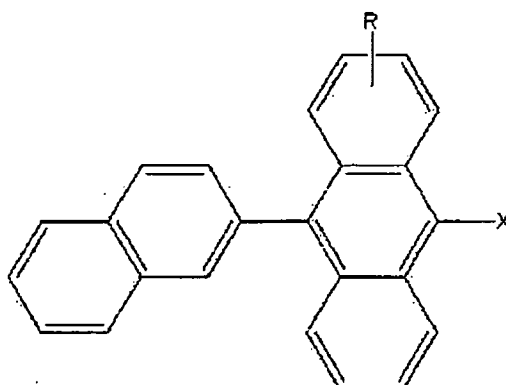
an emission layer comprising a host and a dopant,
the dopant comprising a compound represented by Formula 2:

Formula 2



and the host comprising a compound represented by Formula 3:

Formula 3



wherein R is one selected from the group consisting of a hydrogen atom, a halogen atom, a substituted or unsubstituted C₁ to C₂₀ alkyl group, a substituted or unsubstituted C₁ to C₂₀ alkoxy group, a substituted or unsubstituted C₅ to C₂₀ aryl group, a C₃ to C₃₀ heterocyclic group, and an aliphatic C₃ to C₃₀ hydrocarbon group, and

wherein X is one selected from the group consisting of a naphthyl group, a biphenyl group, phenylnaphthalene, phenylanthracene and their derivatives.

2. The OLED of Claim 1, wherein the host comprises binaphthyl methylantracene.

3. The OLED of Claim 1, wherein the dopant is in an amount from about 1wt% to about 20wt% with reference to the total weight of the host and the dopant.

4. The OLED of any of the preceding claims, further comprising:

a substrate; and

an array of pixels formed over the substrate, each of the pixels comprising sub-pixels configured to emit light of different colors, and at least one of the sub-pixels comprising the emission layer.

5. The OLED of Claim 4, wherein another of the sub-pixels comprises an emission layer which comprises a host and a dopant, the dopant comprising a red light-emitting material.

6. The OLED of Claim 4, wherein another of the sub-pixels comprises an emission layer which comprises a host and a dopant, the dopant comprising a blue light-emitting material.

7. The OLED of Claim 4, wherein each of the sub-pixels further comprises a first electrode and a second electrode such that the emission layer is interposed therebetween, and wherein the second electrodes of the sub-pixels are electrically connected to one another.

8. The OLED of Claim 7, wherein at least one of the sub-pixels further comprises a hole injection layer and/or a hole transport layer between the first electrode and the emission layer.

9. The OLED of Claim 7, wherein at least one of the sub-pixels further comprises an electron transport layer and/or an electron injection layer between the second electrode and the emission layer.

10. A method of making an organic light emitting display device, the method comprising:

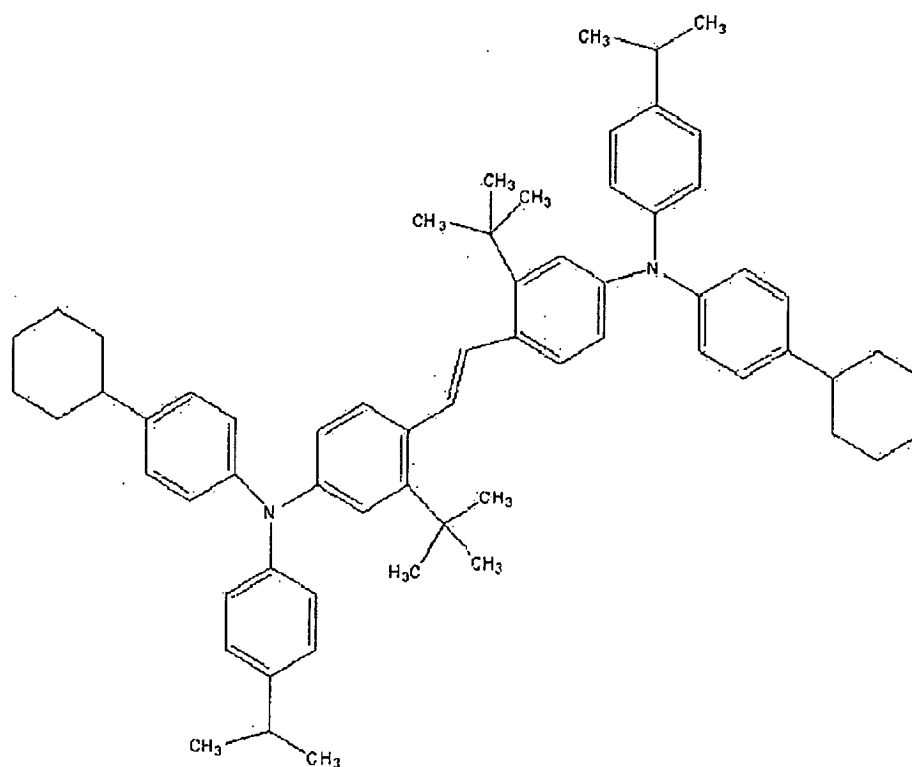
forming a first electrode over a substrate;

forming an organic layer over the substrate, the organic layer comprising a host;

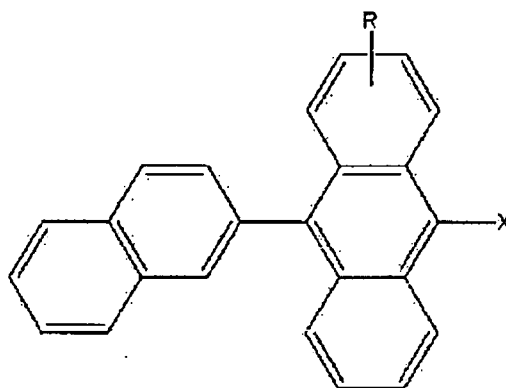
doping the organic layer with a dopant; and

forming a second electrode over the organic layer,

wherein the dopant comprises a compound represented by Formula 2:

Formula 2

and the host comprises a compound represented by Formula 3:

Formula 3

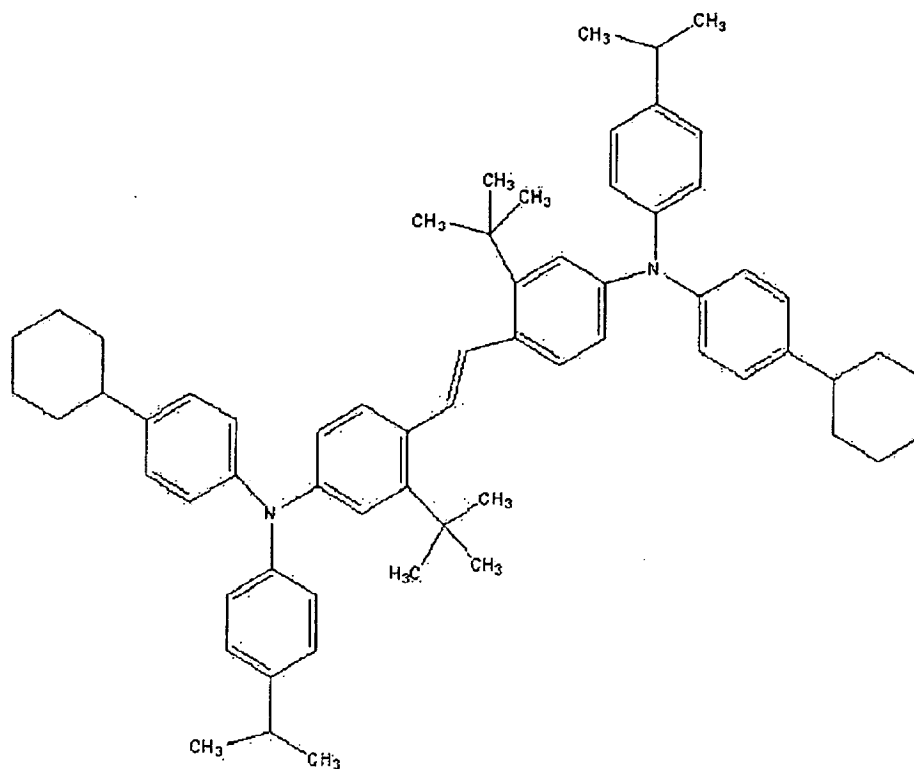
wherein R is one selected from the group consisting of a hydrogen atom, a halogen atom, a substituted or unsubstituted C₁ to C₂₀ alkyl group, a substituted or unsubstituted C₁ to C₂₀ alkoxy group, a substituted or unsubstituted C₅ to C₂₀ aryl group, a C₃ to C₃₀ heterocyclic group, and an aliphatic C₃ to C₃₀ hydrocarbon group, and

wherein X is one selected from the group consisting of a naphthyl group, a biphenyl group, phenylanthracene, phenylanthracene and their derivatives.

11. An electronic device comprising an OLED according to any of claims 1 to 9.

12. Use of a compound represented by Formula 2:

Formula 2

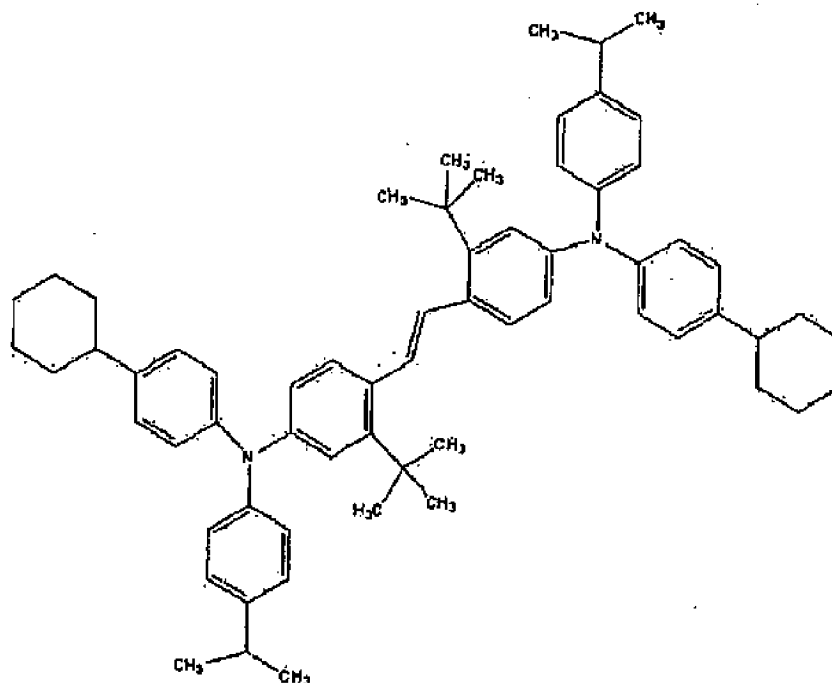


as a dopant for an emission layer of an organic light emitting display device (OLED).

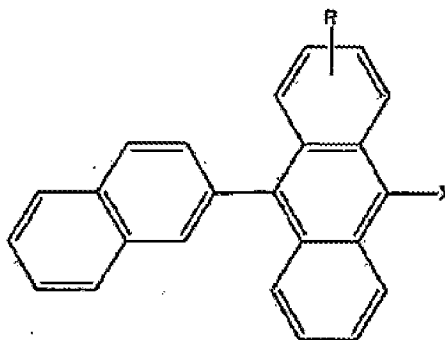
Patentansprüche

1. Organische lichtemittierende Anzeigevorrichtung (OLED), aufweisend:

eine Emissionsschicht, die einen Wirt und einen Dotanden aufweist, wobei der Dotand eine Verbindung aufweist, die durch die Formel 2 dargestellt ist:

Formel 2

und der Wirt eine Verbindung aufweist, die durch die Formel 3 dargestellt ist:

Formel 3

wobei R ein Element ist, ausgewählt aus der Gruppe bestehend aus einem Wasserstoffatom, einem Halogenatom, einer substituierten oder unsubstituierten C₁- bis C₂₀-Alkylgruppe, einer substituierten oder unsubstituierten C₁- bis C₂₀-Alkoxygruppe, einer substituierten oder unsubstituierten C₅- bis C₂₀-Arylgruppe, einer heterozyklischen C₃- bis C₃₀-Gruppe und einer aliphatischen C₃- bis C₃₀-Kohlenwasserstoffgruppe und wobei X ein Element ist, ausgewählt aus der Gruppe bestehend aus einer Naphthylgruppe, einer Biphenylgruppe, Phenylanthracen, Phenylanthracen und deren Derivaten.

2. OLED nach Anspruch 1, wobei der Wirt Binaphthyl-Methylantracen aufweist.
3. OLED nach Anspruch 1, wobei der Dotand in einer Menge von etwa 1 Gew.-% bis etwa 20 Gew.-%, bezogen auf das Gesamtgewicht des Wirtes und des Dotanden, vorliegt.

4. OLED nach einem der vorhergehenden Ansprüche, weiterhin aufweisend:

ein Substrat; und
ein auf dem Substrat ausgebildetes Array von Pixeln, wobei jeder der Pixel Subpixel aufweist, die derart gestaltet
sind, dass sie Licht verschiedener Farben emittieren, und wobei zumindest einer der Subpixel die Emissions-
schicht aufweist.

5. OLED nach Anspruch 4, wobei ein weiterer der Subpixel eine Emissionsschicht aufweist, die einen Wirt und einen
Dotanden aufweist, wobei der Dotant ein Material aufweist, das rotes Licht emittiert.

6. OLED nach Anspruch 4, wobei ein weiterer der Subpixel eine Emissionsschicht aufweist, die einen Wirt und einen
Dotanden aufweist, wobei der Dotand ein Material aufweist, dass blaues Licht emittiert.

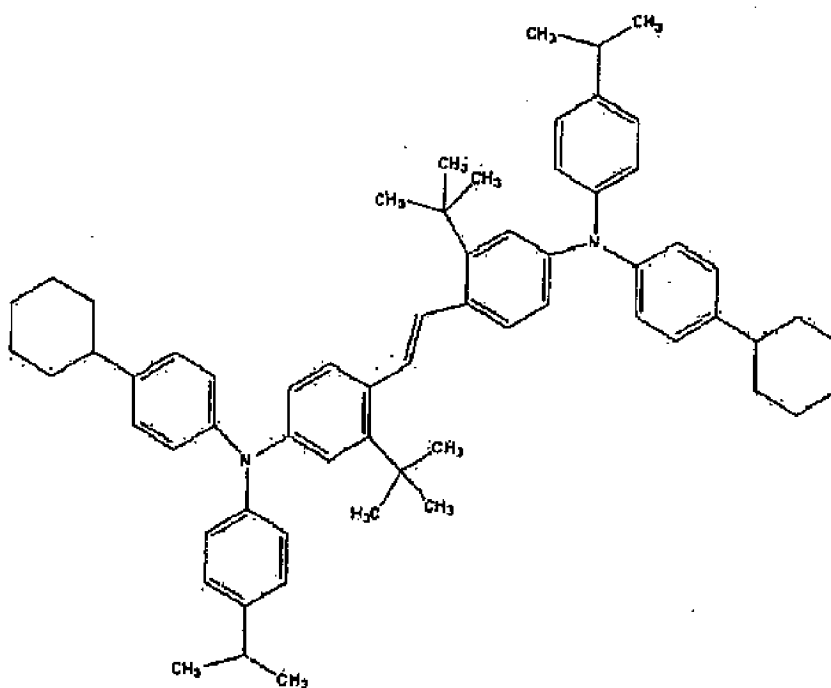
7. OLED nach Anspruch 4, wobei jeder der Subpixel weiterhin eine erste Elektrode und eine zweite Elektrode aufweist,
derart, dass die Emissionsschicht zwischen diesen Elektroden angeordnet ist, und wobei die zweiten Elektroden
der Subpixel elektrisch miteinander verbunden sind.

8. OLED nach Anspruch 7, wobei zumindest einer der Subpixel weiterhin eine Lochinjektionsschicht und/oder eine
Lochtransportschicht zwischen der ersten Elektrode und der Emissionsschicht aufweist.

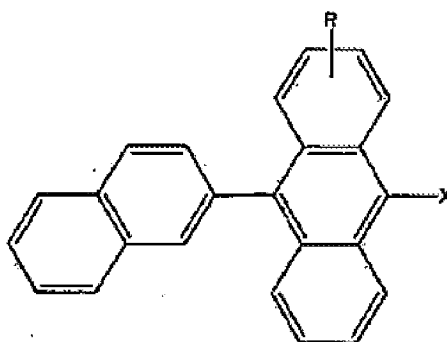
9. OLED nach Anspruch 7, wobei zumindest einer der Subpixel weiterhin eine Elektronentransportschicht und/oder
eine Elektroneninjektionsschicht zwischen der zweiten Elektrode und der Emissionsschicht aufweist.

10. Verfahren zur Herstellung einer organischen lichtemittierenden Anzeigevorrichtung, wobei das Verfahren aufweist:

Ausbildung einer ersten Elektrode auf einem Substrat;
Ausbildung einer organischen Schicht auf dem Substrat, wobei die organische Schicht einen Wirt aufweist;
Dotierung der organischen Schicht mit einem Dotanden; und
Ausbildung einer zweiten Elektrode auf der organischen Schicht,
wobei der Dotand eine Verbindung aufweist, die durch die Formel 2 dargestellt ist:

Formel 2

und der Wirt eine Verbindung aufweist, die durch die Formel 3 dargestellt ist:

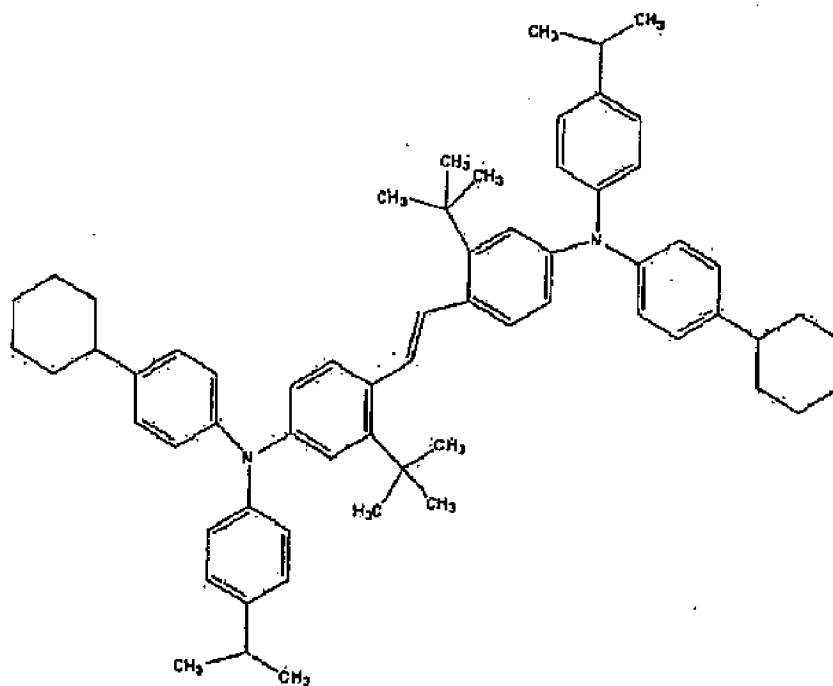
Formel 3

wobei R ein Element ist, ausgewählt aus der Gruppe bestehend aus einem Wasserstoffatom, einem Halogenatom, einer substituierten oder unsubstituierten C₁- bis C₂₀-Alkylgruppe, einer substituierten oder unsubstituierten C₁- bis C₂₀-Alkoxygruppe, einer substituierten oder unsubstituierten C₅- bis C₂₀-Arylgruppe, einer heterozyklischen C₃- bis C₃₀-Gruppe und einer aliphatischen C₃- bis C₃₀-Kohlenwasserstoffgruppe und wobei X ein Element ist, ausgewählt aus der Gruppe bestehend aus einer Naphthylgruppe, einer Biphenylgruppe, Phenylanthracen, Phenylanthracen und deren Derivaten.

11. Elektronische Vorrichtung, aufweisend eine OLED nach einem der Ansprüche 1 bis 9.

12. Verwendung einer Verbindung, die durch die Formel 2 dargestellt ist,

Formel 2

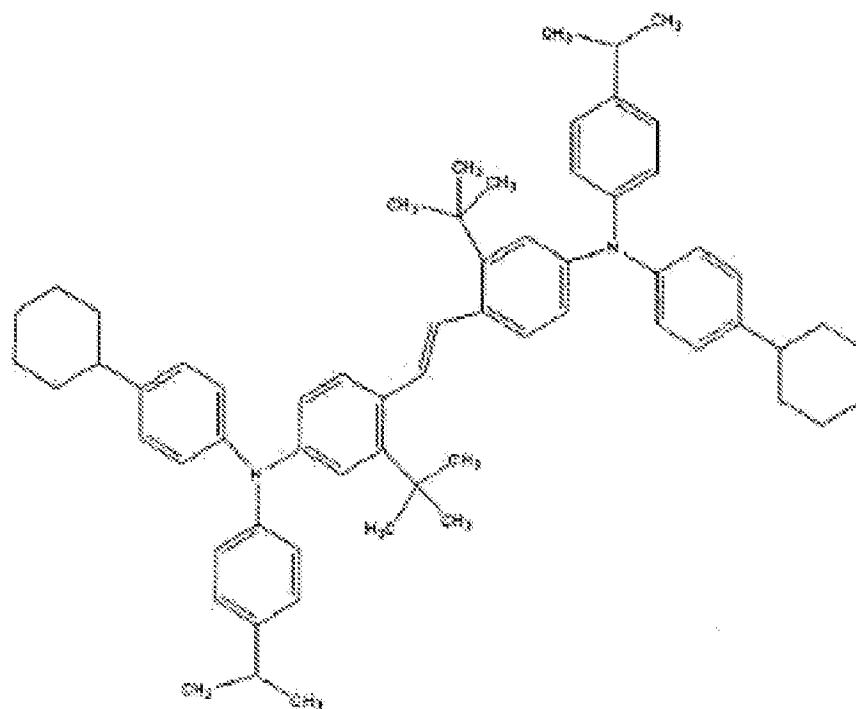


als ein Dotand für eine Emissionsschicht einer organischen lichtemittierenden Anzeigevorrichtung (OLED).

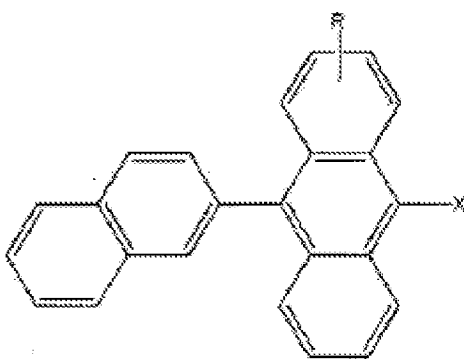
Revendications

1. Dispositif organique d'affichage à émission de lumière (OLED), comportant :

une couche d'émission comprenant un hôte et un dopant,
le dopant comprenant un composé représenté par la Formule 2 :

Formule 2

et l'hôte comprenant un composé représenté par la Formule 3 :

Formule 3

dans lesquelles R est un élément choisi dans le groupe constitué d'un atome d'hydrogène, d'un atome d'halogène, d'un groupe alkyle en C₁ à C₂₀ substitué ou non substitué, d'un groupe alcoxy en C₁ à C₂₀ substitué ou non substitué, d'un groupe aryle en C₅ à C₂₀ substitué ou non substitué, d'un groupe hétérocyclique en C₃ à C₃₀ et d'un groupe hydrocarboné en C₃ à C₃₀ aliphatique, et
 dans lesquelles X est un élément choisi dans le groupe constitué d'un groupe naphthyle, d'un groupe biphenyle, de phénylnaphthalène, de phénylanthracène et de leurs dérivés.

2. OLED selon la revendication 1, dans lequel l'hôte comprend du binaphthyl méthylantracène.
3. OLED selon la revendication 1, dans lequel le dopant est présent en quantité allant d'environ 1% en poids à environ

20% en poids en référence au poids total de l'hôte et du dopant.

4. OLED selon l'une quelconque des revendications précédentes, comportant en outre :

un substrat ; et

une matrice de pixels formée sur le substrat, chacun des pixels comportant des sous-pixels configurés pour émettre de la lumière de différentes couleurs, et au moins l'un des sous-pixels comprenant la couche d'émission.

5. OLED selon la revendication 4, dans lequel un autre des sous-pixels comprend une couche d'émission qui comprend un hôte et un dopant, le dopant comprenant une matière émettant de la lumière rouge.

6. OLED selon la revendication 4, dans lequel un autre des sous-pixels comporte une couche d'émission qui comprend un hôte et un dopant, le dopant comprenant une matière émettant de la lumière bleue.

7. OLED selon la revendication 4, dans lequel chacun des sous-pixels comporte en outre une première électrode et une seconde électrode de façon que la couche d'émission soit interposée entre elles, et dans lequel les secondes électrodes des sous-pixels sont connectées électriquement entre elles.

8. OLED selon la revendication 7, dans lequel au moins l'un des sous-pixels comporte en outre une couche d'injection de trous et/ou une couche de transport de trous entre la première électrode et la couche d'émission.

9. OLED selon la revendication 7, dans lequel au moins l'un des sous-pixels comporte en outre une couche de transport d'électrons et/ou une couche d'injection d'électrons entre la seconde électrode et la couche d'émission.

10. Procédé de réalisation d'un dispositif organique d'affichage à émission de lumière, le procédé comprenant :

la formation d'une première électrode sur un substrat ;

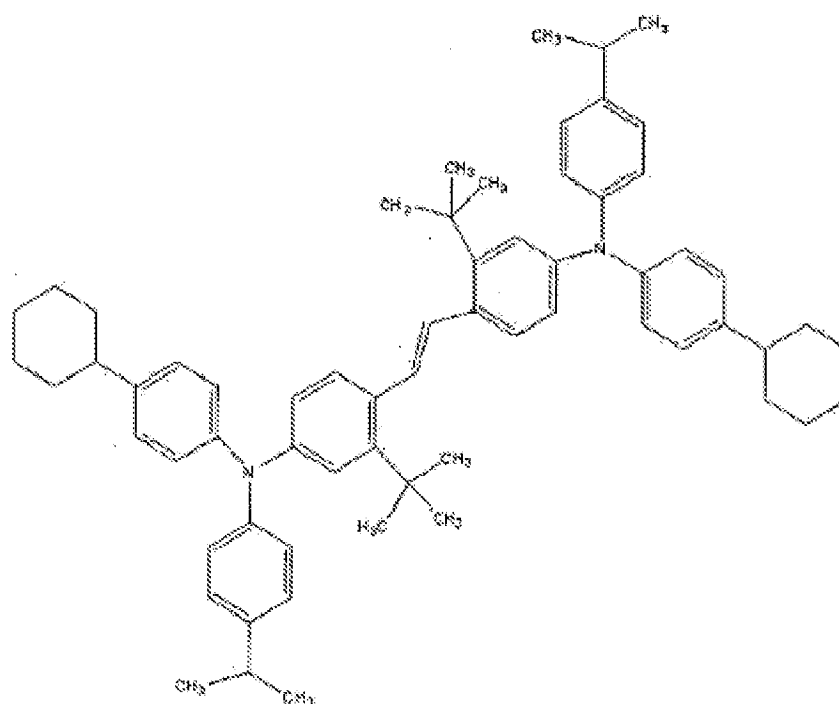
la formation d'une couche organique sur le substrat, la couche organique comprenant un hôte ;

le dopage de la couche organique avec un dopant ; et

la formation d'une seconde électrode sur la couche organique,

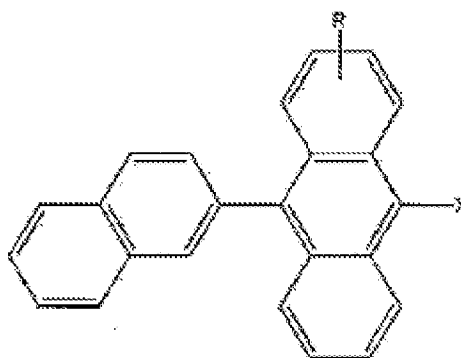
dans lequel le dopant comprend un composé représenté par la Formule 2 :

Formule 2



et l'hôte comprend un composé représenté par la Formule 3 :

Formule 3

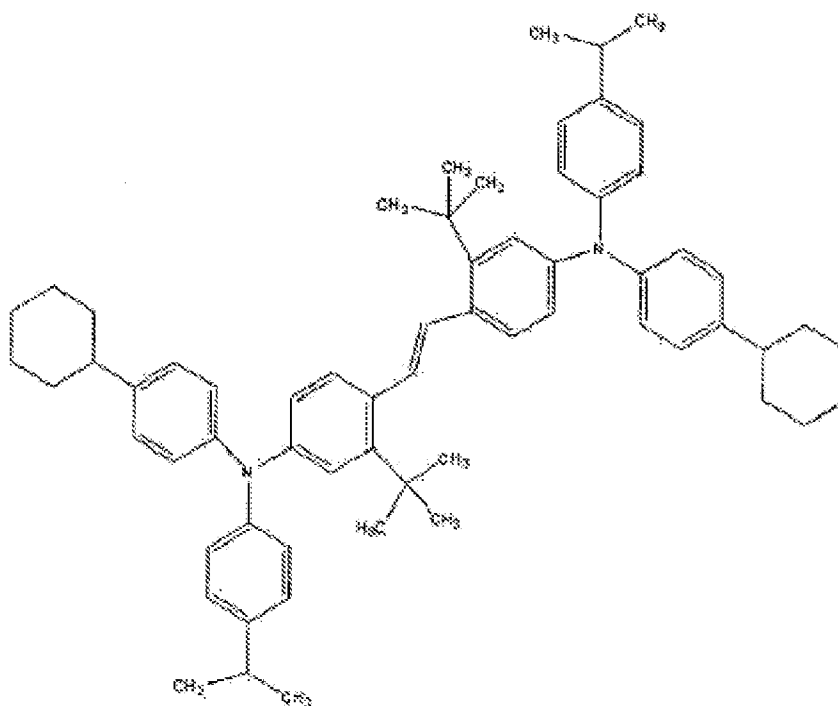


dans lesquelles R est un élément choisi dans le groupe constitué d'un atome d'hydrogène, d'un atome d'halogène, d'un groupe alkyle en C₁ à C₂₀ substitué ou non substitué, d'un groupe alcoxy en C₁ à C₂₀ substitué ou non substitué, d'un groupe aryle en C₅ à C₂₀ substitué ou non substitué, d'une groupe hétérocyclique en C₃ à C₃₀, et d'un groupe hydrocarboné en C₃ à C₃₀ aliphatique, et dans lesquelles X est un élément choisi dans le groupe constitué d'un groupe naphthyle, d'un groupe biphenyle, de phénylnaphthalène, de phénylanthracène et de leurs dérivés.

11. Dispositif électronique comportant un OLED selon l'une quelconque des revendications 1 à 9.

12. Utilisation d'un composé représenté par la formule 2 :

Formule 2



EP 1 744 380 B1

en tant que dopant pour une couche d'émission d'un dispositif organique d'affichage à émission de lumière (OLED).

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

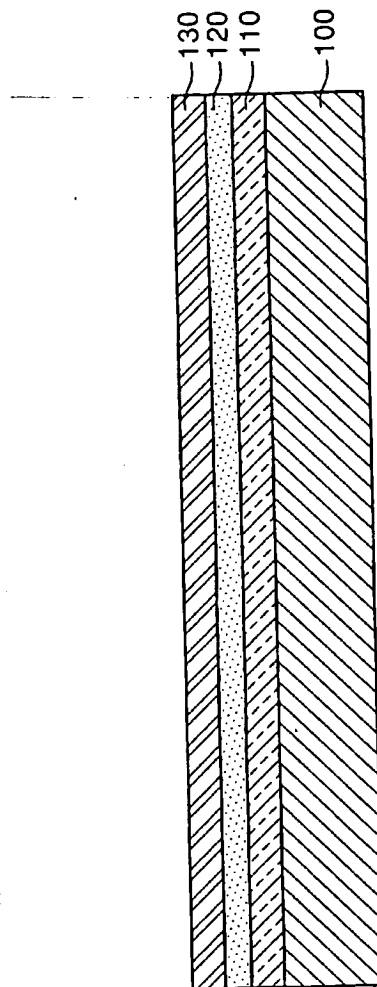


FIG. 2

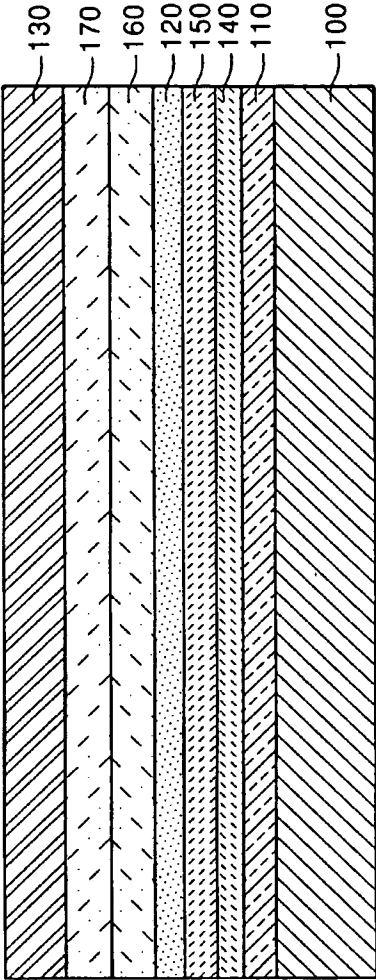
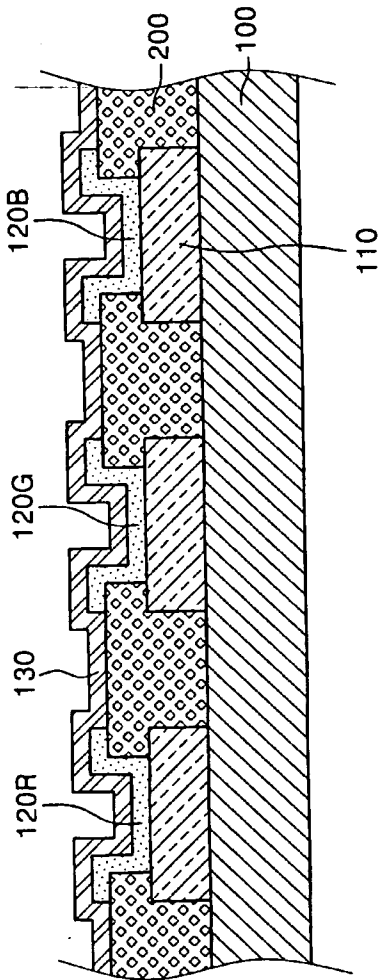


FIG. 3



REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 2005042667 A1 [0004]
- US 20050095454 A1 [0006]

专利名称(译)	有机发光显示装置		
公开(公告)号	EP1744380B1	公开(公告)日	2008-12-10
申请号	EP2006117203	申请日	2006-07-14
[标]申请(专利权)人(译)	三星斯笛爱股份有限公司		
申请(专利权)人(译)	三星SDI CO. , LTD.		
当前申请(专利权)人(译)	三星SDI CO. , LTD.		
[标]发明人	LEE JUN YEOB SAMSUNG SDI CO LTD CHOI YONG JOONG SAMSUNG SDI CO LTD		
发明人	LEE, JUN-YEOB SAMSUNG SDI CO.,LTD. CHUN, MIN-SEUNG SAMSUNG SDI CO., LTD. CHOI, YONG-JOONG SAMSUNG SDI CO., LTD.		
IPC分类号	H01L51/50 H01L51/00		
CPC分类号	H01L51/0059 H01L51/0052 H01L51/0081 H01L51/5012 H01L2251/308		
代理机构(译)	hengelhaupt , Jürgen		
优先权	1020050064354 2005-07-15 KR		
其他公开文献	EP1744380A1		
外部链接	Espacenet		

摘要(译)

公开了一种有机发光显示装置。该器件包括发射层，该发射层包括主体和掺杂剂材料。掺杂剂是具有式1结构的材料之一，其中R可以是选自乙烯，乙烯衍生物，芪，芪衍生物中的一种。此外，R 1至R 6可以彼此不同或相等，并且各自选自氢原子，卤素原子，取代或未取代的C 1 -C 20 烷基，取代或未取代的C 1 -C 20 烷氧基。基团，取代或未取代的C5至C20芳基，C3至C30杂环基和脂族C3至C30烃基。

Formula 2

