

(19)



(11)

EP 2 296 442 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention of the grant of the patent:
31.08.2016 Bulletin 2016/35

(51) Int Cl.:
H05B 33/10 ^(2006.01) **G09F 9/30** ^(2006.01)
H01L 27/32 ^(2006.01) **H01L 51/50** ^(2006.01)
H05B 33/12 ^(2006.01) **H05B 33/22** ^(2006.01)

(21) Application number: **09754421.7**

(86) International application number:
PCT/JP2009/002300

(22) Date of filing: **25.05.2009**

(87) International publication number:
WO 2009/144912 (03.12.2009 Gazette 2009/49)

(54) METHOD OF MANUFACTURING AN ORGANIC ELECTROLUMINESCENT DISPLAY

HERSTELLUNGSVERFAHREN EINES ORGANISCHEN ELEKTROLUMINESZENZDISPLAYS
 PROCÉDÉ DE FABRICATION D'UN DISPOSITIF D'AFFICHAGE ÉLECTROLUMINESCENT ORGANIQUE

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO SE SI SK TR

- **KANATA, Yoshio**
Osaka 540-6207 (JP)

(30) Priority: **29.05.2008 JP 2008141291**

(74) Representative: **Grünecker Patent- und Rechtsanwälte**
PartG mbB
Leopoldstraße 4
80802 München (DE)

(43) Date of publication of application:
16.03.2011 Bulletin 2011/11

(73) Proprietor: **Panasonic Intellectual Property Management Co., Ltd.**
Osaka-shi, Osaka 540-6207 (JP)

(56) References cited:
JP-A- 2003 208 979 **JP-A- 2004 071 222**
JP-A- 2004 090 621 **JP-A- 2008 108 570**
US-A1- 2004 140 759 **US-A1- 2004 242 111**
US-A1- 2005 008 769 **US-A1- 2006 071 968**
US-A1- 2006 290 764 **US-A1- 2007 200 488**
US-A1- 2007 296 758

(72) Inventors:
 • **HAYATA, Hiroshi**
Osaka 540-6207 (JP)
 • **SUZUKI, Naoki**
Osaka 540-6207 (JP)

EP 2 296 442 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The present invention relates to a method of manufacturing an organic electroluminescent (EL) display. More particularly, the invention relates to a method of manufacturing an organic EL display in which an organic light-emitting layer is formed by a coating method (more specifically by an ink jet method).

Background Art

[0002] Organic EL displays can be broadly classified, according to methods with which their organic light-emitting layers are formed, into the following two types. One type employs a method of forming an organic light-emitting layer by deposition, which is used in the case where the organic light-emitting layer is made of a low-molecular-weight organic material. The other type employs a method of forming an organic light-emitting layer by a solvent coating method, which is often used in the case where the organic light-emitting layer is made of a polymeric organic material as well as a low-molecular-weight organic material.

[0003] As one of representative measures for forming an organic light-emitting layer by a solvent coating method, there is a method of discharging droplets of ink containing an organic light-emitting material into pixel regions of a display substrate using an ink jet device to form an organic light-emitting layer (see Patent Document 1). In the discharged droplet, an organic light-emitting material and a solvent are included.

[0004] The ink jet device includes an ink jet head having two or more nozzles. While controlling a positional relationship between the nozzles of the ink jet head and the display substrate, the ink jet device discharges ink from the nozzles. It is known that there are variations in size among droplets discharged from nozzles that the ink jet head has (see Patent Document 2). Reported in Patent Document 2 is a technique of causing a plurality of droplets to land on one pixel region and adjusting the landing position of each droplet, thereby improving film uniformity in the pixel region.

[0005] On the other hand, a pixel region of a display substrate into which droplets are discharged is often defined by a partition, referred to as a "bank". This is for the purpose of causing discharged ink to position-selectively remain in the pixel region. A plurality of pixels are arranged on the substrate in rows of respective colors (R, G or B) such that they form a stripe pattern. As one of methods of discharging droplets onto a display substrate having banks that partition pixels, a method of discharging droplets while causing an ink jet head of an ink jet device to scan in a direction perpendicular to the longitudinal direction of the stripe is known (see Patent Documents 4 to 6).

[0006] Further, as another of the methods of discharg-

ing droplets onto a display substrate having banks that each partition pixels, a method of combining an ink jet head of an ink jet device that scans in a direction perpendicular to the longitudinal direction of the stripe and an ink jet head of the ink jet device that scans in the longitudinal direction of the stripe so as to apply droplets is known (see Patent Document 7).

[0007] On the other hand, banks may define a linear region including a group of pixels of the same color (for example, R: red, G: green, or B: blue) arranged in a row, among pixels arranged in the form of stripes (see Patent Document 3). The bank that defines the linear region may be referred to as a "linear bank". That is, an organic light-emitting layer of R, G or B is formed in every region (hereinafter also referred to as a "linear region") defined by the linear bank.

[0008] Document US 2007/296758 A1 describes a method for printing that includes providing a substrate on which a matrix of color elements is defined, the color elements having respective center lines. A print head assembly including multiple controllable nozzles is positioned over the substrate. The substrate and/or the print head assembly is translated so that the print head assembly scans over the substrate in a scan direction transverse to the center lines of the color elements. Droplets of ink are ejected from the nozzles onto the substrate at selected times while the print head assembly scans over the substrate. The times at which to eject the droplets are selected so as to cause the droplets to land on the color elements at respective locations, such that respective locations are displaced from the center lines.

[0009] Document US 2004/140759 A1 describes a polymer OLED that is used to increase uniformity in thickness of a layer formed of polymer ink, and to prevent mixing of colors. The OLED includes a substrate having a first electrode layer formed thereon in a predetermined pattern, an insulator layer formed on the substrate forming a channel in a predetermined pattern, an organic polymer layer formed based on the channel and having at least an emission layer, a barrier formed at either side of the insulator layer of at least one end of the channel for preventing ink for the organic polymer layer from running out of both ends of the channel, and a second electrode layer formed on the polymer organic layer.

[0010] Document US 2005/008769 A1 aims at reducing or preventing the generation of streak unevenness in a thin film pattern formed using a droplet ejecting method. A liquid applying treatment is described, where a liquid material is applied to a pixel area having a major axis and a minor axis by a droplet ejecting method, and an ejecting treatment along minor axis direction where, in the liquid applying treatment, a nozzle head of a droplet ejecting apparatus is scanned along a minor axis direction of the pixel area, and a droplet is ejected to the pixel area from an inkjet nozzle included in the nozzle head in the scanning process.

Prior Art References

[0011]

Patent Document 1: Japanese Patent Application Laid-Open No.2004-362818
 Patent Document 2: Japanese Patent Application Laid-Open No.2003-266669
 Patent Document 3: US Patent No.7091660
 Patent Document 4: Japanese Patent Application Laid-Open No.2008-15309
 Patent Document 5: U.S. Patent Application Publication No.2008/0113282
 Patent Document 6: Japanese Patent Application Laid-Open No.2008-108570
 Patent Document 7: Japanese Patent Application Laid-Open No.2007-80545

Disclosure of Invention

Problems to be Solved by the Invention

[0012] In the case of forming an organic light-emitting layer on a display substrate having linear banks formed thereon using an ink jet device, as shown in FIG. 1,

- 1) ink jet head 120 of the ink jet device is arranged in an upper portion (or a lower portion) with respect to a line direction of linear banks 111 of display substrate 100 (at this point, preferably, the arrangement is made so that the line direction of linear banks 111 and an alignment direction of nozzles 121 are perpendicular to each other),
- 2) while ink jet head 120 is relatively moved in parallel to the line direction of linear banks 111 (that is, while transporting substrate 100 in the direction shown by an arrow),
- 3) droplets are discharged from nozzles 121 into linear region 110 defined by linear banks 111 to form an organic light-emitting layer.

[0013] In this way, the relative movement of the ink jet head in parallel to the line direction of the linear banks prevents ink to be applied into one linear region from erroneously intruding into the adjacent linear region. That is, in a color display, for example, a linear region in which an R organic light-emitting layer is formed, a linear region in which a G organic light-emitting layer is formed, and a linear region in which a B organic light-emitting layer is formed are repeatedly arranged, so that a stripe pattern is formed. Therefore, ink containing an organic light-emitting material must be reliably prevented from leaking into the adjacent linear region to cause color mixture. For this purpose, ink is discharged while an ink jet head is relatively moved in parallel to the line direction of the linear banks.

[0014] In this case, droplets are always discharged from the same nozzles into one linear region defined by

linear banks. That is, for every region defined by linear banks, its corresponding nozzles that supply (discharge) droplets into the region is set.

[0015] As described above, it is difficult to set the sizes of all nozzles that an ink jet head has to be strictly fixed. Typically, it is said that the dimension error resulting from machining of a nozzle is about $\pm 5\%$. Therefore, according to the foregoing method, the amount of supplied ink slightly differs from one region defined by linear banks to another. The difference in amount of supplied ink causes formed organic light-emitting layers to have different thicknesses; the difference in thickness among organic light-emitting layers leads to differences in amount of emitted light, intensity of emitted light and wavelength of emitted light. When the amount of emitted light, the intensity of emitted light, and the wavelength of emitted light differ from one region defined by linear banks to another as mentioned above, it has been found that a person visually recognizes the differences as a streak when a display is driven.

[0016] An object of the invention is to suppress non-uniformity in thickness of an organic light-emitting layer from one line to another even when an organic light-emitting layer is formed on a display substrate having linear banks by applying ink onto the substrate using ink jetting with an ink jet head having non-uniformity of nozzles. This allows an organic EL display having high image quality without streaks to be manufactured. Further, an object of a preferred aspect of the invention is to provide a method of manufacturing a high definition organic EL display in which color mixture is suppressed.

These objects are achieved by the present invention as claimed in the independent claim. Advantageous and preferred embodiments of the present invention are defined by the dependent claims.

[0017] According to a first aspect, it is provided a method of manufacturing an organic EL display as follows.

[1] A method of manufacturing an organic EL display, comprising:

preparing a display substrate having a substrate, two or more linear banks arranged on the substrate and being in parallel to each other, and two or more pixel regions arranged in linear regions defined by the linear banks;
 arranging an ink jet head which has two or more nozzles aligned in a row at a given pitch and to which ink containing an organic light-emitting material is supplied, to a side with respect to a line direction of the linear banks; and
 relatively moving the ink jet head in a direction perpendicular to the line direction of the linear banks and discharging the ink from the nozzles to apply the ink to every linear region defined by the linear banks.

[2] The manufacturing method as described in [1],

further comprising waiting until the ink applied to the linear regions defined by the linear banks becomes uniform and then drying a solvent contained in the ink.

[3] The manufacturing method as described in [1], wherein a distance from a nozzle at one end to a nozzle at another end, among the nozzles arranged in the ink jet head, is equal to or greater than a length in the line direction of the linear regions of the substrate.

[4] The manufacturing method as described in [1], wherein

a speed of relatively moving the ink jet head in the direction perpendicular to the line direction of the linear banks is inconstant; and

the speed of relatively moving while the ink is discharged from the nozzles to the linear region defined by the linear banks is lower than the speed of relatively moving while the ink is not discharged.

[5] The manufacturing method as described in [1], wherein the ink discharged from the nozzles lands on a forward side in the linear regions defined by the linear banks, with respect to a relative moving direction of the display substrate to the ink jet head.

[6] The manufacturing method as described in [1], wherein:

as to a set of the linear banks defining one of the linear regions, a linear region side of one linear bank has lower wettability than a linear region side of the other linear bank, the one linear bank being forward in the relative moving direction of the display substrate with respect to the inkjet head, the other linear bank being rear in the relative moving direction of the display substrate with respect to the inkjet head.

According to a second aspect, it is provided

[7] an organic EL display, comprising:

a substrate;
a plurality of linear banks arranged on the substrate and being in parallel to each other;
two or more pixel regions arranged in a linear region defined by the linear banks; and
a linear organic light-emitting layer arranged in the linear region including the pixel regions,

wherein contacts between the linear organic light-emitting layer and the linear banks have a fixed height in a line direction.

[8] In the manufacturing method according to [1], the linear region includes at least a first linear region and a second linear region, the first linear region provided at one end of the substrate, the second linear region provided at an opposite end of the substrate, wherein

a contact between the linear organic light-emitting layer arranged in the first linear region and the linear bank at the one end side of the substrate is lower in height than a contact between the linear organic light-emitting layer arranged in the second linear region and the linear bank at the opposite end side of the substrate.

Advantageous Effects of Invention

[0018] According to a method of the invention, although organic light-emitting layers are formed on a display substrate having linear banks by an ink jet method, variations in thickness of the organic light-emitting layer from one linear region to another can be suppressed. An organic EL display without luminance unevenness is therefore obtained. Further, according to a preferred method of the invention, a high definition organic EL display in which color mixture is suppressed is obtained.

Brief Description of Drawings

[0019]

FIG.1 shows a state in which an organic light-emitting layer is formed in a line shape by coating by a typical ink jet method;

FIG.2A shows an arrangement state of organic light-emitting layers; and FIG.2B shows an arrangement state of linear banks and pixel regions;

FIG.3A shows a state of forming an organic light-emitting layer in a line shape by coating with an ink jet method in the invention;

FIG.3B shows a state of forming an organic light-emitting layer in a line shape by coating with an ink jet method of the invention;

FIG.3C shows a state of forming an organic light-emitting layer in a line shape by coating with an ink jet method of the invention;

FIG.4 shows a state of forming an organic light-emitting layer in a line shape by coating with an ink jet method of the invention;

FIG.5 shows a state of forming an organic light-emitting layer in a line shape by coating with an ink jet method of the invention;

FIG.6 shows a state of forming an organic light-emitting layer in a line shape by coating with an ink jet method in the invention;

FIG.7 illustrates that the states of landing ink droplets vary depending on substrate transport speeds;

FIG.8 shows a state of adjusting landing positions of ink droplets to prevent color mixture;

FIG.9 shows a state of obtaining uniformity of a coated film utilizing surface tension of ink with respect to a bank;

FIG.10 illustrates a simulation of leveling of ink discharged into linear regions;

FIG.11 is a graph showing a relationship among sur-

face tension of ink with respect to a linear region (coating region), ink viscosity, and time until a coated film is leveled: where symbol \circ is a plot in the case where surface tension of the coated film is 20 dyn/cm; symbol \square is a plot in the case where surface tension of the coated film is 30 dyn/cm; and symbol Δ is a plot in the case where surface tension of the coated film is 40 dyn/cm;

FIG. 12 shows cross-sections perpendicular to a line direction of organic light-emitting layers formed in linear regions defined by linear banks of an organic EL display of the invention;

FIG. 13 shows cross-sections perpendicular to a line direction of organic light-emitting layers formed in linear regions defined by linear banks of a conventional organic EL display;

FIG. 14 shows cross-sections in parallel to a line direction of organic light-emitting layers formed in linear regions defined by linear banks of an organic EL display of the invention;

FIG. 15 shows cross-sections in parallel to a line direction of organic light-emitting layers formed in linear regions defined by linear banks of a conventional organic EL display;

FIG. 16 schematically shows a state of manufacturing linear banks by a printing method; and

FIG. 17 shows a state when depositing a cathode electrode by sputtering.

Best Mode for Carrying Out the Invention

[0020] An organic EL display manufactured by the invention has two or more linear banks arranged in parallel to each other. The linear bank may be forward tapered or reverse tapered, and preferably forward tapered. The material for a first bank may be any material as long as it has insulating properties; however it is preferable that the material be an insulating resin (such as polyimide). The surface of the linear bank may be subjected to a fluoridation process using fluorine gas plasma or the like to reduce its wettability.

[0021] The line direction of the linear bank may be any direction. Typically, the linear bank is in parallel to the short axis direction of a display or in parallel to its long axis direction.

[0022] An organic light-emitting layer is arranged in a line shape in a region (linear region) sandwiched between linear banks adjacent to each other. FIG. 2A shows a state of an organic EL display in which a cathode electrode and the like are omitted to expose organic light-emitting layers. As shown in FIG. 2A, R organic light-emitting layer 15R, G organic light-emitting layer 15G or B organic light-emitting layer 15B is formed in each linear region 12, and they are repeatedly arranged (forming a stripe pattern). It is preferable that the thickness of an organic light-emitting layer be from about 50 to 100 nm (for example, 60 nm).

[0023] FIG. 2B shows a state in which organic light-

emitting layers 15R, 15G, and 15B are omitted to expose pixel region 13. As shown in FIG. 2B, two or more pixel regions 13 are arranged in rows in linear region 12. Pixel regions 13 are not independently partitioned so that a liquid in the each pixel is not interfere with movement to adjacent pixel. Pixel regions 13 are linked to one another so that the liquid can move among them through gaps 17. In other words, ink discharged into linear region 12 can freely move in linear region 12.

[0024] In each pixel region 13, at least a pixel electrode (typically an anode electrode) is arranged. In the case of employing an active type, an anode electrode is independently arranged in every pixel region while in the case of employing a passive type, anode electrodes are arranged in a stripe pattern. In the case of employing bottom emission, an anode electrode needs to be a transparent electrode, and may be an indium-tin-oxide (ITO) electrode or the like. In the case of employing top emission, an anode electrode is preferably a reflecting electrode, and may be a silver electrode, a silver-palladium-copper alloy (also referred to as "APC") electrode or the like. In the case of employing an active type, an anode electrode is connected to a drain electrode of a thin film transistor (TFT).

[0025] A hole transport layer and an electron blocking layer may be arranged on and above the anode electrode. The hole transport layer is a layer made of a hole transfer material. The materials for the hole transport layer may be oxide such as WO_x (tungsten oxide), MoO_x (molybdenum oxide) or VO_x (vanadium oxide), or a combination of these materials. The hole transfer material may be poly(3,4-ethylenedioxythiophene) doped with polyethylene sulfonate (referred to as "PEDOT-PSS"), or its derivative (such as copolymer). The thickness of a hole transport layer is typically 10 nm or more and 100 nm or less, and can be about 30 nm.

[0026] The electron blocking layer has a role that blocks electrons from being transported to the hole transport layer and a role that transports holes to an organic light-emitting layer with efficiency, and is made of, for example, a polyaniline material. The thickness of an electron blocking layer is typically 10 nm or more and 100 nm or less, and can be about 40 nm.

[0027] As such, the organic light-emitting layer is arranged over the whole linear region including two or more pixel regions aligned in a row. That is, the organic light-emitting layer extends over two or more pixel regions aligned in a row.

[0028] A method of manufacturing an organic EL display panel according to the invention includes 1) preparing a display substrate before organic light-emitting layers are formed (see FIG. 2B), 2) arranging an ink jet head beside the prepared display substrate, and 3) applying ink containing an organic light-emitting material by ink jetting to form an organic light-emitting layer.

[0029] The display substrate before forming organic light-emitting layers is, for example, the substrate shown in FIG. 2B, and includes a substrate, a plurality of linear

banks in parallel to each other, and a plurality of pixel regions arranged in linear regions sandwiched between the linear banks. In pixel regions 13 at this point, for example, anode electrodes are exposed, hole injection transport layers are exposed, or electron blocking layers are exposed.

[0030] In the ink jet head arranged beside the substrate, a plurality of nozzles are arranged in a row. Ink containing an organic light-emitting material is supplied to the head, and the ink is discharged as droplets from the nozzles.

[0031] The organic light-emitting material contained in ink is preferably a polymeric luminescent material, and examples of the polymeric luminescent material include poly phenylene vinylene (PPV) and its derivatives, poly acetylene and its derivatives, polyphenylene and its derivatives, poly para phenyleneethylene and its derivatives, poly 3-hexyl thiophene (P3HT) and its derivatives, poly fluorene (PF) and its derivatives, and the like.

[0032] The ink jet head is arranged beside the substrate. Specifically, the ink jet head is arranged in a side with respect to the line direction of the linear banks, and more specifically in a side with respect to the line direction of a linear bank at the farthest end among a plurality of linear banks. The alignment direction of nozzles of the arranged ink jet may be in parallel to the line direction of linear banks of the substrate (see FIG.3).

[0033] Comparative example not forming part of the invention: As shown in FIG.3A, it is preferable that among nozzles 21 (21-1 to 21-n) arranged in ink jet head 20, a distance from nozzle 21-1 at one end to nozzle 21-n at the other end be equal to or greater than the length in the line direction of linear region 12 of substrate 10. This is because ink can be applied over the whole linear region 12 at a time. When the alignment direction of nozzles 21 of ink jet head 20 is inclined with respect to the line direction of linear region 12, it is preferable that "the component in the foregoing line direction of the distance from nozzles 21-1 to nozzle 21-n" be equal to or greater than the length in the line direction of linear region 12.

[0034] As shown in FIG.3B, a comparative example not forming part of the invention, ink jet head 20 may be arranged so as to be inclined with respect to the line direction. This can decrease the pitch of droplet landing in one linear region, enabling the time required for leveling to be reduced. However, the inclining of ink jet head 20 causes time differences in landing of droplets on the same linear region. Therefore, an ink droplet that has first landed on a region dries and increases its viscosity until the final ink droplet lands on the region, which interferes with leveling after droplets are connected. To solve this drawback, as shown in FIG.3C, a plurality of ink jet heads (20-1 to 20-6) are arranged so as to be each inclined with respect to the line direction. This enables reduction of the time differences in droplet landing to shorten the time required for connecting droplets over the whole linear region. The leveling in the linear region can therefore be ensured. If a plurality of ink jet heads are

overlapped, the time required for connecting droplets over the whole linear region can further be shortened.

[0035] Applying ink in this way allows ink discharged from all nozzles to be leveled in the linear region even if there are variations in discharge caused by size variations among nozzles. Variations in applied film thickness can therefore be suppressed. However, it is not necessarily required for ink amount corresponding to the desired film thickness to be applied in a single scan. The applying of ink to the whole linear region 12 may be completed by repeating scanning a plurality of times. If ink is applied by repeating scanning a plurality of times, however, the viscosity of the ink applied in the former scanning may increase to suppress leveling in its connection portion with ink applied in the latter scanning. Therefore, in the case of using a solvent that easily evaporates, such as ink solvent of an organic light-emitting material, it is desirable that ink be applied over the whole linear region in a single scan.

[0036] It is preferable that the pitch between nozzles 21 arranged in a row in ink jet head 20 be from 10 to 50 μm , and be, for example, about 20 μm . This is for the purpose of causing ink discharged from nozzles 21 to be mutually connected at the point on which the ink lands. It is also preferable that the amount of ink per droplet of the droplets discharged from nozzles 21 be from 1 to 15 pl, and be, for example, 3 pl.

[0037] It is preferable that droplets land also on gap 17 between the pixel regions shown in FIG.2B. The landing of droplets on gap 17 makes it possible to connect ink of the pixel regions to level them with reliability, even though wettability of pixel regions 12 differ from that of gap 17 between the pixel regions. It is also preferable that an electron blocking layer be provided in the whole linear region before a light-emitting layer is applied to make the wettability of pixel regions 12 equal to the wettability of gap 17 between the pixel regions. As a result, ink of the pixel regions can be connected with reliability to improve leveling.

[0038] It is preferable that the height of gap 17 between the pixel regions be greater to some extent than the height of pixel regions 13. However, the difference in height is set so as not to be too large, and the applied film immediately after the applying of ink covers gap 17 so as to avoid interfering with leveling. Thus, while achieving leveling, ink is concentrated into pixel region 13 in a drying process to effectively use an ink material.

[0039] Next, ink jet head 20 is moved relatively with respect to display substrate 10 in a direction perpendicular to the line direction of linear banks 11 of display substrate 10. Ink jet head 20 may be moved, or substrate 10 may be transported, or both of them may be moved. When, as a result of the relative movement of ink jet head 20, nozzles 21 of ink jet head 20 reach one of linear regions 12 (see FIG.4), droplets of ink are discharged from nozzles 21.

[0040] The amount of applied ink is from 100 to 500 pl per pixel. A plurality of droplets may be discharged from

one nozzle into one pixel, thereby supplying the required amount of ink.

[0041] The discharged droplets of ink land on linear region 12. As mentioned above, there are two or more pixel regions 13 in linear region 12, and droplets that have landed on one pixel region can move (wet and spread) to the adjacent pixel region. Since droplets can move between pixel regions, the thickness of the whole applied film formed in linear region 12 is made uniform (see FIG.10).

[0042] That is, as mentioned above, the amount of droplets discharged from nozzles 21 of ink jet head 20 may differ from one nozzle to another. According to the invention, the thickness of the applied film is made uniform (leveled) in linear region 12. Therefore, even though there is a difference among the amounts of droplets from nozzles 21, the applied film in linear region 12 is made uniform.

[0043] Upon completion of discharging of droplets of ink into one linear region 12, ink jet head 20 is further relatively moved so as to move nozzles 21 of ink jet head 20 to next linear region 12 into which droplets of ink are to be discharged (see FIG.5). Typically, R ink, G ink and B ink are applied by their respective individual scans, and therefore droplets of ink are discharged into every three linear regions. When nozzles 21 reach desired linear region 12, droplets of ink are discharged again to cause the droplets to land on linear region 12. This is repeated to apply ink to all linear regions 12 into which the ink is to be applied (see FIG.6).

[0044] Since ink is supplied into every linear region 12 in succession in this way, all the linear regions are coated by discharging from the same nozzles. The same amount of ink can therefore be supplied to all linear regions 12. In other words, variations in thickness of the applied film from one linear region to another are reduced. Consequently, streaks can be prevented from occurring when the regions constitute a display.

[0045] Further, the other color ink is applied in the same way as mentioned above, so that ink of all of R, G and B is applied.

[0046] As described above, the line direction of the linear banks of an organic EL display according to the invention may be in parallel to the short axis direction of the display, or may also be in parallel to the long axis direction. If the line direction of the linear banks is in parallel to the short axis direction, an ink jet head for scanning can be made in a smaller size. In the case where light emission unevenness slightly occurs because of variations in nozzles, the light emission unevenness occurs in a small region and therefore is not conspicuous. On the other hand, if the line direction of the linear banks is in parallel to the long axis direction, the scanning distance of an ink jet head is shortened. This enables coating to be completed in a short time to improve productivity, and also enables drying unevenness during coating to be suppressed.

Color Mixture Prevention

[0047] If ink is supplied into every linear region 12 in succession as described above, a risk of erroneously mixing ink into the adjacent linear region increases, while variations in thickness of the applied film from one linear region to another are reduced. The mixture of ink into the adjacent linear region causes color mixture, remarkably reducing the image quality as a display. In particular, if the speed of relative movement of the ink jet head and the substrate is increased in order to increase productivity, the occurrence rate of color mixture increases. That is, as shown in FIG.7A, when the speed of relative movement is low, a droplet lands within desired linear region 12 with more reliability while, as shown in FIGS.7B and 7C, as the relative movement speed increases, the area for landing of a droplet expands in the direction of the movement, and it may be difficult for a droplet to land within desired linear region 12 (see FIG.7C).

[0048] To prevent color mixture as mentioned above, it can be considered to change the relative movement speed (e.g., the transport speed of the substrate) depending on whether ink is discharged from nozzles or not. In other words, when the position of nozzles corresponds to the linear region, the relative movement speed is decreased so as to cause droplets discharged from nozzles to land on the linear region with reliability. On the other hand, during movement of the nozzles from the linear region into which ink has been applied to the next linear region, it is preferable that the relative movement speed be increased to increase productivity. The relative movement speed (preferably the transport speed of the substrate) when droplets are discharged is preferably from 50 to 300 mm/s, while the relative movement speed (preferably the transport speed of the substrate) when droplets are not discharged is not particularly limited, and is, for example, 400 mm/s or more.

[0049] To prevent color mixture as mentioned above, as shown in FIGS.8A and 8B, ink droplet 14 may be landed on the forward side in the transport direction of the substrate (on the rear side in the movement direction of the ink jet head) in linear region 12. The ink unevenly distributed in the forward in the transport direction of the substrate naturally spreads toward the rear in the transport direction by wind pressure caused by transport of the substrate, thereby enabling formation of applied film 16 (FIG.8C). The substrate itself may optionally be tilted so as to raise the forward in the transport direction of the substrate after the ink application.

[0050] Further, as shown in FIG.9, the surface tension (wettability) of linear bank 11 is utilized. In FIG.9A, the wettability of the surface on the side of region 12 of linear bank 11a is equal to the wettability of the surface on the side of region 12 of linear bank 11b. The linear bank 11a is forward in the transport direction (see arrow) of substrate 10, and the linear bank 11b is rear in the transport direction of substrate 10. As shown in FIG.9A, an ink droplet that has landed in the forward in the transport

direction of the substrate does not spread evenly, and therefore the thickness of organic light-emitting layer 15 is unlikely to become uniform, as shown in FIG.9B.

[0051] On the other hand, in FIG.9C, linear banks 11 define linear region 12, and the wettability of surface 30 on the side of region 12 of linear bank 11b is higher than the wettability of the surface on the side of region 12 of linear bank 11a. The linear bank 11b is rear in the transport direction of the substrate, and the linear bank 11a is forward in the transport direction of the substrate. As shown in FIG.9C, ink can wet and spread over the whole linear region 12 even though an ink droplet lands in the forward in the transport direction of the substrate. As a result, organic light-emitting layer 15 having a uniform film thickness is obtained as shown in FIG.9D.

[0052] It is preferable that a manufacturing method according to the invention be carried out in this way by combining measures for reliably preventing color mixture.

Waiting

[0053] It is preferable that after ink is discharged to a linear region (including a plurality of pixel regions), it be waited until the thickness of an applied film of the ink is made uniform (leveled), and then a solvent of the ink be removed. Specifically, waiting refers to that the substrate is left in the atmosphere or in an inert gas atmosphere.

[0054] The time for waiting varies mainly depending on the viscosity of ink and the surface tension of the ink with respect to a region to which the ink is applied. The viscosity of ink containing an organic light-emitting material to be applied by an ink jet device is from about 5 to 20 cps. The surface tension of ink with respect to a region to which the ink is applied is from 20 to 40 dyn/cm. Hereinbelow, results of the time until the applied film is made uniform obtained by a simulation using the theory of Orchard are shown.

[0055] Three pixel regions 13 arranged in the region (linear region) defined by the linear banks are assumed (see FIG.10). A length 1 in FIG.10 is about 1 mm. The state in which applied film 16 having $\pm 100\%$ variations is formed in this region is set as the initial state (FIG.10A). The time from the initial state to a state in which variations of the applied film is leveled to $\pm 1\%$ (FIG.10B) is obtained. The result is shown in a graph of FIG.11.

[0056] The vertical axis of the graph in FIG.11 indicates time (sec) required for leveling; and the horizontal axis indicates the viscosity (cps) of ink constituting an applied film. Plots of \diamond represent results in the case where the surface tension of the applied region is 20 dyn/cm; plots of \square represent results in the case where the surface tension of the applied region is 30 dyn/cm; and plots of Δ represent results in the case where the surface tension of the coated region is 40 dyn/cm.

[0057] As shown in the graph of FIG.11, it is found that leveling is completed in 5 to 20 seconds in any case. Accordingly, it is found that the thickness of the coated film becomes uniform after waiting for 5 to 20 seconds

after applying of ink.

[0058] As a matter of course, the waiting time may be affected by evaporation of a solvent from the applied film, and therefore is adjusted in accordance with the actual conditions.

[0059] After waiting, with the whole display substrate placed in the high-temperature environment or in the reduced-pressure environment, the solvent is removed from a leveled applied film (drying process). Thereby, an organic light-emitting layer is formed. In this way, an organic light-emitting layer having a highly uniform thickness is formed in each linear region, and variations in thickness of the organic light-emitting layer among linear regions are reduced.

[0060] After the organic light-emitting layers are formed, an electron injection transport layer, an opposite electrode (typically a cathode electrode) and the like are layered to produce an organic EL device, and further a sealing film, a glass substrate and the like are arranged, thereby manufacturing a display.

[0061] The material of a cathode electrode layer differs depending on whether the display is a bottom emission type or a top emission type. In the case of the top emission type, the cathode electrode needs to be transparent, and therefore it is preferable that an ITO electrode, an indium zinc oxide (IZO) electrode or the like be formed. It is preferable that a buffer layer and the like be formed between the organic light-emitting layer and the cathode electrode layer. On the other hand, in the case of the bottom emission type, the cathode electrode need not be transparent, and an electrode made of any material may be used.

[0062] The cathode electrode may be formed on the organic light-emitting layer arranged in each pixel region, and is sometimes formed so as to cover all pixels included in one linear region. The cathode electrode is typically formed by a sputtering method or a deposition method. Further, the cathode electrode need not always be separated by linear region. That is, when an anode electrode is controlled independently for every pixel electrode as in an active-matrix type, a TFT element that drives the pixel electrode is independent, and therefore the cathode electrode can be shared among a plurality of linear regions.

[0063] An organic EL display panel obtained by the method of the invention may be sealed by further providing a cover material to a surface on which the cathode electrode is formed. With the cover material, intrusion of moisture and oxygen is suppressed.

[0064] The organic EL display panel obtained by the method of the invention can be manufactured as described above, and can have structural features in a relationship between organic light-emitting layers formed in linear regions by coating and linear banks.

[0065] A first feature of the organic EL display panel obtained by the method of the invention is that the heights of contacts between an organic light-emitting layer arranged in each linear region and linear banks are fixed in the line direction. As shown in FIG.12, when attention

is focused on one linear region (linear region X, Y or Z), the thickness of organic light-emitting layer 15 is fixed in the line direction. That is, regarding organic light-emitting layer 15 formed in each linear region (linear region X, Y or Z) in FIG.12-1, a cross-section along the line A-A (FIG.12-2), a cross-section along the line B-B (FIG.12-3), and a cross-section along the line C-C (FIG.12-4) are approximately identical to one another; the heights of contacts between organic light-emitting layer 15 and linear banks 111 are fixed in the line direction. The fixed height means that a difference between the minimum height and the maximum height is within 20% (preferably 10%) of the film thickness with a pixel of the organic light-emitting layer serving as the center. This is because according to a method of the invention, there is no large difference in the drying environment for a coating liquid in one linear region.

[0066] In contrast, in an organic light-emitting layer formed by providing a coating liquid along the line direction of linear banks, variations in the line direction easily occur among the heights of contacts between the organic light-emitting layer and linear banks in one linear region (see FIG.13). That is, regarding an organic light-emitting layer formed in each linear region (X', Y' or Z') in FIG.13-1, a cross-section along the line A'-A' (FIG.13-2), a cross-section along the line B'-B' (FIG.13-3), and a cross-section along the line C'-C' (FIG.13-4) are not fixed, and variations are large. For example, when attention is focused on linear region X', a cross-section in A' is stranded on a side surface of bank 111 at the right side; a cross-section in C' is not stranded on a side surface of bank 111. In the case of providing a coating liquid along the line direction, there is a large difference in the drying environment of the coating liquid in one linear region, and therefore such variations occur.

[0067] The organic EL display panel having banks sometimes deteriorates gradually in its long-term use. It is considered that one of causes of the deterioration is that an outflow from the bank acts on the organic light-emitting layer. The outflow from the bank is, for example, moisture and an organic matter containing a hydroxyl group. The degree of deterioration of the organic light-emitting layer because of an outflow from the bank is considered to be affected by a positional relationship between the organic light-emitting layer and the bank.

[0068] The distance between pixels adjacent to each other in each linear region is very short. Therefore, when a difference occurs in the degree of deterioration of the pixels to cause a difference in light-emitting characteristic, the difference is visually recognized with ease as light emission unevenness of a display.

[0069] As mentioned above, in the organic EL display obtained by the method of the invention, the heights of contacts between the an organic light-emitting layer and linear banks can be fixed in every linear region. Therefore, the degree of progress of long-term deterioration can be the same among organic light-emitting devices included in one linear region. Accordingly, light emission

unevenness of a display can be suppressed even in the long-term use.

[0070] A second feature of the organic EL display panel obtained by the method of the invention is as follows.

5 The height of contact between an organic light-emitting layer formed in a linear region on one end of a display panel and linear bank are greater than the height of contact between an organic light-emitting layer formed in a linear region on the other end of the display panel and linear banks. As shown in FIG.12-1, since the drying speed of a coating liquid applied to linear region X in an end on a side (right side) where coating of substrate 100 starts is rapid, organic light-emitting layer 15 formed by drying is likely to be stranded on a side surface of bank 111 (see FIGS.12-2 to 12-4). On the other hand, since the drying speed of a coating liquid applied to linear region Z in an end on a side (left side) opposite to the side where coating of substrate 100 starts is slow, formed organic light-emitting layer 15 is unlikely to be stranded on a side surface of bank 111.

[0071] As a matter of course, the film thickness profile of an organic light-emitting layer in each pixel affects the light-emitting characteristic. Moreover, even with a difference of the film thickness profile that is not visually recognized as the light-emitting characteristic, the heat generation characteristic may be varied. Specifically, since organic light-emitting layer 15 formed in linear region X arranged in one end (on a side where coating starts) of a display panel in FIG.12-1 tends to have a large film thickness distribution, the amount of heat generation of an organic light-emitting device in linear region X is relatively large. On the other hand, since organic light-emitting layer 15 formed in linear region Z arranged in the other end of the display panel has a suppressed film thickness distribution, the amount of heat generation of organic light-emitting device 15 in linear region Z is relatively small.

[0072] Thus, when the organic EL display obtained by the method of the invention is driven, heat is easily generated from one end to produce a flow of heat therefrom (see arrow H). If such a flow of heat does not exist, a temperature distribution in the form of a concentric circle around the vicinity of the center of the panel occurs. The use in a long period is likely to cause light emission unevenness corresponding to this temperature distribution. The light emission unevenness in the form of a concentric circle around the vicinity of the center of the panel is easy to visually recognize. When a flow of heat occurs as in the display obtained by the method of the invention, the temperature distribution is not in the form of a concentric circle around the center of the panel. In this case, even if light emission unevenness occurs, it is difficult to visually recognize the unevenness.

[0073] One of the sealing structure of the organic EL display is a structure referred to as a "can sealing structure." The can sealing structure is a structure that puts a sealing can on a display substrate on which an organic light-emitting device is formed, so that the organic light-

emitting device is protected from the external environment. In the can sealing structure, heat tends to stay inside the sealing can. When a flow of heat is produced inside the sealing can, a heat distribution is made uniform by convection. Further, moisture and oxygen gas present in the interior of the sealing can move by the flow of heat. When an adsorbent that absorbs moisture and oxygen gas is arranged at a downstream position, moisture and oxygen gas can be removed with efficiency.

[0074] A third feature of the organic EL display obtained by the method of the invention is that film thickness profiles in the line direction of organic light-emitting layers formed in linear regions are similar to one another. That is, as shown in FIG. 14-1, any one of organic light-emitting layers 15 formed in linear regions is relatively thick at one position (G) in the line direction; it is relatively thin at another position (H) in the line direction (see FIGS. 14-2 to 14-4). FIG. 14-2 is a cross-sectional view taken along the line D-D of FIG. 14-1; FIG. 14-3 is a cross-sectional view taken along the line E-E of FIG. 14-1; FIG. 14-4 is a cross-sectional view taken along the line F-F of FIG. 14-1.

[0075] As described above, nozzles of an ink jet head vary in size, and their sizes are not necessarily constant. According to a coating method of the invention, droplets simultaneously fall over the whole one linear region, and the thickness of the coated film is made uniform (leveled). Therefore, the thickness of an organic light-emitting layer is made uniform over the whole linear region. However, variations in the sizes of nozzles, variations in the temperatures of nozzles and variations in the drying states of nozzles, which have no influence on light-emitting characteristic, are reflected in the thickness of an organic light-emitting layer to cause a distribution of the thickness.

[0076] Even if the organic light-emitting layer of the organic EL display obtained by the method of the invention has a distribution in thickness, thickness distributions in the line direction of organic light-emitting layers of any linear regions are similar (see FIGS. 14-2 to 14-4). That is, positions in the line direction of the thickest portions or the thinnest portions of organic light-emitting layers in linear regions are exactly aligned or vary within a distance 2 to 8 times as long as the nozzle pitch. Therefore, even if a stress is applied to a display such that the display is curved in the line direction (bent around an axis perpendicular to the line direction), deformations in the thickness direction in all linear regions are the same. This suppresses damage to organic light-emitting layers.

[0077] On the other hand, as shown in FIG. 15-1, in organic light-emitting layers 15 formed by providing a coating liquid along the line direction of linear banks, their film thickness profiles in the line direction differ from one linear region to another and are not similar (FIGS. 15-2 to 15-4). That is, FIG. 15-2 is a cross-sectional view taken along the line D'-D' of FIG. 15-1; FIG. 15-3 is a cross-sectional view taken along the line E'-E' of FIG. 15-1; FIG. 15-4 is a cross-sectional view (FIG. 15-4) taken along the line F'-F' of FIG. 15-1. The film thickness profiles of

any organic light-emitting layers 15 differ from one another. In such a case, when a stress is applied to a display such that the display is curved in the line direction (bent around an axis perpendicular to the line direction), deformations in the thickness direction greatly differ from one adjacent linear region to another. This adds damage to organic light-emitting layers.

[0078] The organic EL display panel can be made as a flexible display (e.g., a roll display or a folding display). As a usage of a flexible display, for example, it is conceivable to bend the display in parallel with the extending direction of linear banks. If the thickness profile of an organic light-emitting layer in one linear region distinctly differs from the thickness profile of an organic light-emitting layer in another linear region, the organic light-emitting layer in the one linear region is likely to be broken upon bending the display in parallel with the extending direction of linear banks. In a method of coating along the line direction of linear banks, an organic light-emitting layer having a distinctly different thickness profile is sometimes formed because of variations in ink jet nozzles. In this case, the whole organic light-emitting layer is broken. As a result, the quality as a display cannot be ensured. In the organic EL display obtained by the method of the invention, even if there are variations in the nozzles of an ink jet head, a coating liquid applied into a linear region is made even. This makes it difficult to form an organic light-emitting layer having a distinctly different thickness profile. As mentioned above, in the organic EL display obtained by the method of the invention, thickness profiles in the line direction of organic light-emitting layers in linear regions are similar. Therefore, even if each of the organic light-emitting layers has portion having a distinct thickness can be formed, the portions are aligned along the line perpendicular to the line direction. Therefore, the organic light-emitting layer is unlikely to be broken with bending the display in parallel with the extending direction of linear banks.

[0079] Linear banks of the organic EL display obtained by the method of the invention may be formed by a photolithography method, and may also be formed by a printing method. Examples of the printing method include a gravure offset printing method. As shown in FIG. 16, according to a printing method, a bank material (e.g., a resin material) placed on the surface of printing cylinder 200, so-called cylinder, is transferred onto substrate 100 to form linear banks 111. The shapes of linear banks 111 formed by the printing method are precisely the same in the line direction. That is, variations in shape in the line direction are the same for any linear banks 111.

[0080] When by a method of the invention ink is applied in each linear region of linear banks formed by a printing method, through leveling of the coating liquid the shape profile of the organic light-emitting layer is hard to be reflected by the variations in shape in the linear bank. On the other hand, if an organic light-emitting layer is formed by supplying a coating liquid along the line direction of linear banks to each linear region defined by linear banks

formed by a printing method, not only the shape profile of the organic light-emitting layer is likely to be reflected by the variations in shape in the linear bank, but also the variations of nozzles of an ink jet head and the shape variations in the line direction of linear banks might be combined together.

[0081] The organic EL display panel obtained by the method of the invention is sometimes provided with a color filter for every pixel in order to increase color purity. The color filter is made of a colored layer arranged between linear banks adjacent to each other. In the case of forming a colored layer of this color filter by an ink jet method, variations of nozzles of an ink jet head sometimes cause unevenness in the color filter. To address this, when an organic light-emitting layer is formed by coating liquid along the direction perpendicular to the line direction of linear banks as in the invention, it is preferable that a color filter be formed by coating liquid along the line direction of linear banks. This is for the purpose of suppressing combining of mutual variations. For the sake of cost reduction, a colored layer of the color filter is sometimes applied along linear regions in succession by a dispenser or the like. In this case, it is preferable that an organic light-emitting layer be formed by coating in a direction perpendicular to the linear banks so that mutual variations are not combined together.

[0082] The cathode electrode of the organic EL display obtained by the method of the invention is sometimes deposited by sputtering. For example, in the case of a top emission type organic EL display, ITO, which is a transparent electrode, is sometimes deposited as a cathode electrode by sputtering. Sputtering deposition can be performed, for example, using a magnetron sputtering device, which transports a member on which a cathode electrode is to be deposited (a display substrate on which an organic light-emitting device with no cathode electrode) to cause it to pass through a sputter region. Since the environment of the sputter region is not necessarily uniform (with variations), slight streaks can occur along the transport direction in a film formed by sputtering.

[0083] In the case where an organic light-emitting layer is formed by coating liquid along the direction perpendicular to the line direction of linear banks as in the invention, as shown in FIG. 17, when a cathode electrode is deposited by sputtering, it is preferable that substrate 100 be transported along the line direction of linear banks (i.e., the longitudinal direction of organic light-emitting layer 15) to pass through sputter region 300. This is for the purpose of suppressing combining of variations of nozzles of an ink jet head and variations in the sputter region together.

[0084] In the case of an active-matrix organic EL display, cathode electrodes of all organic light-emitting pixels can be made conductive. When the substrate is transported along the line direction of linear banks to pass through a sputter region, the coverage is increased to suppress thinning or cutting of the deposited cathode on the bank. Therefore, conductivity of the cathode elec-

trode can be improved .

[0085] Further, the organic EL display obtained by the method of the invention can have a sealing resin layer that seals an organic light-emitting device formed on a substrate. To seal the organic light-emitting device with resin layer, for example, sealing resin can be applied to a display substrate on which an organic light-emitting device is arranged; and placing a sealing substrate (glass substrate) on the display substrate, a gap between the display substrate and the sealing substrate is filled with sealing resin. When the display substrate and the sealing substrate are brought into close contact to each other, the sealing resin spreads in the gap along the line direction of linear banks. Since the sealing resin spreads along the line direction, streaks in the line direction sometimes occur in the formed sealing resin layer.

[0086] As mentioned above, the organic light-emitting layer of the invention is formed by coating liquid along the direction perpendicular to the line direction of linear banks, and therefore streaks in the line direction are unlikely to occur. Therefore, light emission unevenness due to streaks in the foregoing sealing resin can be suppressed. In contrast, in the organic light-emitting layer formed by providing a coating liquid along the line direction of linear banks, streaks in the line direction are likely to occur. Therefore, there is a potential of emphasizing light emission unevenness in combination with streaks of the foregoing sealing resin.

Industrial Applicability

[0087] With a manufacturing method of the invention, a high definition organic EL display without streaks is provided.

Description of Reference Numerals

[0088]

100	substrate
110	linear region
111	linear bank
120	ink jet head
121	nozzle
10	substrate
11	linear bank
12	linear region
13	pixel region
14	ink droplet
15, 16	15R, 15G, 15B organic light-emitting layer applied film
17	gap
20	ink jet head
21	nozzle
200	printing cylinder
300	sputter region

Claims

1. A method of manufacturing an organic electroluminescent (EL) display, comprising:

providing a display substrate having a substrate (10), at least two linear banks (11) arranged on the substrate (10) in parallel, and at least two pixel regions (13) arranged in linear regions (12) defined by the at least two linear banks (11), wherein adjacent pixel regions (13) arranged in a linear region (12) are separated by a gap region (17);

arranging a plurality of ink jet heads (20-1 to 20-6) adjacent to one another at an edge of the substrate (10), the edge being parallel to a line direction of the at least two linear banks (11), each ink jet head (20-1 to 20-6) being inclined with respect to the line direction,

the plurality of ink jet heads (20-1 to 20-6) each including at least two or more nozzles (21-1 to 21-n) aligned in a row at a predetermined pitch, wherein ink containing an organic light-emitting material is supplied to the at least two nozzles (21-1 to 21-n); and

characterized in that

as to a pair of the at least two linear banks (11) defining one of the linear regions (12), a linear region side of one linear bank (11) of the pair has lower wettability for the ink than a linear region side of the other linear bank (11) of the pair,

the one linear bank (11) being rear in the moving direction of the plurality of ink jet heads (20-1 to 20-6) relative to the display substrate, the other linear bank (11) being forward in the moving direction of the plurality of ink jet heads (20-1 to 20-6) relative to the display substrate.

2. The manufacturing method according to claim 1, further comprising, after the ink discharging step, waiting until the ink applied to the linear regions (12) defined by the at least two linear banks (11) becomes uniform in thickness, and then drying a solvent contained in the ink.
3. The manufacturing method according to claim 1, wherein a speed of moving the plurality of ink jet heads (20-1 to 20-6) relative to the display substrate in the direc-

tion perpendicular to the line direction of the at least two linear banks (11) is variable; and

the speed of moving the plurality of ink jet heads (20-1 to 20-6) relative to the display substrate while the ink is discharged from the at least two nozzles (21-1 to 21-n) to the linear regions (12) defined by the at least two linear banks (11) is less than the speed of moving the plurality of ink jet heads (20-1 to 20-6) relative to the display substrate while the ink is not discharged.

4. The manufacturing method according to claim 1, wherein the ink discharged from the at least two nozzles (21-1 to 21-n) lands on a rear side in the linear regions (12) defined by the at least two linear banks (11), with respect to the moving direction of the plurality of ink jet heads (20-1 to 20-6) relative to the display substrate, the ink landing on the rear side and spreading toward a forward side in the linear regions (12) defined by the at least two linear banks (11), with respect to the moving direction of the plurality of ink jet heads (20-1 to 20-6) relative to the display substrate.

Patentansprüche

1. Herstellungsverfahren eines organischen Elektrolumineszenzdisplays (ELD), umfassend:

Bereitstellen eines Anzeigesubstrats mit einem Substrat (10), mindestens zwei linearen Bänken (11), die parallel auf dem Substrat (10) angeordnet sind, und mindestens zwei Pixelregionen (13), die in linearen Regionen (12) angeordnet sind, welche von den mindestens zwei linearen Bänken (11) definiert werden, wobei benachbarte Pixelregionen (13), die in einer linearen Region (12) angeordnet sind, durch eine Spaltregion (17) getrennt sind;

Anordnen einer Vielzahl von Tintendruckköpfen (20-1 bis 20-6) nebeneinander an einem Rand des Substrats (10), wobei der Rand parallel zu einer Linienrichtung der mindestens zwei linearen Bänke (11) verläuft, wobei jeder Tintendruckkopf bezüglich der Linienrichtung geneigt ist,

wobei die Vielzahl von Tintendruckköpfen (20-1 bis 20-6) jeweils mindestens zwei oder mehr Düsen (21-1 bis 21-n) aufweist, die mit einer vorgegebenen Neigung in einer Reihe ausgerichtet sind, wobei Tinte, die ein organisches lichtemittierendes Material enthält, zu den mindestens zwei Düsen (21-1 bis 21-n) geleitet wird; und

Bewegen der Vielzahl von Tintenstrahldruckköpfen (20-1 bis 20-6) relativ zu dem Substrat in einer Richtung lotrecht zu der Linienrichtung der mindestens zwei linearen Bänke (11) und

Ausstoßen der Tinte aus den mindestens zwei Düsen (21-1 bis 21-n), um die Tinte auf jede der linearen Regionen (12) aufzubringen und eine organische lichtemittierende Schicht auf den mindestens zwei Pixelregionen (13) zu bilden;

dadurch gekennzeichnet, dass

bei einem Paar der mindestens zwei linearen Bänke (11), welches eine der linearen Regionen (12) definiert, eine lineare Regionsseite einer linearen Bank (11) des Paares eine geringere Benetzungsfähigkeit für die Tinte als eine lineare Regionsseite der anderen linearen Bank (11) des Paares aufweist, die eine lineare Bank (11) hinten in der Bewegungsrichtung der Vielzahl von Tintendruckköpfen (20-1 bis 20-6) relativ zu dem Anzeigesubstrats angeordnet ist, die andere lineare Bank (11) vorne in der Bewegungsrichtung der Vielzahl von Tintendruckköpfen (20-1 bis 20-6) relativ zu dem Anzeigesubstrat angeordnet ist.

2. Herstellungsverfahren nach Anspruch 1, des Weiteren umfassend, nach dem Schritt zum Ausstoßen der Tinte, Warten bis die auf die linearen Regionen (12), welche von den mindestens zwei linearen Bänken (11) definiert wird, aufgebrachte Tinte eine gleichmäßige Dicke aufweist, und dann Trocknen eines in der Tinte enthaltenen Lösungsmittels.
3. Herstellungsverfahren nach Anspruch 1, wobei eine Bewegungsgeschwindigkeit der Vielzahl von Tintendruckköpfen (20-1 bis 20-6) relativ zu dem Anzeigesubstrat in der Richtung lotrecht zu der Linienrichtung der mindestens zwei linearen Bänke (11) variabel ist; und die Bewegungsgeschwindigkeit der Vielzahl von Tintendruckköpfen (20-1 bis 20-6) relativ zu dem Anzeigesubstrat, während die Tinte aus den mindestens zwei Düsen (21-1 bis 21-n) auf die linearen Regionen (12) ausgestoßen wird, die von den mindestens zwei linearen Bänken (11) definiert werden, geringer als die Bewegungsgeschwindigkeit der Vielzahl von Tintendruckköpfen (20-1 bis 20-6) relativ zu dem Anzeigesubstrat ist, während die Tinte nicht ausgestoßen wird.
4. Herstellungsverfahren nach Anspruch 1, wobei die von den mindestens zwei Düsen (21-1 bis 21-n) ausgestoßene Tinte auf einer Rückseite in den linearen Regionen (12) landet, die von den mindestens zwei linearen Bänken (11) definiert werden, bezüglich der Bewegungsrichtung der Vielzahl von Tintendruckköpfen (20-1 bis 20-6) relativ zu dem Anzeigesubstrat, und wobei die Tinte auf der Rückseite landet und sich nach vorne zu einer Vorderseite in den linearen Regionen (12) ausbreitet, die von den mindestens zwei linearen Bänken (11) definiert werden, bezüglich der Bewegungsrichtung der Vielzahl von Tinten-

druckköpfen (20-1 bis 20-6) relativ zu dem Anzeigesubstrat.

5 **Revendications**

1. Procédé de fabrication d'un dispositif d'affichage électroluminescent (EL) organique, comprenant :

la fourniture d'un substrat d'affichage comportant un substrat (10), au moins deux bancs linéaires (11) agencés sur le substrat (10) en parallèle et au moins deux régions de pixels (13) agencées dans des régions linéaires (12) définies par les au moins deux bancs linéaires (11), dans lequel des régions de pixels adjacentes (13) agencées dans une région linéaire (12) sont séparées par une région d'espace (17) ; l'agencement d'une pluralité de têtes à jet d'encre (20-1 à 20-6) adjacentes entre elles au niveau d'un bord du substrat (10), le bord étant parallèle à la direction de ligne des au moins deux bancs linéaires (11), chaque tête à jet d'encre (20-1 à 20-6) étant inclinée par rapport à la direction de ligne, les têtes de la pluralité de têtes à jet d'encre (20-1 à 20-6) incluant chacune au moins deux buses (21-1 à 21-n) alignées dans une rangée avec un espacement prédéterminé, dans lequel de l'encre contenant un matériau électroluminescent organique est fournie aux au moins deux buses (21-1 à 21-n) ; et le déplacement de la pluralité de têtes à jet d'encre (20-1 à 20-6) par rapport au substrat d'affichage dans une direction perpendiculaire à la direction de ligne des au moins deux bancs linéaires (11) et l'évacuation de l'encre des au moins deux buses (21-1 à 21-n) pour appliquer l'encre à chacune des régions linéaires (12) pour former une couche électroluminescente organique sur les au moins deux régions de pixels (13) ;

caractérisé en ce que

en ce qui concerne une paire des au moins deux bancs linéaires (11) définissant une des régions linéaires (12), un côté de région linéaire d'un banc linéaire (11) de la paire possède une mouillabilité à l'encre inférieure à celle du côté de région linéaire de l'autre banc linéaire (11) de la paire, le premier banc linéaire (11) étant en arrière dans la direction de déplacement de la pluralité de têtes à jet d'encre (20-1 à 20-6) par rapport au substrat d'affichage, l'autre banc linéaire (11) étant en avant dans la direction de déplacement de la pluralité de têtes à jet d'encre (20-1 à 20-6) par rapport au substrat d'affichage.

2. Procédé de fabrication selon la revendication 1, comprenant en outre, après l'étape d'évacuation d'encre, l'attente que l'encre appliquée aux régions linéaires (12) définies par les au moins deux bancs linéaires (11) devienne d'une épaisseur uniforme, puis le séchage du solvant contenu dans l'encre. 5
3. Procédé de fabrication selon la revendication 1, dans lequel
la vitesse de déplacement de la pluralité de têtes à jet d'encre (20-1 à 20-6) par rapport au substrat d'affichage dans la direction perpendiculaire à la direction de ligne des au moins deux bancs linéaires (11) est variable ; et 10
la vitesse de déplacement de la pluralité de têtes à jet d'encre (20-1 à 20-6) par rapport au substrat d'affichage pendant que l'encre est évacuée des au moins deux buses (21-1 à 21-n) vers les régions linéaires (12) définies par les au moins deux bancs linéaires (11) est inférieure à la vitesse de déplacement de la pluralité de têtes à jet d'encre (20-1 à 20-6) par rapport au substrat d'affichage pendant que l'encre n'est pas évacuée. 15
20
4. Procédé de fabrication selon la revendication 1, dans lequel l'encre évacuée par les au moins deux buses (21-1 à 21-n) atterrit sur le côté arrière des régions linéaires (12) définies par les au moins deux bancs linéaires (11) par rapport à la direction de déplacement de la pluralité de têtes à jet d'encre (20-1 à 20-6) relativement au substrat d'affichage, l'encre atterrissant sur le côté arrière et s'étalant vers le côté avant dans les régions linéaires (12) définies par les au moins deux bancs linéaires (11) par rapport à la direction de déplacement de la pluralité de têtes à jet d'encre (20-1 à 20-6) relativement au substrat d'affichage. 25
30
35

40

45

50

55

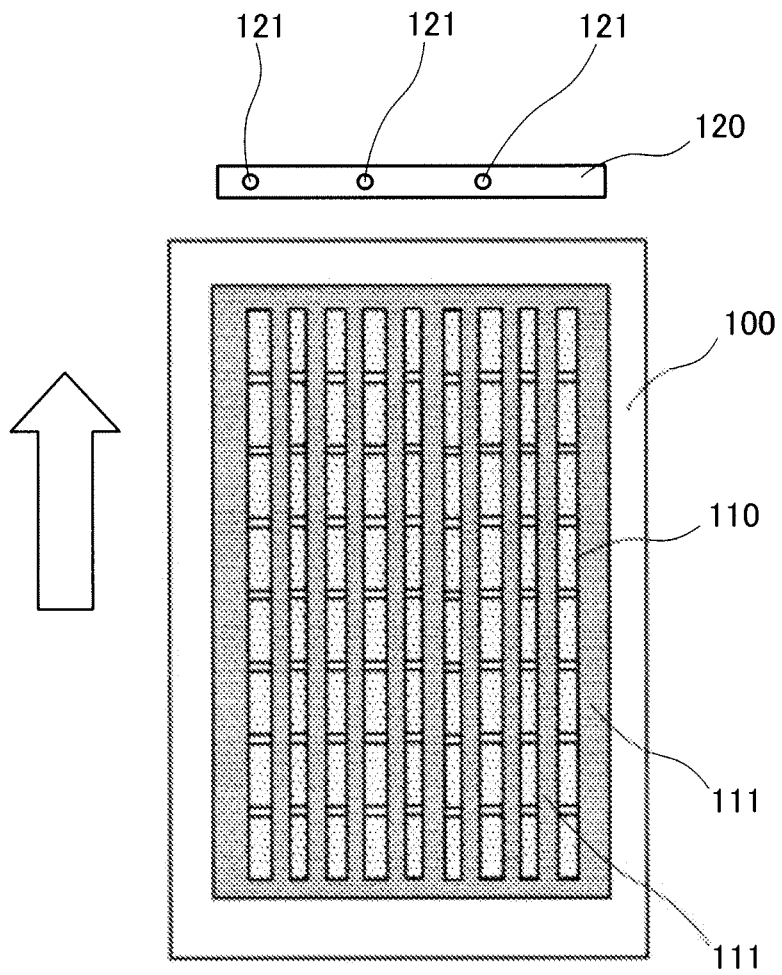


FIG.1

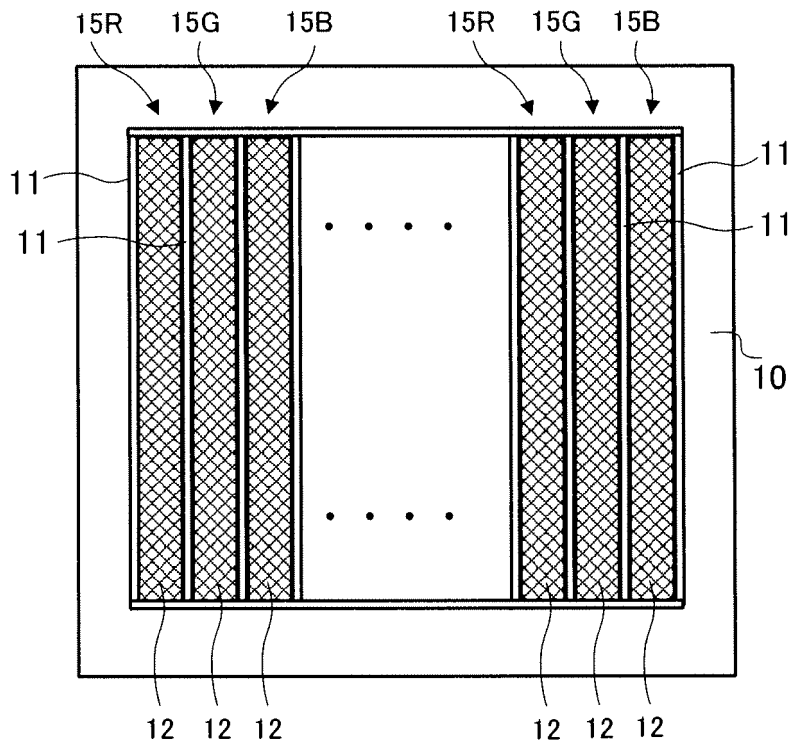


FIG. 2A

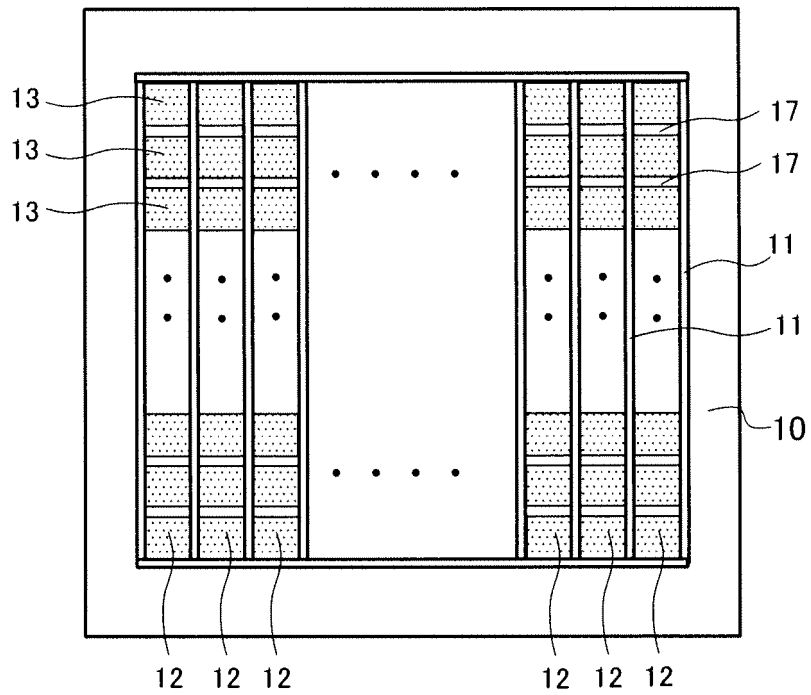


FIG. 2B

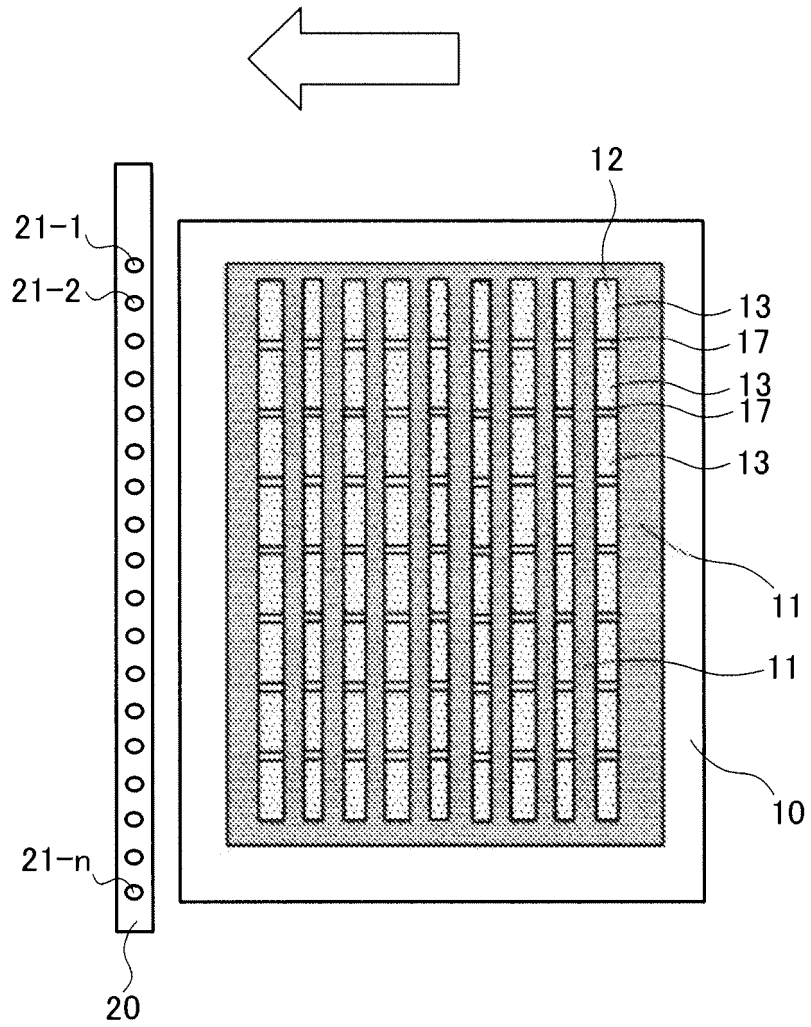


FIG.3A

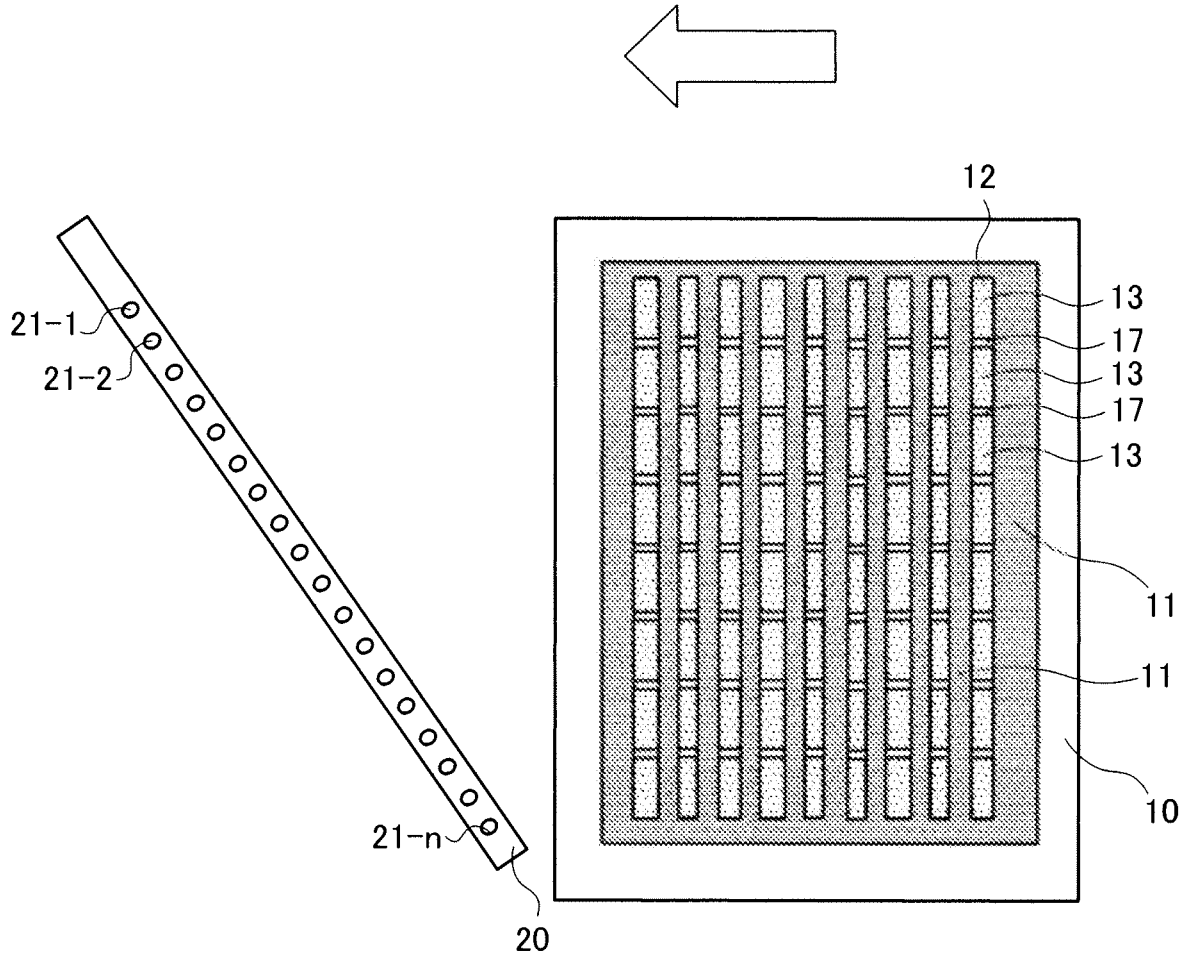


FIG.3B

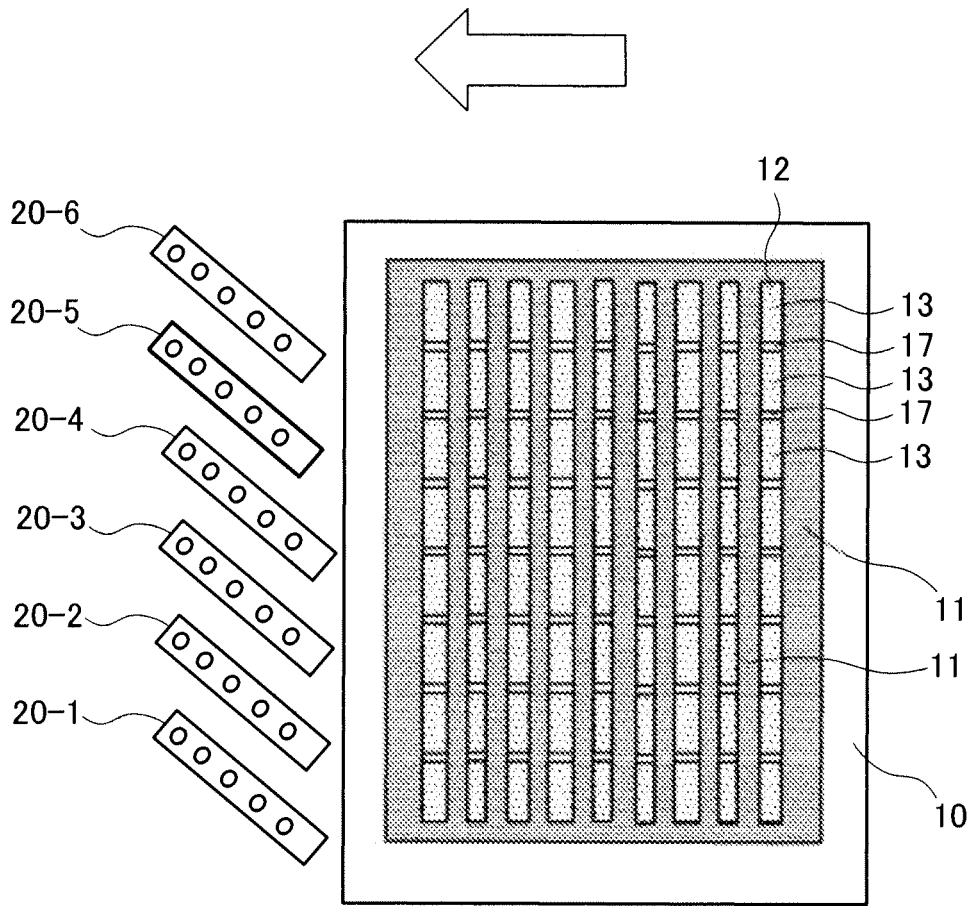


FIG.3C

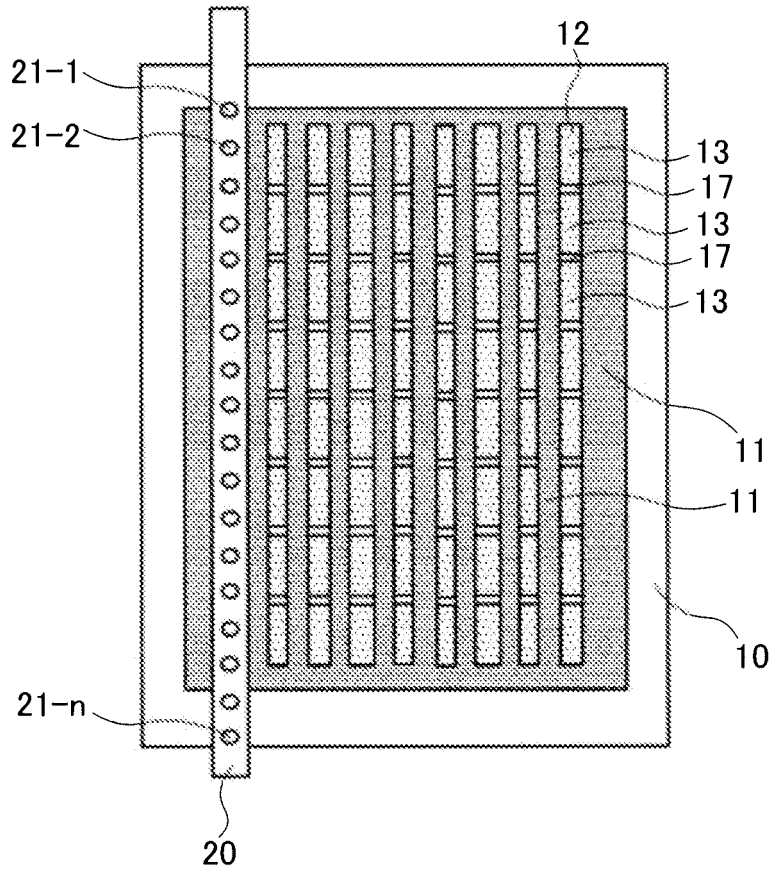


FIG.4

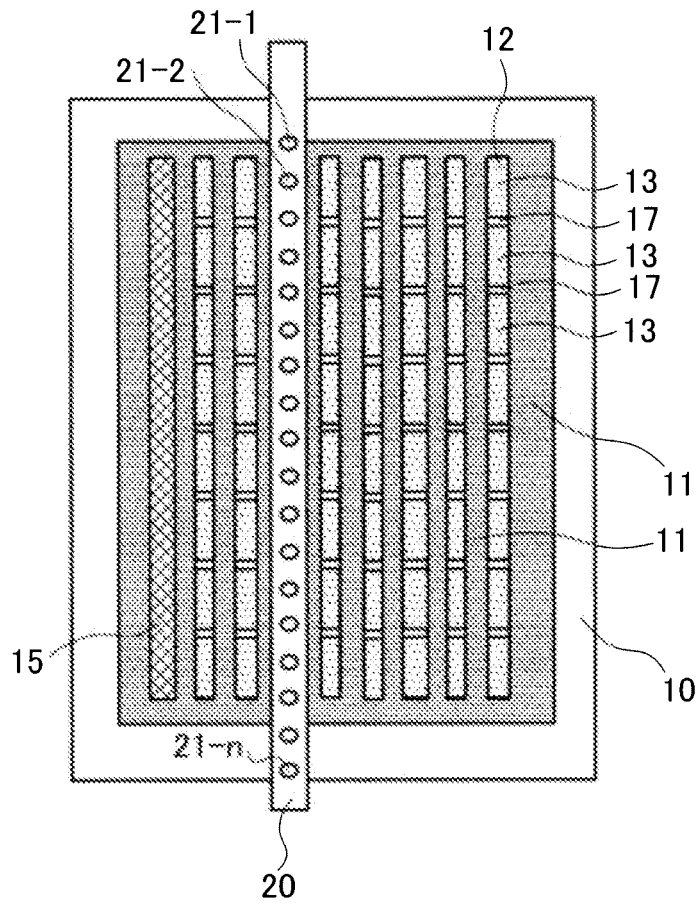


FIG.5

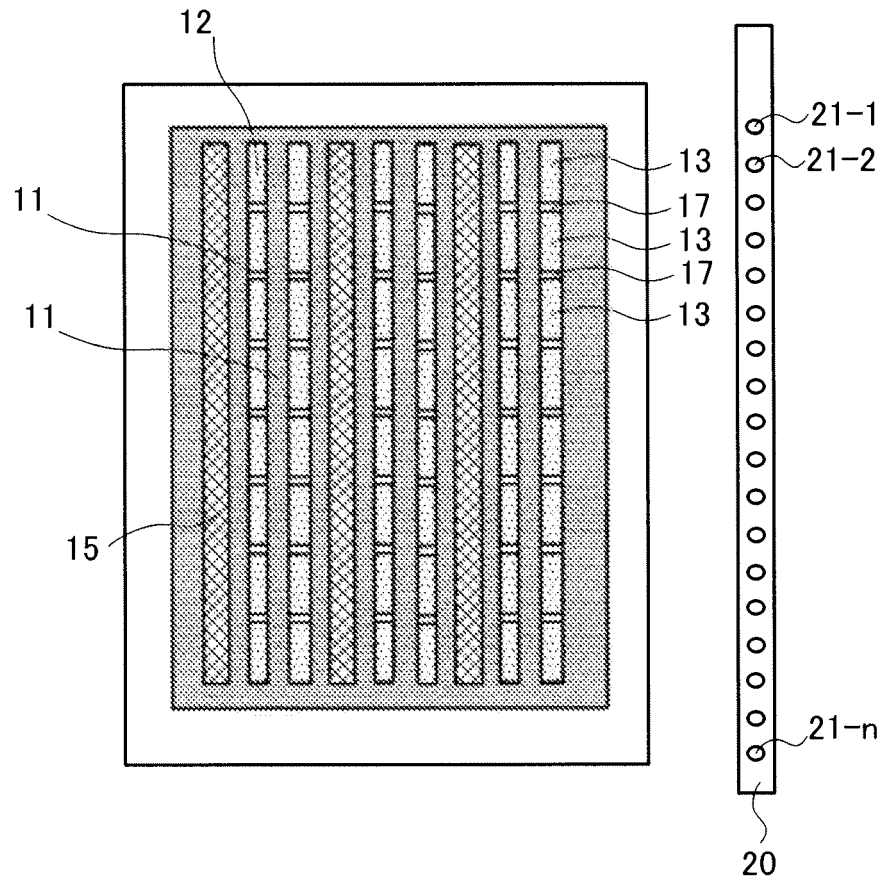


FIG.6

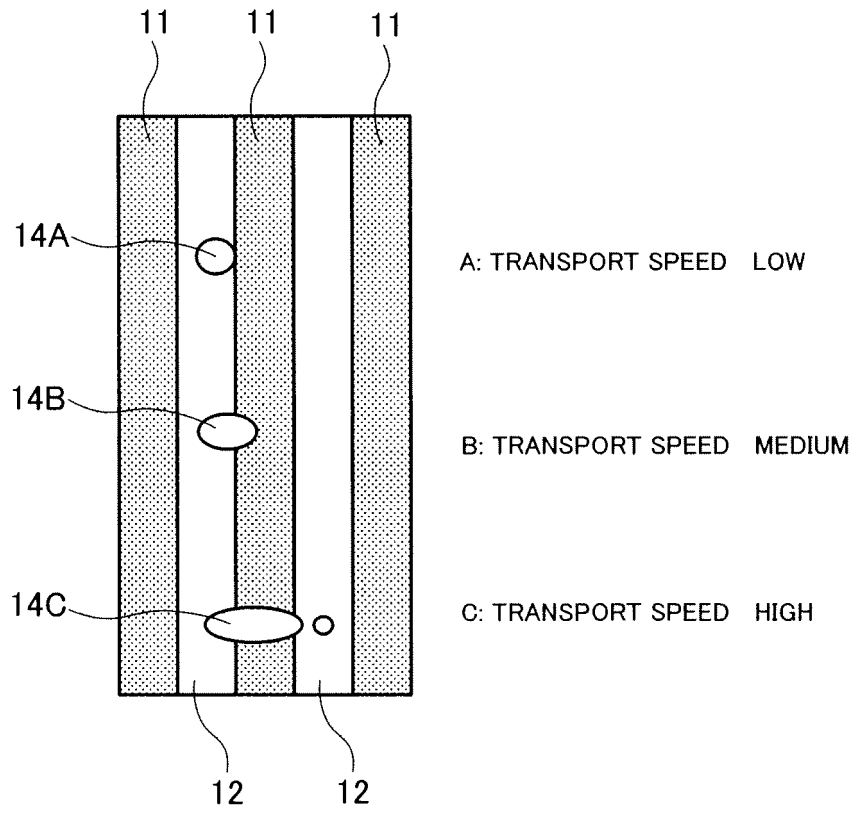
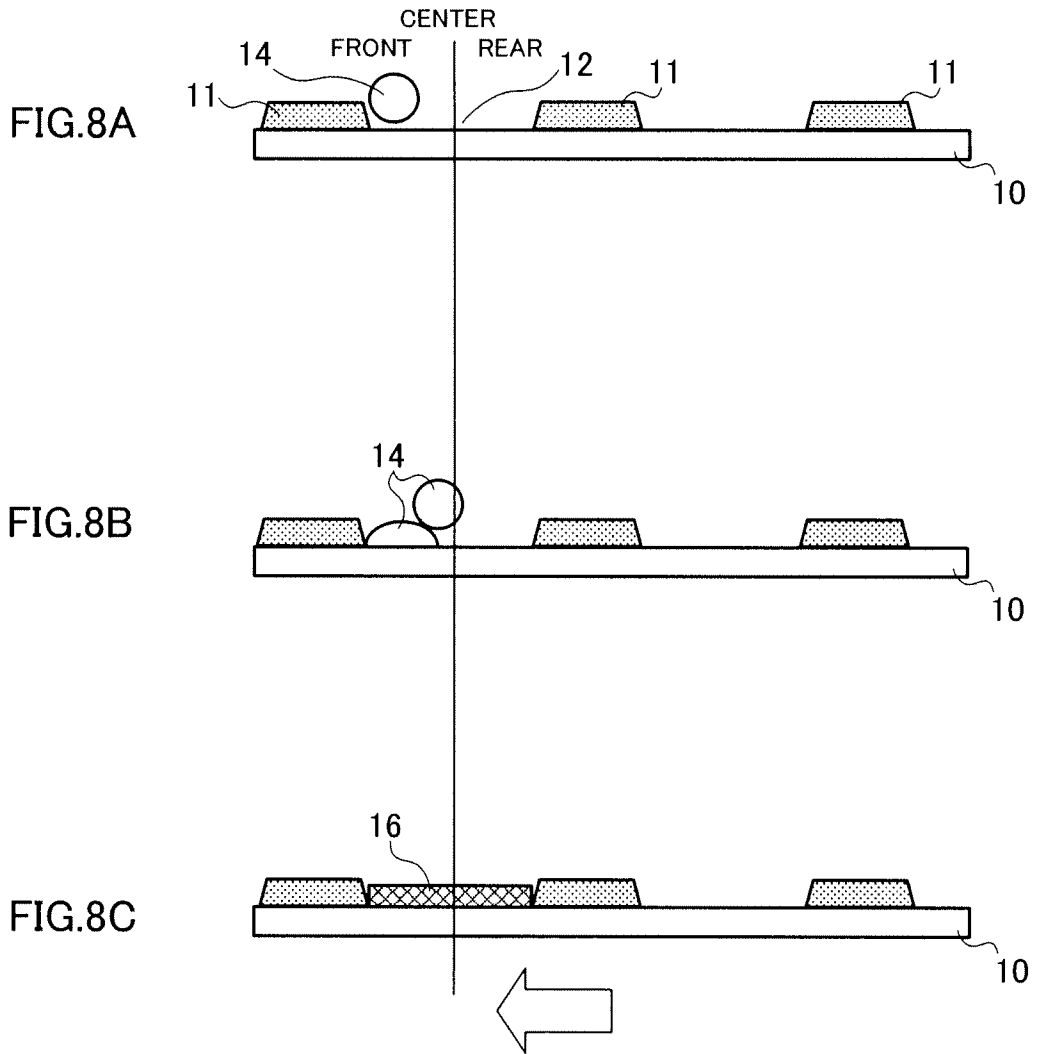

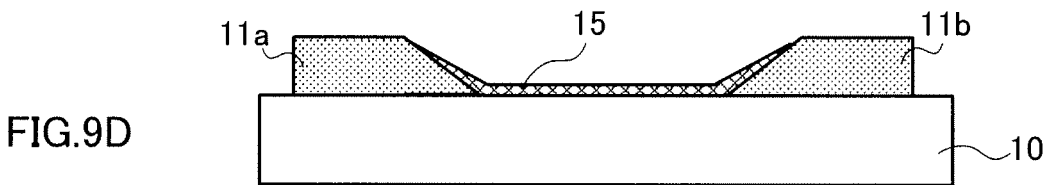
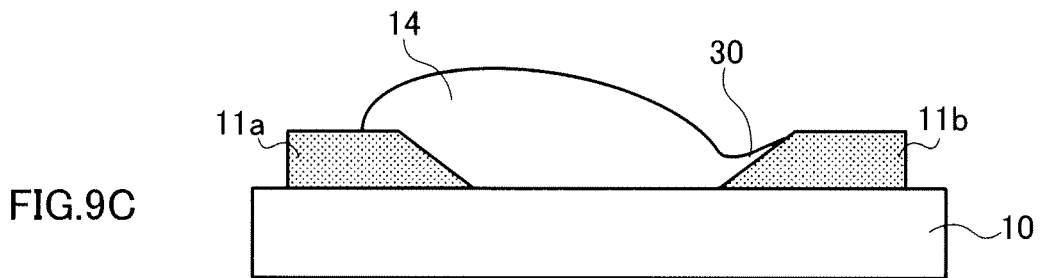
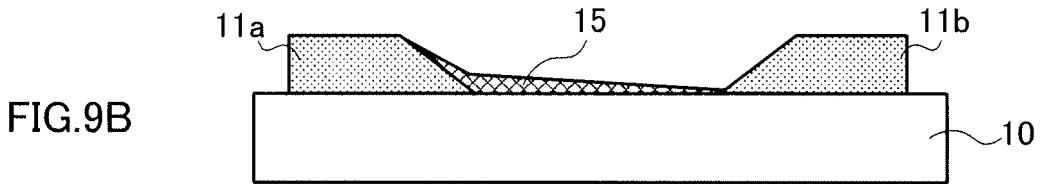
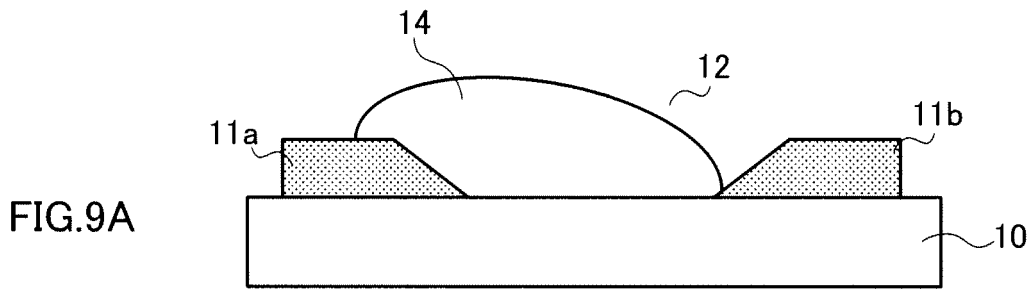


FIG.7





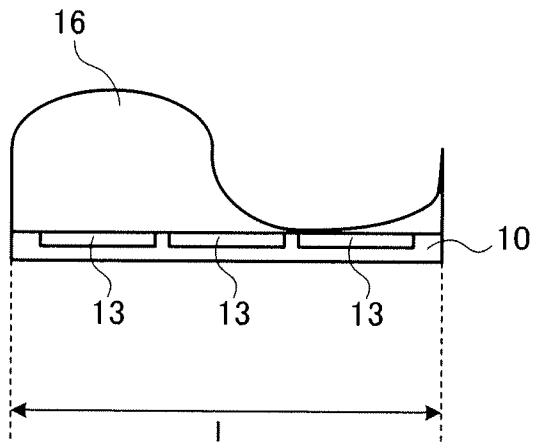


FIG. 10A

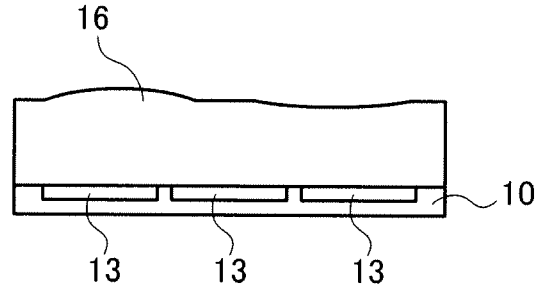


FIG. 10B

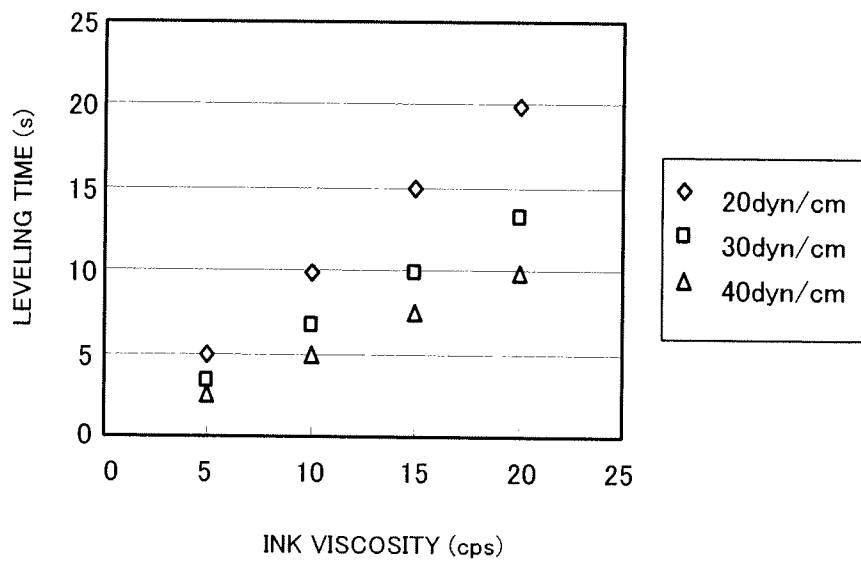


FIG. 11

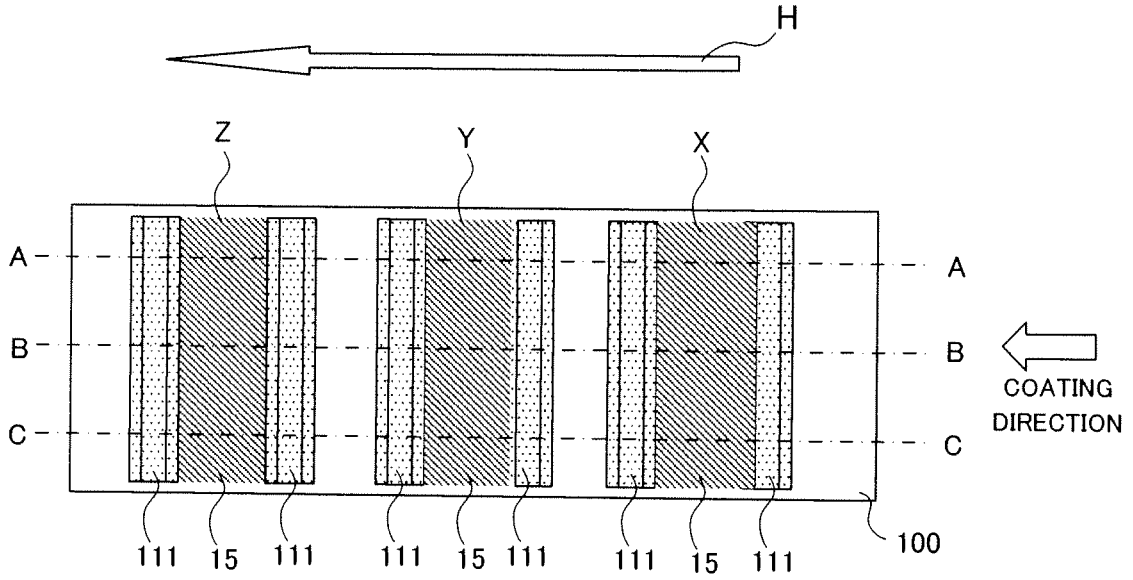


FIG. 12-1

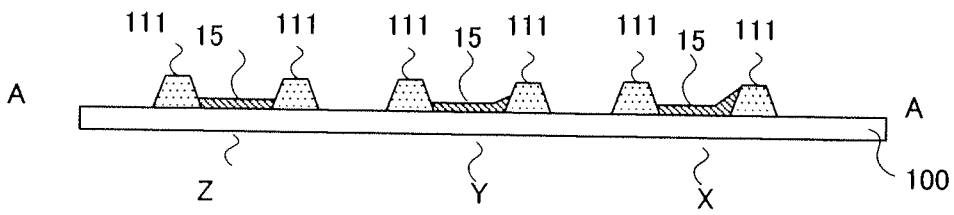


FIG. 12-2

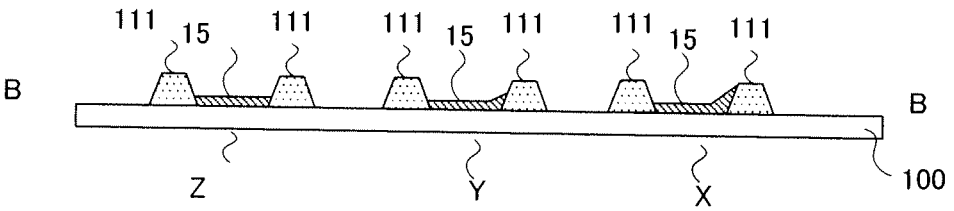


FIG. 12-3

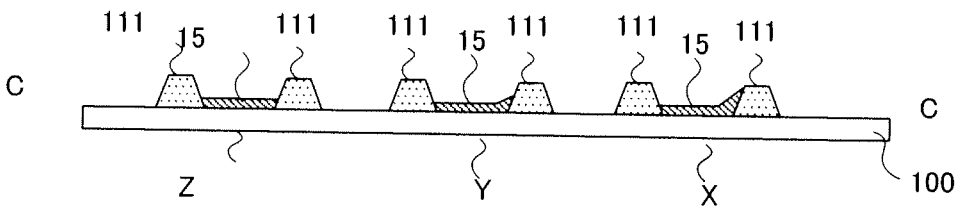


FIG. 12-4

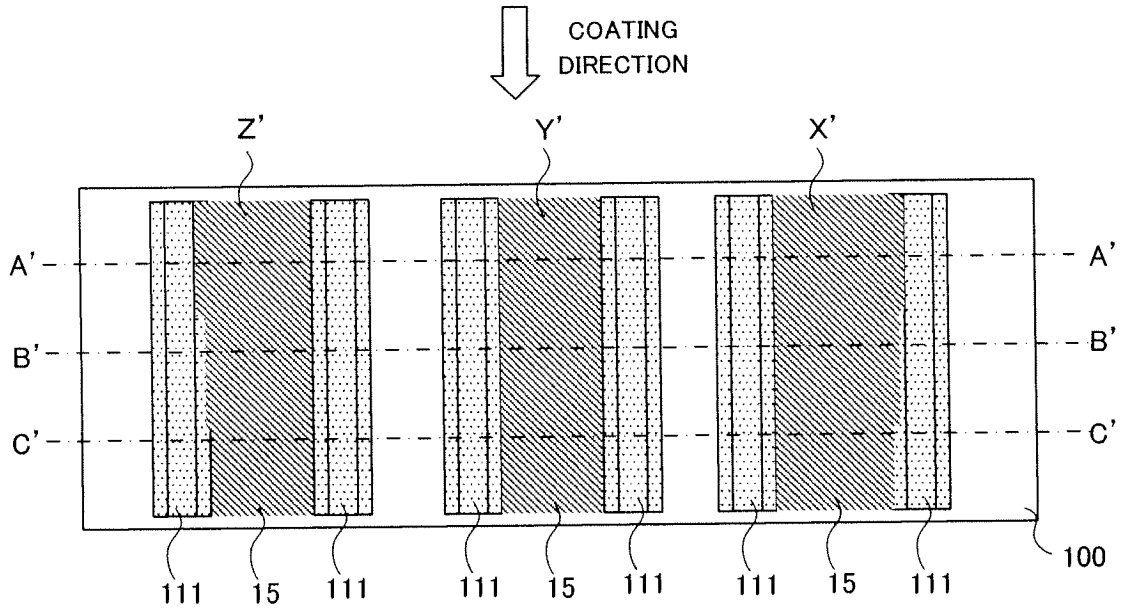


FIG.13-1

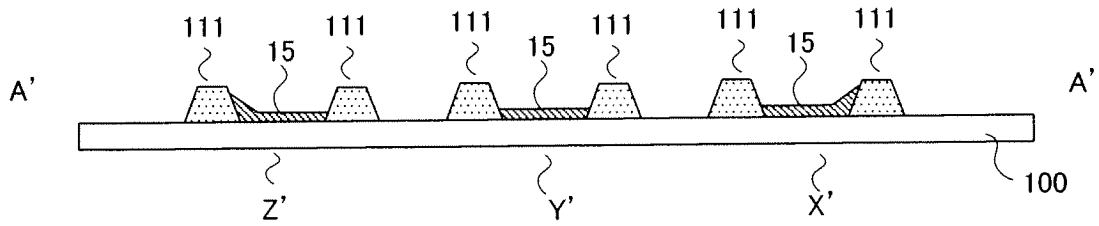


FIG.13-2

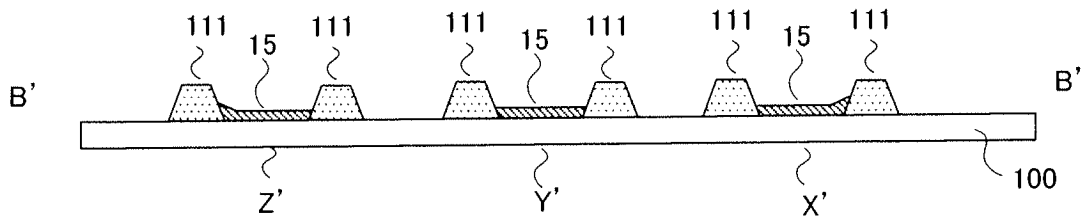


FIG.13-3

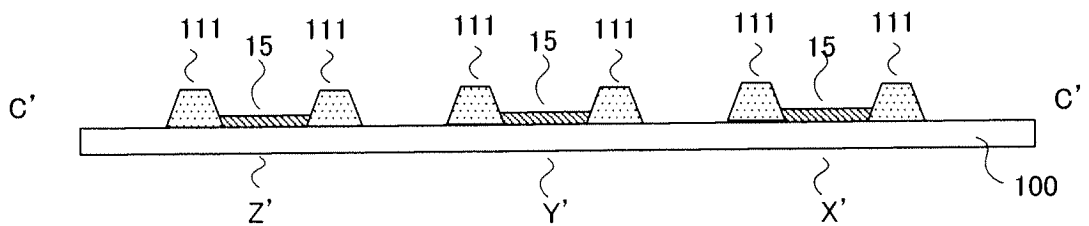


FIG.13-4

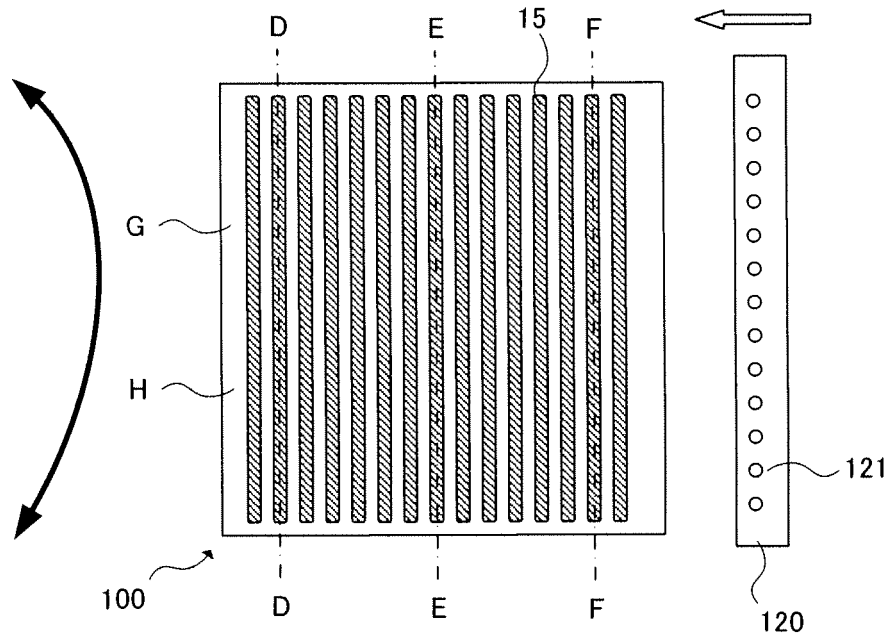


FIG. 14-1

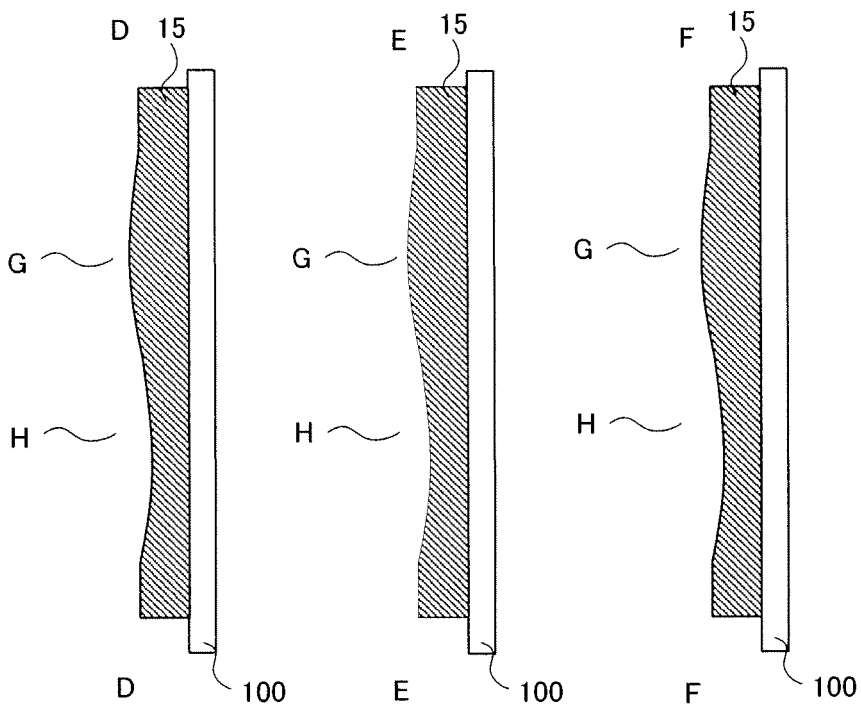


FIG. 14-2

FIG. 14-3

FIG. 14-4

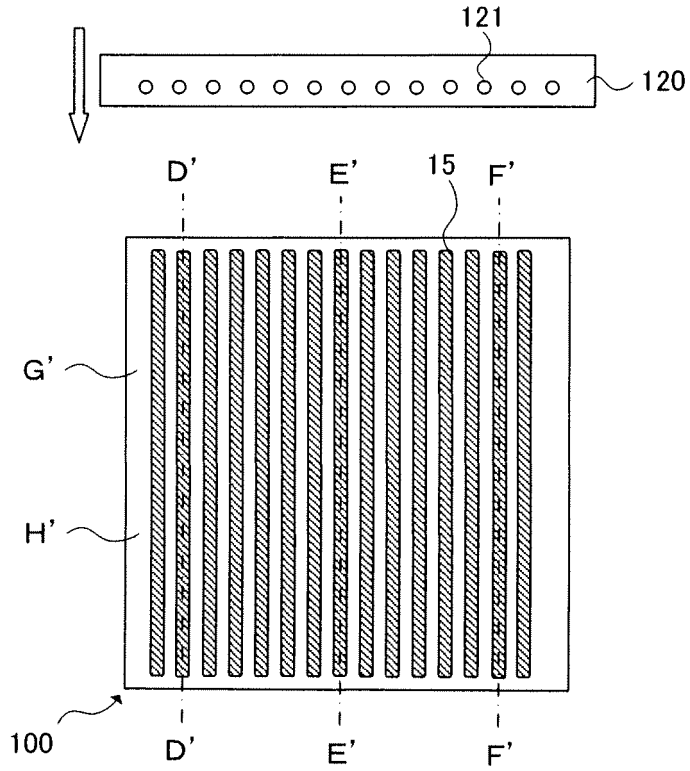


FIG. 15-1

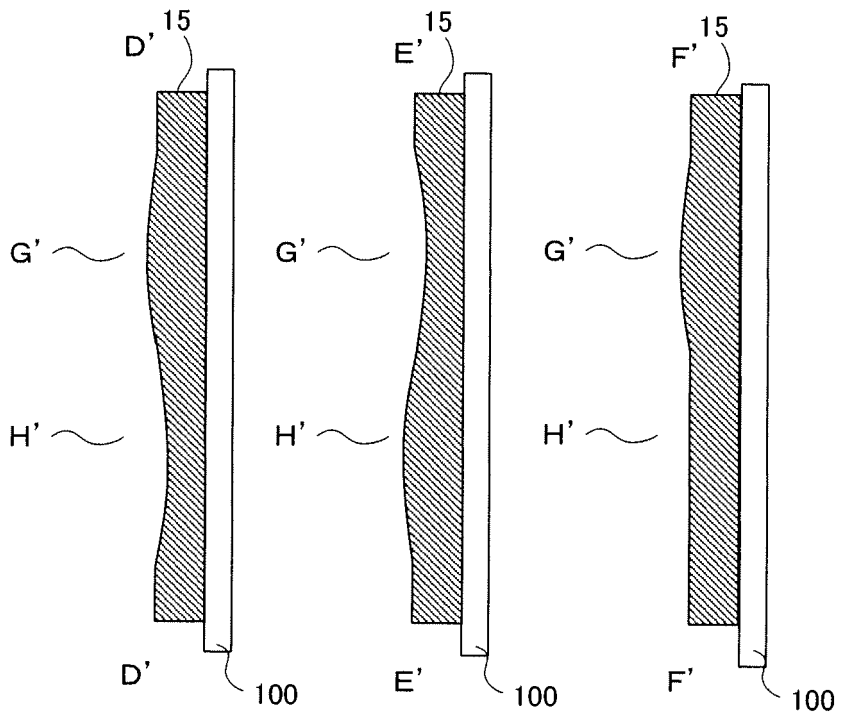


FIG. 15-2

FIG. 15-3

FIG. 15-4

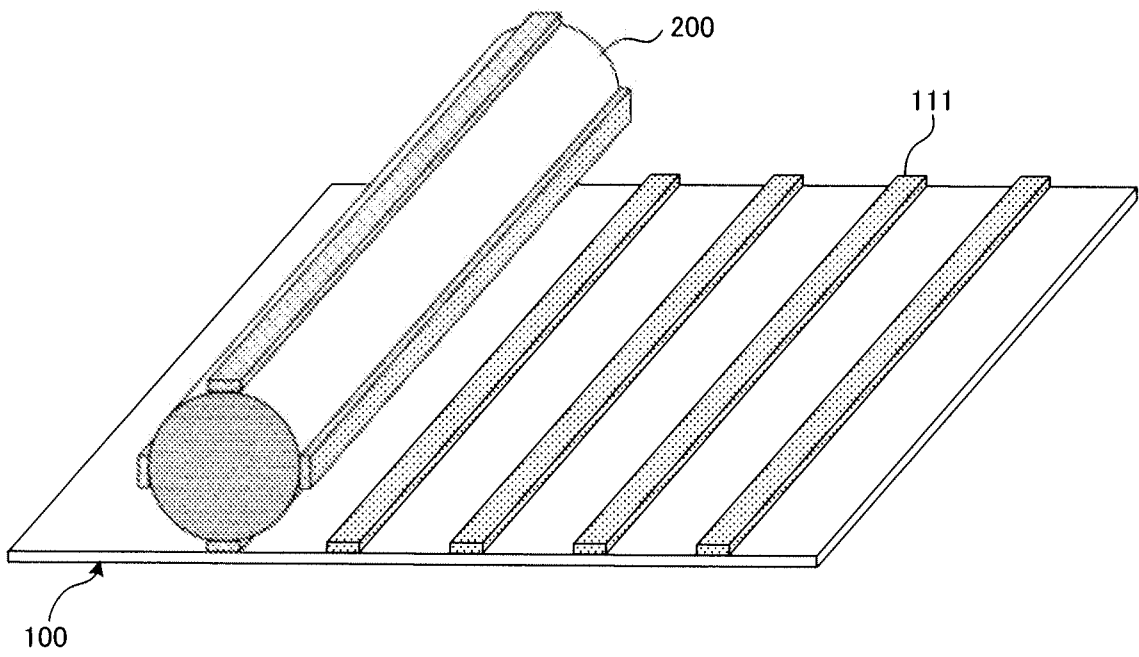


FIG.16

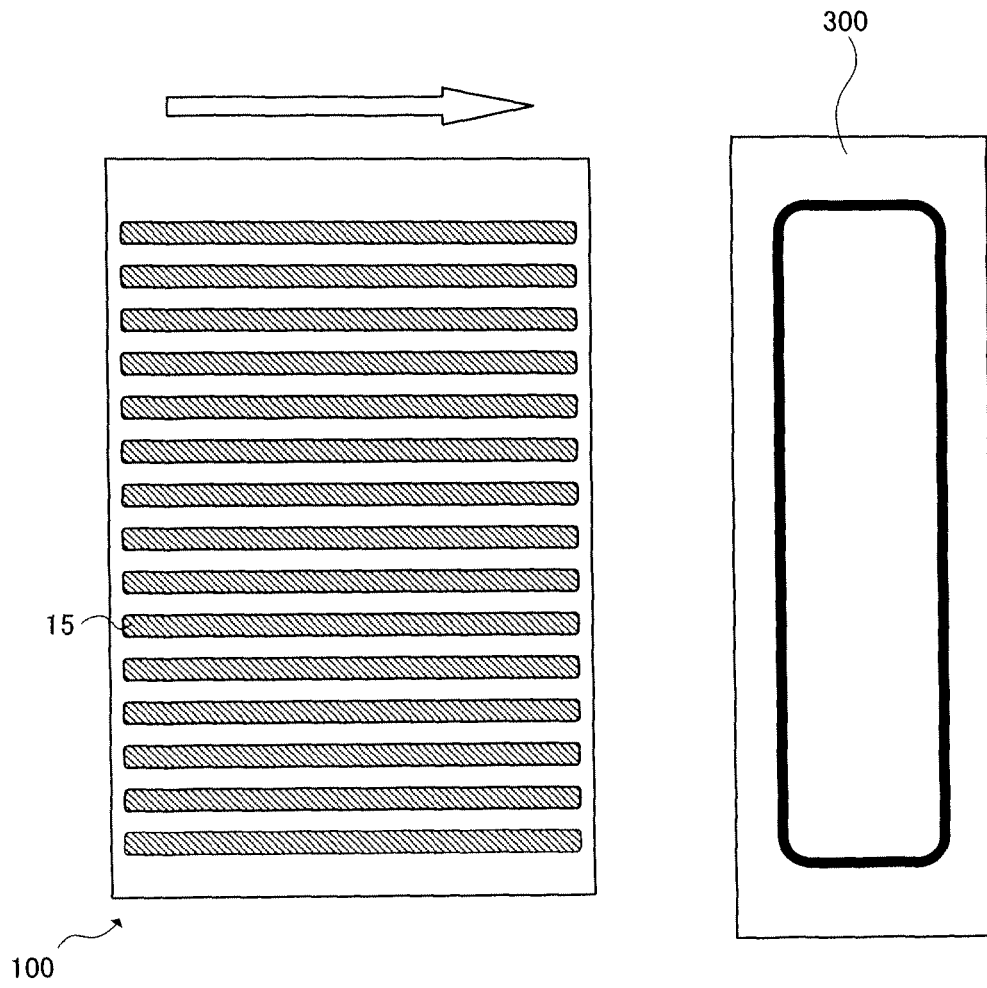


FIG.17

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2007296758 A1 [0008]
- US 2004140759 A1 [0009]
- US 2005008769 A1 [0010]
- JP 2004362818 A [0011]
- JP 2003266669 A [0011]
- US 7091660 B [0011]
- JP 2008015309 A [0011]
- US 20080113282 A [0011]
- JP 2008108570 A [0011]
- JP 2007080545 A [0011]

专利名称(译)	制造有机电致发光显示器的方法		
公开(公告)号	EP2296442B1	公开(公告)日	2016-08-31
申请号	EP2009754421	申请日	2009-05-25
[标]申请(专利权)人(译)	松下电器产业株式会社		
申请(专利权)人(译)	松下电器产业株式会社		
当前申请(专利权)人(译)	PANASONIC知识产权管理有限公司, LT		
[标]发明人	HAYATA HIROSHI SUZUKI NAOKI KANATA YOSHIO		
发明人	HAYATA, HIROSHI SUZUKI, NAOKI KANATA, YOSHIO		
IPC分类号	H05B33/10 G09F9/30 H01L27/32 H01L51/50 H05B33/12 H05B33/22		
CPC分类号	H01L51/0005 H01L27/3211 H01L27/3246 H01L51/56		
优先权	2008141291 2008-05-29 JP		
其他公开文献	EP2296442A4 EP2296442A1		
外部链接	Espacenet		

摘要(译)

本发明提供了一种抑制有机EL显示器中发光条纹的方法，该有机EL显示器具有通过喷墨方法涂覆形成的有机发光层。本发明的有机EL显示器的制造方法包括：准备具有两个或更多个彼此平行的线性堤的显示基板，以及布置在线性堤之间的区域中的两个或更多个像素区域；布置喷嘴头使得喷嘴的排列方向和线性排的线方向平行；并且在垂直于线性排的线方向的方向上相对移动喷嘴头并从喷嘴排出墨水以将墨水施加到由线性排限定的每个区域。

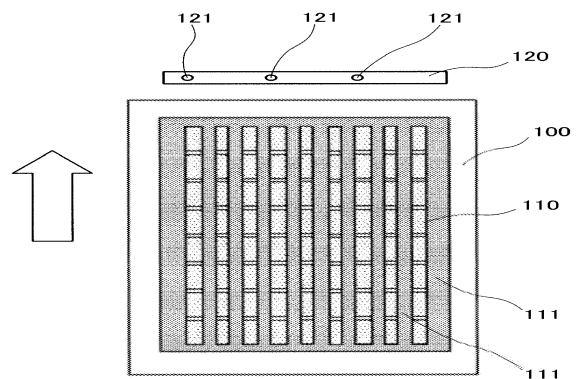


FIG. 1