

Description

TECHNICAL FIELD

[0001] At least one embodiment of the present invention relates to an organic electroluminescent display panel, its manufacturing method and a display device.

BACKGROUND

[0002] Currently, organic electroluminescent display (OLED) panels are becoming dominant in the display field due to characteristics such as low power consumption, high color saturation, wide angle of view, slim thickness, no requirement for light source, flexible, and so on.

[0003] The basic structure of an OLED includes a base substrate, and an anode, a light emitting layer and a cathode subsequently provided on the base substrate. Its principle for emitting light is that, when a voltage is applied across the anode and the cathode to provide a current, electrons from the cathode are recombined with holes from the anode at the light emitting layer to form excitons, so that the organic material in the light emitting layer is excited to emit light. The light emitting layer can be made by an inkjet printing technology, and generally, before preparing the light emitting layer, a pixel definition layer can be made on the base substrate on which the anode has been formed, to define the position for the pixel area, after that, the light emitting layer is formed in an opening region corresponding to the pixel area in the pixel definition layer, and finally, a film layer for the cathode is made on the light emitting layer

SUMMARY

[0004] At least one embodiment of the present invention provides an organic electroluminescent display panel, its manufacturing method and a display device, by which the film layer formed after the pixel definition layer has good uniformity, and thus the light emitting performance of the OLED is improved.

[0005] At least one embodiment of the present invention provides an organic electroluminescent display panel comprising a base substrate and a pixel definition layer located on the base substrate; the pixel definition layer has opening regions corresponding to pixel areas of the organic electroluminescent display panel, and each of the opening regions has an opening larger than a bottom surface of the opening region; the pixel definition layer has an upper surface formed from a hydrophobic material, and an inclination surface of the pixel definition layer corresponding to each of the opening regions is formed from a hydrophilic material.

[0006] At least one embodiment of the present invention further provides a manufacturing method for the organic electroluminescent display panel provided by the above embodiment of the present invention, the manufacturing method includes forming a pixel definition layer

on a base substrate so that the pixel definition layer has opening regions corresponding to pixel areas in the organic electroluminescent display panel, wherein each of the opening regions has an opening larger than a bottom surface of the opening region, the pixel definition layer has an upper surface formed from a hydrophobic material, and an inclination surface of the pixel definition layer corresponding to each of the opening regions is formed from a hydrophilic material.

[0007] At least one embodiment of the present invention further provides a display device including the organic electroluminescent display panel provided by the embodiments of the present invention.

DESCRIPTION OF THE DRAWINGS

[0008] In order to clearly illustrate the technical solution of the embodiments of the invention, the drawings of the embodiments will be briefly described in the following; it is obvious that the described drawings are only related to some embodiments of the invention and thus are not limitative of the invention.

FIG. 1a and FIG. 1b are schematic structure views showing the organic electroluminescent display panel having a pixel definition layer, respectively; FIG. 2a is a top view showing the organic electroluminescent display panel provided by an embodiment of the present invention; FIG. 2b is a schematic cross-sectional view of FIG. 2a taken along a direction A-A'; FIG. 3 is a flowchart view showing a manufacturing method for the organic electroluminescent display panel, provided by an embodiment of the present invention; FIG. 4 is a flowchart view showing a manufacturing method for the organic electroluminescent display panel, provided by a first embodiment of the present invention; FIG. 5 is a flowchart view showing a manufacturing method for the organic electroluminescent display panel, provided by a second embodiment of the present invention; FIG. 6a to FIG. 6d are schematic views showing the structure of the organic electroluminescent display panel after each of steps of its manufacturing method according to the first embodiment of the present invention is performed, respectively; and FIG. 7a to FIG. 7b are schematic views showing the structure of the organic electroluminescent display panel after each of steps of its manufacturing method according to the second embodiment of the present invention is performed, respectively.

DETAILED DESCRIPTION

[0009] In order to prepare objects, technical details and advantages of the embodiments of the invention appar-

ent, the technical solutions of the embodiments will be described in a clearly and fully understandable way in connection with the drawings related to the embodiments of the invention. Apparently, the described embodiments are just a part but not all of the embodiments of the invention. Based on the described embodiments herein, those skilled in the art can obtain other embodiment(s), without any inventive work, which should be within the scope of the invention.

[0010] Currently, the pixel definition layer in an OLED has mainly two kinds of structures. One structure involves a pixel definition layer having a regular trapezoidal cross-section with an upper bottom side being smaller than a lower bottom side, as shown in FIG. 1a (only partly shown in FIG. 1a). Generally, after the pixel definition layer 10 has a regular trapezoidal cross-section is made, in order to avoid color blending between adjacent pixel areas, it is necessary to subject the surface of the pixel definition layer to hydrophobic treatment to have hydrophobic property. In this way, although the color blending problem can be avoided, the inventors of the present application have noted that, there may be unevenly spreading problem when preparing the light emitting layer 20 in the opening regions of the pixel definition layer subsequently, resulting in minute gaps in the light emitting layer 20, thus short circuit at the minute gaps would be easily incurred between the subsequently formed cathode 40 and the anode 50 located below the light emitting layer. Another structure involves a pixel definition layer having an inverted trapezoidal cross-section with an upper bottom side being larger than a lower bottom side, as shown in FIG. 1b (only partly shown in FIG. 1b). Although the pixel definition layer 60 in an inverted trapezoidal shape can avoid short circuit between the cathode 70 and the anode 80, the inventors of the present application have noted that the pixel definition layer 60 in an inverted trapezoidal shape causes the subsequently formed cathode 70 to be broken easily.

[0011] Therefore, the above structures of the pixel definition layer will influence the uniformity of the film layer formed subsequently, and thus influence the light emitting performance of the OLED.

[0012] Hereinafter, the specific embodiments of the organic electroluminescent display panel, its manufacturing method and the display device provided by the examples of the present invention will be described in detail, in connection with the attached drawings.

[0013] The thickness and shape of the film layers in the attached drawings are not intended to reflect the real scale of the organic electroluminescent display panel, and are used to schematically illustrate the content of the embodiments of the present invention.

[0014] At least one embodiment of the present invention provides an organic electroluminescent display panel, as shown in FIG. 2a and FIG. 2b, the organic electroluminescent display panel includes a base substrate 100 and a pixel definition layer 200 located on the base substrate 100. The pixel definition layer 200 includes opening

regions 300 corresponding to pixel areas of the organic electroluminescent display panel, and the opening of each of the opening regions 300 is larger than the bottom surface of the opening region. For example, for each of the opening regions 300, the opening in its cross-section perpendicular to the base substrate is larger than its bottom side, and the width of the cross-section is firstly increased and then decreased from the opening to the bottom side, can be considered as an inverted trapezoidal structure, that is, the cross-section of the pixel definition layer 200 perpendicular to the base substrate 100 has an upper bottom side smaller than a lower bottom side, and the width of the cross-section is firstly decreased and then increased from the upper bottom side to the lower bottom side, and can be considered as a regular trapezoidal structure. Alternatively, for example, the opening of the opening region 300 in the cross-section perpendicular to the base substrate is larger than its bottom side, and the cross-section is gradually decreased from the opening to the bottom side, is in an inverted trapezoidal structure, that is, the cross-section of the pixel definition layer 200 perpendicular to the base substrate 100 has an upper bottom side smaller than a lower bottom side, and the width of the cross-section is gradually increased from the upper bottom side to the lower bottom side, and is in a regular trapezoidal structure. An upper surface a of the pixel definition layer 200 is formed from a hydrophobic material, and an inclination surface b of the pixel definition layer 200 corresponding to the opening region 300 is formed from a hydrophilic material.

[0015] In the above organic electroluminescent display panel provided by an embodiment of the present invention, the pixel definition layer provided therein has opening regions corresponding to pixel areas of the organic electroluminescent display panel, and for each of the opening region, the opening is larger than the bottom surface thereof, thus, the breakage problem occurred in the subsequently formed pattern of the cathode can be avoided. By using the hydrophobic material in the upper surface of the pixel definition layer, the subsequently coated light emitting material will not easily residued on the upper surface of the pixel definition layer, and therefore, the color blening problem between the adjacent pixel areas can be avoided. Meantime, by using a hydrophilic material in the inclination surface of the pixel definition layer corresponding to the opening regions, it can be guaranteed that the subsequently coated light emitting material can be uniformly filled into the opening regions, minute gaps occurred due to unevenly spreading of the light emitting material can be avoided, and thus the short circuit problem between the anode and the cathode can be avoided, and therefore the above organic electroluminescent display panel provided by the embodiment of the present invention can guarantee the uniformity of the film layers formed after the pixel definition layer, and the light emitting performance of the organic electroluminescent display panel can be improved.

[0016] In practice, in the organic electroluminescent

display panel provided by an embodiment of the present invention, in order enable the pixel definition layer 200 to have the upper surface "a" that is formed from a hydrophobic material and the inclination surface "b" corresponding to the opening regions formed from a hydrophilic material, as shown in FIG. 2b, in one embodiment, the structure of the pixel definition layer 200 may include a first pixel definition layer structure 210 formed by the hydrophobic material, and a second pixel definition layer structure 220 formed by the hydrophilic material, and a side surface of the second pixel definition layer structure is adhered to a side surface of the first pixel definition layer structure. Thus, the pixel definition layer 200 formed by the first pixel definition layer structure 210 and the second pixel definition layer structure 220 can have the hydrophobic characteristic on the upper surface "a," by which the subsequently coated light emitting material cannot be easily left on the upper surface "a," and the color blending problem between the adjacent pixel areas can be avoided. Meantime, the inclination surface "b" of the pixel definition layer 200 has a hydrophilic characteristic, by which it is guaranteed that the subsequently coated light emitting material can be evenly filled in the opening regions 300, and the minute gaps occurred due to unevenly spreading of the light emitting material cannot be caused.

[0017] In practice, in at least one example of the above organic electroluminescent display panel provided by the embodiment of the present invention, the first pixel definition layer structure 210 may adopt an inverted trapezoidal structure in cross-section perpendicular to the base substrate 100; in at least one example, the second pixel definition layer structure 220 may adopt a triangular structure in cross-section perpendicular to the base substrate 100. When preparing the pixel definition layer 200, in at least one embodiment, the material for the first pixel definition layer structure 210 may employ a hydrophobic material with negative photoresist characteristics, so as to prepare the first pixel definition layer structure 210 having the cross-section in an inverted trapezoidal structure. Because the material with negative photoresist characteristics will form a material insoluble in developing liquid after exposure while the unexposed material will be soluble in the developing liquid, a pattern of the first pixel definition layer structure can be formed. Also because as the thickness of the negative photoresist is increased, the closer the photoresist material approaches the base substrate, the less the light intensity received by the photoresist material. In at least one embodiment, the material for the second pixel definition structure 220 can employ a hydrophilic material with positive photoresist characteristics, to prepare the second pixel definition layer structure 220 having the cross-section in a triangular structure. The positive photoresist material is insoluble in the developing liquid by itself, after being irradiated, forms a material soluble in the developing liquid, and thus the structure having the cross-section in a triangular structure can be easily formed.

[0018] In practice, in the above organic electroluminescent display panel provided by the embodiment of the present invention, in order to prevent the second pixel definition layer structure made from the hydrophilic material from influencing the hydrophobic characteristics of the upper surface of the pixel definition layer, in at least one example, the height of the second pixel definition layer structure in the cross-section perpendicular to the base substrate is set to be lower than the height of the first pixel definition layer structure in the cross-section perpendicular to the base substrate. In at least one example, the height of the first pixel definition layer structure in the cross-section perpendicular to the base substrate can be controlled to be from 0.1 μm to 100 μm , for example, the height of the first pixel definition layer structure in its cross-section perpendicular to the base substrate is controlled to be from 0.5 μm to 5 μm , if the height of the second pixel definition layer structure in the cross-section perpendicular to the base substrate is lower than the height of the first pixel definition layer structure in the cross-section perpendicular to the base substrate, the cross-section of the pixel definition layer perpendicular to the base substrate is in a structure like a regular trapezoidal. If the height of the second pixel definition layer structure in the cross-section perpendicular to the base substrate is equal to the height of the first pixel definition layer structure in the cross-section perpendicular to the base substrate, the cross-section of the pixel definition layer perpendicular to the base substrate is in a regular trapezoidal structure. Accordingly, if the cross-section of the pixel definition layer perpendicular to the base substrate is in a structure like a regular trapezoidal, the opening regions have a structure like an inverted trapezoidal in the cross-section perpendicular to the base substrate; and if the cross-section of the pixel definition layer perpendicular to the base substrate is in a regular trapezoidal structure, the opening regions have an inverted trapezoidal structure in the cross-section perpendicular to the base substrate.

[0019] In practice, the organic electroluminescent display panel provided by the embodiment of the present invention will usually include film layer structures, such as a light emitting layer, a cathode, an anode, and so on, and other structures such as thin film transistors, gate lines, data lines, or the like will generally also be formed on the base substrate, and these structures can be embodied by many methods, and will not be limited.

[0020] Base on the same invention concept, at least one embodiment of the present invention further provides a manufacturing method for the above organic electroluminescent display panel provided by any embodiment of the present invention, the manufacturing method includes forming a pixel definition layer on a base substrate so that the pixel definition layer has opening regions corresponding to pixel areas in the organic electroluminescent display panel, each of the opening regions has an opening larger than the bottom surface of the opening region, the upper surface of the pixel definition layer is

formed from a hydrophobic material, and the inclination surface of the pixel definition layer corresponding to the opening region is formed from a hydrophilic material. Because the principle of the present method for solving the problem in the known technology is similar to that in the organic electroluminescent display panel as described above, the implementation of the method can refer to the implementation of the above organic electroluminescent display panel, and repetitions will be omitted here.

[0021] In practice, as shown in FIG. 3, the manufacturing method for the organic electroluminescent display panel provided by the embodiment of the present invention, for example, may include the steps of:

S101, forming a pattern of the first pixel definition layer structure on the base substrate; and
S102, forming a pattern of the second pixel definition layer structure on the base substrate on which the first pixel definition layer structure has been formed.

[0022] In practice, in the manufacturing method for the above organic electroluminescent display panel provided by the embodiment of the present invention, the step S101 of forming a pattern of the first pixel definition layer structure on the base substrate, for example, may be achieved by firstly depositing a layer of a hydrophobic material with negative photoresist characteristics on the base substrate, and then subjecting the hydrophobic material with the negative photoresist characteristics to a patterning process by using a first mask plate to form the pattern of the first pixel definition layer structure.

[0023] In practice, because the first pixel definition structure is formed from the a hydrophobic material with negative photoresist characteristics, the first pixel definition layer structure can have its cross-section perpendicular to the base substrate to be of an inverted trapezoidal structure.

[0024] In practice, in the manufacturing method for the above organic electroluminescent display panel provided by the embodiment of the present invention, the step S102 of forming the pattern of the second pixel definition layer structure on the base substrate on which the first pixel definition layer structure has been formed, for example, can be achieved by firstly depositing a layer of a hydrophilic material with positive photoresist characteristics on the base substrate on which the first pixel definition layer structure has been formed, and then subjecting the hydrophilic material with positive photoresist characteristics to a patterning process by using the pattern of the first pixel definition layer structure as a mask plate, to form the pattern of the second pixel definition layer structure.

[0025] In practice, because the material of the second pixel definition layer structure employs the hydrophilic material with positive photoresist characteristics, the second pixel definition layer structure can have its cross-section perpendicular to the base substrate to be a triangular structure.

[0026] In practice, only one mask plate can be used during the manufacturing process of the first pixel definition layer structure and the second pixel definition layer structure (that is, the same mask plate is used when preparing the first pixel definition layer structure and the second pixel definition layer structure), and thus the number of the mask plate will not be increased compared with the manufacturing process for a pixel definition layer in single layer structure. Furthermore, because the materials respectively for forming the second pixel definition layer structure and the first pixel definition layer structure have opposite photosensitive characteristics, the pattern of the first pixel definition layer structure which is formerly formed can also be used as a mask plate during the manufacturing process of the second pixel definition layer structure, whereby the error occurred in alignment of the mask plate with the base substrate can be avoided, which otherwise would influence the accuracy for forming the patterns.

[0027] Hereinafter, with reference to two specific embodiments, the manufacturing method for the organic electroluminescent display panel provided by the embodiment of the present invention will be described in detail.

25 First Example

[0028] As shown in FIG. 4, the steps for manufacturing the organic electroluminescent display panel will be described as follows, as illustrated by step S201 to step S204:

S201, coating a layer of a hydrophobic material with negative photoresist characteristics on the base substrate 100, as shown in FIG. 6a;

S202, patterning the hydrophobic material with negative photoresist characteristics by means of exposure, development, and etching by using a first mask plate, to form the pattern of the first pixel definition layer structure 210. In this process, because the hydrophobic material has negative photoresist characteristics, it is insoluble in a development liquid after being exposed, while the unexposed material is soluble in the development liquid, thus the pattern of the first pixel definition layer structure can be formed. Also because as the thickness of the negative photoresist is increased, the closer the photoresist material approaches the base substrate, the less the light intensity the photoresist material can receive, the thus-formed pattern of the first pixel definition layer structure 210 can have its cross-section perpendicular to the base substrate to be an inverted trapezoidal structure, as shown in FIG. 6b.

S203, coating a layer of a hydrophilic material with positive photoresist characteristics on the base substrate 100, on which the first pixel definition layer structure 210 has been formed, by a thickness less than the height of the first pixel definition layer structure 210, that is, the hydrophilic material with positive

photoresist characteristics is only coated in the opening regions of the pixel definition layer, as shown in FIG. 6c.

S204, because the cross-section of the first pixel definition layer perpendicular to the base substrate is in an inverted trapezoidal structure with its opening larger than its bottom side, by using the pattern of the first pixel definition layer structure 210 as a mask plate, patterning the hydrophilic material with positive photoresist characteristics by means of exposure, development and etching, to form the pattern of the second pixel definition layer structure 220. Since the second pixel definition layer structure 220 is formed from the hydrophilic material with positive photoresist characteristics, at this time, the second pixel definition layer structure 220 has its cross-section perpendicular to the base substrate to be a triangular structure, as shown in FIG. 6d.

[0029] Up to now, by the above steps S201 to S204 provided in the first embodiment, the pixel definition layer of the above organic electroluminescent display panel provided by the embodiment of the present invention can be made.

Second Example

[0030] As shown in FIG. 5, the steps for manufacturing the pixel definition layer of the organic electroluminescent display panel will be described in detail below, as illustrated by steps S301 to S304.

[0031] The steps S301 and S302 are totally identical with the steps S201 and S202 in the first embodiment, thus will not be further described here.

[0032] S303, coating a layer of a hydrophilic material with positive photoresist characteristics on the base substrate 100 on which the first pixel definition layer structure 210 has been formed. In this process, the hydrophilic material fully covers the first pixel definition layer structure 210, that is, the upper surface of the first pixel definition layer structure 210 is also covered by the hydrophilic material, as shown in FIG. 7a.

[0033] S304, patterning the hydrophilic material with positive photoresist characteristics by means of exposure, development, and etching, to form the pattern of the second pixel definition layer structure 220. Upon etching, the hydrophilic material covering the upper surface of the first pixel definition layer structure 210 is etched off to expose the upper surface of the first pixel definition layer structure, and a portion of the hydrophilic material between the first pixel definition layer structures 210 is also etched off, as shown in FIG. 7b.

[0034] Up to now, by the above steps S301 to S304 provided in the second embodiment, the pixel definition layer of the above organic electroluminescent display panel provided by the embodiment of the present invention can be made.

[0035] In practice, the manufacturing method for the

organic electroluminescent display panel provided by the embodiments of the present invention may further include forming film layer structures, such as a light emitting layer, a cathode, an anode, and so on, on the base substrate, and other structures such as thin film transistors, gate lines, data lines, or the like can also be formed on the base substrate, and these specific structures can be embodied in many ways, and will not be limited here.

[0036] Based on the same invention concept, at least one embodiment of the present invention further provides a display device including any one of the above organic electroluminescent display panels as provided by the embodiments of the present invention. The display device can be a mobile phone, a tablet computer, a television, a display, a laptop computer, a digital photo frame, a navigator, and any other product or component having display function. Other component essential to the display device can be conceived by the person skilled in the art, will not be further described and also will not be regarded as limitation on the present invention. The implementation of the display device can be made with reference to the embodiments of the above organic electroluminescent display panel, and the repetition will be omitted here.

[0037] With the organic electroluminescent display panel, its manufacturing method and the display device provided by the embodiments of the present invention, the pixel definition layer provided in the organic electroluminescent display panel has opening regions corresponding to the pixel areas of the organic electroluminescent display panel, and each of the opening regions has an opening larger than a bottom surface of the opening region, that is, the cross-section of the pixel definition layer perpendicular to the base substrate is of a regular trapezoidal structure or a structure like a regular trapezoidal, thus the breakage problem occurred in the subsequently formed pattern of the cathode can be avoided. By forming the upper surface of the pixel definition layer from a hydrophobic material, the subsequently coated light emitting material is not easily left on the upper surface of the pixel definition layer, and thus the color blending problem between the adjacent pixel areas can be avoided. At the same time, the inclination surface of the pixel definition layer corresponding to the opening regions is formed from a hydrophilic material, whereby it can be guaranteed that the subsequently coated light emitting material can be evenly filled in the opening regions, and the minute gaps occurred due to unevenly spreading of the light emitting material would not be caused. Therefore, with the above organic electroluminescent display panel provided by the embodiments of the present invention, the uniformity of the film layers formed after the pixel definition layer can be guaranteed, and the light emitting performance of the organic electroluminescent display panel can be improved.

[0038] The present disclosure has been described above by way of the exemplary embodiment, and the protection scope of the present disclosure would not be

limited therein, and is only defined by the following claims.

[0039] The present application claims the priority of Chinese Patent Application No. 201410389844.X filed on August 8, 2014, the Chinese Patent Application is entirely incorporated therein as a part of the present application by reference.

Claims

1. An organic electroluminescent display panel, comprising a base substrate and a pixel definition layer located on the base substrate, wherein:

the pixel definition layer has opening regions corresponding to pixel areas of the organic electroluminescent display panel, and each of the opening regions has an opening larger than a bottom surface of the opening region; an upper surface of the pixel definition layer is formed from a hydrophobic material, and an inclination surface of the pixel definition layer corresponding to each of the opening regions is formed from a hydrophilic material.

2. The organic electroluminescent display panel according to claim 1, wherein the pixel definition layer includes a first pixel definition layer structure formed from the hydrophobic material and a second pixel definition layer structure formed from the hydrophilic material, and a side surface of the second pixel definition layer structure is adhered with a side surface of the first pixel definition layer structure.

3. The organic electroluminescent display panel according to claim 2, wherein the first pixel definition layer structure has a cross-section perpendicular to the base substrate in an inverted trapezoidal structure.

4. The organic electroluminescent display panel according to claim 2 or 3, wherein the second pixel definition layer structure has a cross-section perpendicular to the base substrate in a triangular structure.

5. The organic electroluminescent display panel according to any one of claims 2-4, wherein a height of the second pixel definition layer structure in its cross-section perpendicular to the base substrate is lower than a height of the first pixel definition layer structure in its cross-section perpendicular to the base substrate.

6. The organic electroluminescent display panel according to any one of claims 2-5, wherein a material for the first definition layer structure is a hydrophobic material with negative photoresist characteristics.

7. The organic electroluminescent display panel according to any one of claims 2 - 6, wherein a material for the second pixel definition layer structure is a hydrophilic material with positive photoresist characteristics.

8. A manufacturing method for the organic electroluminescent display panel according to any one of claims 1-7, including steps of:

forming the pixel definition layer on the base substrate, wherein the pixel definition layer has opening regions corresponding to pixel areas of the organic electroluminescent display panel, and each of the opening regions has an opening larger than a bottom surface of the opening region; and an upper surface of the pixel definition layer is formed from a hydrophobic material, and an inclination surface of the pixel definition layer corresponding to each of the opening regions is formed from a hydrophilic material.

9. The manufacturing method according to claim 8, wherein forming of the pixel definition layer on the base substrate includes:

forming a pattern of the first pixel definition layer structure on the base substrate; and forming a pattern of the second pixel definition layer structure on the base substrate on which the first pixel definition layer structure has been formed.

10. The manufacturing method according to claim 9, wherein:

a layer of the hydrophobic material with negative photoresist characteristics is deposited on the base substrate; the hydrophobic material with negative photoresist characteristics is subjected to a patterning process by a first mask plate to form the pattern of the first pixel definition layer structure.

11. The manufacturing method according to claim 9 or 10, wherein:

a layer of the hydrophilic material with positive photoresist characteristics is deposited on the base substrate on which the first pixel definition layer structure has been formed; the hydrophilic material with positive photoresist characteristics is subjected to a patterning process by using the pattern of the first pixel definition layer structure as a mask plate or by using the mask plate used in forming the first pixel definition layer structure, to form the pattern of the second pixel definition layer structure.

12. The manufacturing method according to claim 11, wherein upon depositing the hydrophilic material, a thickness by which the hydrophilic material is coated is less than a height of the first pixel definition layer structure. 5

13. The manufacturing method according to claim 11, wherein, in depositing the hydrophilic material, the hydrophilic material is caused to fully cover the first pixel definition layer structure, and in forming the pattern of the second pixel definition layer structure, the hydrophilic material covering the top of the first pixel definition layer structure is etched off to expose the upper surface of the first pixel definition layer structure. 10 15

14. A display device comprising the organic electroluminescent display panel according to any one of claims 1-7. 20

25

30

35

40

45

50

55

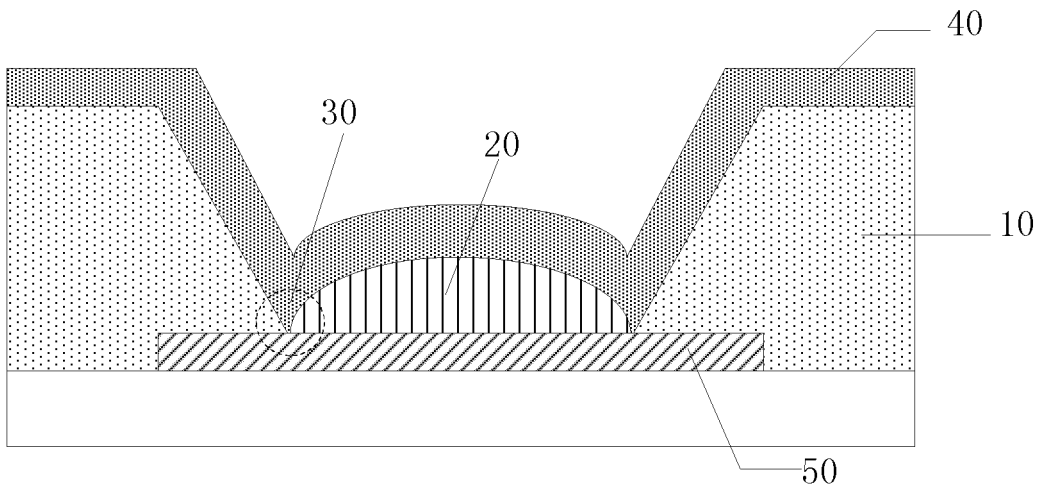


FIG.1a

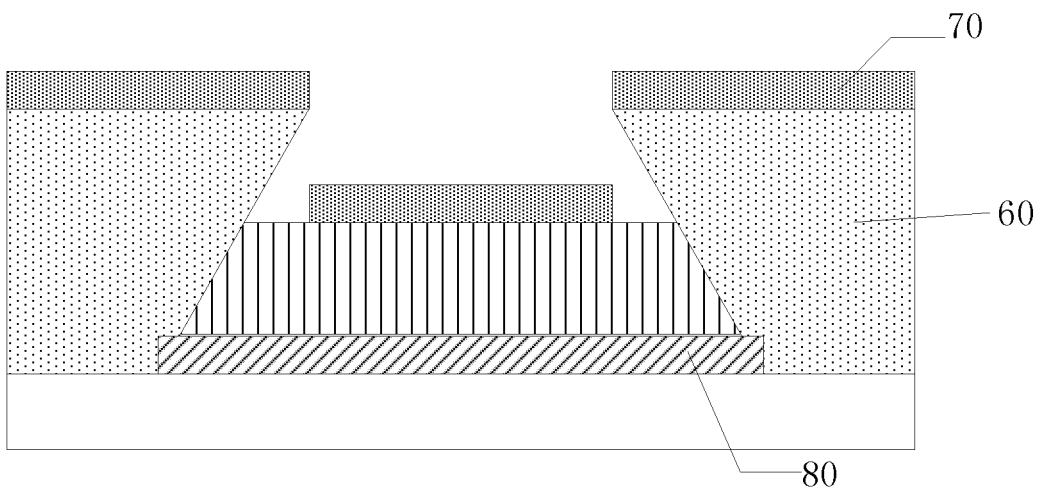


FIG.1b

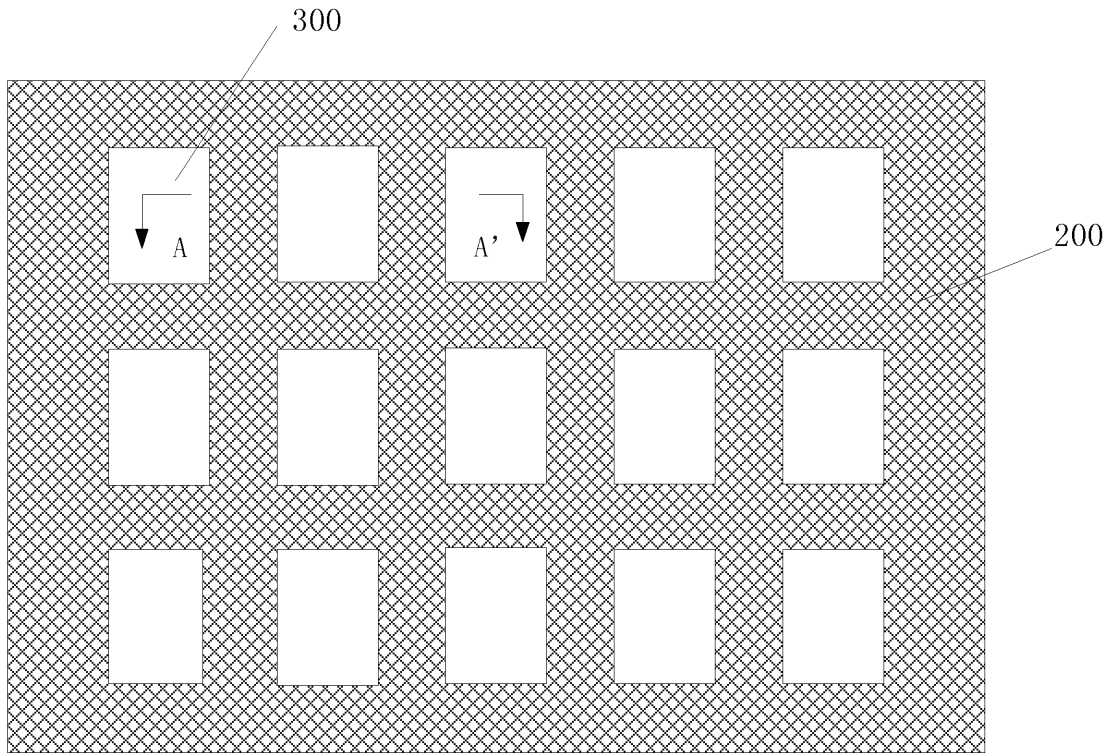


FIG. 2a

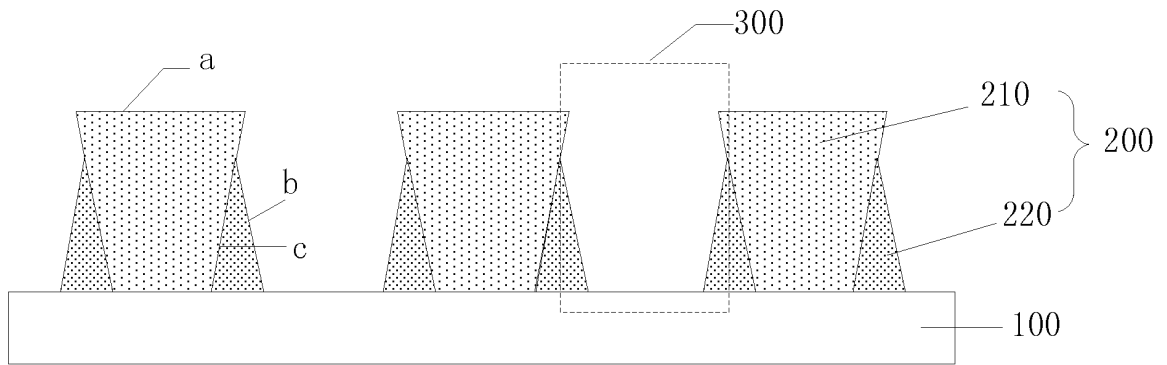


FIG. 2b

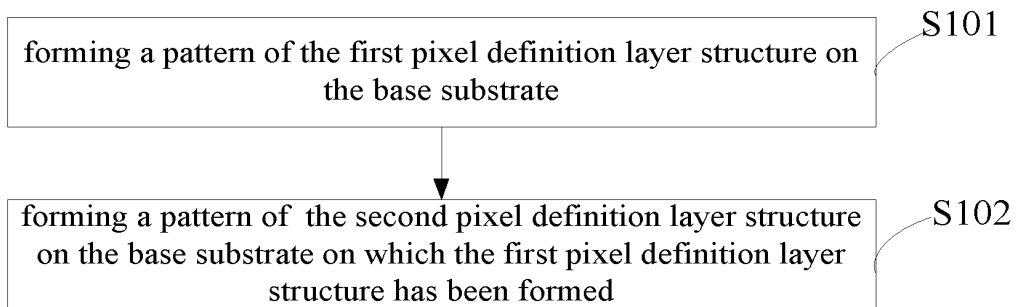


FIG. 3

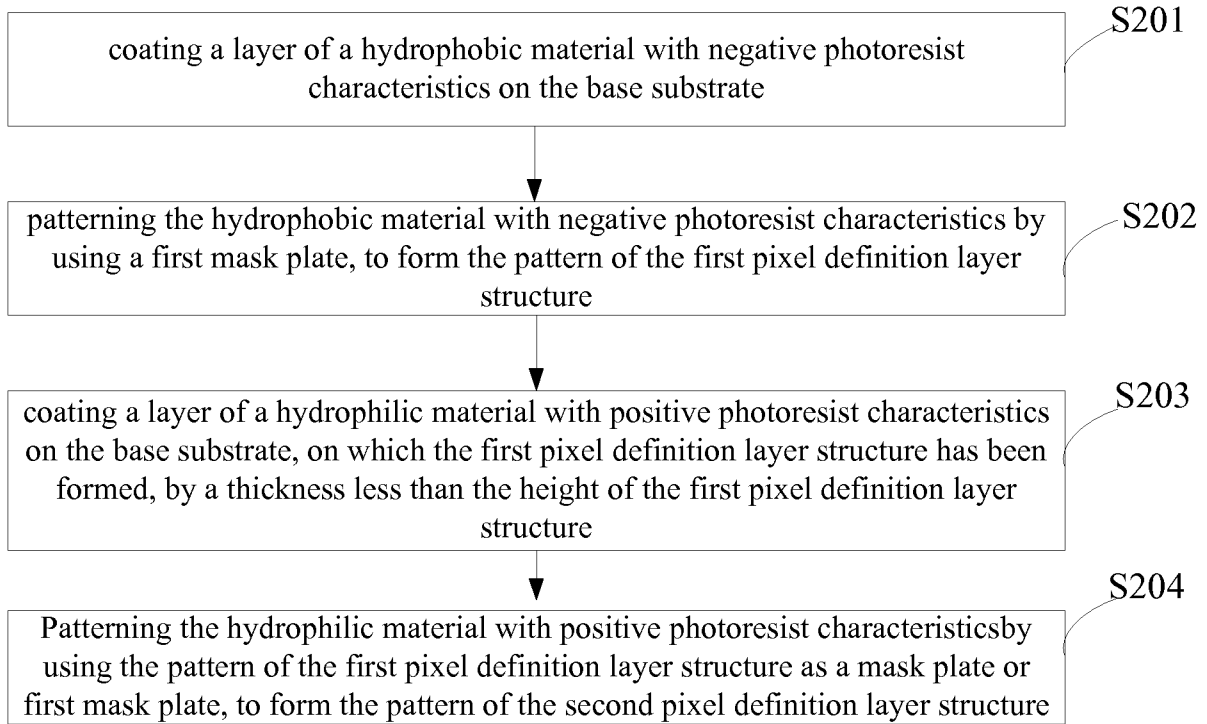


FIG.4

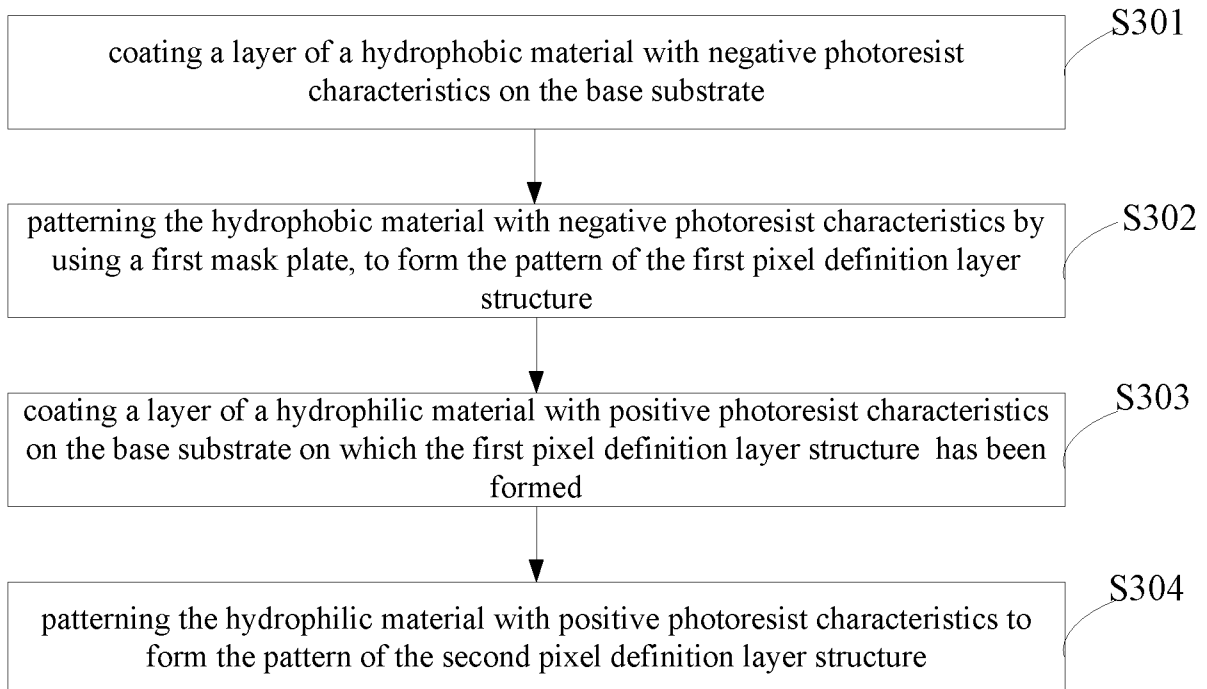


FIG.5

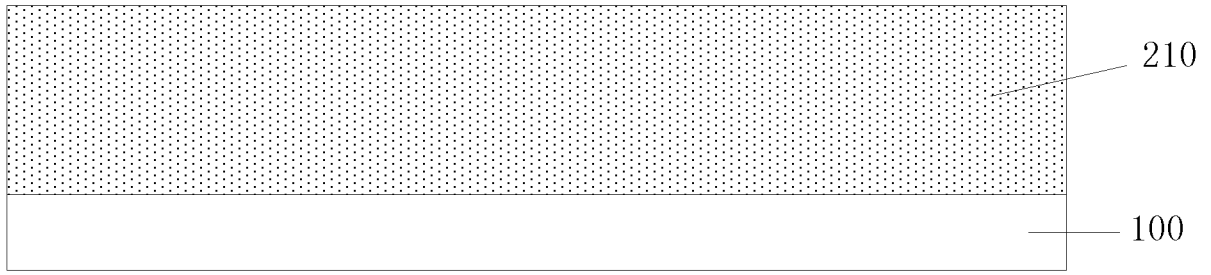


FIG. 6a

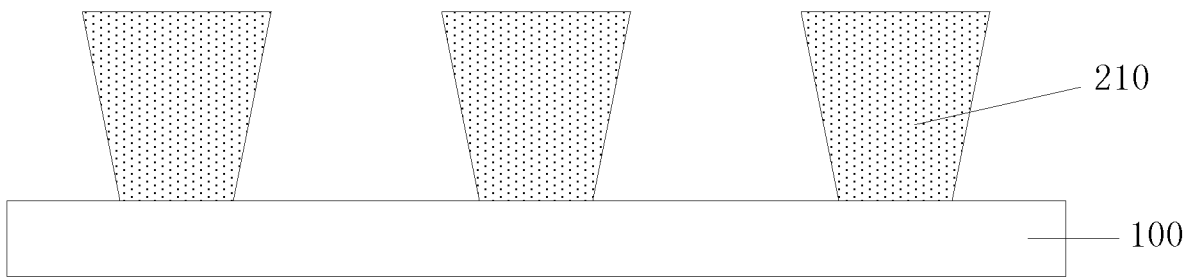


FIG. 6b

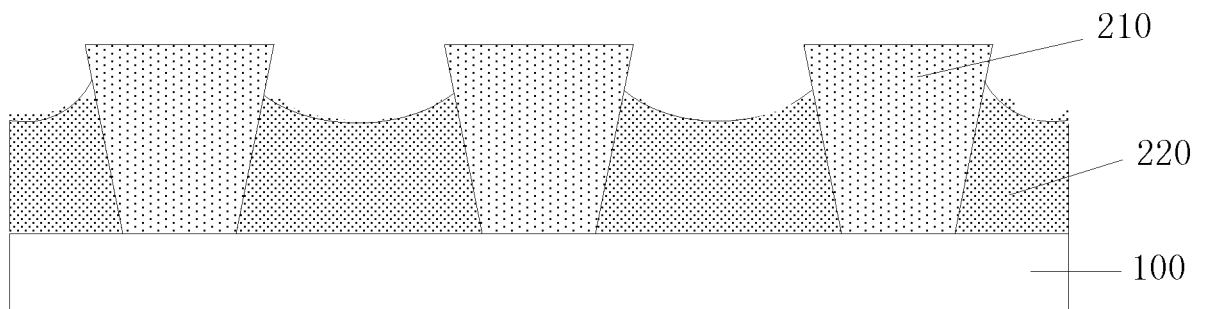


FIG. 6c

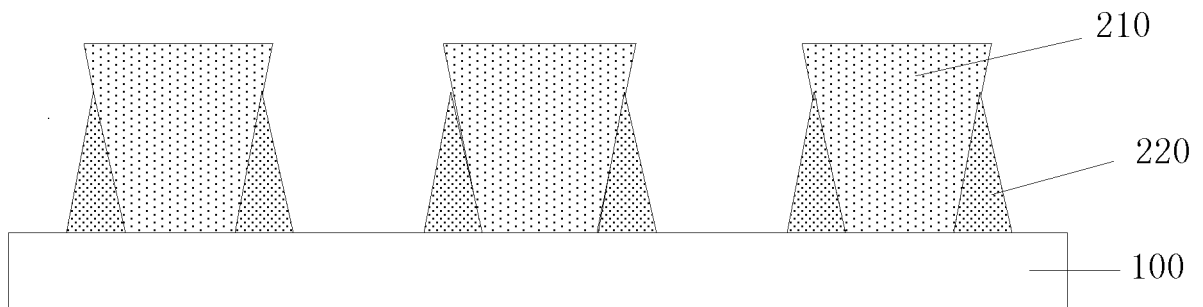


FIG. 6d

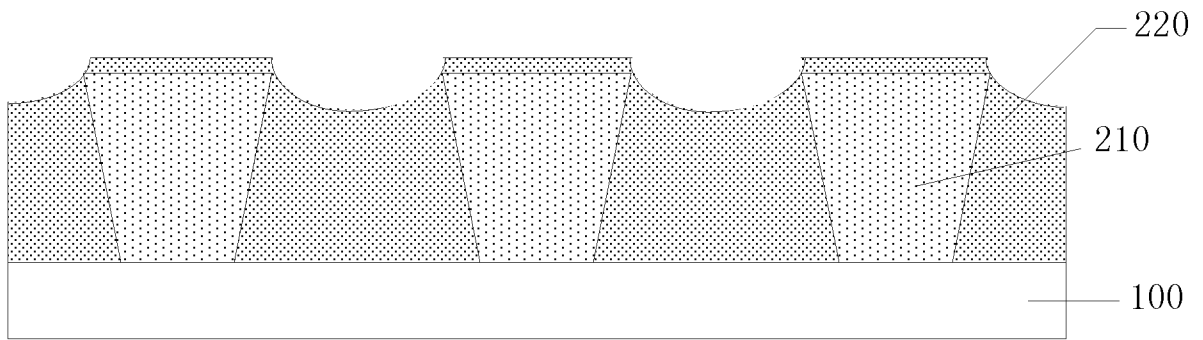


FIG.7a

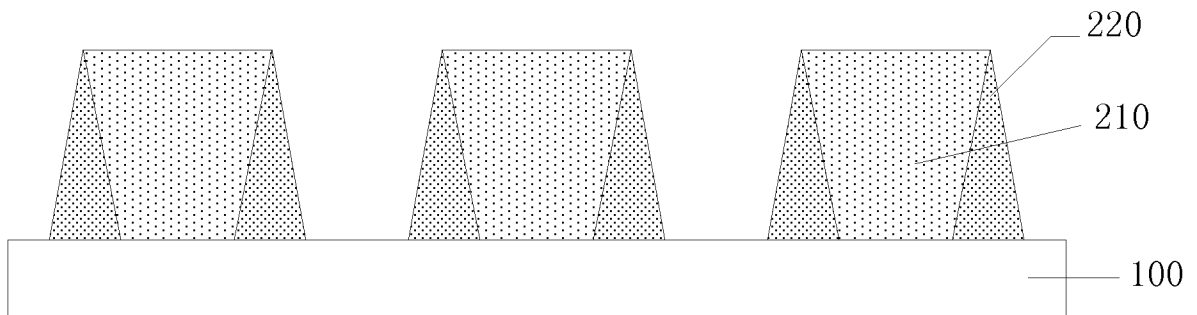


FIG.7b

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2014/090290

A. CLASSIFICATION OF SUBJECT MATTER

H01L 27/32 (2006.01) i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01L 27/-

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNPAT, CNKI, WPI, EPODOC: BOE; SONG, Yingying; HONG, Xiaowen; HONG, Haozhi; OLED, EL, organic light emitting, trapezoid, phobic, philic, Organic w electroluminescent, display, pixel w defin +, laver, open+, lyophobic, lyophilic, hydrophilic, hydrophobic

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN 101399283 A (SEIKO EPSON CORPORATION), 01 April 2009 (01.04.2009), the whole document	the whole document
A	CN 103839964 A (LG DISPLAY CO., LTD.), 04 June 2014 (04.06.2014), the whole document	the whole document
A	CN 1622706 A (SEIKO EPSON CORPORATION), 01 June 2005 (01.06.2005), the whole document	the whole document
A	CN 103413819 A (BOE TECHNOLOGY GROUP CO., LTD.), 27 November 2013 (27.11.2013), the whole document	the whole document
A	CN 203205422 U (BOE TECHNOLOGY GROUP CO., LTD.), 18 September 2013 (18.09.2013), the whole document	the whole document
A	JP 2008-243406 A (SEIKO EPSON CORP.), 09 October 2008 (09.10.2008), the whole document	the whole document

 Further documents are listed in the continuation of Box C.
 See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier application or patent but published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 13 April 2015 (13.04.2015)	Date of mailing of the international search report 04 May 2015 (04.05.2015)
Name and mailing address of the ISA/CN: State Intellectual Property Office of the P. R. China No. 6, Xitucheng Road, Jimenqiao Haidian District, Beijing 100088, China Facsimile No.: (86-10) 62019451	Authorized officer WANG, Jianliang Telephone No.: (86-10) 62413501

Form PCT/ISA/210 (second sheet) (July 2009)

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2014/090290

Patent Documents referred in the Report	Publication Date	Patent Family	Publication Date		
CN 101399283 A	01 April 2009	KR 100690526 B1	09 March 2007		
		TW 1257825 B	01 July 2006		
		US 2008030119 A1	07 February 2008		
		US 7795809 B2	14 September 2010		
		US 2005112341 A1	26 May 2005		
		CN 100448329 C	31 December 2008		
		JP 3915806 B2	16 May 2007		
		KR 20050045824 A	17 May 2005		
		US 7294856 B2	13 November 2007		
		CN 1617639 A	18 May 2005		
CN 103839964 A	04 June 2014	CN 101399283 B	30 March 2011		
		JP 2005174906 A	30 June 2005		
		JP 2005174907 A	30 June 2005		
		JP 4556566 B2	06 October 2010		
		KR 20140064328 A	28 May 2014		
		US 2014139102 A1	22 May 2014		
		CN 1622706 A	01 June 2005	TW 200526075 A	01 August 2005
				KR 20050051550 A	01 June 2005
				US 7336030 B2	26 February 2008
				JP 4815761 B2	16 November 2011
KR 100692451 B1	09 March 2007				
US 2005116632 A1	02 June 2005				
JP 2005326799 A	24 November 2005				
TW 1257824 B	01 July 2006				
JP 2011029195 A	10 February 2011				
JP 5088709 B2	05 December 2012				
CN 103413819 A	27 November 2013	WO 2015010424 A1	29 January 2015		
CN 203205422 U	18 September 2013	None			
JP 2008-243406 A	09 October 2008	None			

Form PCT/ISA/210 (patent family annex) (July 2009)

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- CN 201410389844 X [0039]

专利名称(译)	有机电致发光显示面板及其制造方法和显示装置		
公开(公告)号	EP3179513A1	公开(公告)日	2017-06-14
申请号	EP2014882128	申请日	2014-11-05
[标]申请(专利权)人(译)	京东方科技集团股份有限公司		
申请(专利权)人(译)	京东方科技集团股份有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司.		
[标]发明人	SONG YINGYING HUNG HSIAO WEN HUNG HAO CHIH		
发明人	SONG, YINGYING HUNG, HSIAO WEN HUNG, HAO CHIH		
IPC分类号	H01L27/32		
CPC分类号	H01L27/3246 H01L51/0005 H01L51/0012 H01L51/5012 H01L2227/323		
优先权	201410389844.X 2014-08-08 CN		
其他公开文献	EP3179513B1 EP3179513A4		
外部链接	Espacenet		

摘要(译)

公开了一种有机电致发光显示面板及其制造方法和显示装置。在有机电致发光显示面板中，设置在其中的像素限定层（200）具有与OLED中的像素区域对应的开口区域（300），并且每个开口区域（300）具有大于开口的底表面的开口。地区（300）。像素限定层（200）的上表面（a）由疏水材料形成，并且与每个开口区域（300）对应的像素限定层（200）的倾斜表面（b）由a形成。亲水材料。上述OLED可以确保在保障像素限定层（200）改善OLED的发光性能之后形成的膜层的均匀性。

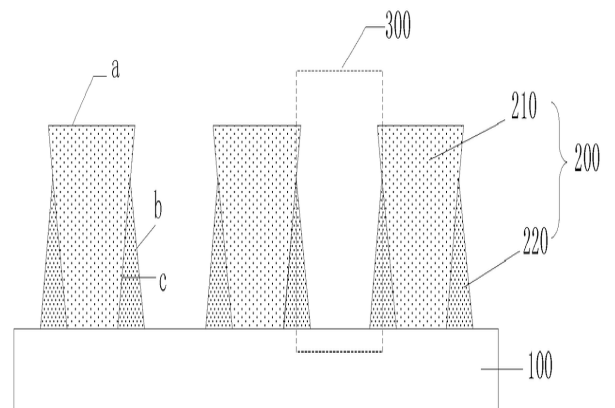


FIG.2b