



(51) International Patent Classification:
H01L 51/50 (2006.01)

(21) International Application Number:
PCT/CN2015/099126

(22) International Filing Date:
28 December 2015 (28.12.2015)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
201510222251.9 4 May 2015 (04.05.2015) CN

(71) Applicant: **BOE TECHNOLOGY GROUP CO., LTD.**
[CN/CN]; No. 10 Jiuxianqiao Rd., Chaoyang District,
Beijing 100015 (CN).

(72) Inventors: **WU, Chang Yen**; No. 9 Dize Rd., BDA,
Beijing 100176 (CN). **SHANG GUAN, Ronggang**; No. 9
Dize Rd., BDA, Beijing 100176 (CN). **WAN, Xiang**; No.
9 Dize Rd., BDA, Beijing 100176 (CN).

(74) Agent: **TEE & HOWE INTELLECTUAL PROPERTY
ATTORNEYS**; CHEN, Yuan, 10th Floor, Tower D, Min-
sheng Financial Center, 28 Jianguomennei Avenue,
Dongcheng District, Beijing 100005 (CN).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ORGANIC LIGHT EMITTING DIODE AND DISPLAY DEVICE THEREOF

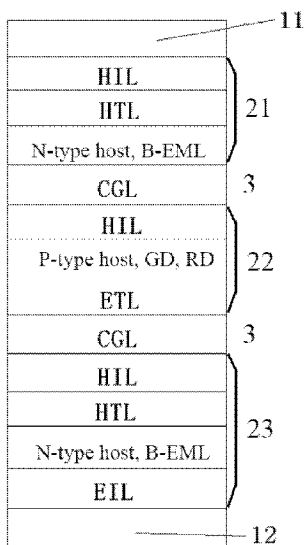


FIG. 1

(57) Abstract: An organic light emitting diode (OLED) is disclosed. The OLED comprises a cathode (12), an anode (11), a plurality of light emitting layers (21,22,23) connected in series between the cathode (12) and the anode (11), and a charge generation layer (3) between at least one pair of adjacent light emitting layers. At least one light emitting layer comprises a host layer having charge transport property.

ORGANIC LIGHT EMITTING DIODE AND DISPLAY DEVICE THEREOF

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application claims priority to Chinese Patent Application No. 201510222251.9, filed on May 4, 2015, the contents of which are incorporated by reference in the entirety.

FIELD

[0002] The present invention relates to organic electroluminescence technology, more particularly, to an organic light emitting diode and a display device thereof.

BACKGROUND

[0003] An organic light emitting diode (OLED) typically include a cathode and an anode, and light emitting units between the cathode and the anode. An OLED can be a single unit OLED or a tandem OLED. A single unit OLED has only one light emitting unit, which includes a hole injection layer (HIL), a hole transport layer (HTL), an emitting material layer (EML), an electron transport layer (ETL), and an electron injection layer (EIL). A tandem OLED has multiple light emitting units connected in series between the cathode and the anode.

SUMMARY

[0004] In one aspect, the present invention provides an organic light emitting diode comprising a cathode; an anode; a plurality of light emitting layers connected in series between the cathode and the anode; and a charge generation layer between at least one pair of adjacent light emitting layers. At least one light emitting layer comprises a host layer having charge transport property.

[0005] Optionally, the charge generation layer is adjacent to a hole injection layer of a neighboring light emitting layer.

[0006] Optionally, a majority of the host has a charge mobility rate larger than $10^{-4} \text{ cm}^2 / \text{Vs}$.

[0007] Optionally, the host layer comprises an N-type host.

[0008] Optionally, the at least one light emitting layer further comprises a hole transport layer on a side of the host layer distal to the cathode.

- [0009] Optionally, the host layer is in direct contact with the cathode.
- [0010] Optionally, the host layer is in direct contact with the charge generation layer.
- [0011] Optionally, the N-type host has electron transport property, and comprises one or more compounds selected from a group consisting of oxazole derivatives and dendrimers thereof, metal chelates, azole compounds, quinoline derivatives, quinoxaline derivatives, di-aza anthracene derivatives, phenanthroline, heterocyclic silicon compounds, and perfluorinated -s oligomers.
- [0012] Optionally, the thickness of the host layer is in a range of around 25 nm to around 60 nm.
- [0013] Optionally, a lowest unoccupied molecular orbital energy level of the N-type host is higher than that of the charge generation layer by a difference within about 0.2 eV.
- [0014] Optionally, the host layer comprises a P-type host.
- [0015] Optionally, the at least one light emitting layer further comprises an electron transport layer on a side of the host layer distal to the anode.
- [0016] Optionally, the at least one light emitting layer further comprises a hole injection layer sandwiched by the host layer and the charge generation layer.
- [0017] Optionally, the P-type host has hole transport property, and comprises triarylamine or derivatives thereof.
- [0018] Optionally, the thickness of the host layer is in a range of around 25 nm to around 60 nm.
- [0019] Optionally, the host layer comprises an N-type host and a P-type host.
- [0020] Optionally, the host layer is in direct contact with the cathode.
- [0021] Optionally, the thickness of the host layer is in a range of around 30 nm to around 65 nm.
- [0022] Optionally, a light emitting layer most proximal to the cathode further comprises an electron injection layer on a side of the light emitting layer proximal to the cathode.
- [0023] Optionally, a light emitting layer most proximal to the anode further comprises a hole injection layer on a side of the light emitting layer proximal to the anode.

[0024] In another aspect, the present invention also provides a display device comprising the organic light emitting diode as described herein.

BRIEF DESCRIPTION OF THE FIGURES

[0025] The following drawings are merely examples for illustrative purposes according to various disclosed embodiments and are not intended to limit the scope of the present invention.

[0026] FIG. 1 is a diagram illustrating the structure of an organic light emitting diode in an embodiment.

[0027] FIG. 2 is a diagram illustrating the structure of an organic light emitting diode in another embodiment.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0028] The disclosure will now describe more specifically with reference to the following embodiments. It is to be noted that the following descriptions of some embodiments are presented herein for purpose of illustration and description only. It is not intended to be exhaustive or to be limited to the precise form disclosed.

[0029] Typically, multiple light emitting units of a single unit OLED are simply stacked together to make a conventional tandem OLED. A conventional OLED therefore has a complex structure having many layers. The manufacturing process for making such a conventional OLED has strict requirements for equipment, and is costly.

[0030] The disclosure in some embodiments provides an organic light emitting diode having a cathode, an anode, and a plurality of light emitting layers connected in series between the cathode and the anode. At least one light emitting layer includes a host layer. Optionally, the organic light emitting diode includes a charge generation layer between at least one pair of adjacent light emitting layers. Optionally, the organic light emitting diode includes a charge generation layer between multiple pairs of adjacent light emitting layers. Optionally, the organic light emitting diode includes a charge generation layer between every pair of adjacent light emitting layers. Optionally, the charge generation layer is adjacent to a hole injection layer of a neighboring light emitting layer.

[0031] The host layer has charge transport property, therefore functions as both a charge transport layer and a light emitting layer. Due to the charge transport property of the host

layer, the number of independent charge transport layers (e.g., a charge transport layer which is not also an emission layer) in an organic light emitting diode can thus be reduced.

[0032] Depending on the types of hosts used, the host layer can have electron transport property or hole transport property, or both. For example, an N-type host layer would possess electron transport property. A P-type host layer would possess hole transport property. A host layer may have both N-type and P-type hosts. Such a host layer would have both electron transport property and hole transport property.

[0033] Due to the electron transport property of the N-type host and the hole transport property of the P-type host, the manufacturing process of the organic light emitting diode can be simplified. For example, when an N-type host layer is used, an electron transport layer in the OLED can be eliminated without affecting the properties of the OLED. Similarly, when a P-type host is used, a hole transport layer in the OLED can be eliminated without affecting the properties of the OLED. Moreover, when a host layer containing both an N-type host and a P-type host is used, an electron transport layer and a hole transport layer can both be eliminated without affecting the properties of the OLED.

[0034] Various N-type hosts and P-type hosts having charge transport property can be used for making the host layer. Examples of N-type hosts include, but are not limited to, oxazole derivatives and dendrimers thereof, metal chelates, azole compounds, quinoline derivatives, quinoxaline derivatives, di-aza anthracene derivatives, phenanthroline, heterocyclic silicon compounds, and perfluorinated -s oligomers. Examples of P-type hosts include, but are not limited to, triarylamine and derivatives thereof.

[0035] Optionally, the hosts have relatively high charge mobility rate, e.g., $> 1 \times 10^{-4} \text{ cm}^2 / \text{Vs}$, $5 \times 10^{-4} \text{ cm}^2 / \text{Vs}$ or $1 \times 10^{-3} \text{ cm}^2 / \text{Vs}$. Optionally, a majority of the host has a charge mobility rate, e.g., $> 1 \times 10^{-4} \text{ cm}^2 / \text{Vs}$, $5 \times 10^{-4} \text{ cm}^2 / \text{Vs}$ or $1 \times 10^{-3} \text{ cm}^2 / \text{Vs}$.

[0036] Optionally, the thickness of the host layer can be designed to be in the range of around 25 nm to around 60 nm, e.g., around 25 nm to around 30 nm, around 30 nm to around 40 nm, around 40 nm to around 50 nm, or around 50 nm to around 60 nm. Optionally, when the host layer includes both a P-type host and an N-type host, the thickness of the host layer is in the range of around 30 nm to around 65 nm, e.g., around 30 nm to around 40 nm, around 40 nm to around 50 nm, around 50 nm to around 60 nm, or around 60 nm to around 65 nm. Optionally, the lowest unoccupied molecular orbital energy level of the N-type host is higher than that of the charge generation layer. Optionally, the lowest unoccupied molecular orbital

energy level of the N-type host is higher than that of the charge generation layer by a difference within about 0.2 eV.

[0037] Optionally, when the host layer is an N-type host, the light emitting layer further includes a hole transport layer on a side of the host layer distal to the cathode. For example, in a light emitting layer that is most proximal to the anode and is between the anode and a charge generation layer, the hole transport layer is on a side of the host layer distal to the cathode (e.g., proximal to the anode). In a light emitting layer that is most proximal to the cathode and is between the cathode and a charge generation layer, the hole transport layer is on the side of the host layer distal to the cathode (e.g., proximal to the anode). Similarly, a hole transport layer in a light emitting layer other than those proximal to the cathode and the anode may be on a side of the host layer distal to the cathode.

[0038] When an N-type host layer is included in a light emitting layer most proximal to the cathode, the OLED manufacturing process can be further simplified by eliminating a charge generation layer between the cathode and the host layer. Optionally, in a light emitting layer most proximal to the cathode, the host layer is in direct contact with the cathode.

[0039] When an N-type host layer is used in a light emitting layer distal to the cathode, the OLED manufacturing process can be further simplified by eliminating an electron transport layer between a charge generation layer and a host layer of a light emitting layer. Optionally, the host layer is in direct contact with the charge generation layer.

[0040] Optionally, when the host layer is a P-type host layer, the light emitting layer further includes an electron transport layer on a side of the host layer distal to the anode. For example, in a light emitting layer that is most proximal to the cathode and is between the cathode and a charge generation layer, the electron transport layer is on a side of the host layer distal to the cathode (e.g., proximal to the cathode). In a light emitting layer that is most proximal to the anode and is between the anode and a charge generation layer, the electron transport layer is disposed on the side distal to the anode (e.g., proximal to the cathode). Similarly, an electron transport layer in a light emitting layer other than those proximal to the cathode and the anode may be on a side of the host layer distal to the anode.

[0041] Optionally, when the host layer contains a P-type host, the light emitting layer is distant from the anode (e.g., other than the layer most proximal to the anode). Optionally, when the P-type light emitting layer is distant from the anode, the P-type light emitting layer further comprises a hole injection layer sandwiched by the host layer and a charge generation layer.

[0042] When the host layer includes both an N-type host and a P-type host, optionally the host layer is in direct contact with the cathode.

[0043] In some embodiments, the properties of the OLED may be further improved by including an electron injection layer in a light emitting layer most proximal to the cathode. The electron injection layer is on a side of the light emitting layer proximal to the cathode. Similarly, the properties of the OLED may be improved by including a hole injection layer in a light emitting layer most proximal to the anode. The hole injection layer is on a side of the light emitting layer proximal to the anode.

[0044] The light emitting layer may include light emitting materials of different colors. For example, the host (e.g., an N-type, a P-type, or both) material can be mixed with various light emitting materials of different colors for making the host layer. Optionally, an OLED has two light emitting layers each containing blue light emitting material, and a third light emitting layer containing red and green light emitting materials.

[0045] Various appropriate materials may be used for making the charge generation layer. Examples of such materials include, but are not limited to, oxazole derivatives and dendrimers thereof, metal chelates, azole compounds, quinoline derivatives, quinoxaline derivatives, di-aza anthracene derivatives, phenanthroline, heterocyclic silicon compounds, and perfluorinated -s oligomers.

[0046] FIG. 1 is a diagram illustrating the structure of an organic light emitting diode in an embodiment. Referring to FIG. 1, the organic light emitting diode in the embodiment includes three light emitting layers. The light emitting layer most proximal to the anode 11 is the first light emitting layer 21. The light emitting layer most proximal to the cathode 12 is the third light emitting layer 23. The light emitting layer in the middle is the second light emitting layer 22. A charge generation layer 3 is disposed between the first light emitting layer 21 and the second light emitting layer 22, and between the second light emitting layer 22 and the third light emitting layer 23. The charge generation layers 3 are adjacent to the hole injection layers in the second light emitting layer 22 and the third light emitting layer 23, respectively.

[0047] Referring to FIG. 1, the first light emitting layer 21 includes three layers: a hole injection layer (HIL), a hole transport layer (HTL), and an N-type host, B-EML layer. The N-type host, B-EML layer is a host layer for emitting blue light. The thickness of the host layer in the embodiment is larger than 25 nm. The second light emitting layer 22 includes three layers: a hole injection layer (HIL), a P-type host, GD, RD layer, and an electron

transport (ETL) layer. GD refers to green light emitting material, and RD refers to red light emitting material. The P-type host, GD, RD layer is a host layer containing a P-type host mixed with green light emitting material and red light emitting material. The thickness of the host layer in the embodiment is larger than 25 nm. The third light emitting layer 23 includes four layers: a hole injection layer (HIL), a hole transport layer (HTL), an N-type host, B-EML layer (the host layer), and an electron injection layer (EIL). The thickness of the host layer in the embodiment is larger than 25 nm.

[0048] FIG. 2 is a diagram illustrating the structure of an organic light emitting diode in another embodiment. Referring to FIG. 2, the organic light emitting diode in the embodiment includes three light emitting layers. The light emitting layer most proximal to the anode 11 is the first light emitting layer 21. The light emitting layer most proximal to the cathode 12 is the third light emitting layer 23. The light emitting layer in the middle is the second light emitting layer 22. A charge generation layer 3 is disposed between the first light emitting layer 21 and the second light emitting layer 22, and between the second light emitting layer 22 and the third light emitting layer 23. The charge generation layer 3 is adjacent to a hole injection layer of a neighboring light emitting layer.

[0049] Referring to FIG. 2, the first light emitting layer 21 includes three layers: a hole injection layer (HIL), a hole transport layer (HTL), and an N-type host, B-EML layer. The N-type host, B-EML layer is a host layer for emitting blue light. The thickness of the host layer in the embodiment is larger than 25 nm. The second light emitting layer 22 includes two layers: a hole injection layer (HIL), and a P-type, N-type, YD layer. YD refers to yellow light emitting material. The P-type, N-type, YD layer is a host layer containing a P-type host and an N-type host mixed with yellow light emitting material. The thickness of the host layer in the embodiment is larger than 30 nm. The third light emitting layer 23 includes four layers: a hole injection layer (HIL), a hole transport layer (HTL), an N-type host, B-EML layer (the host layer), and an electron injection layer (EIL). The thickness of the host layer in the embodiment is larger than 25 nm.

[0050] As compared to conventional organic light emitting diode in which multiple light emitting units of a single unit OLED are simply stacked together, the number of layers in the organic light emitting diodes of FIGs. 1 and 2 are much reduced due to the charge transport property of the host layer.

[0051] The organic light emitting diodes are provided in FIGs. 1 and 2 as illustrating examples. Various modifications and similar arrangements can be made based on the

detailed description of the disclosure. For example, the organic light emitting diodes may have additional charge transport layers. For example, the number of light emitting layers can be more than three, e.g., 4, 5, 6, 7, 8, 9, 10, 11. Optionally, the number of light emitting layers is less than 15, 14, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4. Optionally, the number of total organic layers in the organic light emitting diode is less than 20, 19, 18, 17, 16, 15, 14, 13, 12, 11, 10.

[0052] The present invention also provides a display device having an organic light emitting device as described herein. The display device can be of any suitable type, e.g., an electronic paper display device, an OLED display panel, a mobile phone, an AMOLED display device, an AMOLED television, a laptop, a computer, PDA, GPS, an in-vehicle display device, a projection display, a camera, a video recorder, a digital camera, an electronic watch, a calculator, a meter, a public display, a virtual display, and so on.

[0053] The foregoing description of the embodiments of the invention has been presented for purposes of illustration and description. It is not intended to be exhaustive or to limit the invention to the precise form or to exemplary embodiments disclosed. Accordingly, the foregoing description should be regarded as illustrative rather than restrictive. Obviously, many modifications and variations will be apparent to practitioners skilled in this art. The embodiments are chosen and described in order to best explain the principles of the invention and its best mode practical application, thereby to enable persons skilled in the art to understand the invention for various embodiments and with various modifications as are suited to the particular use or implementation contemplated. It is intended that the scope of the invention be defined by the claims appended hereto and their equivalents in which all terms are meant in their broadest reasonable sense unless otherwise indicated. Therefore, the term “the invention”, “the present invention” or the like does not necessarily limit the claim scope to a specific embodiment, and the reference to exemplary embodiments of the invention does not imply a limitation on the invention, and no such limitation is to be inferred. The invention is limited only by the spirit and scope of the appended claims. Moreover, these claims may refer to use “first”, “second”, etc. following with noun or element. Such terms should be understood as a nomenclature and should not be construed as giving the limitation on the number of the elements modified by such nomenclature unless specific number has been given. Any advantages and benefits described may not apply to all embodiments of the invention. It should be appreciated that variations may be made in the embodiments described by persons skilled in the art without departing from the scope of the present invention as defined by the following claims. Moreover, no element and component in the

present disclosure is intended to be dedicated to the public regardless of whether the element or component is explicitly recited in the following claims.

WHAT IS CLAIMED IS:

1. An organic light emitting diode, comprising:
a cathode;
an anode;
a plurality of light emitting layers connected in series between the cathode and the anode; and
a charge generation layer between at least one pair of adjacent light emitting layers;
wherein at least one light emitting layer comprises a host layer having charge transport property.
2. The organic light emitting diode of claim 1, wherein the charge generation layer is adjacent to a hole injection layer of a neighboring light emitting layer.
3. The organic light emitting diode of claim 1, wherein a majority of the host has a charge mobility rate larger than $10^{-4} \text{ cm}^2 / \text{Vs}$.
4. The organic light emitting diode of claim 1, wherein the host layer comprises an N-type host.
5. The organic light emitting diode of claim 4, wherein the at least one light emitting layer further comprises a hole transport layer on a side of the host layer distal to the cathode.
6. The organic light emitting diode of claim 4, wherein the host layer is in direct contact with the cathode.
7. The organic light emitting diode of claim 4, wherein the host layer is in direct contact with the charge generation layer.
8. The organic light emitting diode of claim 4, wherein the N-type host has electron transport property, and comprises one or more compounds selected from a group consisting of oxazole derivatives and dendrimers thereof, metal chelates, azole compounds, quinoline derivatives, quinoxaline derivatives, di-aza anthracene derivatives, phenanthroline, heterocyclic silicon compounds, and perfluorinated -s oligomers.

9. The organic light emitting diode of claim 4, wherein the thickness of the host layer is in a range of around 25 nm to around 60 nm.
10. The organic light emitting diode of claim 4, wherein a lowest unoccupied molecular orbital energy level of the N-type host is higher than that of the charge generation layer by a difference within about 0.2 eV.
11. The organic light emitting diode of claim 1, wherein the host layer comprises a P-type host.
12. The organic light emitting diode of claim 11, wherein the at least one light emitting layer further comprises an electron transport layer on a side of the host layer distal to the anode.
13. The organic light emitting diode of claim 11, wherein the at least one light emitting layer further comprises a hole injection layer sandwiched by the host layer and the charge generation layer.
14. The organic light emitting diode of claim 11, wherein the P-type host has hole transport property, and comprises triarylamine or derivatives thereof.
15. The organic light emitting diode of claim 11, wherein the thickness of the host layer is in a range of around 25 nm to around 60 nm.
16. The organic light emitting diode of claim 1, wherein the host layer comprises an N-type host and a P-type host.
17. The organic light emitting diode of claim 16, wherein the host layer is in direct contact with the cathode.
18. The organic light emitting diode of claim 16, wherein the thickness of the host layer is in a range of around 30 nm to around 65 nm.
19. The organic light emitting diode of claim 1, wherein a light emitting layer most proximal to the cathode further comprises an electron injection layer on a side of the light emitting layer proximal to the cathode.
20. The organic light emitting diode of claim 1, wherein a light emitting layer most proximal to the anode further comprises a hole injection layer on a side of the light emitting layer proximal to the anode.

21. A display device comprising the organic light emitting diode of any one of claims 1-20.

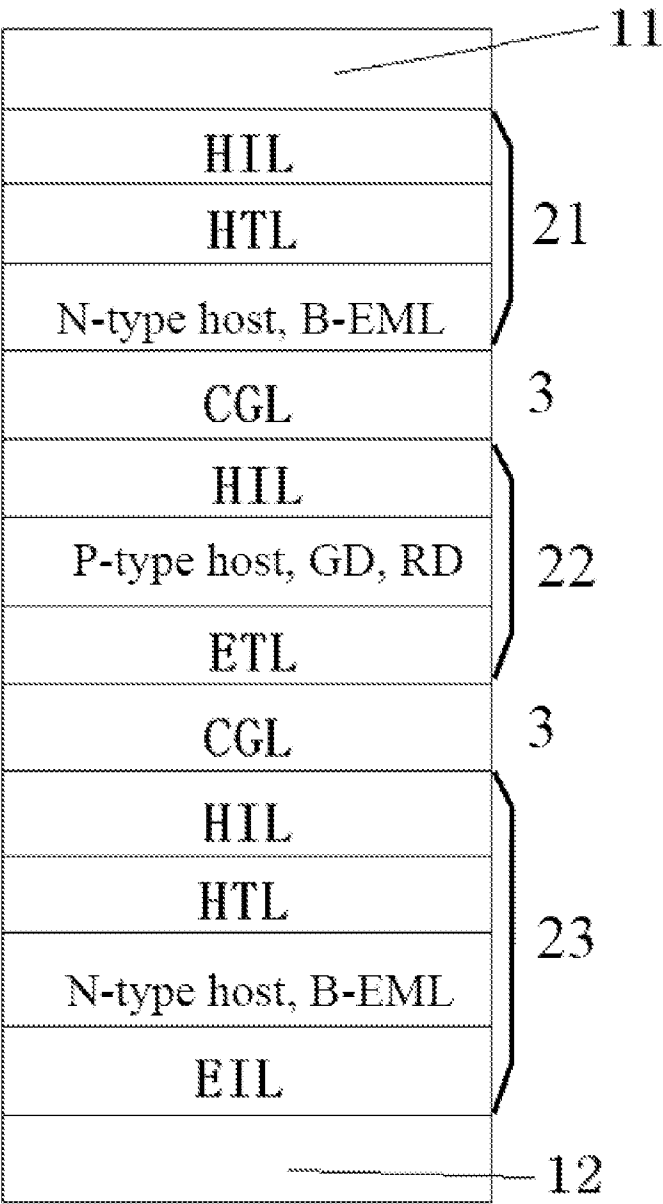


FIG. 1

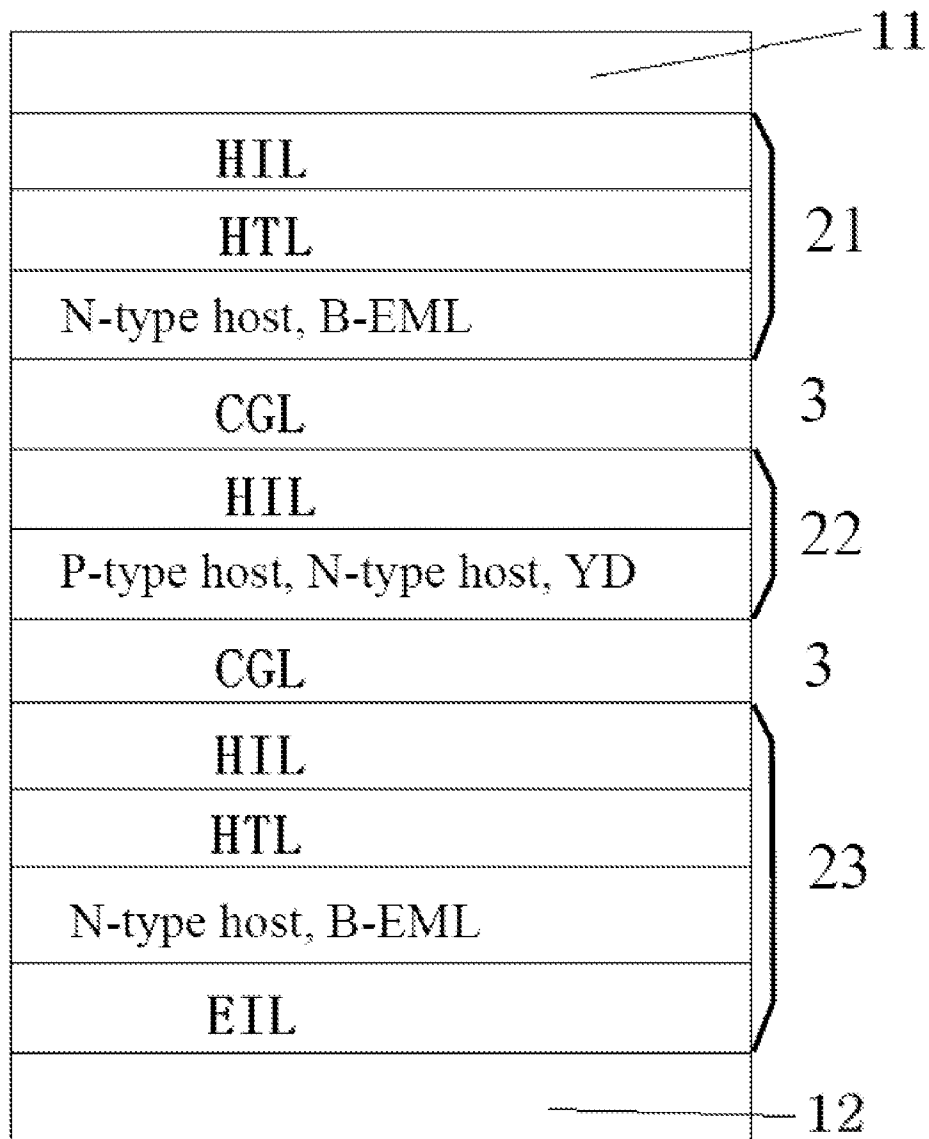


FIG. 2

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/099126

A. CLASSIFICATION OF SUBJECT MATTER		
H01L 51/50(2006.01)i		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
H01L 51/-		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
CNTXT;CNABS;DWPI;SIPOABS:OLED, organic electroluminescent, stack, tandem, charge generation, transport, host,series		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
PX	CN 104795432 A (BOE TECHNOLOGY GROUP CO LTD) 22 July 2015 (2015-07-22) the whole document	1-21
X	CN 103165817 A (LG DISPLAY CO LTD) 19 June 2013 (2013-06-19) paragraphs [0042]-[0072] and figure 1	1-5, 8-16, 18-21
Y	CN 103165817 A (LG DISPLAY CO LTD) 19 June 2013 (2013-06-19) paragraphs [0042]-[0072] and figure 1	6, 7, 17
X	US 2013320368 A1 (SEMICONDUCTOR ENERGY LAB) 05 December 2013 (2013-12-05) paragraphs [0043]-[0090] and figure 1	1-5, 8-16, 18-21
Y	CN 101195720 A (ORGANIC VISIONS INC) 11 June 2008 (2008-06-11) specification, page 4, line 25 to page 8, line 23 and figure 3	6, 7, 17
Y	CN 101661996 A (UNIV JILIN) 03 March 2010 (2010-03-03) specification, page 6, line 10 to page 7, line 6 and figure 1	6, 7, 17
A	CN 101960632 A (GLOBAL OLED TECHNOLOGY LLC) 26 January 2011 (2011-01-26) the whole document	1-21
☒ Further documents are listed in the continuation of Box C. ☒ See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
25 March 2016		01 April 2016
Name and mailing address of the ISA/CN		Authorized officer
STATE INTELLECTUAL PROPERTY OFFICE OF THE P.R.CHINA 6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing 100088, China		CHE,Xiaolu
Facsimile No. (86-10)62019451		Telephone No. (86-10)62089965

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2015/099126

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	CN 1498049 A (EASTMAN KODAK CO) 19 May 2004 (2004-05-19) the whole document	1-21

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2015/099126

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
CN	104795432	A	22 July 2015	None			
CN	103165817	A	19 June 2013	KR	20130064661	A	18 June 2013
				DE	102012111877	A1	13 June 2013
				GB	2497427	A	12 June 2013
				CN	103165817	B	20 January 2016
				US	2013146850	A1	13 June 2013
				DE	102012111877	A9	14 August 2013
				US	8796676	B2	05 August 2014
				KR	101429924	B1	14 August 2014
US	2013320368	A1	05 December 2013	DE	102013208844	A1	05 December 2013
				JP	2014007156	A	16 January 2014
				US	8994043	B2	31 March 2015
				KR	20130135779	A	11 December 2013
CN	101195720	A	11 June 2008	WO	2008067673	A1	12 June 2008
				TW	200826731	A	16 June 2008
				US	2008135804	A1	12 June 2008
CN	101661996	A	03 March 2010	None			
CN	101960632	A	26 January 2011	KR	20100129279	A	08 December 2010
				US	2009191428	A1	30 July 2009
				EP	2243176	B1	24 August 2011
				US	7955719	B2	07 June 2011
				WO	2009097084	A1	06 August 2009
				AT	521997	T	15 September 2011
				KR	101225674	B1	23 January 2013
				JP	2011511414	A	07 April 2011
				EP	2243176	A1	27 October 2010
				CN	101960632	B	27 June 2012
				JP	5113913	B2	09 January 2013
CN	1498049	A	19 May 2004	TW	200415936	A	16 August 2004
				TW	I309142	B	21 April 2009
				US	6717358	B1	06 April 2004
				KR	20040032765	A	17 April 2004
				JP	2004281371	A	07 October 2004
				EP	1408563	B1	28 July 2010
				JP	4570017	B2	27 October 2010
				EP	1408563	A2	14 April 2004
				KR	100973473	B1	03 August 2010
				DE	60333530	D1	09 September 2010

专利名称(译)	有机发光二极管及其显示装置		
公开(公告)号	EP3292572A4	公开(公告)日	2019-01-02
申请号	EP2015858122	申请日	2015-12-28
[标]申请(专利权)人(译)	京东方科技集团股份有限公司		
申请(专利权)人(译)	京东方科技集团股份有限公司.		
当前申请(专利权)人(译)	京东方科技集团股份有限公司.		
[标]发明人	WU CHANG YEN SHANG GUAN RONGGANG WAN XIANG		
发明人	WU, CHANG YEN SHANG GUAN, RONGGANG WAN, XIANG		
IPC分类号	H01L51/50		
CPC分类号	H01L27/3209 H01L51/5012 H01L51/5016 H01L2251/5384 H01L51/0059 H01L51/5004 H01L51/5044 H01L2251/552		
代理机构(译)	COHAUSZ & FLORACK		
优先权	201510222251.9 2015-05-04 CN		
其他公开文献	EP3292572A1		
外部链接	Espacenet		

摘要(译)

本申请公开了一种包括阴极的有机发光二极管;阳极;多个发光层串联连接在阴极和阳极之间;和至少一对相邻发光层之间的电荷产生层。至少一个发光层包括具有电荷传输性质的主体层。