



(11)

EP 1 546 283 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
20.06.2012 Bulletin 2012/25

(51) Int Cl.:
C09K 11/06 ^(2006.01) **H01B 1/12** ^(2006.01)
H01L 51/30 ^(2006.01) **H05B 33/14** ^(2006.01)

(21) Application number: **03770522.5**

(86) International application number:
PCT/US2003/030509

(22) Date of filing: **24.09.2003**

(87) International publication number:
WO 2004/029176 (08.04.2004 Gazette 2004/15)

(54) **ELECTRICALLY CONDUCTING ORGANIC POLYMER/NANOPARTICLE COMPOSITES AND METHODS FOR USE THEREOF**

ELEKTRISCH LEITFÄHIGE KOMPOSITWERKSTOFFE BASIEREND AUF ORGANISCHEN
POLYMEREN UND NANOTEILCHEN SOWIE DEREN VERWENDUNG

COMPOSITES DE POLYMERES ORGANIQUES ELECTROCONDUCTEURS ET DE
NANOPARTICULES ET PROCEDES D'UTILISATION

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IT LI LU MC NL PT RO SE SI SK TR**

(30) Priority: **24.09.2002 US 413114 P**

(43) Date of publication of application:
29.06.2005 Bulletin 2005/26

(60) Divisional application:
10011570.8 / 2 341 118

(73) Proprietor: **E.I. DU PONT DE NEMOURS AND
COMPANY**
Wilmington, DE 19898 (US)

(72) Inventor: **HSU, Che-hsiung**
Wilmington, DE 19808 (US)

(74) Representative: **Hoffmann, Benjamin et al**
Dehns
St. Bride's House
10 Salisbury Square
London EC4Y 8JD (GB)

(56) References cited:
EP-A- 0 962 943 EP-A- 1 231 251
WO-A-01/38219 WO-A-99/34371
WO-A1-03/050824 WO-A2-03/012908
US-A- 5 863 465 US-A1- 2002 009 680
US-A1- 2002 038 999 US-A1- 2002 099 119
US-A1- 2002 127 381

- "Römpp Chemie Lexikon," 1 January 1993
(1993-01-01), G. Thieme Verlag, Stuttgart vol. 9,
page 2459,

Remarks:

The file contains technical information submitted after
the application was filed and not included in this
specification

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 546 283 B1

DescriptionField of the Invention

5 **[0001]** The invention relates to the use of conductive organic polymers in the production of pixellated electroluminescent devices, such as organic light emitting diodes, and thin film field effect transistor electrodes.

Background

10 **[0002]** Conductive organic polymers originally attracted the attention of researchers over 20 years ago. The interest generated by these polymers compared to conventional conducting materials (e.g., metals, semiconductive metal oxides) was largely due to factors such as light weight, flexibility, durability, and potential ease of processing. To date the most commercially successful conductive organic polymers are the polyanilines and polythiophenes, which are marketed under a variety of tradenames. These materials can be prepared by polymerizing aniline or dioxythiophene monomers
 15 in aqueous solution in the presence of a water soluble polymeric acid, such as poly(styrenesulfonic acid) (PSS), as described in, for example, U.S. Patent No. 5,300,575 entitled "Polythiophene dispersions, their production and their use." The recent development of electroluminescent (EL) devices for use in light emissive displays and thin film field effect transistors for use as electrodes has resulted in a new area of interest in conductive organic polymers. EL devices such as organic light emitting diodes (OLEDs) containing conductive organic polymers generally have the following
 20 configuration:

anode/buffer layer/EL polymer/cathode

25 The anode is typically any material that has the ability to inject holes into the otherwise filled π -band of the semiconducting, EL polymer, such as, for example, indium/tin oxide (ITO). The anode is optionally supported on a glass or plastic substrate. The EL polymer is typically a conjugated semiconducting organic polymer such as poly(paraphenylenevinylene) or polyfluorene. The cathode is typically any material, such as Ca or Ba, that has the ability to inject electrons into the otherwise empty π^* -band of the semiconducting, EL polymer.

30 **[0003]** The buffer layer is typically a conductive organic polymer which facilitates the injection of holes from the anode into the EL polymer layer. The buffer layer can also be called a hole-injection layer, a hole transport layer, or may be characterized as part of a bilayer anode. Typical aqueous-dispersible conductive organic polymers employed as buffer layers are the emeraldine salt form of polyaniline (PAni) or a polymeric dioxyalkylenethiophene doped with a polymeric sulfonic acid.

[0004] EP1231251 discloses thin film inorganic light emitting diodes that contain ZnS as a dopant.

35 **[0005]** WO99/34371 discloses a screen-printable paste for producing electrically conductive coatings.

[0006] EP0962943 discloses an organic-inorganic conductive composite that contains colloidal particles of conductive zinc antimonate, colloidal particles of conductive indium antimonate, or mixtures thereof.

[0007] WO018/38219 discloses a method of manufacturing nanotubes.

[0008] WO03/012908 discloses a battery structure.

40 **[0009]** US2002/0127381 discloses a conductive roller that contains a covering layer comprising a conductive polymer.

[0010] WO03/050824 discloses a material for making a conductive pattern.

[0011] US2002/0099119 discloses compositions having a conductive polymer and colloidal silica particles.

[0012] US2002/0009680 discloses compositions for forming a scratch resistant layer than have nanoparticles together with a conductive polymer.

45 **[0013]** US5,863,465 discloses emulsion polymerisation processes forming polyanilines. US20020038999 teaches buffer layers comprising host polymers.

[0014] While the buffer layer must have some electrical conductivity in order to facilitate charge transfer, the highest conductivity of buffer layer films derived from commonly known aqueous polyaniline or polythiophene dispersion is generally in the range of about 10^{-3} S/cm. The conductivity is about three order magnitude higher than necessary. Indeed,
 50 in order to prevent cross-talk between anode lines (or pixels), the electrical conductivity of the buffer layers should be minimized to about 10^{-6} S/cm without negatively affecting the light emitting properties of a device containing such a buffer layer. For example, a film made from a commercially available aqueous poly(ethylenedioxythiophene) dispersion, Baytron-P VP Al 4083 from H. C. Starck, GmbH, Leverkusen, Germany, has conductivity of $\sim 10^{-3}$ S/cm. This is too high to avoid cross-talk between pixels. Accordingly, there is a need for high resistance buffer layers for use in electrolumi-
 55 nescent devices.

SUMMARY OF THE INVENTION

[0015] In accordance with the invention, there is provided an organic electronic device comprising at least one electroluminescent layer (130) positioned between two electrical contact layers (110, 150), the device having at least one layer made from the method comprising adding a plurality of nanoparticles to an aqueous dispersion of a conductive organic polymer selected from polyanilines and poly(dioxythiophenes), and casting said layer from said aqueous dispersion onto a substrate, wherein said nanoparticles are organic nanoparticles or inorganic nanoparticles, wherein said inorganic nanoparticles are selected from silica and alumina, and said organic nanoparticles are perfluoroethylene sulfonates, wherein the at least one layer is a buffer layer (120), and wherein the electroluminescent layer is a light emitting layer.


BRIEF DESCRIPTION OF THE DRAWINGS**[0016]**

FIG. 1 illustrates a cross-sectional view of an electronic device that includes a buffer layer according to the invention.

DETAILED DESCRIPTION

[0017] Compositions are provided comprising aqueous dispersions of electrically conducting organic polymers and a plurality of nanoparticles. As used herein, the term "dispersion" refers to a continuous medium containing a suspension of minute particles. In accordance with the invention, the "continuous medium" is typically an aqueous liquid, e.g., water. Nanoparticles according to the invention can be inorganic or organic. As used herein, the term "inorganic" means that the nanoparticles are substantially free of carbon. As used herein, the term "organic" means that the nanoparticles are composed substantially of carbon. As used herein, the term "nanoparticle" refers to particles having sizes less than 1000 nanometers (nm).

[0018] Compositions typically contain a continuous aqueous phase in which the electrically conducting organic polymer is dispersed. Electrically conductive organic polymers contemplated for use in the practice of the invention include, for example, all forms of the polyanilines (e.g., leucoemeraldine, emeraldine, nigraniline, and the like) which are capable of forming acid/base salts to render the polymers electrically conductive. It is well known that different forms of polyaniline polymers can be synthesized, depending upon the degree of oxidation. Polyaniline (PAni) can generally be described as being composed of monomer units having aromatic amine nitrogen atoms, as in Formula I below, and/or aromatic imine nitrogen atoms:



wherein:

n is an integer from 0 to 4;


and

R is independently selected so as to be the same or different at each occurrence and is selected from alkyl, alkenyl, alkoxy, cycloalkyl, cycloalkenyl, alkanoyl, alkylthio, aryloxy, alkylthioalkyl, alkylaryl, arylalkyl, amino, alkylamino, dialkylamino, aryl, alkylsulfinyl, alkoxyalkyl, alkylsulfonyl, arylthio, arylsulfinyl, alkoxycarbonyl, arylsulfonyl, carboxylic acid, halogen, cyano, or alkyl substituted with one or more of sulfonic acid, carboxylic acid, halo, nitro, cyano or epoxy moieties; or any two R groups together may form an alkylene or alkenylene chain completing a 3, 4, 5, 6, or 7-membered aromatic or alicyclic ring, which ring may optionally include one or more divalent nitrogen, sulfur or

oxygen atoms.

[0019] Although formula I shows the monomer units in the unprotonated form, it is known that in the presence of an acid (such as, poly(2-acrylamido-2-methyl-1-propanesulfonic acid) (PAAMPSA), poly(styrenesulfonic acid) (PSS), and the like), the basic nitrogen atoms will be protonated to form a salt. The relative proportion of imine nitrogen atoms to amine nitrogen atoms increases with increasing form in which the ratio of monomer units having Formula I to those having aromatic imine nitrogens is 2:1. In this embodiment, the ratio of amine nitrogen atoms to imine nitrogen atoms is 1:1.

[0020] In another embodiment, the electrically conductive organic polymer is poly(dioxythiophene). Poly(dioxythiophenes) contemplated for use in the practice of the invention have Formula III:

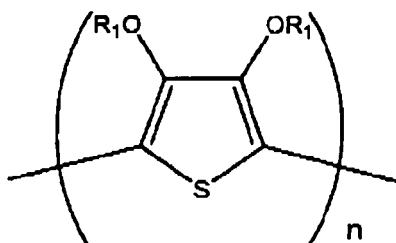

III

wherein:

R_1 and R_1' are each independently selected from hydrogen and alkyl having 1 to 4 carbon atoms, or R_1 and R_1' taken together form an alkylene chain having 1 to 4 carbon atoms, which may optionally be substituted by alkyl or aromatic groups having 1 to 12 carbon atoms, or a 1,2-cyclohexylene radical, and n is greater than about 9.

[0021] The electrically conductive organic polymers used in the invention compositions and methods are typically prepared by oxidatively polymerizing the corresponding monomers in aqueous solution containing a polymeric acid (e.g., PAAMPSA, PSS, and the like). The oxidative polymerization is carried out using an oxidizing agent such as ammonium persulfate, sodium persulfate, or the like. Thus, for example, when aniline is oxidatively polymerized in the presence of PAAMPSA, the electrically conductive acid/base salt PAni/PAAMPSA is formed. When ethylenedioxythiophene (EDT) is oxidatively polymerized in the presence of PSS, the electrically conductive acid/base salt polyethylenedioxythiophene (PEDT)/PSS is formed.

[0022] The aqueous solution also can include a polymerization catalyst such as ferric sulfate, ferric chloride, and the like. The polymerization is typically carried out at low temperatures, e.g., between $\sim 10^\circ\text{C}$ and 30°C . After completion of the polymerization reaction, the polymers are optionally isolated by precipitation from aqueous dispersion using a non-solvent for the polymers, e.g., acetone, and the like. When the electrically conductive organic polymer is isolated, the material is typically refined to produce polymer particles having a size less than about 1000 nm. In one embodiment, the polymer particles are less than about 500 nm. In another embodiment, the polymer particles are less than about 50 nm. The isolated electrically conductive organic polymer particles are then either directly combined with an aqueous dispersion of nanoparticles or the electrically conductive organic polymer particles are redispersed in water prior to combination with an aqueous dispersion of nanoparticles.

[0023] In another embodiment of the invention methods, the oxidative polymerization is carried out in the presence of nanoparticles, thereby producing an aqueous dispersion without isolating the electrically conductive organic polymer. For example, nanoparticles may be added to an aqueous solution containing aniline monomers, thereby forming a dispersion. An oxidizing agent can then be added to polymerize the monomers in the presence of the nanoparticles. This embodiment of the invention is economically attractive since it provides invention aqueous dispersions in a "one-pot" synthesis. Invention aqueous dispersions prepared by either method provide the advantage of being easily filtered, for example, through a Millex 0.45 μm HV filter. Thus, invention aqueous dispersions readily provide continuous, smooth films.

[0024] Organic additives, such as steric stabilizers, may optionally be added to the aqueous solution prior to oxidative polymerization. These additives facilitate formation of electrically conductive organic polymers having nanometer sized particles. Organic additives include, for example, polyacrylamide, polyvinylalcohol, poly(2-vinylpyridine), poly(vinyl acetate), poly(vinyl methyl ether), poly(vinylpyrrolidone), poly(vinyl butyral), and the like.

[0025] Nanoparticles contemplated for use in the practice of the present invention can be either inorganic or organic. Inorganic nanoparticles contemplated for use in the practice of the invention are selected from alumina and silica. Organic nanoparticles contemplated for use in the practice of the invention are colloidal sulfonic acids, namely perfluoroethylene sulfonates.

[0026] Nanoparticles contemplated for use in the practice of the invention may have a variety of shapes and sizes. In one embodiment, the nanoparticles are substantially spherical. In another embodiment, the nanoparticles are substantially elongated such as metal nanowires. Nanoparticles contemplated for use in the practice of the invention typically have an average particle diameter less than about 500 nm. In another embodiment, the nanoparticles have an average particle diameter less than about 100 nm. In still another embodiment, the nanoparticles have an average particle diameter less than about 50 nm. In another embodiment, the aspect ratio of elongated nano-particles is greater than 1 to 100. Aspect ratio is defined as ratio of particle width to particle length. For elongated particles, the "particle size" is considered to be the particle width. In another embodiment, the nano-particles have an irregular geometry. For irregularly-shaped particles, the "particle size" is considered to be size of the smallest screen opening through which the particle will pass.

[0027] There are provided buffer layers cast from aqueous dispersions comprising electrically conductive organic polymers and nanoparticles. Both the electrically conducting polymers and the nanoparticles can be readily dispersed in water. Thus, continuous, smooth films can be produced by casting from aqueous dispersions containing electrically conducting polymers and nanoparticles. Invention buffer layers have a reduced conductivity relative to buffer layers of identical composition except the inorganic nanoparticles are absent. Electrical resistivity is inversely proportional to electrical conductivity. Thus, as employed herein, the phrases "high resistance" and "low conductivity" are used interchangeably with reference to the buffer layers described herein. As used herein, the phrases "high resistance" and "low conductivity" each refer to a conductivity level less than that of a commercially available buffer layers, i.e., less than about 1.0×10^{-3} S/cm. In another embodiment, the resistivities preferably less than 1.0×10^{-5} S/cm. Resistivity and conductivity values are typically reported in units of ohm-centimeter (ohm-cm) and Siemens per centimeter (S/cm), respectively. As used herein, conductivity values are reported (using the unit S/cm) rather than resistivity values.

[0028] The invention provides electronic devices comprising at least one electroluminescent layer (usually a semiconductor conjugated polymer) positioned between two electrical contact layers, wherein at least one of the layers of the device includes a buffer layer as described above. As shown in FIG. 1, a typical device has an anode layer 110, a buffer layer 120, an electroluminescent layer 130, and a cathode layer 150. Adjacent to the cathode layer 150 is an optional electron-injection/transport layer 140. Between the buffer layer 120 and the cathode layer 150 (or optional electron injection/transport layer 140) is the electroluminescent layer 130.

[0029] The device may include a support or substrate (not shown) that can be adjacent to the anode layer 110 or the cathode layer 150. Most frequently, the support is adjacent the anode layer 110. The support can be flexible or rigid, organic or inorganic. Generally, glass or flexible organic films are used as a support. The anode layer 110 is an electrode that is more efficient for injecting holes than the cathode layer 150. The anode can include materials containing a metal, mixed metal, alloy, metal oxide or mixed oxide. Suitable materials include the mixed oxides of the Group 2 elements (i.e., Be, Mg, Ca, Sr, Ba, Ra), the Group 11 elements, the elements in Groups 4, 5, and 6, and the Group 8-10 transition elements. If the anode layer 110 is to be light transmitting, mixed oxides of Groups 12, 13 and 14 elements, such as indium-tin-oxide, may be used. As used herein, the phrase "mixed oxide" refers to oxides having two or more different cations selected from the Group 2 elements or the Groups 12, 13, or 14 elements. Some non-limiting, specific examples of materials for anode layer 110 include indium-tin-oxide ("ITO"), aluminum-tin-oxide, gold, silver, copper, and nickel. The anode may also comprise an organic material such as polyaniline or polythiophene.

[0030] The anode layer 110 may be formed by a chemical or physical vapor deposition process or spin-cast process. Chemical vapor deposition may be performed as a plasma-enhanced chemical vapor deposition ("PECVD") or metal organic chemical vapor deposition ("MOCVD"). Physical vapor deposition can include all forms of sputtering, including ion beam sputtering, as well as e-beam evaporation and resistance evaporation. Specific forms of physical vapor deposition include rf magnetron sputtering and inductively-coupled plasma physical vapor deposition ("IMP-PVD"). These deposition techniques are well known within the semiconductor fabrication arts.

[0031] Usually, the anode layer 110 is patterned during a lithographic operation. The pattern may vary as desired. The layers can be formed in a pattern by, for example, positioning a patterned mask or resist on the first flexible composite barrier structure prior to applying the first electrical contact layer material. Alternatively, the layers can be applied as an overall layer (also called blanket deposit) and subsequently patterned using, for example, a patterned resist layer and wet chemical or dry etching techniques. Other processes for patterning that are well known in the art can also be used. When the electronic devices are located within an array, the anode layer 110 typically is formed into substantially parallel strips having lengths that extend in substantially the same direction.

[0032] The buffer layer 120 is usually cast onto substrates using a variety of techniques well-known to those skilled in the art. Typical casting techniques include, for example, solution casting, drop casting, curtain casting, spin-coating, screen printing, inkjet printing, and the like. Alternatively, the buffer layer can be patterned using a number of such

processes, such as ink jet printing.

[0033] The electroluminescent (EL) layer 130 may typically be a conjugated polymer such as poly(paraphenylenevinylene) or polyfluorene. The particular material chosen may depend on the specific application, potentials used during operation, or other factors. The EL layer 130 containing the electroluminescent organic material can be applied from solution by any conventional technique, including spin-coating, casting, and printing. The EL organic materials can be applied directly by vapor deposition processes, depending upon the nature of the materials. In another embodiment, an EL polymer precursor can be applied and then converted to the polymer, typically by application of heat or other source of external energy (e.g., visible light or UV radiation).

[0034] Optional layer 140 can function both to facilitate electron injection/transport, and also serve as a confinement layer to prevent quenching reactions at layer interfaces. More specifically, layer 140 may promote electron mobility and reduce the likelihood of a quenching reaction if layers 130 and 150 would otherwise be in direct contact. Examples of materials for optional layer 140 include metal-chelated oxinoid compounds (e.g., Alq₃ or the like); phenanthroline-based compounds (e.g., 2,9-dimethyl-4,7-diphenyl-1,10-phenanthroline ("DDPA"), 4,7-diphenyl-1,10-phenanthroline ("DPA"), or the like); azole compounds (e.g., 2-(4-biphenyl)-5-(4-t-butylphenyl)-1,3,4-oxadiazole ("PBD" or the like), 3-(4-biphenyl)-4-phenyl-5-(4-t-butylphenyl)-1,2,4-triazole ("TAZ" or the like); other similar compounds; or any one or more combinations thereof. Alternatively, optional layer 140 may be inorganic and comprise BaO, LiF, Li₂O, or the like.

[0035] The cathode layer 150 is an electrode that is particularly efficient for injecting electrons or negative charge carriers. The cathode layer 150 can be any metal or nonmetal having a lower work function than the first electrical contact layer (in this case, the anode layer 110). As used herein, the term "lower work function" is intended to mean a material having a work function no greater than about 4.4 eV. As used herein, "higher work function" is intended to mean a material having a work function of at least approximately 4.4 eV.

[0036] Materials for the cathode layer can be selected from alkali metals of Group 1 (e.g., Li, Na, K, Rb, Cs), the Group 2 metals (e.g., Mg, Ca, Ba, or the like), the Group 12 metals, the lanthanides (e.g., Ce, Sm, Eu, or the like), and the actinides (e.g., Th, U, or the like). Materials such as aluminum, indium, yttrium, and combinations thereof, may also be used. Specific non-limiting examples of materials for the cathode layer 150 include barium, lithium, cerium, cesium, europium, rubidium, yttrium, magnesium, and samarium.

[0037] The cathode layer 150 is usually formed by a chemical or physical vapor deposition process. In general, the cathode layer will be patterned, as discussed above in reference to the anode layer 110. If the device lies within an array, the cathode layer 150 may be patterned into substantially parallel strips, where the lengths of the cathode layer strips extend in substantially the same direction and substantially perpendicular to the lengths of the anode layer strips. Electronic elements called pixels are formed at the cross points (where an anode layer strip intersects a cathode layer strip when the array is seen from a plan or top view).

[0038] In other embodiments, additional layer(s) may be present within organic electronic devices. For example, a layer (not shown) between the buffer layer 120 and the EL layer 130 may facilitate positive charge transport, band-gap matching of the layers, function as a protective layer, or the like. Similarly, additional layers (not shown) between the EL layer 130 and the cathode layer 150 may facilitate negative charge transport, band-gap matching between the layers, function as a protective layer, or the like. Layers that are known in the art can be used. In addition, any of the above-described layers can be made of two or more layers. Alternatively, some or all of inorganic anode layer 110, the buffer layer 120, the EL layer 130, and cathode layer 150, may be surface treated to increase charge carrier transport efficiency. The choice of materials for each of the component layers may be determined by balancing the goals of providing a device with high device efficiency with the cost of manufacturing, manufacturing complexities, or potentially other factors.

[0039] The EL layer 130 is a light-emitting layer that is activated by signal (such as in a light-emitting diode). After reading this specification, skilled artisans will be capable of selecting material(s) that are suitable for their particular applications. The light-emitting materials may be dispersed in a matrix of another material, with or without additives, but preferably form a layer alone. The EL layer 130 generally has a thickness in the range of approximately 50-500 nm.

[0040] In organic light emitting diodes (OLEDs), electrons and holes, injected from the cathode 150 and anode 110 layers, respectively, into the EL layer 130, form negative and positively charged polarons in the polymer. These polarons migrate under the influence of the applied electric field, forming a polaron exciton with an oppositely charged species and subsequently undergoing radiative recombination. A sufficient potential difference between the anode and cathode, usually less than approximately 12 volts, and in many instances no greater than approximately 5 volts, may be applied to the device. The actual potential difference may depend on the use of the device in a larger electronic component. In many embodiments, the anode layer 110 is biased to a positive voltage and the cathode layer 150 is at substantially ground potential or zero volts during the operation of the electronic device. A battery or other power source(s) may be electrically connected to the electronic device as part of a circuit but is not illustrated in FIG. 1.

[0041] The invention will now be described in greater detail by reference to the following non-limiting examples.

EXAMPLESComparative Example 1

[0042] This comparative example illustrates preparation of PAni/PAAMPSA and its electrical conductivity and light emitting device properties as a buffer layer.

[0043] Synthesis of PAni/PAAMPSA was carried out in the following manner. Aniline (4.08 g) was dissolved in a 150 ml aqueous solution containing PAAMPSA (6.35 g, PAAMPSA was obtained from Sigma-Aldrich Corp., St. Louis, MO, USA) in the form of 15 weight % aqueous solution; weight average molecular weight of the PAAMPSA is 2,000,000). The aqueous solution containing aniline and PAAMPSA was placed into a 4-necked 500 ml round bottomed flask and cooled to -4°C with an ice/water bath. The solution was stirred continuously with a magnetic stirrer. To the chilled aqueous aniline/PAAMPSA solution, a 100 ml aqueous solution containing 4.235 g PAAMPSA and 2.36 g ammonium persulfate was added at a constant rate over a one hour period. The polymerization was allowed to proceed for 198 minutes.

[0044] The reaction mixture was then poured into two centrifuge bottles and centrifuged at 8000 rpm at 15°C for 30 minutes. After centrifugation, the supernatant was slowly added to acetone to precipitate the polymeric product. After precipitation, the solid polymer was washed repeatedly in acetone, filtered, and dried overnight in a vacuum oven ($\sim 18\text{ Hg.}$, N_2 bleed, ambient temperature) Yield is 7.03 g.

[0045] PAni/PAAMPSA (1.21 g) as prepared above was dispersed in 39.12 g deionized water, which constitutes 3.0 wt % solid in the aqueous solution. The dispersion was tested for electrical conductivity and light emission properties. Commercially available indium tin oxide (ITO)/glass plates having ITO layers 100 to 150 nm thick were cut into samples 30 mm x 30 mm in size. The ITO layers were subsequently etched with oxygen plasma. The ITO on the glass substrates to be used for electrical conductivity measurements were etched into a series of parallel lines of ITO to be used as electrodes. The ITO on the substrates to be made into LEDs for light emission measurement were etched into a 15 mm x 20 mm layer of ITO to serve as the anode. The aqueous dispersion was then spin-coated onto each of the ITO/glass substrates at a spinning speed of 1,200 rpm. The resulting PAni/PAAMPSA layer was about 137 nm thick.

[0046] A sample for viscosity measurement was prepared as follows: 0.0989 g of the PAni/PAAMPSA was mixed with 9.9081 g deionized water, which constitutes 0.99 wt % PAni/PAAMPSA in the dispersion. The mixture was magnetically stirred overnight. It should be noted that the coating thickness is lower (137 nm vs. 300 nm) when compared with Invention Example 4 in spite of lower spin coating speed (1,200 rpm vs. 6,000 rpm). The comparison shows that the dispersion has a lower viscosity than the dispersion in Invention Example 4.

[0047] The PAni/PAAMPSA coated ITO/glass substrates were dried in nitrogen at 90°C for 30 minutes before measuring for electrical conductivity. Electrical conductivity was determined by measuring the resistance between two electrodes and was calculated to be $3.6 \times 10^{-5}\text{ S/cm}$ based on the resistance, the thickness of the conductive layer and the distance between the two electrodes used to measure the resistance. The conductivity is shown in Table I.

[0048] For light emission measurements, when incorporated into a light emitting diode (LED), the PAni/PAAMPSA layer was top-coated with a super-yellow emitter poly(substituted-phenylene vinylene) (PDY 131 obtained from Covion Company, Frankfurt, Germany) to serve as the active electroluminescent (EL) layer. The thickness of the EL layer was approximately 70 nm. All film thicknesses were measured with a TENCOR 500 Surface Profiler. For the cathode, Ba and Al layers were vapor deposited onto the EL layer at a pressure of $1.3 \times 10^{-4}\text{ Pa}$. The final thickness of the Ba layer was 3 nm; the thickness of the Al layer on top of the Ba layer was 300 nm. LED device performance was tested as follows. Measurements of current vs. applied voltage, light emission brightness vs. applied voltage, and light emission efficiency (candela/ampere-cd/A) were measured with a Keithley 236 source-measure unit from Keithley Instrument Inc. (Cleveland, OH), and a S370 Optometer with a calibrated silicon photodiode (UDT Sensor, Inc., Hawthorne, CA). Current was applied to each of five LED with a current density of 8.3 mA/cm^2 at room temperature. The average voltage to achieve the current density was 4.2 volts and the average light efficiency, and light emission brightness were 8.3 cd/A and 115 cd/m^2 , respectively, as summarized in Table I. Table I also shows that device half-life at 80°C and 3.3 mA/cm^2 current density was 12 hrs.

Invention Example 1

[0049] This example illustrates preparation of an aqueous PAni/PAAMPSA dispersion with silica nanoparticles and its electrical conductivity and light emission properties as a buffer layer.

[0050] PAni/PAAMPSA (0.63 g) prepared as in Comparative Example 1 was combined with 0.75 g Snowtex-UP[®] (0.75 g, Nissan Chemical Industries, Ltd. Tokyo, Japan), which contains 0.152 g silica nanoparticles, and 24.07 g deionized water. Snowtex-UP[®] is an aqueous dispersion having a pH from 9.0 to 10.5, and having a silica particle size of about 5-20 nm in width and about 40-300 nm in length. The silica:PAni/PAAMPSA weight ratio is 4.1:1.

[0051] The dispersion was tested for electrical conductivity and light emission properties in the same manner as

described in Comparative Example 1. As shown in the results summarized in Table 1, a buffer layer cast from the dispersion of Invention Example 1 has a lower conductivity (8.2×10^{-7} S/cm vs. 3.6×10^{-5} S/cm) and higher half-life (29 hours vs. 12 hours) when compared with Comparative Example 1. This example demonstrates effect of nano-particles on reducing conductivity with enhanced device life-time.

Invention Example 2

[0052] This example illustrates preparation of an invention aqueous PAni/PAAMPSA dispersion with colloidal silica and its electrical conductivity and light emission properties as a buffer layer.

[0053] PAni/PAAMPSA (0.61 g) as prepared in Comparative Example 1 was combined with Snowtex-O® (0.75 g, from Nissan Chemical Industries, Ltd. Tokyo, Japan), which contains 0.153 g silica nanoparticles, and 23.47 g deionized water. Snowtex-O® is an aqueous dispersion having a pH range of 2-4 and having a silica particle size of 10-20 nm. The silica:PAni/PAAMPSA weight ratio is 3.99:1

[0054] The dispersion was tested for electrical conductivity and light emission properties in the same manner as described in Comparative Example 1. As shown in the results summarized in Table 1, a buffer layer cast from the dispersion of Invention Example 2 has a lower conductivity (7.6×10^{-7} S/cm vs. 3.6×10^{-5} S/cm) and higher half-life (30 hours vs. 12 hours) when compared with Comparative Example 1. This example again demonstrates effect of nano-particles on reducing conductivity with enhanced device life-time.

Example 3

[0055] This example illustrates preparation of an invention aqueous PAni/PAAMPSA dispersion with electrically semi-conductive oxide and its electrical conductivity and light emission properties as a buffer layer.

[0056] PAni/PAAMPSA (0.90 g) as prepared in Comparative Example 1 was combined with Celmax CX-Z300H® (1.97 g, a zinc antimonite from Nissan Chemical Industries, Ltd. Tokyo, Japan), which contains 0.601 g conductive oxide particles, and 48.53 g deionized water. The Celmax CX-Z300H® is an aqueous dispersion having a pH of 6.85, and having 20 nm oxide nanoparticles. Conductivity of the oxide powder is 3.6 S/cm measured on a compressed dried pellet at a pressure of 160 Kg/cm². The oxides:PAni/PAAMPSA weight ratio is 1.50:1

[0057] The dispersion was tested for electrical conductivity and light emission properties in the same manner as described in Comparative Example 1. As shown in the results summarized in Table 1, a buffer layer cast from the dispersion of Invention Example 3 has a lower conductivity (8.3×10^{-8} S/cm vs. 3.6×10^{-5} S/cm) and higher half-life (61 hours vs. 12 hours) when compared with Comparative Example 1. This example again demonstrates effect of nano-particles on reducing conductivity with enhanced device life-time.

Invention Example 4

[0058] This example illustrates the preparation of an invention aqueous dispersion of PAni/PAAMPSA in the presence of SiO₂ nanoparticles and its electrical conductivity and light emitting properties as a buffer layer.

[0059] Synthesis of PAni/PAAMPSA in the presence of SiO₂ nanoparticles was carried out in the following manner. PAAMPSA (36.32 g of 15 wt % aqueous solution from Sigma-Aldrich Corp., St. Louis, MO, USA) was placed in a 250 Nalgene® plastic bottle. To the PAAMPSA solution was added Snowtex-UP® (34.33 g from Nissan Chemical Industries, Ltd. Tokyo, Japan). Snowtex-UP® is an aqueous dispersion with pH of 9.0 to 10.5, containing silica particles sized 5-20 nm in width and 40-300 nm in length. The PAAMPSA/Snowtex-Up® silica mixture was dispersed in deionized water (150 ml). To this dispersion was added aniline (4.08 g). The aqueous PAAMPSA/Snowtex-Up®/aniline mixture was placed in a 4-necked 500 ml Round Bottomed Flask and then cooled to ~4 °C with an ice/water mixture. The solution was stirred continuously with a magnetic stirrer. To the chilled PAAMPSA/Snowtex-Up®/aniline dispersion 100 ml aqueous solution containing 4.493 g PAAMPSA (as above) and ammonium persulfate (2.33 g) was added over a one hour period. The reaction was allowed to proceed for 180 minutes.

[0060] The reaction mixture was then poured into two centrifuge bottles and centrifuged at 8000 rpm at 15°C for 30 minutes. After centrifugation, the supernatant was slowly added to acetone to precipitate the polymeric product. After precipitation, the solid polymer was washed repeatedly in acetone, filtered, and dried overnight in a vacuum oven (~ 18 Hg., N₂ bleed, ambient temperature) (Yield was 14.19 g). It should be noted that the yield is almost twice the yield in Comparative Example 1. The increase in yield indicates that SiO₂ nanoparticles are present within the PAni/PAAMPSA.

[0061] PAni/PAAMPSA/SiO₂ (1.20 g, as prepared above) was dispersed in 38.80 g deionized water, which dispersion constitutes 3.0 wt % solid in the water. A buffer layer was cast onto an ITO substrate as in the previous examples. For light emission measurements, the PAni/PAAMPSA/silica layer was then top-coated with a super-yellow emitter poly (substituted-phenylene vinylene) (PDY 131 obtained from Covion Company, Frankfurt, Germany) to serve as the active electroluminescent (EL) layer in an LED device. The thickness of the EL layer was approximately 70 nm. Thickness of

all films was measured with a TENCOR 500 Surface Profiler.

[0062] For the cathode, Ba and Al layers were vapor deposited on top of the EL layer under a vacuum of 1.3×10^{-4} Pa. The final thickness of the Ba layer was 3 nm; the thickness of the Al layer on top of the Ba layer was 300 nm. LED device performance was tested as follows. Measurements of current vs. applied voltage, light emission brightness vs. applied voltage, and light emission efficiency (candela/ampere-cd/A) were measured with a Keithley 236 source-measure unit from Keithley Instrument Inc. (Cleveland, OH), and a S370 Optometer with a calibrated silicon photodiode (UDT Sensor, Inc., Hawthorne, CA). Current was applied to each of five LED devices with a current density of 8.3 mA/cm^2 at room temperature. The average voltage to achieve the current density was 4.3 volts and the average light efficiency, and light emission brightness were 5.3 cd/A and 130 cd/m^2 , respectively, as summarized in Table I. Table I also shows that device half-life at 80°C and 3.3 mA/cm^2 current density was 42 hrs. It should be noted that the half-life is enhanced 4X and emission intensity is higher (130 cd/m^2 vs. 115) when compared with the PAni/PAAMPSA without silica in spite of the thickness being 2.2 times the thickness illustrated in Comparative Example 1.

Table 1 Effect of inorganic nanoparticles added to PAni/PAAMPSA on light emission properties of OLEDs on a glass substrate						
Example	Coating thickness (nm)	Conductivity (S/cm)	Voltage (volt) @ 8.3 mA/cm^2	Efficiency (Cd/A) @ 8.3 mA/cm^2	Brightness (Cd/m ²) @ 3.3 mA/cm^2 , 80°C	Half-life (hr) @ 3.3 mA/cm^2 , 80°C
Comparative Example 1	137 @ 1,200 rpm	3.6×10^{-5}	4.2	8.3	115	12
Invention Example 1	114 @ 1,200 rpm	8.2×10^{-7}	4.8	8.1	135	29
Invention Example 2	166 @ 1,200 rpm	7.6×10^{-7}	4.9	7.4	108	30
Example 3	113 @ 1,200 rpm	8.3×10^{-8}	4.1	8.0	148	61
Invention Example 4	300 @ 6,000 rpm	9.0×10^{-7}	4.3	5.3	130	42

[0063] As shown in Table 2, the aqueous dispersion of Invention Example 4 produces a 300 nm coating thickness at a spinning speed of 6,000 rpm. The coating thickness is much higher than that of Comparative Example 1 (300 nm vs. 137 nm) despite a higher spin-coating speed (6,000 rpm vs. 1,200 rpm). The comparison shows that the PAni/PAAMPSA polymerized with silica nanoparticles has a higher viscosity than PAni/PAAMPSA polymerized without silica nanoparticles. As shown in Table II, this increased viscosity produces buffer layers having an increased thickness. The dispersion for viscosity measurement was prepared as follows: 0.0999 g of the PAni/PAAMPSA/silica was mixed with 9.9164 g deionized water, which constitutes 1.00 wt% PAni/PAAMPSA/silica in the dispersion.

Table 2 Viscosity of Aqueous PAni/PAAMPSA Dispersions			
	Viscosity (cps)		
Sample	10 s^{-1}	100 s^{-1}	1000 s^{-1}
Comparative Example 1	5.50	4.52	4.10
Invention Example 4	8.30	6.80	6.15

Claims

1. An organic electronic device comprising at least one electroluminescent layer (130) positioned between two electrical contact layers (110, 150), the device having at least one layer made from the method comprising adding a plurality of nanoparticles to an aqueous dispersion of a conductive organic polymer selected from polyanilines and poly(dioxythiophenes), and casting said layer from said aqueous dispersion onto a substrate,

wherein said nanoparticles are organic nanoparticles or inorganic nanoparticles,
 wherein said inorganic nanoparticles are selected from silica and alumina, and said organic nanoparticles are
 perfluoroethylene sulfonates,
 wherein the at least one layer is a buffer layer (120), and
 wherein the electroluminescent layer is a light emitting layer.

2. The device according to claim 1, wherein the device is a light-emitting diode or light-emitting diode display.
3. The device according to claim 1 or claim 2, wherein the electrically conductive organic polymer is prepared by
 oxidatively polymerising the corresponding monomers in an aqueous solution containing a polymeric acid.
4. The device according to claim 3, wherein the polymeric acid is poly(2-acrylamido-2-methyl-1-propanesulfonic acid)
 or polystyrene sulfonic acid.
5. The device according to claim 1, wherein the at least one layer is a buffer layer having a conductivity of less than
 1.0×10^{-3} S/cm as determined in the description comprising an electrically conductive polymer comprising at least
 one conductive polymer that is selected from polyaniline with poly(2-acrylamido-2-methyl-1-propanesulfonic acid)
 as the counterion (PAni/PAAMPSA) and poly(ethylenedioxythiophene) with poly(styrenesulfonic acid) as the coun-
 terion (PEDT/PSS), and a plurality of nanoparticles dispersed therewith, wherein said nanoparticles are perfluor-
 oethylene sulfonates.

Patentansprüche

1. Organisches elektronisches Gerät, umfassend mindestens eine elektrolumineszente Lage (130), die zwischen zwei
 elektrischen Kontaktlagen (110, 150) positioniert ist, wobei das Gerät mindestens eine Lage aufweist, die durch das
 Verfahren hergestellt ist, das das Hinzufügen einer Mehrzahl von Nanopartikeln zu einer wässrigen Dispersion eines
 leitfähigen organischen Polymers, ausgewählt aus Polyanilinen und Poly(dioxythiophenen), und das Absetzen der
 Lage aus der wässrigen Dispersion auf das Substrat umfasst,
 wobei die Nanopartikel organische Nanopartikel oder anorganische Nanopartikel sind,
 wobei die anorganischen Nanopartikel ausgewählt sind aus Siliziumdioxid und Aluminiumoxid, und die organischen
 Nanopartikel Perfluorethylensulfonate sind,
 wobei die mindestens eine Lage eine Pufferlage (120) ist, und
 wobei die elektrolumineszente Lage eine lichtemittierende Lage ist.
2. Gerät nach Anspruch 1, wobei das Gerät eine lichtemittierende Diode oder eine Anzeige einer lichtemittierenden
 Diode ist.
3. Gerät nach Anspruch 1 oder Anspruch 2, wobei das elektrisch leitfähige organische Polymer durch oxidative Poly-
 merisation der entsprechenden Monomere in einer wässrigen Lösung, die eine Polymersäure enthält, zubereitet wird.
4. Gerät nach Anspruch 3, wobei die Polymersäure Poly(2-acrylamido-2-methyl-1-propanesulfonsäure) oder Polysty-
 rolsulfonsäure ist.
5. Gerät nach Anspruch 1, wobei die mindestens eine Lage eine Pufferlage ist, die eine Leitfähigkeit von weniger als
 $1,0 \times 10^{-3}$ S/cm aufweist, wie in der Beschreibung beschrieben, umfassend ein elektrisch leitfähiges Polymer,
 umfassend mindestens ein leitfähiges Polymer, das ausgewählt ist aus Polyanilin mit Poly(2-acrylamido-2-methyl-
 1-propanesulfonsäure) als Gegenion (PAni/PAAMPSA) und Poly(ethylenedioxythiophen) mit Poly(styrolsulfonsäure)
 als Gegenion (PEDT/PSS), und eine Mehrzahl von darin dispergierten Nanopartikeln, wobei die Nanopartikel Per-
 fluorethylensulfonate sind.

Revendications

1. Dispositif électronique organique, comprenant au moins une couche électroluminescente (130) positionnée entre
 deux couches de contact électrique (110, 150), le dispositif ayant au moins une couche fabriquée selon le procédé
 comprenant l'ajout d'une pluralité de nanoparticules à une dispersion aqueuse d'un polymère organique conducteur
 sélectionné parmi les polyanilines et les poly(dioxythiophènes), et le dépôt de ladite couche à partir de ladite dis-

persion sur un substrat,
 lesdites nanoparticules étant des nanoparticules organiques ou des nanoparticules inorganiques (130),
 lesdites particules inorganiques étant sélectionnées à partir de la silice et l'alumine, lesdites nanoparticules orga-
 niques étant des sulfonates de perfluoroéthylène,
 ladite au moins une couche étant une couche tampon (120), et
 la couche électroluminescente étant une couche émettrice de lumière.

2. Dispositif selon la revendication 1, le dispositif étant une diode électroluminescente ou un afficheur à diode élec-
 troluminescente.

3. Dispositif selon la revendication 1 ou la revendication 2, dans lequel le polymère organique électriquement conduc-
 teur est préparé en polymérisant par oxydation les monomères correspondants dans une solution aqueuse contenant
 un acide polymère.

4. Dispositif selon la revendication 3, dans lequel l'acide polymère est l'acide polystyrène sulfonique ou l'acide poly
 (2-acrylamido-2-méthyl-1-propanesulfonique).

5. Dispositif selon la revendication 1, dans lequel la au moins une couche est une couche tampon ayant une conductivité
 de moins de $1,0 \times 10^{-3}$ S/cm tel que déterminé dans la description comprenant un polymère électriquement conduc-
 teur comprenant au moins un polymère conducteur sélectionné à partir de polyaniline avec de l'acide poly(2-
 acrylamido-2-méthyl-1-propanesulfonique) en tant que contre-ion (PAni/PAAMPSA) et poly(éthylènedioxythiophène)
 avec de l'acide polystyrène sulfonique en tant que contre-ion (PEDT/PSS), et une pluralité de nanoparticules
 qui y sont dispersées, lesdites nanoparticules étant des sulfonates de perfluoroéthylène.

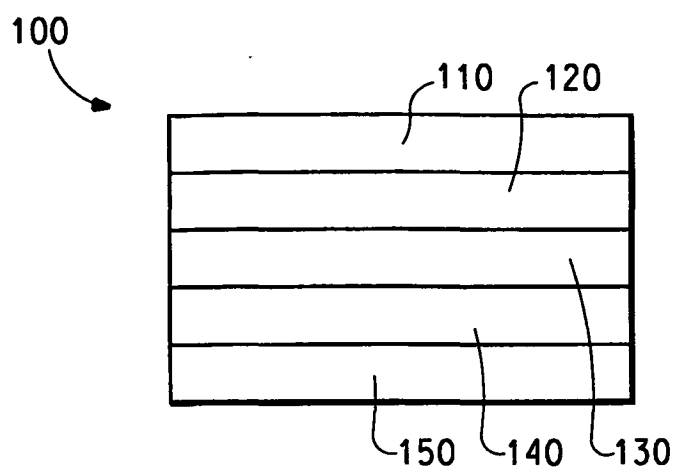


FIG. 1

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5300575 A [0002]
- EP 1231251 A [0004]
- WO 9934371 A [0005]
- EP 0962943 A [0006]
- WO 01838219 A [0007]
- WO 03012908 A [0008]
- US 20020127381 A [0009]
- WO 03050824 A [0010]
- US 20020099119 A [0011]
- US 20020009680 A [0012]
- US 5863465 A [0013]
- US 20020038999 A [0013]

专利名称(译)	导电有机聚合物/纳米颗粒复合物及其使用方法		
公开(公告)号	EP1546283B1	公开(公告)日	2012-06-20
申请号	EP2003770522	申请日	2003-09-24
[标]申请(专利权)人(译)	纳幕尔杜邦公司		
申请(专利权)人(译)	E.I.DU PONT DE NEMOURS AND COMPANY		
当前申请(专利权)人(译)	E.I.DU PONT DE NEMOURS AND COMPANY		
[标]发明人	HSU CHE HSIUNG		
发明人	HSU, CHE-HSIUNG		
IPC分类号	C09K11/06 H01B1/12 H01L51/30 H05B33/14 C08K3/00 H01L51/00 H01L51/05 H01L51/40 H01L51/50		
CPC分类号	B82Y10/00 B82Y20/00 B82Y30/00 C01P2004/13 C01P2004/16 C01P2004/54 C01P2004/62 C01P2004/64 C01P2006/40 C08K3/01 C08K3/04 C08K3/08 C08K7/06 C08K7/24 C08K2201/011 C08L25/18 C08L33/24 C08L65/00 C08L79/02 C09C1/0081 C09D5/028 C09D5/24 C09D7/61 C09D7/65 C09D7/67 C09D7/68 C09D7/70 H01B1/12 H01L51/0021 H01L51/0035 H01L51/0037 H01L51/0048 H01L51/0052 H01L51/0541 H01L51/0566 H01L51/5088 H01L2251/5369 Y02E10/549 C08L2666/06 C08L2666/14 C08L2666/22		
代理机构(译)	霍夫曼BENJAMIN		
优先权	60/413114 2002-09-24 US		
其他公开文献	EP1546283A1		
外部链接	Espacenet		

摘要(译)

提供的组合物包含导电有机聚合物的水分散体和多个纳米颗粒。由本发明组合物浇铸的薄膜可用作电致发光器件中的缓冲层，例如有机发光二极管 (OLED) 和用于薄膜场效应晶体管的电极。含有纳米颗粒的缓冲层具有比没有纳米颗粒的缓冲层低得多的导电性另外，当结合到电致发光 (EL) 器件中时，根据本发明的缓冲层有助于EL器件的更高的应力寿命。

